
AN102801 THRU AN102900

FED. SUP. CLASS. 5306

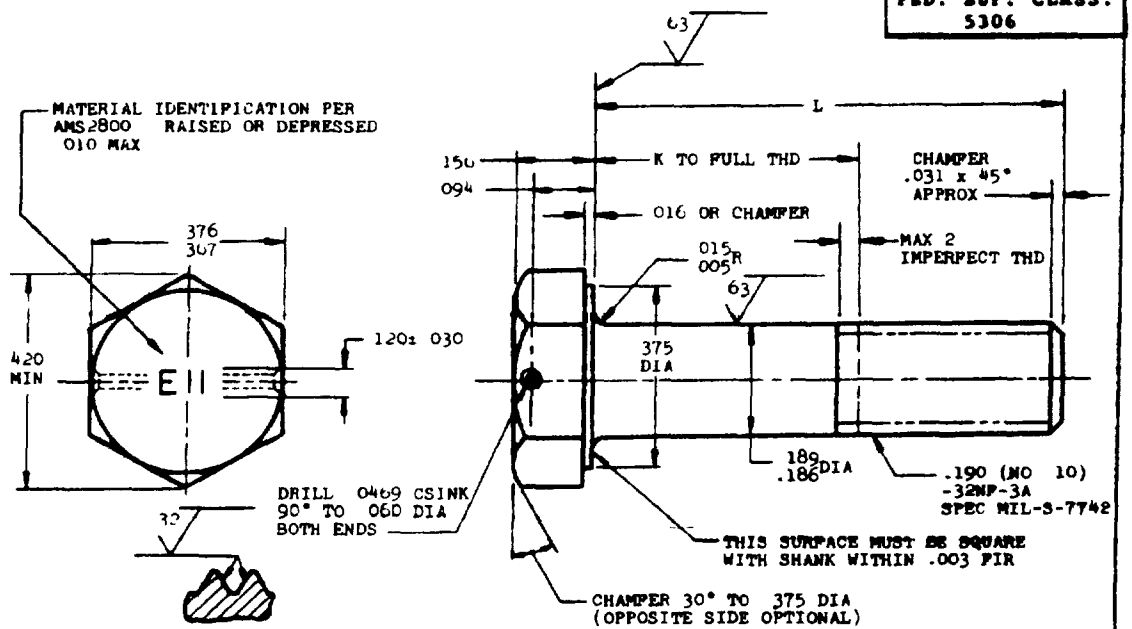


SECTION THRU THREAD PROFILE

| L | K +.000 -.060 | PART NO | L | K +.000 -.060 | PART NO | L | K +.000 -.060 | PART NO | L | K +.000 -.060 | PART NO |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | 938 | 312 | AN102815 | 2 250 | 1 625 | AN102830 | | | |
| | | | 1 000 | 375 | AN102816 | 2 375 | 1 750 | AN102831 | | | |
| | | | 1.062 | 438 | AN102817 | 2 500 | 1.875 | AN102832 | | | |
| | | | 1 125 | 500 | AN102818 | 2 625 | 2.000 | AN102833 | | | |
| | | | 1 188 | 562 | AN102819 | 2 750 | 2 125 | AN102834 | | | |
| | | | 1 250 | 625 | AN102820 | 2 875 | 2.250 | AN102835 | | | |
| 375 | (a) | AN102806 | 1 312 | .688 | AN102821 | 3 000 | 2 375 | AN102836 | | | |
| .438 | (a) | AN102807 | 1 375 | .750 | AN102822 | 3 125 | 2.500 | AN102837 | | | |
| .500 | (a) | AN102808 | 1 438 | .812 | AN102823 | 3.250 | 2.625 | AN102838 | | | |
| .562 | (a) | AN102809 | 1 500 | 875 | AN102824 | 3 375 | 2 750 | AN102839 | | | |
| 625 | (a) | AN102810 | 1 625 | 1 000 | AN102825 | 3 500 | 2 875 | AN102840 | | | |
| 688 | (a) | AN102811 | 1 750 | 1 125 | AN102826 | 3.625 | 3.000 | AN102841 | | | |
| 750 | .125 | AN102812 | 1.875 | 1 250 | AN102827 | 3 750 | 3 125 | AN102842 | | | |
| .812 | .188 | AN102813 | 2.000 | 1 375 | AN102828 | 3.875 | 3.250 | AN102843 | | | |
| .875 | 250 | AN102814 | 2 125 | 1 500 | AN102829 | | | | | | |

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE (1) SHANK SHALL BE STRAIGHT WITHIN .004 FIR. PER INCH OF BOLT LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .011 FIR

MATERIAL. STEEL AMS6322

HARDNESS. ROCKWELL C26-32

FINISH CADMIUM PLATE AMS2400

SURFACE ROUGHNESS AS107

MANUFACTURING SPECIFICATION

(3) INSPECTION ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS3040

BREAK SHARP EDGES .003- .015 UNLESS OTHERWISE SPECIFIED

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°

DO NOT USE UNASSIGNED PART NUMBERS

THIS STANDARD WAS DEVELOPED COOPERATIVELY BY THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

**INACTIVE FOR NEW DESIGN AFTER 3 MARCH 1969**
**NO SUPERSEDING STANDARD**

APPROVED 8 June 49 REVISED (1) 31 Aug 54 (2) 3 Mar 60 (3) 30 June 86

DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited

| | | |
|---|---|---|
| P.A. AF-11<br>CUST. NAVY-AS<br>ARMY-AV | AIR FORCE-NAVY AERONAUTICAL STANDARD<br>BOLT - DRILLED HEX HEAD, 1 HOLE, 190-32 | AN102801<br>THRU<br>AN102900 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:24Z
Check the source to verify that this is the current version before use.

Project No. 5306-1013