
FED SUP CLASS 5306

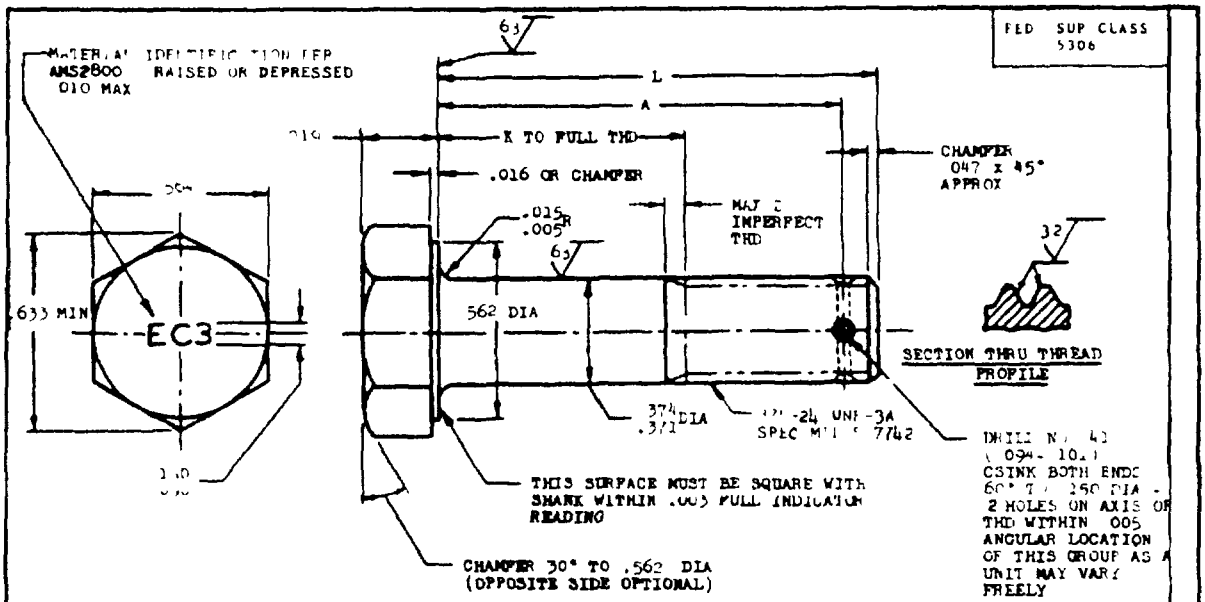

L	A	K +.000 -.060	PART NO	L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO
				2 125	1.985	1 375	AN105825	4 750	4 610	4 000	AN105846
				2 250	2 110	1 500	AN105826	4 875	4 735	4 125	AN105847
.750	.610	.438	AN105806	2 375	2.235	1 625	AN105827	5 000	4.860	4 250	AN105848
.812	.672	.500	AN105807	2.500	2.360	1.750	AN105828	5.125	4 985	4 375	AN105849
.875	.735	.125	AN105808	2 625	2.485	1.875	AN105829	5 250	5 110	4 500	AN105850
.938	.798	.750	AN105809	2.750	2.610	2.000	AN105830	5 375	5 235	4 625	AN105851
1 000	.860	.250	AN105810	2 875	2.735	2 125	AN105831	5 500	5 360	4 750	AN105852
1 062	.922	.312	AN105811	3.000	2 860	2.250	AN105832	5.625	5 485	4.875	AN105853
1 125	.985	.375	AN105812	3 125	2 985	2 375	AN105833	5 750	5 610	5 000	AN105854
1 188	1 048	.438	AN105813	3.250	3 110	2.500	AN105834	5 875	5 735	5 125	AN105855
1 250	1 11	.500	AN105814	3 375	3 235	2 625	AN105835	6 000	5 860	5 250	AN105856
1 312	1.172	.56	AN105815	3.500	3 360	2.750	AN105836				
1 375	1 23	.625	AN105816	3 625	3 485	2 875	AN105837				
1 438	1 298	.688	AN105817	3 750	3 610	3 000	AN105838				
1 500	1 360	.750	AN105818	3.875	3 735	3.125	AN105839				
1 562	1.422	.812	AN105819	4 000	3.860	3 250	AN105840				
1.625	1 485	.875	AN105820	4.125	3.985	3 375	AN105841				
1 688	1 548	.938	AN105821	4 250	4 110	3 500	AN105842				
1.750	1 610	1.000	AN105822	4.375	4 235	3.625	AN105843				
1 875	1.735	1 125	AN105823	4 500	4.360	3 750	AN105844				
2 000	1 860	1 250	AN105824	4 625	4 485	3 875	AN105845				

(2) THREAD TO H.S. MAXIMUM TWO IMPERFECT THREADS

NOTE (1) SHANK SHALL BE STRAIGHT WITHIN .0025 FIR PER INCH OF BOLT LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .017 FIR

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD

MATERIAL CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS ASI07
MANUFACTURING SPECIFICATION AMS 7
(1) INSPECTION ALL PARTS SHALL UNDERGO PENETRANT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2644
THREAD SHALL EDGE [illegible] DIMENSIONS & SPECIFIED
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES LINEAR DIMENSIONS [illegible] ANGULAR DIMENSIONS ±2°
DO NOT USE UNASSIGNED PART NUMBERS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

P A
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES HEX HEAD, DRILLED SHANK 375-24

AN105801 THRU AN105900

Project No 5306-104

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.