
FED SUP CLASS 5306

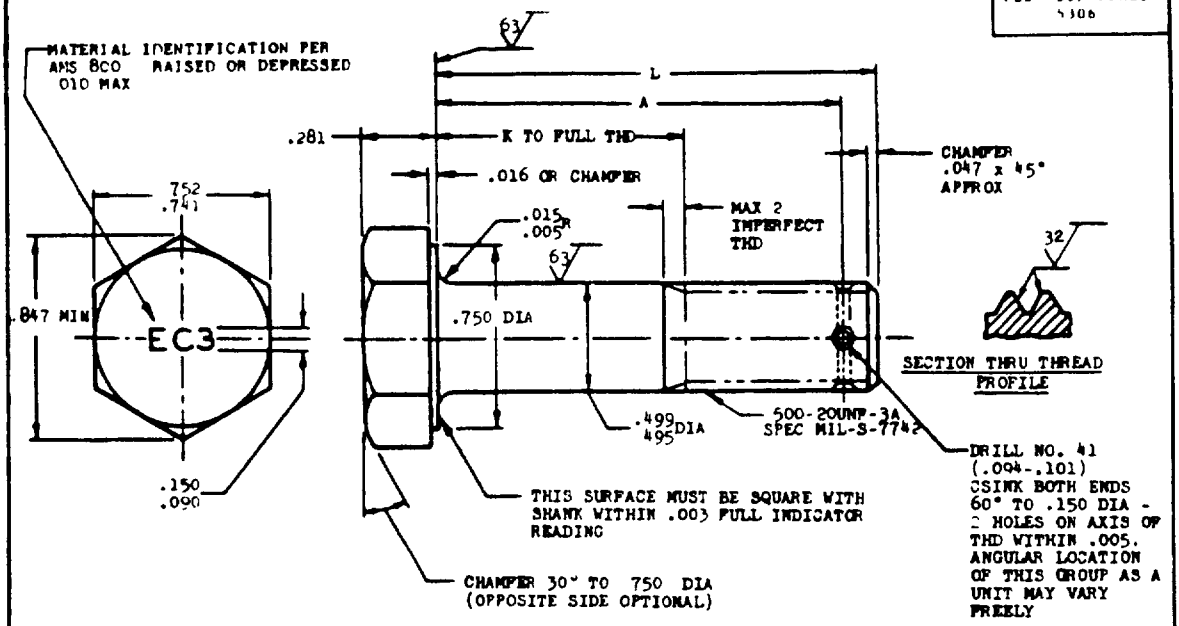

L	A	K +.000 -.060	PART NO	L	A	K +.000 -.060	PART NO.	L	A	K +.000 - .060	PART NO
				2.375	2.235	1.500	AN106024	5 000	4.860	4.125	AN106045
				2 500	2.360	1 625	AN106025	5.125	4.985	4.250	AN106046
				2.625	2 485	1.750	AN106026	5.250	5.110	4.375	AN106047
.938	.798	(a)	AN106006	2.750	2.610	1 875	AN106027	5.375	5 235	4.500	AN106048
1 000	.860	125	AN106007	2.875	2 735	2.000	AN106028	5.500	5.360	4.625	AN106049
1.062	922	.188	AN106008	3.000	2.860	2 125	AN106029	5.625	5.485	4.750	AN106050
1 125	985	250	AN106009	3.125	2 985	2.250	AN106030	5.750	5.610	4.875	AN106051
1.188	1 048	.312	AN106010	3.250	3.110	2.375	AN106031	5.875	5.735	5.000	AN106052
1.250	1.110	375	AN106011	3.375	3 235	2.500	AN106032	6.000	5.860	5.125	AN106053
1.312	1 172	.438	AN106012	3 500	3 360	2 625	AN106033				
1 375	1.235	500	AN106013	3.625	3.485	2.750	AN106034				
1.438	1 298	.562	AN106014	3.750	3.610	2.875	AN106035				
1.500	1.360	.625	AN106015	3.875	3 735	3.000	AN106036				
1.562	1 422	.688	AN106016	4.000	3.860	3 125	AN106037				
1 625	1 485	750	AN106017	4.125	3 985	3.250	AN106038				
1.688	1 548	.812	AN106018	4.250	4.110	3 375	AN106039				
1.750	1.610	.875	AN106019	4.375	4 235	3.500	AN106040				
1.875	1.735	1.000	AN106020	4 500	4.360	3.625	AN106041				
2.000	1.860	1 125	AN106021	4.625	4 485	3.750	AN106042				
2.125	1 985	1.250	AN106022	4 750	4.610	3.875	AN106043				
2 250	2.110	1 375	AN106023	4.875	4 735	4.000	AN106044				

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR PER INCH OF BOLT LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .023 FIR

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS AS107
MANUFACTURING SPECIFICATION AMS 7472
(3) INSPECTION ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES, LINEAR DIMENSIONS ± .010 ANGULAR DIMENSIONS ±2°
DO NOT USE UNASSIGNED PART NUMBERS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

P A
USAF 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES HEX HEAD DRILLED SHANK 500-20

AN106001 THRU AN106100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.