
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

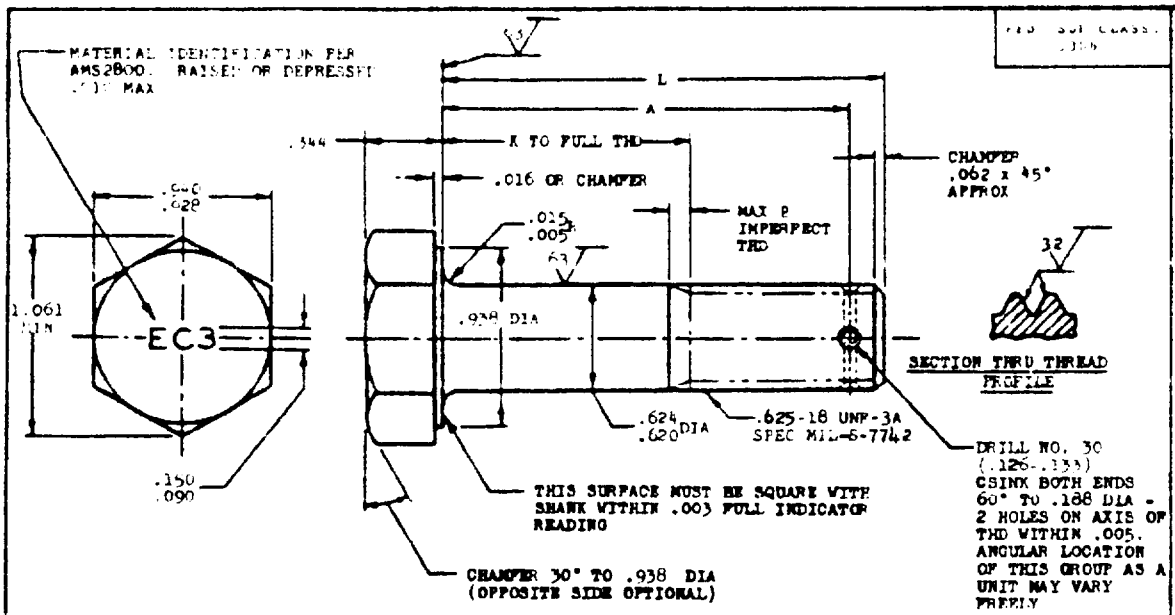

L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.
				2.625	2.465	1.625	AN106224	5.250	5.090	4.250	AN106245
				2.750	2.590	1.750	AN106225	5.375	5.215	4.375	AN106246
				2.875	2.715	1.875	AN106226	5.500	5.340	4.500	AN106247
1.125	.965	.125	AN106206	3.000	2.840	2.000	AN106227	5.625	5.465	4.625	AN106248
1.188	1.028	.188	AN106207	3.125	2.965	2.125	AN106228	5.750	5.590	4.750	AN106249
1.250	1.090	.250	AN106208	3.250	3.090	2.250	AN106229	5.875	5.715	4.875	AN106250
1.312	1.152	.312	AN106209	3.375	3.215	2.375	AN106230	6.000	5.840	5.000	AN106251
1.375	1.215	.375	AN106210	3.500	3.340	2.500	AN106231				
1.438	1.278	.438	AN106211	3.625	3.465	2.625	AN106232				
1.500	1.340	.500	AN106212	3.750	3.590	2.750	AN106233				
1.562	1.402	.562	AN106213	3.875	3.715	2.875	AN106234				
1.625	1.465	.625	AN106214	4.000	3.840	3.000	AN106235				
1.688	1.528	.688	AN106215	4.125	3.965	3.125	AN106236				
1.750	1.590	.750	AN106216	4.250	4.090	3.250	AN106237				
1.812	1.652	.812	AN106217	4.375	4.215	3.375	AN106238				
1.875	1.715	.875	AN106218	4.500	4.340	3.500	AN106239				
2.000	1.840	1.000	AN106219	4.625	4.465	3.625	AN106240				
2.125	1.965	1.125	AN106220	4.750	4.590	3.750	AN106241				
2.250	2.090	1.250	AN106221	4.875	4.715	3.875	AN106242				
2.375	2.215	1.375	AN106222	5.000	4.840	4.000	AN106243				
2.500	2.340	1.500	AN106223	5.125	4.965	4.125	AN106244				

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAT PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .028 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION: AMS 7472
(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES, LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±1°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES HEX HEAD, DRILLED SHANK, .625-18

AN106201 THRU AN106300

Project No. 5320-1045

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.