AN125401 THRU AN125550

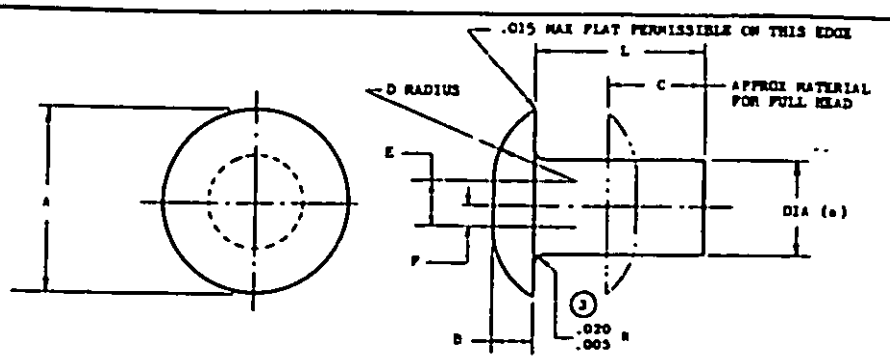

DIAMETER	A	B +.010 -.000	C	D	E	F	K
.062 ± .001	.125 ± .006	.027	.116	05A	.031	.015	.010
.094 ± .001	.188 ± .009	.040	.169	.082	.046	.023	.010
.125 +.001 -.002	.250 ± .012	.054	.225	.108	.062	.031	.010
.156 +.001 -.002	.312 ± .016	.067	.281	.135	.078	.039	.015
.188 +.001 -.002	.375 ± .019	.080	.338	16A	.093	.046	.015
.250 ± .002	.500 ± .025	.107	.450	.217	.125	.062	.020
.312 ± .002	.62[illegible] ± .031	.133	.561	.272	.156	.078	.020
.375 ± .002	.750 ± .037	.160	.675	.328	.187	.093	.020

L	DIAMETER AND PART NUMBERS							
	.062	.094	.125	.156	.188	.250	.312	.375
.125	AN125A01							
.188	AN125A02	AN125A20	AN125A38					
.250	AN125A03	AN125A21	AN125A39	AN125A57	AN125A75			
.312	AN125A04	AN125A22	AN125A40	AN125A58	AN125A76	AN125A94		
.375	AN125A05	AN125A23	AN125A41	AN125A59	AN125A77	AN125A95		
.438	AN125A06	AN125A24	AN125A42	AN125A60	AN125A78	AN125A96		
.500	AN125A07	AN125A25	AN125A43	AN125A61	AN125A79	AN125A97		
.562		AN125A26	AN125A44	AN125A62	AN125A80	AN125A98		
.625		AN125A27	AN125A45	AN125A63	AN125A81	AN125A99	AN125517	
.750		AN125A28	AN125A46	AN125A64	AN125A82	AN125500	AN125518	AN125536
.875		AN125A29	AN125A47	AN125A65	AN125A83	AN125501	AN125519	AN125537
1.000		AN125A30	AN125A48	AN125A66	AN125A84	AN125502	AN125520	AN125538
1.125			AN125A49	AN125A67	AN125A85	AN125503	AN125521	AN125539
1.250			AN125A50	AN125A68	AN125A86	AN125504	AN125522	AN125540
1.375			AN125A51	AN125A69	AN125A87	AN125505	AN125523	AN125541
1.500			AN125A52	AN125A70	AN125A88	AN125506	AN125524	AN125542

(a) SHANK DIAMETER TO BE MEASURED WITHIN .100 OF BASE OF HEAD

RIVET HEAD MUST BE CONCENTRIC WITH SHANK DIAMETER WITHIN "I" FIR.

MATERIAL: CORROSION RESISTANT STEEL AMS 7226

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES, LINEAR DIMENSIONS ± .010.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

P.A. Air Force - 82
Other Cust. Army AV Navy AS
PROCUREMENT SPEC.

AIR FORCE-NAVY AERONAUTICAL STANDARD

RIVET - UNIVERSAL HEAD, CORROSION RESISTANT STEEL

AN125401 THRU AN125550

5320-0224

US GOVERNMENT PRINTING OFFICE 1974 603 103/1197

APPROVED 8 Jan 49 REVISED (1) 9 Mar 52 (2) 24 Nov 56 (3) 27 Jan 74

User activities:
Army
Navy
Air Force
DSA

Review activities:
Army
Navy
Air Force - 11
DSA - 16

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.