
FED. SUP CLASS. 5307

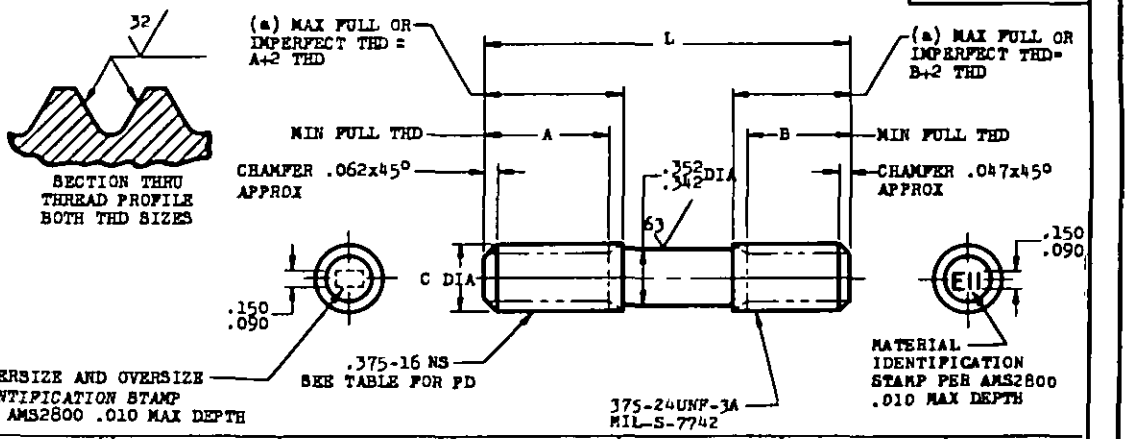


| UNDERSIZE AND OVERSIZE IDENTIFICATION | | | -.003 (-3) | STANDARD | +.003 (3) | +.006 (6) | +.009 (9) | +.012 (12) |
|---|---|---|---|---|---|---|---|---|
| C | | | .370 -.375 | .370 -.375 | .370 -.375 | .370 -.375 | .379 -.384 | .379 -.384 |
| PD BEFORE PLATING | | | .3357-.3367 | .3387-.3397 | .3417-.3427 | .3447-.3457 | .3477-.3487 | .3507-.3517 |
| PD AFTER PLATING | | | .3362-.3377 | .3392-.3407 | .3422-.3437 | .3452-.3467 | .3482-.3497 | .3512-.3527 |
| PD LEAD THREAD | | | .3294-.3314 | .3324-.3344 | .3354-.3374 | .3384-.3404 | .3414-.3434 | .3444-.3464 |
| L | A | B | PART NUMBER | PART NUMBER | PART NUMBER | PART NUMBER | PART NUMBER | PART NUMBER |
| 1.438 | .750 | .562 | AN126599 | AN126600 | AN126601 | AN126602 | AN126603 | AN126604 |
| 1.500 | .812 | .562 | AN126605 | AN126606 | AN126607 | AN126608 | AN126609 | AN126610 |
| 1.625 | .938 | .562 | AN126611 | AN126612 | AN126613 | AN126614 | AN126615 | AN126616 |
| 1.688 | .938 | .625 | AN126617 | AN126618 | AN126619 | AN126620 | AN126621 | AN126622 |
| 1.781 | .750 | .938 | AN126623 | AN126624 | AN126625 | AN126626 | AN126627 | AN126628 |
| 1.875 | .750 | .938 | AN126629 | AN126630 | AN126631 | AN126632 | AN126633 | AN126634 |
| 1.969 | .938 | .938 | AN126635 | AN126636 | AN126637 | AN126638 | AN126639 | AN126640 |
| 2.062 | .938 | .938 | AN126641 | AN126642 | AN126643 | AN126644 | AN126645 | AN126646 |

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322. (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960.)
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 291
MANUFACTURING SPECIFICATION AMS 7456.
(2) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE INASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 23 Jun 58 (2) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the air force-navy standard for this product. This drawing supersedes all preceding standard drawings for the same product and shall govern effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

| PA 11<br>CUST: AV, AS<br>11 | AIR FORCE-NAVY AERONAUTICAL STANDARD<br>STUD - STRAIGHT, .375-16 x .375-24 | AN126587<br>THRU<br>AN126652 |
|---|---|---|

Project No. 5307-0344

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.