
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

FED SUP CLASS 5307

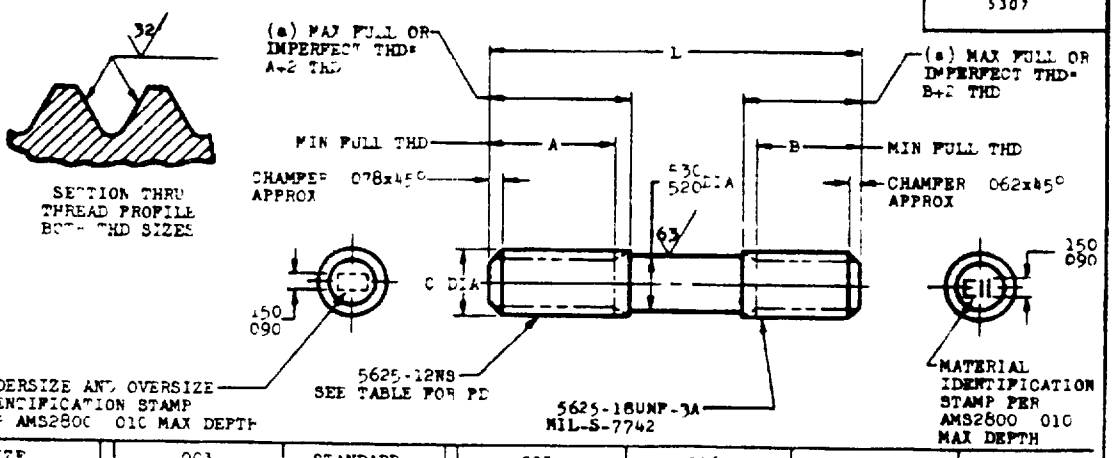

UNDERSIZE AND OVERSIZE IDENTIFICATION	- 003	STANDARD	+ 003	+ 006	+ 009	- 012
	(4)		(3)	(6)	(5)	(12)
C	.557 - .562	.557 - .562	.557 - .562	.557 - .562	.566 - .571	.566 - .571
PD BEFORE PLATING	.5104- .5114	.5134- .5144	.5164- .5174	.5194- .5204	.5224- .5234	.5254- .5264
PD AFTER PLATING	.5109- .5124	.5139- .5154	.5169- .5184	.5199- .5214	.5229- .5244	.5259- .5274
PD LEAD THREAD	.5034- .5044	.5064- .5084	.5094- .5114	.5124- .5144	.5154- .5174	.5184- .5204
L / A / B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.125 / 1.125 / 813	AN126779	AN126780	AN126781	AN126782	AN126783	AN126784
1.438 / 1.406 / 813	AN126785	AN126786	AN126787	AN126788	AN126789	AN126790

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972 NO SUPERSEDING STANDARD

NOTE PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR
(a) CROSS THREADING PERMISSABLE AT THREAD RUNOUTS ON SHORT STUDS
MATERIAL STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960)
HARDNESS ROCKWELL C26-32
FINISH CADMIUM PLATE AMS 2400 DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN
SURFACE ROUGHNESS AS291
MANUFACTURING SPECIFICATION AMS 7456
(3) INSPECTION ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640
BREAK SHARP EDGES .003- .015 UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES LINEAR DIMENSIONS ± .010
DO NOT USE UNASSIGNED PART NUMBERS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 19 May 50 REVISED (1) 23 Jun 58 (2) 26 Oct 72 (3) 30 June 1986

PA 11
CUST: AV, AS 11

AIR FORCE-NAVY AERONAUTICAL STANDARD

STUD - STRAIGHT, [illegible]

AN126767 THRU AN126820

U.S. GOVERNMENT PRINTING OFFICE

Project No 5315-034

U S GOVERNMENT PRINTING OFFICE 1986 — 605 036/43947

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.