
FED. SUP CLASS. 5306

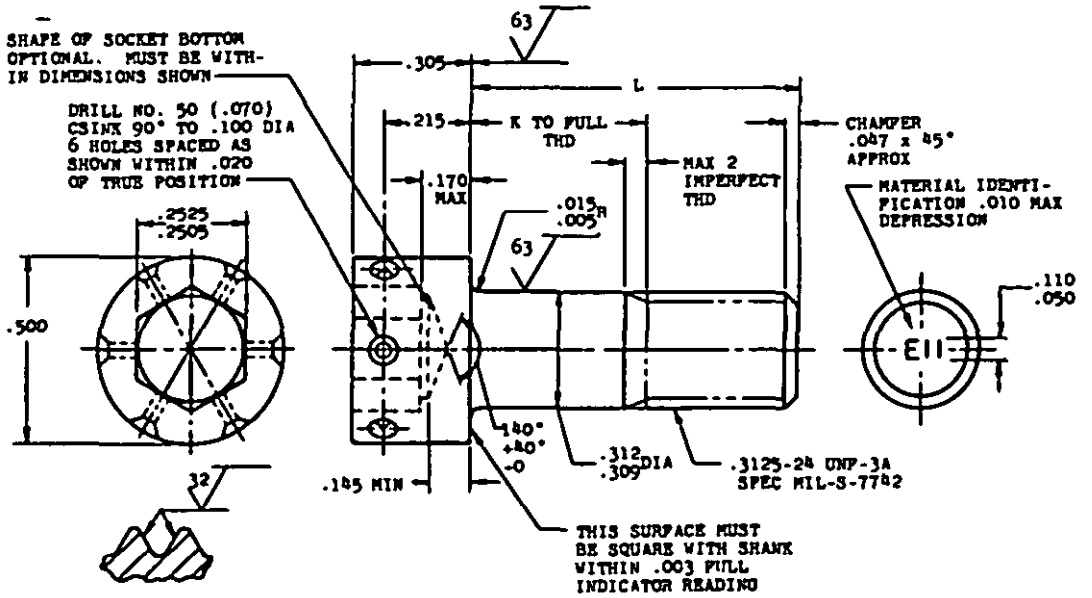

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
.500	(a)	AN148756	1.375	.500	AN148770	2.625	1.750	AN148784	4.375	3.500	AN148798
.562	(a)	AN148757	1.438	.562	AN148771	2.750	1.875	AN148785	4.500	3.625	AN148799
.625	(a)	AN148758	1.500	.625	AN148772	2.875	2.000	AN148786	4.625	3.750	AN148800
.688	(a)	AN148759	1.562	.688	AN148773	3.000	2.125	AN148787	4.750	3.875	AN148801
.750	(a)	AN148760	1.625	.750	AN148774	3.125	2.250	AN148788	4.875	4.000	AN148802
.812	(a)	AN148761	1.688	.812	AN148775	3.250	2.375	AN148789	5.000	4.125	AN148803
.875	(a)	AN148762	1.750	.875	AN148776	3.375	2.500	AN148790	5.125	4.250	AN148804
.938	(a)	AN148763	1.812	.938	AN148777	3.500	2.625	AN148791	5.250	4.375	AN148805
1.000	.125	AN148764	1.875	1.000	AN148778	3.625	2.750	AN148792	5.375	4.500	AN148806
1.062	.188	AN148765	2.000	1.125	AN148779	3.750	2.875	AN148793	5.500	4.625	AN148807
1.125	.250	AN148766	2.125	1.250	AN148780	3.875	3.000	AN148794	5.625	4.750	AN148808
1.188	.312	AN148767	2.250	1.375	AN148781	4.000	3.125	AN148795	5.750	4.875	AN148809
1.250	.375	AN148768	2.375	1.500	AN148782	4.125	3.250	AN148796	5.875	5.000	AN148810
1.312	.438	AN148769	2.500	1.625	AN148783	4.250	3.375	AN148797	6.000	5.125	AN148811

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED .003 FIR PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE HEXAGON SOCKET IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR.
(4) THE CONCENTRICITY OF THE SHANK IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR.

MATERIAL: STEEL AMS 6322

HARDNESS: ROCKWELL C32-36

FINISH: CADMIUM PLATE AMS2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS7452

③ INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

INACTIVE FOR DESIGN AFTER 1 JAN 1960 SEE DRAWING MS9090

For definition and application of drawing status notes, see ANA Bulletin No. 337.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 3 Jan 49 REVISED ① 7 Jan 53 ② 1 Aug 58 ③ 10 June 1960

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

PA 11 CUST AV. AS 11	AIR FORCE-NAVY AERONAUTICAL STANDARD BOLT - SOCKET HEAD, 6 HOLES DRILLED, .3125-24	AN148751 THRU AN148850

Project No. 5306-1068

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27:27
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1988 — 606-036/43936