DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs not later than 6 months after the latest date of approval shown.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS.
5306

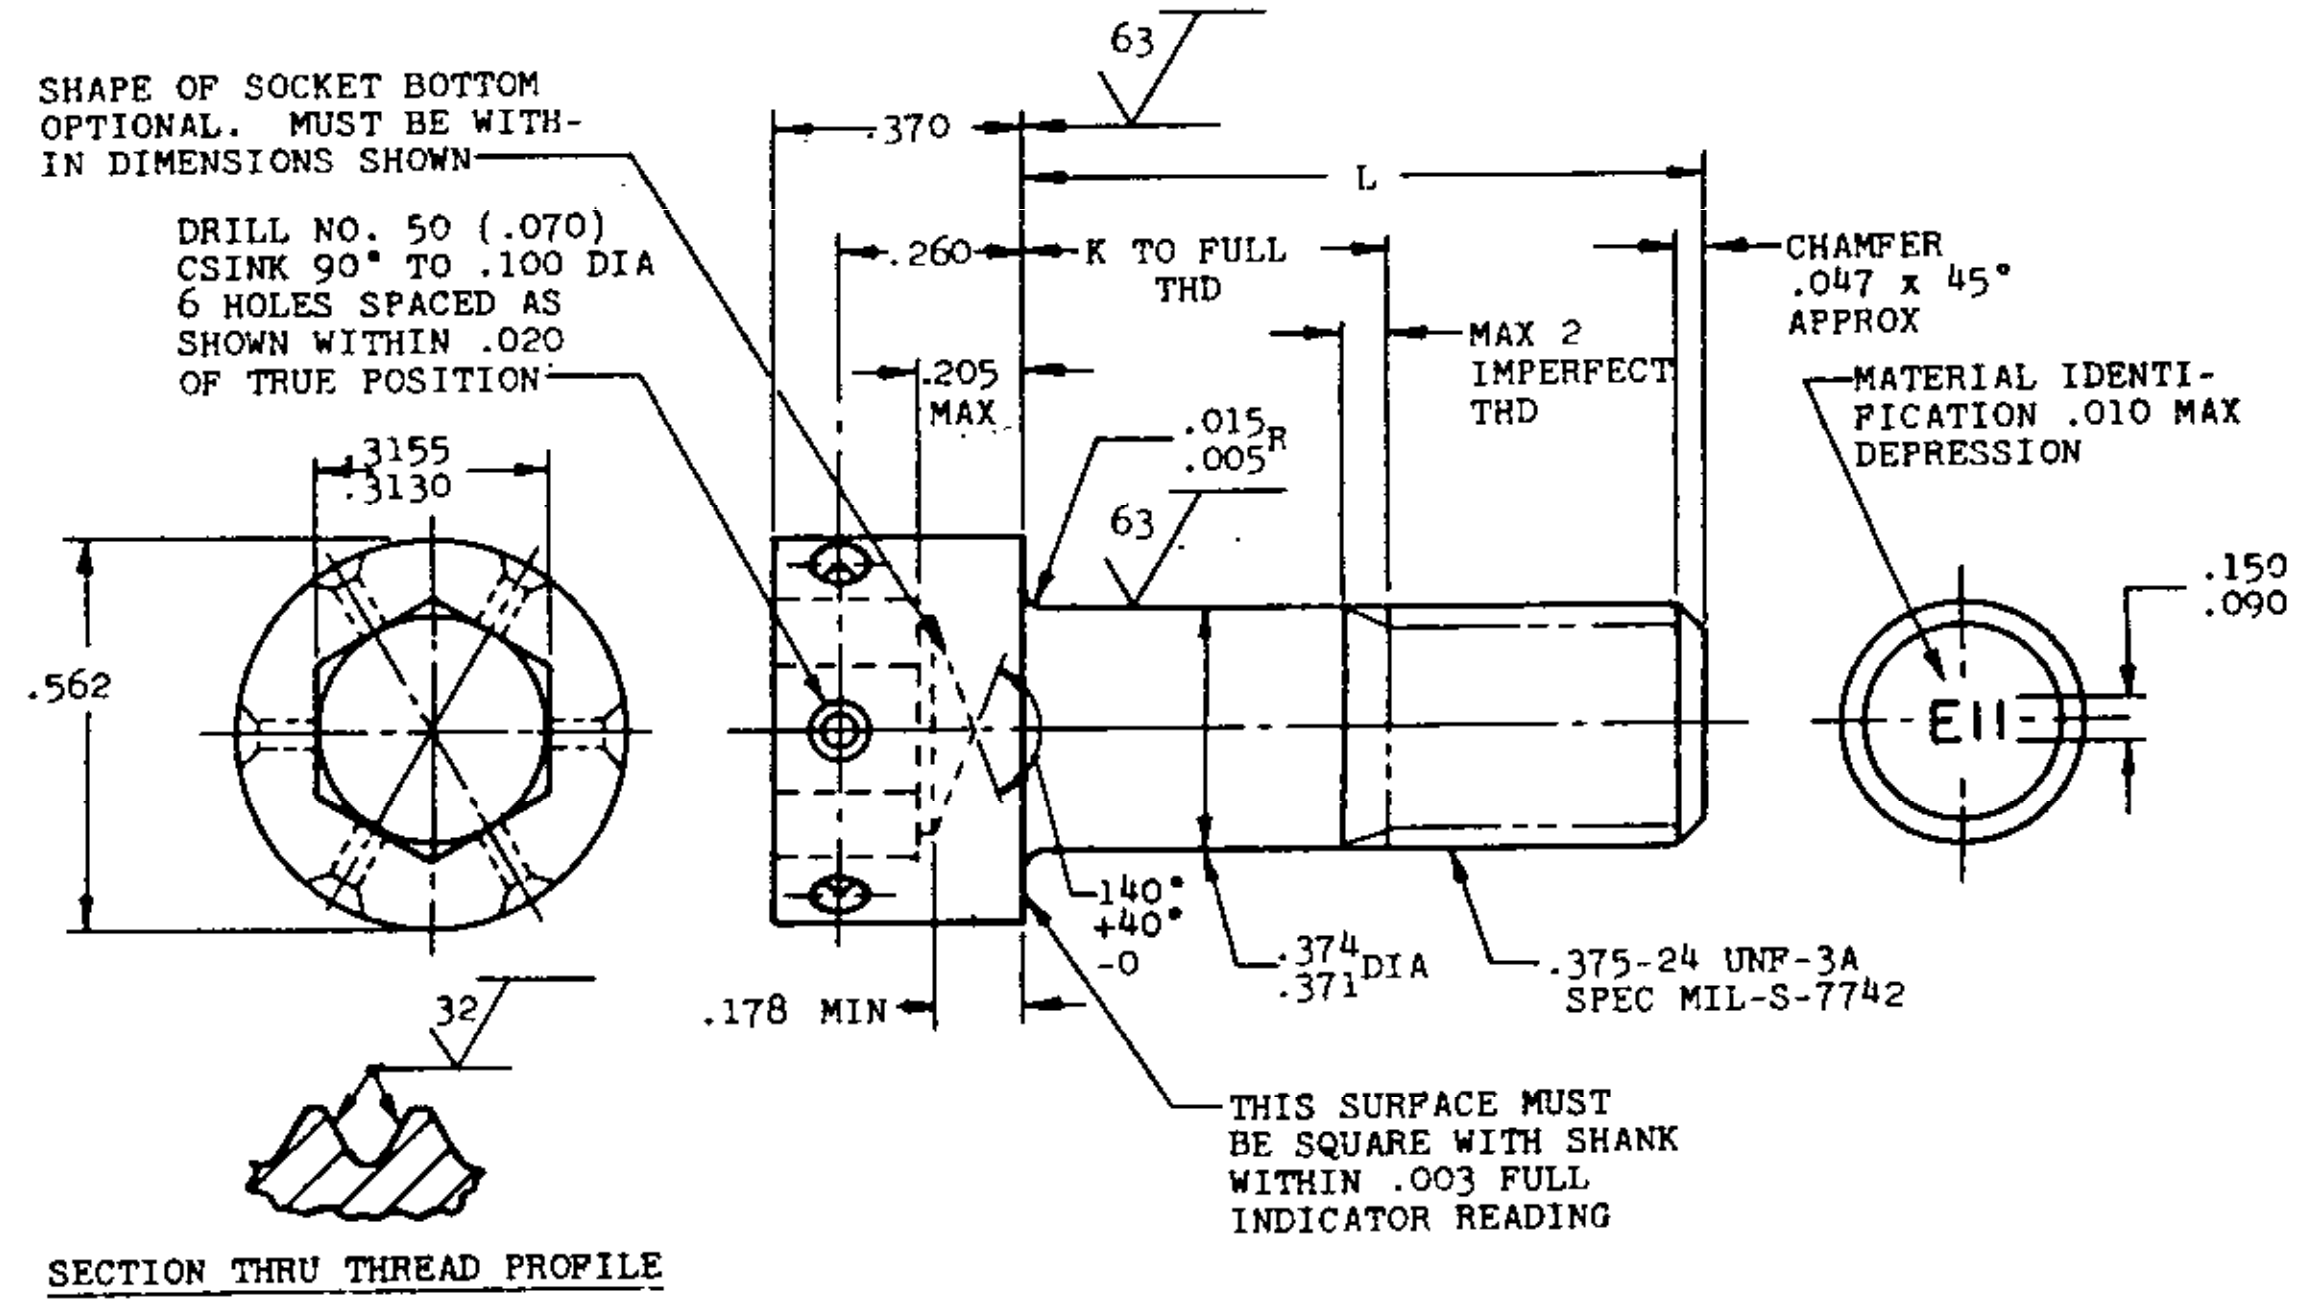
SHAPE OF SOCKET BOTTOM OPTIONAL. MUST BE WITHIN DIMENSIONS SHOWN
DRILL NO. 50 (.070) CSINK 90° TO .100 DIA 6 HOLES SPACED AS SHOWN WITHIN .020 OF TRUE POSITION
63
.370
L
.260
K TO FULL THD
CHAMFER .047 x 45° APPROX
.205 MAX
MAX 2 IMPERFECT THD
MATERIAL IDENTIFICATION .010 MAX DEPRESSION
.015 .005 R
63
.3155 .3130
.562
.150 .090
E11
.140° +40° -0
.374 .371 DIA
.375-24 UNF-3A SPEC MIL-S-7742
32
.178 MIN
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FULL INDICATOR READING
SECTION THRU THREAD PROFILE

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.438	.438	AN148871	2.625	1.625	AN148885	4.375	3.375	AN148899
.625	(a)	AN148858	1.500	.500	AN148872	2.750	1.750	AN148886	4.500	3.500	AN148900
.688	(a)	AN148859	1.562	.562	AN148873	2.875	1.875	AN148887	4.625	3.625	AN148901
.750	(a)	AN148860	1.625	.625	AN148874	3.000	2.000	AN148888	4.750	3.750	AN148902
.812	(a)	AN148861	1.688	.688	AN148875	3.125	2.125	AN148889	4.875	3.875	AN148903
.875	(a)	AN148862	1.750	.750	AN148876	3.250	2.250	AN148890	5.000	4.000	AN148904
.938	(a)	AN148863	1.812	.812	AN148877	3.375	2.375	AN148891	5.125	4.125	AN148905
1.000	(a)	AN148864	1.875	.875	AN148878	3.500	2.500	AN148892	5.250	4.250	AN148906
1.062	(a)	AN148865	1.938	.938	AN148879	3.625	2.625	AN148893	5.375	4.375	AN148907
1.125	.125	AN148866	2.000	1.000	AN148880	3.750	2.750	AN148894	5.500	4.500	AN148908
1.188	.188	AN148867	2.125	1.125	AN148881	3.875	2.875	AN148895	5.625	4.625	AN148909
1.250	.250	AN148868	2.250	1.250	AN148882	4.000	3.000	AN148896	5.750	4.750	AN148910
1.312	.312	AN148869	2.375	1.375	AN148883	4.125	3.125	AN148897	5.875	4.875	AN148911
1.375	.375	AN148870	2.500	1.500	AN148884	4.250	3.250	AN148898	6.000	5.000	AN148912

-(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE:
(1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED .0025 FIR PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE HEXAGON SOCKET IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR.
(4) THE CONCENTRICITY OF THE SHANK IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR.

MATERIAL: STEEL AMS 6322

HARDNESS: ROCKWELL C32-36

FINISH: CADMIUM PLATE AMS2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS7452

③ INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

INACTIVE FOR DESIGN AFTER 1 JAN 1960 SEE DRAWING MS9091

For definition and application of drawing status notes, see ANA Bulletin No. 337.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 30 Jun 49 REVISED ① 7 Jan 53 ② 1 Aug 58 ③ 30 June 1986

PA 11
CUST AV, AS
11

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - SOCKET HEAD, 6 HOLES DRILLED, .375-24

AN148851
THRU
AN148950

U.S. GOVERNMENT PRINTING OFFICE 1957-

Project No. 5306-1069

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.