MIL-C-62053D(AT)
15 May 1985
SUPERSEDING
MIL-C-62053C(AT)
27 October 1978

MILITARY SPECIFICATION

CARRIER, GUIDED MISSILE EQUIPMENT, M730 AND M730A1; PROCESSING FOR STORAGE AND SHIPMENT OF

This specification is approved for use by US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the Levels A and B processing of the Carrier Missile Equipment, M730 and M730A1 for storage and shipment (see 1.2).

1.2 Classification. Processing shall be of the following levels, as specified (see 6.2):

Level A - Maximum military protection.

Level A is the processing required for the protection of vehicles during shipment, handling, and storage exceeding 90 days from the date of actual processing. This level does not provide for driveaway capability. It does provide for domestic or overseas shipment, including open deck loading.

Level B - Minimum military protection.

Level B is the limited processing required for the protection of vehicles during shipment, handling, and storage not to exceed 90 days from the date of actual processing. This level provides for driveaway capability, when specified, and domestic or overseas shipment (excluding open deck loading).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: AMSTA-GSS, Warren, MI 48397-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AREA PACK

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS
FEDERAL

O-I-490	- Inhibitor, Corrosion, Liquid Cooling System.
O-S-576	- Sodium Bicarbonate, Technical.
O-S-801	- Sulfuric Acid Electrolyte; for Storage Batteries.
P-D-220	- Detergent, General Purpose.
FF-N-105	- Nails, Brads, Staples and Spikes: Wire, Cut and Wrought.
GG-T-250	- Tester, Antifreeze Solutions.
NN-P-530	- Plywood, Flat Panel.
QQ-S-741	- Steel, Carbon: Structural Shapes, Plates, and Bars.
QQ-S-781	- Strapping Steel, Flat, and Seals.
RR-W-360	- Wire Fabric, Industrial.
TT-I-1795	- Ink, Marking, Stencil, Opaque (Porous and Nonporous Surfaces).
TT-V-121	- Varnish, Spar, Water-Resisting.
UU-P-268	- Paper, Kraft, Wrapping.
UU-T-81	- Tag, Shipping and Stock.
VV-F-800	- Fuel Oil, Diesel.
VV-L-800	- Lubricating Oil, General Purpose, Preservative (Water-displacing, Low Temperature).
ZZ-T-416	- Tire, Pneumatic, Retread and Repair Materials.
MMM-A-178	- Adhesive, Paper Label, Water-resistant.
PPP-B-601	- Box, Wood, Cleated Plywood.
PPP-B-621	- Box, Wood, Nailed and Lock Corner.
PPP-B-636	- Box, Shipping, Fiberboard.
PPP-S-760	- Strapping, Nonmetallic (and Connectors).
PPP-T-42	- Tape, Packaging/Masking, Paper.
PPP-T-60	- Tape, Packaging, Waterproof.
PPP-T-97	- Tape, Pressure-sensitive Adhesive, Filament Reinforced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-117	- Bag, Sleeve and Tubing - Interior Packaging.
MIL-B-121	- Barrier Material, Greaseproofed, Water-Proofed Flexible.
MIL-C-450	- Coating Compound, Bituminous Solvent Type, Black (for Ammunition).
MIL-L-2105	- Lubricating Oil, Gear, Multipurpose.
MIL-C-5501	- Cap and Plug, Protective, Dust and Moisture Seal.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-B-11188	- Battery, Storage, Lead-Acid.
MIL-A-11755	- Antifreeze, Arctic-Type.
MIL-B-12841	- Basic Issue Items for Military Vehicles, Carriages and Equipment, Preparation for Shipment and Storage of.
MIL-P-13983	- Paint, Temporary, Lusterless, Gasoline Removable.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold Application.
MIL-D-16791	- Detergent, General Purpose (Liquid, Nonionic).
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative and Break-in.
MIL-T-22085	- Tape, Adhesive, Preservation and Sealing.
MIL-B-22191	- Barrier Material, Transparent, Flexible, Heat Sealable.
MIL-P-46002	- Preservative Oil, Contact and Volatile Corrosion-Inhibited.
MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package.
MIL-T-50036	- Talc, Technical, T1 and T3.
MIL-H-52079	- Hose, Preformed, Semi-Flexible, Reinforced.
MIL-D-81298	- Dye, Liquid Red, for the Detection of Leaks in Aircraft Fuel Systems.

STANDARDS
MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-731	- Quality of Wood Members for Containers and Pallets.
MS35338	- Washer, Lock-Spring, Helical, Regular (Medium) Series.
MS35691	- Nut, Plain, Hexagon (Jam) UNC-2B and UNF-2B.
MS35751	- Bolt, Square Neck, Round Head (Carriage), Steel, Cadmium or Zinc Plated, UNC-2A.
MS35842	- Clamp, Hose: Low Pressure Type "F".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A569 - Steel, Carbon, Hot-Rolled Sheet and Strip Commercial Quality Specification for.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA, 19103.)

ASSOCIATION OF AMERICAN RAILROADS PUBLICATIONS

Section No. 1 - General Rules Governing Loading of Commodities on Open Top Cars.
Section No. 6 - Rules Governing the Loading of Defense Material on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 59 East Van Buren, Chicago, Illinois 60605.)

DEPARTMENT OF TRANSPORTATION (DOT)

Hazardous Materials Regulations

(Application for copies should be addressed to the Department of Transportation, Hazardous Materials Regulations Board, Washington, DC 20590.)

Federal Motor Carrier Safety Regulations

(Application for copies should be addressed to the Department of Transportation, Bureau of Motor Carriers, Washington, DC 20590.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), one of the first 10 production processed vehicles shall be subjected to the inspection specified in 4.2. Approval of this vehicle shall not relieve the contractor of his obligation to process all vehicles in accordance with this specification. Unless otherwise specified by the Government, any change to materials or design after approval shall require additional vehicles to be inspected as specified in 4.2. The Government representative shall select the vehicle to be inspected.

3.2 Materials. Materials shall be as specified herein and in referenced specifications and standards. Materials shall be free of defects which adversely affect performance or serviceability (see 4.5.1 and 6.5).

3.3 Processing levels. Level A processing shall be as specified in 3.4. Level B processing shall be as specified in 3.5.

3.4 Level A.

3.4.1 Preparation prior to processing. Except as otherwise specified herein, and to the maximum extent consistent with production efficiency, economy, and safe storage and shipment, the vehicle shall be prepared for storage and shipment in a completely assembled condition after test runs and completion and approval of all necessary repairs. Specified equipment shall be installed and all adjustments made so that the vehicle may be operated, shipped, and placed into service with a minimum of delay.

3.4.1.1 Record forms. Two copies of DD Form 1397 shall be provided. Information on forms shall include preservation accomplished and depreservation instructions. The Equipment Log Book Binder and one copy of DD Form 1397 shall be placed in a bag conforming to type I, class B, style 2 of MIL-B-117. The bag shall be closed by heat sealing and securely attached in the driver's compartment of the vehicle. The other copy of DD Form 1397 shall be waterproofed with adhesive conforming to MMM-A-178 or sealed in a transparent plastic bag and securely attached in a conspicuous location on the exterior of the vehicle.

3.4.1.2 Processing records. Records of vehicle processing shall be maintained and shall be readily available for review by the Government representative.

3.4.2 Government furnished equipment. Unless previously accomplished, Government furnished equipment (GFE) (other than installed) shall be packaged, packed and marked in accordance with the individual document for the specific item. GFE shall be stowed with basic issue items (BII).

3.4.3 Preservatives and atomized spray equipment. When atomized spraying of preservative oils is specified, equipment shown in figures 1 and 2, or equivalent, shall be used. Compressed air supply lines shall be equipped with moisture separators every 50 feet or fraction thereof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.4 Disassembly. Maximum reduction in cube shall be effected for shipment. Parts vulnerable to damage or pilferage and projecting parts, whose disassembly will accomplish reduction in cube, shall be removed. Removed items shall be preserved, packaged, and packed (separate from BII). Unpainted metal parts shall be coated with preservative conforming to MIL-C-16173, grade 4. Removed bolts, nuts, screws, pins, and washers shall be identified and placed in one of the mating parts and secured. The packed parts shall be placed in the vehicle and secured to prevent movement and damage during shipment and storage.

3.4.4.1 Matchmarking. Parts removed from the vehicle shall be matchmarked when necessary to facilitate reassembly. Matchmarking information shall be put on cloth shipping tags conforming to type A of UU-T-81, or on metal tags using waterproof ink or paint, and attached to mating parts. The marked cloth shipping tags shall be waterproofed with varnish conforming to TT-V-121 or adhesive conforming to MMM-A-178.

3.4.5 Cleaning and drying.

3.4.5.1 Interior of vehicle. Interior surfaces of vehicle shall be cleaned with solution of detergent conforming to P-D-220, or type I of MIL-D-16791 and water. Solution temperature shall not exceed 210 degrees Fahrenheit (°F), and pressure shall not exceed five pounds per square inch (psi) measured four inches from the nozzle. After cleaning, cleaned surfaces shall be rinsed with clean water and dried. Care shall be taken during cleaning and rinsing operations to assure that no solution or water enters instruments, connections, or other components susceptible to water damage. Solution or water shall not accumulate and remain in cavities that cannot be drained. Vehicles with decals, markers, straps, and floor plates installed shall only be hand-cleaned with solution of P-D-220, or type I of MIL-D-16791 and water, to prevent damage to these components. Cleaned surfaces shall be hand-rinsed and dried (see 4.5.2).

3.4.5.1.1 Battery supports and retainers. Battery supports and retainers shall be cleaned with a solution of one-half pound of sodium bicarbonate, conforming to O-S-576, per gallon of water. After cleaning, cleaned surfaces shall be flushed with clean water, then thoroughly dried. Dried surfaces shall then be preserved with compound conforming to MIL-C-450.

3.4.5.1.2 Cleaning and drying of backrests and seats. Backrest and seat cushions shall be cleaned with a solution of detergent, conforming to P-D-220, or type I of MIL-D-16791, in warm water. After cleaning, cushions shall be wiped with cloths saturated with clean water to remove cleaning solution. Care shall be taken not to saturate cushions with cleaning solution or water. After rinsing, cushions shall be dried, then protected in accordance with 3.4.17.3.

3.4.5.2 Vehicle exterior. The vehicle exterior, including the cargo bed, shall be cleaned using a solution of detergent conforming to P-D-220, or type 1 of MIL-D-16791, in warm water or steam. Cleaning shall remove all foreign matter. After cleaning, cleaned surfaces shall be rinsed with clean water or steam and thoroughly dried. Care shall be taken to avoid entry of water or steam into driver's or engine compartment (see 4.5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.6 Relubrication. If the vehicle has been operated more than 75 miles since lubrication, or after the vehicle has been cleaned in accordance with 3.4.5.2, it shall be relubricated using materials conforming to applicable drawings, specifications, or lubrication orders. All exposed oil can points such as, but not limited to, levers, locking levers, locking bars, locking pins, pintle pins, hinge pins, hinges, strikers, wing nuts, door locks, hand-operated locking knobs, latches, linkage, and threaded ends of yokes and related clevis pins shall be lubricated with oil conforming to VV-L-800. Excess lubricant shall be removed after lubrication.

3.4.7 Transmission, transfer assembly, control differential and final drive preservation. The transmission shall contain lubricating oil only, conforming to grade PE 10-1 of MIL-L-21260, filled to the operating level. The transfer assembly, control differential, and final drive shall contain lubricating oil conforming to grades PE 10-1 or PE 30-1, as applicable, of MIL-L-21260 filled to the operating level. DD Form 1397 shall be annotated with the grade of lubricant used (see 3.4.1.1).

3.4.8 Cooling system. The cooling system shall be protected by one of the following procedures, as specified (see 4.5.3 and 6.2):

a. For shipment to, and storage in, areas where the temperature drops below minus 40°F, systems shall be protected as specified in 3.4.8.1.
b. For shipment and storage within the bounds of 30 degrees north latitude and 20 degrees south latitude, except continental United States, systems shall be protected as specified in 3.4.8.2.
c. For all other shipments, cooling systems shall be protected as specified in 3.4.8.3.

NOTE: DD Form 1397 (see 3.4.1.1) shall be completed to indicate coolant used.

3.4.8.1 Antifreeze compound procedure. The cooling system shall be filled to the operating level with antifreeze compound conforming to MIL-A-11755. The compound shall be used without dilution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH ANTIFREEZE (ARCTIC-TYPE) - DO NOT DRAIN", shall be securely attached to the radiator filler neck.

3.4.8.2 Water and corrosion inhibitor procedure. The cooling system shall be filled with clear water up to, but not including, the radiator upper tank. A corrosion inhibitor conforming to O-I-490 shall be added in the proportion of five ounces of inhibitor for each ten quarts of water. The inhibitor shall be dissolved in two quarts of warm water and poured into the radiator while the engine is idling. More water shall be added, if necessary, to fill the radiator to operating level. A warning tag, bearing the information "COOLING SYSTEM DOES NOT CONTAIN ANTIFREEZE - FILLED WITH WATER AND INHIBITOR", shall be securely attached to radiator filler neck.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.8.3 Water and antifreeze procedure. The cooling system shall be filled to operating level with a clean solution consisting of equal parts by volume of antifreeze (ethylene glycol) conforming to type I of MIL-A-46153 and water. The engine shall be operated until a temperature has been reached that causes the thermostat to open to assure complete mixing and even distribution of the antifreeze solution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH WATER AND ANTIFREEZE SOLUTION (ETHYLENE GLYCOL) IN EQUAL PARTS BY VOLUME - DO NOT DRAIN", shall be securely attached to the radiator filler neck.

3.4.9 Engine crankcase preservation. The engine crankcase shall be filled to the operating level with lubricating oil conforming to MIL-L-21260, of the seasonal grade specified in the applicable drawing, specification, or lubrication order. DD Form 1397 shall be annotated with the type and grade of lubricant used (see 3.4.1.1).

3.4.10 Fuel tank preservation. The fuel tank cap and filler screen shall be removed and coated with lubricating oil conforming to grade PE 30-1 of MIL-L-21260. The fuel tank shall be drained to the maximum extent possible. The contractor shall maintain a written formula to ascertain the correct amount of residual fuel remaining after the draining operation. One quart of lubricating oil conforming to grade PE 10-1 of MIL-L-21260 shall be added to each five gallons or portion thereof of residual fuel. The tank cap and filler screen shall be reinstalled (see 4.5.4).

3.4.10.1 Fuel expansion tank. After draining the fuel tank, vent lines shall be disconnected, the fitting from the upper right hand end of the expansion tank removed and two quarts of lubricating oil conforming to grade PE 10-1 of MIL-L-21260 added through the vent line block. The fitting shall then be reinstalled and the vent lines reconnected.

3.4.10.2 Fuel tank security. After processing the fuel tank as specified in 3.4.10, the cap shall be secured with a bracket fabricated and installed in accordance with figure 3.

3.4.11 Engine preservation. Engine preservation shall be in accordance with 3.4.11.1 through 3.4.11.6 in an uninterrupted sequence.

3.4.11.1 Fuel system and combustion chamber. Prior to processing, the engine shall be cooled to assure that the cylinder head temperature, measured at the injector nozzle flange surface of all cylinders, is not more than 100°F. Cooling shall be accomplished by induced air currents, circulation of engine coolant, or by waiting the period of time required to attain the above specified temperature. When the ambient temperature exceeds 100°F, the engine shall be cooled to a temperature equivalent to the ambient. After the engine has been cooled, the fuel supply system from the fuel tank shall be shut off. A portable container with two compartments shall be positioned to provide gravity feed to the engine. One compartment shall be filled with preservative oil conforming to grade 1 of MIL-P-46002 to which has been added an oil soluble red dye conforming to MIL-D-81298, in a concentration sufficient to impart a marked coloring to the oil. The second compartment shall be filled with diesel fuel conforming to VV-F-800 (the container shown in figure 4 has proven satisfactory for engine preservation). Disconnect the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

fuel line between the primary fuel filter and fuel pump at the primary fuel filter outlet. Drain the diesel fuel from the secondary fuel filter. Remove the filter can, and extract the filter element. Fill the filter can with preservative oil, conforming to grade 1, MIL-P-46002, and reinstall it. Connect the fuel line from the auxiliary fuel container to the fuel pump supply line. Disconnect the vehicle fuel return line at the quick disconnect coupling. Connect a transparent plastic fuel line to the engine end of the disconnected fuel return line. Insert the other end of the plastic line into a recovery container to collect the returned oil. Disconnect the air cleaner hose from the air inlet elbow. An air restrictor boot fabricated in accordance with figure 5 shall be installed on the air inlet elbow and secured with a clamp to assure that air to the engine is completely cut off. The fuel valve on the auxiliary fuel tank shall be turned to the preservative oil position. Place the engine fuel control in RUN position. Crank the engine with the starter for a period of not less than 30 seconds and not more than 45 seconds (NOTE: The engine may fire for approximately five seconds). The fuel valve on the auxiliary fuel container shall be turned to the OFF position. Remove the filter can from the secondary fuel filter. Drain the preservative oil, grade 1, MIL-P-46002, from the can and wipe it clean with a lint free cloth. Place the filter element in the filter can and fill the can with diesel fuel VV-F-800. Reinstall the filter can in the original position (see 4.5.5).

CAUTION: Special precautions shall be taken to assure that the time limits specified shall not be exceeded or the engine starter, or starter solenoid may be damaged. Excessive cranking could also cause hydrostatic lock.

3.4.11.2 Engine purging. Purge fuel return lines of all preservative oil, by turning the auxiliary fuel tank valve to the diesel fuel position and closing the engine fuel control shut off. Crank the engine with the starter to remove all traces of red colored preservative oil from the plastic return line. (CAUTION: DO NOT OPERATE STARTER FOR A PERIOD EXCEEDING 45 SECONDS.) If all preservative oil has not been purged, rest the starter for three minutes and repeat the purge operation. Turn the auxiliary fuel tank valve to the OFF position. Remove the fuel line and reconnect it to the outlet side of the primary fuel filter. Turn on the vehicle fuel supply system. Remove the air restrictor boot. Disconnect the plastic fuel return line, and reconnect the vehicle fuel return line at the quick disconnect coupling (see 4.5.5).

3.4.11.3 Preservation through air intake and exhaust system. After preservation in accordance with 3.4.11.1 and 3.4.11.2, one ounce of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomized into the exhaust opening. The opening shall then be sealed with tape conforming to type IV, class 1, of PPP-T-60 or type II of MIL-T-22085. The hose shall be disconnected at the air intake, and one ounce of preservative oil conforming to grade 1, MIL-P-46002, shall be atomized into the air intake opening. The air intake opening and the engine crankcase breathers shall then be sealed with plastic plugs conforming to MIL-C-5501 or with tape

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

conforming to type IV, class 1, of PPP-T-60 or type II of MIL-T-22085. A red warning tag bearing the information "ENGINE PRESERVED WITH VCI - DO NOT CRANK" and "BEFORE CRANKING, REMOVE CAPS, TAPE, OR PLUGS, AND REINSTALL HOSE" shall be placed in a conspicuous location within driver's compartment. DD Form 1397 shall be annotated to show engine is preserved with volatile corrosion-inhibited oil (VCI) (see 4.5.5).

3.4.11.4 Preservation through oil level gage rod opening. After preservation in accordance with 3.4.11.1 and 3.4.11.2, the oil level gage rod shall be removed, and six ounces of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomized into the crankcase through the oil level gage rod opening. An extension of sufficient length to permit the spray nozzle to be within the crankcase shall be used. The spray nozzle shall not be submerged in the crankcase oil. After spraying has been accomplished, the oil level gage rod shall be reinstalled. All openings to the engine interior including the oil level gage rod opening and the oil filler cap shall be sealed with tape conforming to type IV, class 1 of PPP-T-60 or type II of MIL-T-22085 (see 4.5.5).

3.4.11.5 Preservation through flywheel housing. Two ounces of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomized into the flywheel housing.

3.4.11.6 Air cleaner. Air cleaner openings shall be sealed with tape conforming to type IV, class 1 of PPP-T-60 or type II of MIL-T-22085.

3.4.12 Personnel and engine compartment heaters and lines. The personnel and engine heaters shall have the fuel supply shut off valve, located at the inlet side of the fuel filters turned to the OFF position. The main fuel line supplying fuel to the heaters shall be disconnected at a point closest to the shut off valves. Fuel from the fuel lines shall be allowed to drain. Seal the ends of the disconnected fuel lines and shut off valves with plastic plugs/caps conforming to MIL-C-5501 or with tape conforming to type IV, class 1 of PPP-T-60 or type II of MIL-T-22085. External exhaust opening shall be sealed with tape conforming to type IV, class 1, of PPP-T-60 or type II of MIL-T-22085, or plastic plug/cap conforming to MIL-C-5501. Four warning tags, each bearing the information "HEATER FUEL LINES DISCONNECTED AND SEALED. PRIOR TO PLACING PERSONNEL OR ENGINE HEATERS IN OPERATION, REMOVE PLUGS/CAPS OR TAPE FROM FUEL LINES, EXHAUST STACK AND SHUT OFF VALVES. OPERATE HEATER FUEL PUMP AND DRAIN A MINIMUM OF ONE QUART OF FUEL THROUGH THE FUEL LINES INTO A PORTABLE CONTAINER. RECONNECT HEATER FUEL LINES.", shall be prepared. One tag each shall be secured to the personnel and engine heater operating switches, and one each to the personnel and engine heaters.

3.4.13 Winch assembly. The winch gear case shall be filled to operating level with lubricant conforming to grade 90 of MIL-L-2105. The wire cable shall be unreeled and all its surfaces coated with preservative conforming to grade 1 of MIL-C-16173. The cable shall be rewound. While the cable is being rewound, it shall be inspected for damage to the preservative coating. Any breaks in coating shall be represerved prior to rewinding. All other moving, mating parts shall be coated with grease conforming to MIL-G-10924.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.14 Doors. Rubber seals around doors shall be coated with powdered talc conforming to type IV, class C of ZZ-T-416 or technical talc conforming to MIL-T-50036.

3.4.15 Engine compartment access plate and drain plugs. The engine compartment access plate, gasket, and attaching hardware shall be removed for ventilation. A screen conforming to figure 6 shall be installed in the access plate opening and secured with four of the existing mounting screws and washers. The two forward MS drain plugs (MS49005-14) shall be removed for drainage. Bare metal surfaces of drain plugs shall be preserved with compound conforming to grade 4 of MIL-C-16173. The plate, gasket, preserved drain plugs, and four access plate mounting screws and washers shall be packaged as specified in 3.4.17.10. The information "REMOVE SCREEN, INSTALL ACCESS PLATE, GASKET, AND FRONT DRAIN PLUGS BEFORE VEHICLE OPERATION" shall be stenciled on the exterior of the vehicle using white or yellow paint conforming to MIL-P-13983. Stenciling shall be in characters not less than 0.75 inch high.

3.4.16 Miscellaneous preservation. Except as otherwise specified herein, all exposed unpainted metal surfaces, except track shoes on the exterior of the vehicle, shall be coated with compound conforming to grade 1 of MIL-C-16173. All exposed, unpainted, unplated ferrous metal surfaces on the interior of the vehicle shall be coated with compound conforming to grade 4 of MIL-C-16173.

3.4.17 Packaging.

3.4.17.1 Dry charged batteries and cables. Dry charged batteries shall be installed and secured in the vehicle battery carrier. Battery cables shall be secured to the battery carrier with 0.75 inch tape conforming to type IV of PPP-T-97. Battery filler cap openings shall be sealed by placing a 2-inch wide by 3-mil thick piece of film conforming to type II of MIL-B-22191, over each filler cap opening with its cap removed. The sheet shall be of sufficient length to allow it to be depressed into the opening to the same depth as the filler plug. Filler caps shall be screwed or inserted into openings to form a complete seal without damaging the sheet. If batteries have been processed in accordance with MIL-B-11188, they need not be reprocessed as above.

3.4.17.2 Electrolyte. Electrolyte shall be packaged and packed in accordance with O-S-801, except that the exterior container shall conform to class 2 of PPP-B-621, or PPP-B-601 overseas type. Marking shall conform to O-S-801. The packed electrolyte shall be stowed in the same location as the BII and secured independently to permit separate removal.

3.4.17.3 Packaging of backrests and seats. Cushions of backrests and seats (see 3.4.5.1.2) shall be covered with paper conforming to grade B of UU-P-268 with a minimum basis weight of 60 pounds. Paper shall be secured with tape conforming to type I of PPP-T-42.

3.4.17.4 Fire extinguishers. Fire extinguishers shall contain a minimum of 90 percent of rated full charge. All seals shall be intact. DA Form 253 shall be completed, then attached securely to each extinguisher (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.17.5 Tow hooks and tow pintle. Tow hooks, pintle, and attaching hardware shall be removed for shipment. Removed items shall be packaged in a type CF, class weather-resistant box conforming to PPP-B-636. The box shall be closed with tape conforming to type III, class 1, of PPP-T-60, identified as to contents, and securely stowed within the crew compartment.

3.4.17.6 Exhaust pipe. The exhaust pipe and attaching clamps shall be removed for shipment and packaged in a box conforming to type CF, class weather-resistant of PPP-B-636. The box shall be closed with tape conforming to type III, class 1, of PPP-T-60, identified as to contents, and securely stowed within the crew compartment.

3.4.17.7 Cab cover, windshield, and door windows. The cab cover, windshield, and door windows shall be removed for shipment and storage. Unpainted metal surfaces shall be coated with preservative conforming to MIL-C-16173, grade 4. Removed bolts, nuts, screws, pins and washers shall be placed in one of the mating parts and secured. The fabric cover shall be thoroughly dried, folded and placed in a container conforming to PPP-B-636, type CF, class weather-resistant. The container shall be closed with tape conforming to type III, class 1, of PPP-T-60. Windshield wipers shall be placed in a bag conforming to MIL-B-117, type I, class B. Rubber molding around windows shall be dusted with talc conforming to type IV, class C of ZZ-T-416 or technical talc conforming to MIL-T-50036. The packaged cab cover, windshield, door windows and windshield wipers shall be packed in a box conforming to class 2 of PPP-B-621, or PPP-B-601. Items shall be blocked, braced and cushioned in the container. The box shall be identified and stowed with BII.

3.4.17.8 Cargo cover installation. The cargo cover installation, except tie down hooks and stanchion base, shall be removed for shipment. Unpainted metal surfaces shall be coated with preservative conforming to MIL-C-16173, grade 4. Removed screws, nuts, and washers shall be packaged separately in a bag conforming to MIL-B-117, type 1, class B, and placed within the cover assembly container. The cover assembly with ropes shall be thoroughly dried, folded and wrapped with barrier material conforming to MIL-B-121, type II, grade A, class 2, and secured with tape PPP-T-60, type III, class 1. The stanchions shall then be placed in a wood box conforming to PPP-B-621, class 2 or to PPP-B-601, style I (30-1/2 x 20-1/2 x 21-1/2 I.D.). Cargo cover bows shall be individually spiral wrapped with barrier material conforming to MIL-B-121, type II, grade A, class 2. Three of the wrapped bows shall be bundled together and secured with tape PPP-T-60, type III, class 1 in three places. The box and bows shall be identified and stowed with BII.

3.4.17.9 Basic issue items (BII). Unless otherwise specified (see 6.2), BII shall be processed, packaged and packed in accordance with MIL-B-12841. BII shall be stowed and secured in accordance with 3.4.17.9.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.17.9.1 Stowage and securement of BII. BII and items removed for shipment shall be identified to the pertinent vehicle by serial number and, except during shipment, shall be stored inside buildings. Packed BII and removed items shall be placed within the cargo compartment. Boxes shall be loaded in a manner that will not increase the cube of the vehicle. Large wooden boxes shall be placed on the vehicle floor and shall be secured with 1.25 inch wide strapping conforming to type 1, class B of QQ-S-781. Strapping shall be secured to holding devices within the compartment. Smaller wooden boxes shall be secured to the larger boxes with 0.75 inch wide strapping conforming to type 1, class B of QQ-S-781. All boxes shall be secured in such a manner as to prevent any movement during transit, and to prevent damage to containers or vehicle interiors. Corner protectors shall be used under all strapping.

3.4.17.9.2 Vehicle closure. Each vehicle shall be provided with a protective closure kit fabricated and installed in accordance with Appendix A.

3.4.17.10 Access plate, gasket, and drain plugs. Access plate, gasket, and preserved drain plugs (see 3.4.15) shall be packaged in a box conforming to type CF, class weather-resistant of PPP-B-636. The box shall be closed with tape conforming to type III, class 1 of PPP-T-60, identified as to contents, and securely stowed within driver's compartment.

3.4.17.11 Cargo compartment. A protective decking shall be fabricated and installed in the cargo compartment in accordance with figures 7, 8, 9, and 10.

3.4.17.12 Launcher mounting holes. Plastic plugs conforming to MIL-C-5501, size M5501/7-F24, shall be placed into the four launcher mounting holes. The washer and plastic plugs shall be secured to the launcher mounting pads with tape conforming to type IV, class 1 of PPP-T-60 or type II of MIL-T-22085.

3.4.17.13 Blast deflector brackets. Brackets to prevent movement of the blast deflector shall be fabricated and installed in accordance with figure 11.

3.4.17.14 Blast cover. The blast cover shall be partially unfolded and strapped for shipment and storage in accordance with figure 12.

3.5 Level B processing. Vehicles shall be processed in the same manner as specified for Level A, with the following exceptions (see 1.2).

3.5.1 Transmission, transfer assembly, control differential, and final drives. The transmission, transfer assembly, control differential, and final drives shall contain operational lubricant, as specified on applicable drawings, specifications, or lubrication order, filled to operating level. If, however, these units contain lubricating oil conforming to grades PE 10-1 or PE 30-1 of MIL-L-21260, an additional amount of the same oil shall be added to attain the operating level. Operating lubricants shall not be mixed with MIL-L-21260. DD Form 1397 shall be annotated to indicate grade of lubricant or preservative oil used (see 3.4.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.5.2 Engine crankcase. The engine crankcase shall contain normal operational lubricant, as specified in lubrication order, filled to operational level. DD Form 1397 shall be annotated to indicate grade of lubricant used (see 3.4.9).

3.5.3 Residual fuel. Unless otherwise specified (see 6.2), vehicles shall be shipped without draining residual fuel from the fuel tanks (see 3.4.10).

3.5.4 Engine. The engine shall require no preservation for level B shipment and storage (see 3.4.11).

3.5.5 Personnel heater and fuel pump. Unless otherwise specified (see 6.2), personnel heaters and fuel pump shall be in a ready to use condition (see 3.4.12).

3.5.6 Winch assembly. Winch gear boxes shall be filled with operational lubricant. Cable shall not be preserved (see 3.4.13).

3.5.7 Backrests and seats. Cushions of backrest and seats may be covered or uncovered (see 3.4.17.3).

3.5.8 Tow hooks and tow pintle. Tow hooks and tow pintle shall be removed for overseas shipment only (see 3.4.17.5).

3.5.9 Vehicle closure. A vehicle closure kit shall not be provided for level B shipment and storage. Openings to vehicle interior shall be sealed in accordance with Appendix B (see 3.4.17.9.2).

3.6 Loading.

3.6.1 Loading flat cars. Loading of vehicles on open top railroad cars shall be in accordance with the applicable requirements of Section 1, General Rules Governing the Loading of Commodities on Open Top Cars, and figures 87 and 87A of Section 6, Rules Governing the Loading of Department of Defense Material on Open Top Cars, publicaton of the Association of American Railroads.

3.6.2 Highway shipment. Loading of vehicles for shipment by haulaway, and rules for shipment by driveaway or towaway, shall be in accordance with Department of Transportation Publication "Federal Motor Carrier Safety Regulations" and applicable military publications.

3.6.3 Drive-on/drive-off capability. When specified (see 6.2), the vehicle shall be capable of operation during loading and unloading. When vehicles are to be operated for loading or unloading, the following provisions shall apply.

3.6.3.1 Additional fuel. Additional fuel shall be added, as required, to accomplish movement of the vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.6.3.2 Batteries and electrolyte. Batteries shall be filled with electrolyte and fully charged, and battery cables connected (see 3.4.17.1 and 3.4.17.2). After the vehicle self-movement for loading or placement in storage, the ground cable at battery shall be disconnected, and then secured to battery carrier with 0.75 inch tape conforming to type IV of PPP-T-97. A tag bearing the following message, "VEHICLE PRESERVED FOR DRIVEAWAY CONDITION. BEFORE CRANKING, CONNECT GROUND CABLE TO BATTERY TERMINAL. ENGINE AND FUEL TANKS NOT PRESERVED", shall be located in a conspicuous place in the driver's compartment.

3.6.3.3 Blast cover closure. Provisions of Appendix B shall not be required when drive-on/drive-off capability is specified (see 6.2).

3.6.4 Reprocessing engine after loading.

3.6.4.1 Level A. If the engine is operated in connection with moving of the vehicle to the loading area or during the loading itself, the engine shall reprocessed as specified in 3.4.11.1 through 3.4.11.6.

3.6.4.2 Level B. If the engine is operated in connection with movement of the vehicle for loading or unloading, there shall be no additional processing of the engine.

3.7 Marking. In addition to any special marking required in the contract (see 6.2), the vehicle shall be marked in accordance with MIL-STD-129.

3.7.1 Lifting points. The information "LIFT HERE" shall be stenciled adjacent to the lifting eyes, with arrows pointing to the lifting eyes, using black ink conforming to TT-I-1795. Stenciling shall be in characters not less than 0.75 inch high.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform or witness any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection records. The contractor shall maintain records of all inspections performed, and such records shall be readily available for review by the Government representative.

4.2 First article inspection. One of the first ten production processed vehicles (see 3.1) shall be subjected to the inspections specified in 4.5.1 through 4.5.5 to determine conformance to the requirements of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

TABLE I. Processing requirements.
(See indicated paragraphs for level A and level B requirements.)

Component	Cleaning	Preservation		Packaging/Stowage	
	Levels A & B	Level A	Level B	Level A	Level B
Record forms		3.4.1.1	3.4.1.1	3.4.1.1	3.4.1.1
Disassembly		3.4.4	3.4.4	3.4.4	3.4.4
Matchmarking		3.4.4.1	3.4.4.1	3.4.4.1	3.4.4.1
Interior of vehicle	3.4.5.1				
Battery supports and retainers	3.4.5.1.1	3.4.5.1.1	3.4.5.1.1		
Backrests and seats	3.4.5.1.2			3.4.5.1.2	3.5.7
Exterior of vehicle	3.4.5.2				
Relubrication		3.4.6	3.4.6		
Transmission, transfer assembly, control differential, and final drive 1/		3.4.7	3.4.7		
Cooling system 1/		3.4.8	3.4.8		
Antifreeze compound procedure		3.4.8.1	3.4.8.1		
Water and corrosion inhibitor procedure		3.4.8.2	3.4.8.2		
Water and antifreeze procedure		3.4.8.3	3.4.8.3		
Engine crankcase 1/		3.4.9	3.4.9		
Engine preservation		3.4.11	3.4.11		
Preservation through fuel system and combustion chamber		3.4.11.1	3.4.11.1		
Engine purging		3.4.11.2	3.4.11.2		
Preservation through air intake and exhaust system 1/		3.4.11.3	3.4.11.3		
Preservation through oil level gage rod opening		3.4.11.4	3.4.11.4	3.4.11.4	
Preservation through flywheel housing		3.4.11.5			
Air cleaner				3.4.11.6	
Personnel and engine compartment heaters and lines		3.4.12	3.5.5	3.4.12	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

TABLE I. Processing requirements - Continued.
(See indicated paragraphs for level A and level B requirements.)

Component	Cleaning	Preservation		Packaging/Stowage	
	Levels A & B	Level A	Level B	Level A	Level B
Fuel tank		3.4.10	3.5.3	3.4.10.2	
Fuel expansion tank		3.4.10.1	3.5.3		
Cargo compartment				3.4.17.11	3.4.17.11
Launcher mounting holes				3.4.17.12	3.4.17.12
Blast deflector brackets				3.4.17.13	3.4.17.13
Winch assembly			3.5.6		
Doors		3.4.14	3.4.14		
Engine compartment access plate and drain plugs		3.4.15	3.4.15	3.4.17.10	3.4.17.10
Miscellaneous preservation		3.4.16	3.4.16		
Batteries and cables		3.4.17.1	3.4.17.1	3.4.17.1	3.4.17.1
Electrolyte				3.4.17.2	3.4.17.2
Fire extinguishers				3.4.17.4	3.4.17.4
Tow hooks and pintle				3.4.17.5	3.5.8
Exhaust pipe				3.4.17.6	3.4.17.6
Cab cover, windshield and door windows		3.4.17.7		3.4.17.7	
Cargo cover installation		3.4.17.8	3.4.17.8	3.4.17.8	3.4.17.8
Basic issue items		3.4.17.9	3.4.17.9	3.4.17.9	3.4.17.9
Stowage				3.4.17.9.1	3.4.17.9.1
Vehicle closure				3.4.17.9.2	3.5.9
Loading flat cars				3.6.1	3.6.1
Highway shipment				3.6.2	3.6.2
Reprocessing engine after loading				3.6.4.1	3.6.4.2
Marking				3.7	3.7
Lifting points				3.7.1	3.7.1

1/ Inspect DD Form 1397

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

4.2.1 Failure. Failure of any first article samples to conform to the applicable requirements of this specification shall be cause for rejection of the vehicles by the Government. The vehicle shall not be accepted until objective evidence that the contractor has corrected the condition causing the failure has been provided to the Government.

4.3 Quality conformance tests.

4.3.1 Acceptance tests. Unless otherwise specified (see 6.2), one processed vehicle selected at random from each day's production shall be tested in accordance with 4.5.2 through 4.5.4.

4.3.2 Control tests. Control tests shall be conducted on one of the first 10 vehicles processed and thereafter one per month. The processed vehicles shall be subjected to the inspections specified in 4.5.1 through 4.5.5.

4.4 Failure. Failure of any processed vehicle to pass any of the specified tests shall be cause for the Government to refuse acceptance of the production quantity represented, until action taken by the contractor to correct defects and prevent recurrence has been approved by the Government.

4.5 Methods of inspection.

4.5.1 Materials. To determine conformance to 3.2, all materials to be used in processing of vehicles shall be inspected in accordance with the material specifications. Certified inspection and laboratory test reports shall be provided which show that furnished materials conform to the applicable material specifications, except for materials that have been inspected by the Government at the source. Materials listed on a Qualified Products List shall be obtained from one of the approved sources indicated.

4.5.2 Cleaning. To determine conformance to 3.4.5.1, the vehicle interior shall be inspected for cleanliness in accordance with the applicable provisions of MIL-P-116. To determine conformance to 3.4.5.2, the vehicle exterior shall be inspected for cleanliness. Surfaces to which tape is to be applied shall be examined for cleanliness before application.

4.5.3 Cooling system. To determine conformance to 3.4.8, the engine coolant shall be tested using a hydrometer-thermometer type tester, with a range of minus 60°F to plus 160°F, conforming to GG-T-250.

4.5.4 Fuel tank. To determine conformance to 3.4.10, visual inspection of preservative application shall be done to assure compliance with the contractor's formula.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

4.5.5 Engine. To determine conformance to 3.4.11.1 through 3.4.11.6, as applicable, the interior of the engine shall be disassembled to the extent necessary to permit visual examination of all surfaces within the combustion chamber. The combustion chamber is all surfaces within the cylinder from and including the surface of the head within the cylinder. All surfaces within the combustion chamber shall have a wet coating of preservative oil, as obtained when the item is dipped or flushed with the oil. The processing method of the approved preserved engine shall be submitted in writing for use in processing engines in all subsequent production vehicles.

5. PACKAGING

This section is not applicable to this specification.

6. NOTES

6.1 Intended use. This specification covers processing of the M730 and M730A1 vehicle for storage outside of buildings, for immediate shipment and domestic or overseas shipment, including carloading (see 1.1).

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Level type of processing required (see 1.2).
c. If first article samples are not required (see 3.1).
d. Required procedure for protection of cooling system (see 3.4.8).
e. If BII should be processed, packed, packaged, or stowed other than as specified (see 3.4.17.9).
f. If draining of residual fuel from fuel tank is required (see 3.5.3).
g. If personnel heaters and fuel pump shall not be in ready to use condition (see 3.5.5).
h. If drive-on/drive-off capability is required (see 3.6.3).
i. If special marking is required (see 3.7).
j. If responsibility for inspection shall be other than as specified (see 4.1).
k. If inspections other than those specified are required (see 4.3.1).

6.3 Safety precautions. Caution should be exercised in handling carbon dioxide (CO_2) fire extinguisher cylinders. Cylinders should not be dropped, permitted to strike each other, or handled roughly. Extreme care should be exercised during the reinstallation operation to avoid activating fire extinguisher control system (see 3.4.17.4).

6.4 Forms. A copy of the "Equipment Log Book" and all required forms i.e., DD Form 1397 (see 3.4.1.1) and DA Form 253 (see 3.4.17.4) will be furnished to the contractor by the Government at least 30 days before shipment of the vehicles required by the contract delivery schedule.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

6.5 Recycled materials. The use of recycled materials which meet the requirements of the applicable material specifications without jeopardizing the intended use of the item shall be encouraged (see 3.2).

6.6 Dimensions. Unless otherwise specified all dimensions are in inches.


6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army - AT

Preparing activity:
Army - AT

(Project No. PACK-A310)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

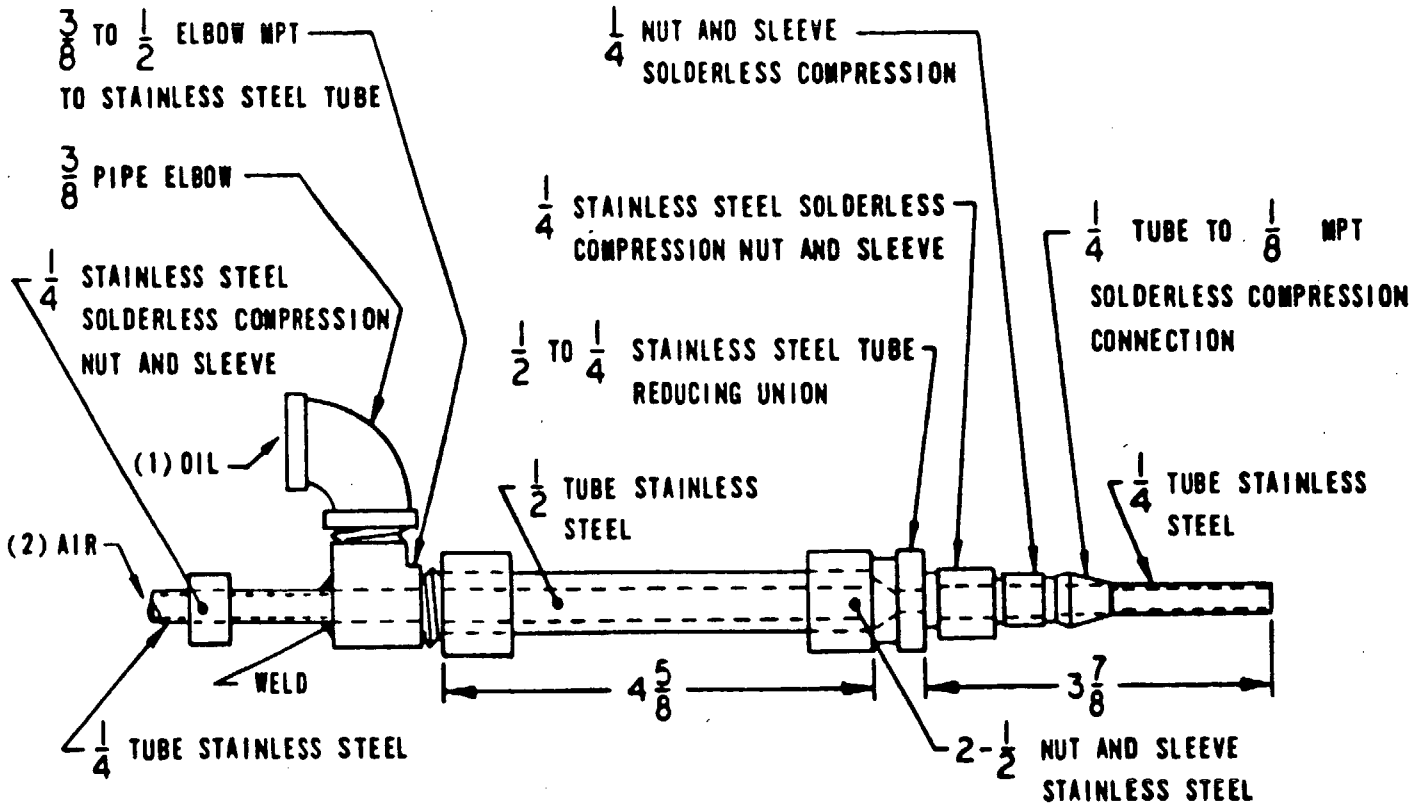


NOTE: (1) AND (2) CONNECT TO CORRESPONDING LINES ON FIGURE 3

FABRICATION DETAILS FOR OIL SPRAY ATOMIZING NOZZLE

FIGURE 1. Atomizing device.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

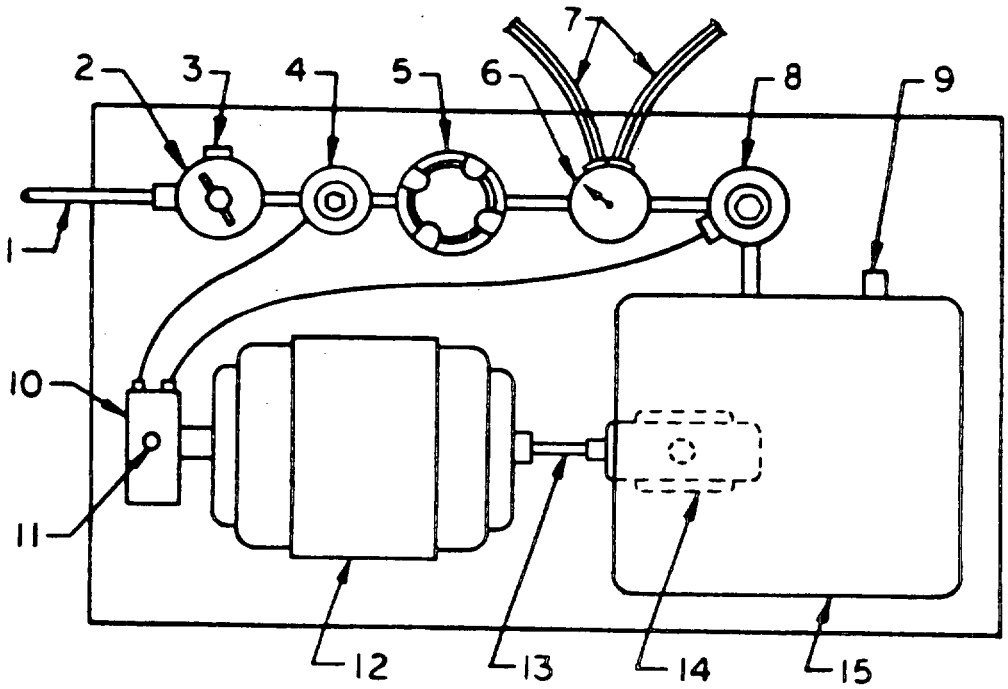


1. AIR LINE
2. AIR PRESSURE REGULATOR
3. AIR PRESSURE GAGE
4. SOLENOID VALVE
5. MOISTURE SEPARATOR
6. OIL PRESSURE GAGE
7. TWO DOUBLE TAPED LINES
8. SOLENOID VALVE
9. OIL TANK LEVEL GAGE
10. ELECTRIC JUNCTION BOX
11. ELECTRIC LINE
12. MOTOR 1/4 H P
13. SHAFT
14. POSITIVE DISPLACEMENT OIL PUMP
15. OIL TANK


NOTE:
THIS EQUIPMENT HAS PROVEN SATISFACTORY FOR ATOMIZE SPRAYING OF PRESERVATIVE OIL IN CONJUNCTION WITH FIGURE 2

FIGURE 2. Pressure pump.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.



REMOVE SCREW AND WASHER IN RELATIONSHIP WITH EAR'S OF GAS CAP



PLACE BRACKET ITEM 1 BETWEEN EAR'S OF GAS CAP AND SECURE WITH REMOVED SCREW AND WASHER

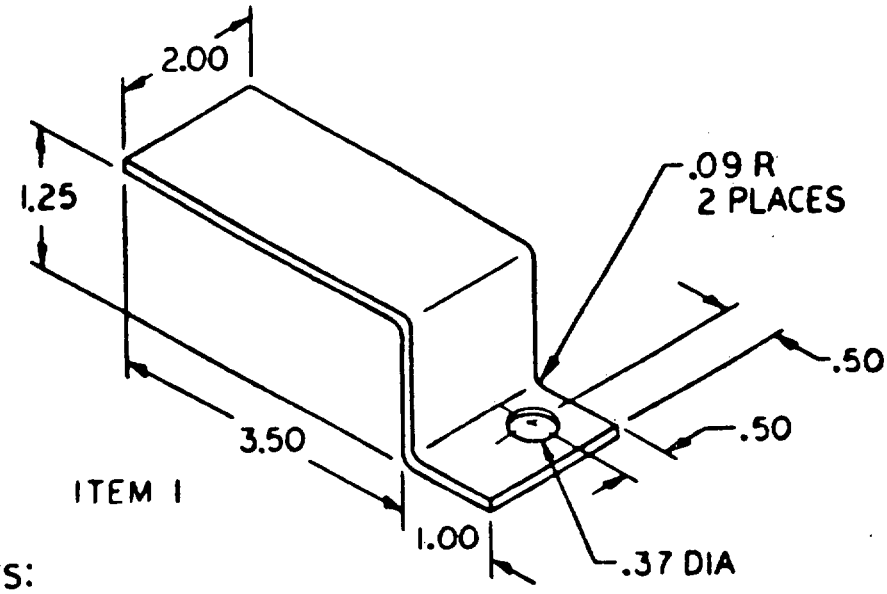

NOTES:

1. MATERIAL: STEEL, CARBON, HR, ASTM A569, .125 THK.
2. FINISH: MIL-C-16173, GRADE 1.

FIGURE 3. Bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.


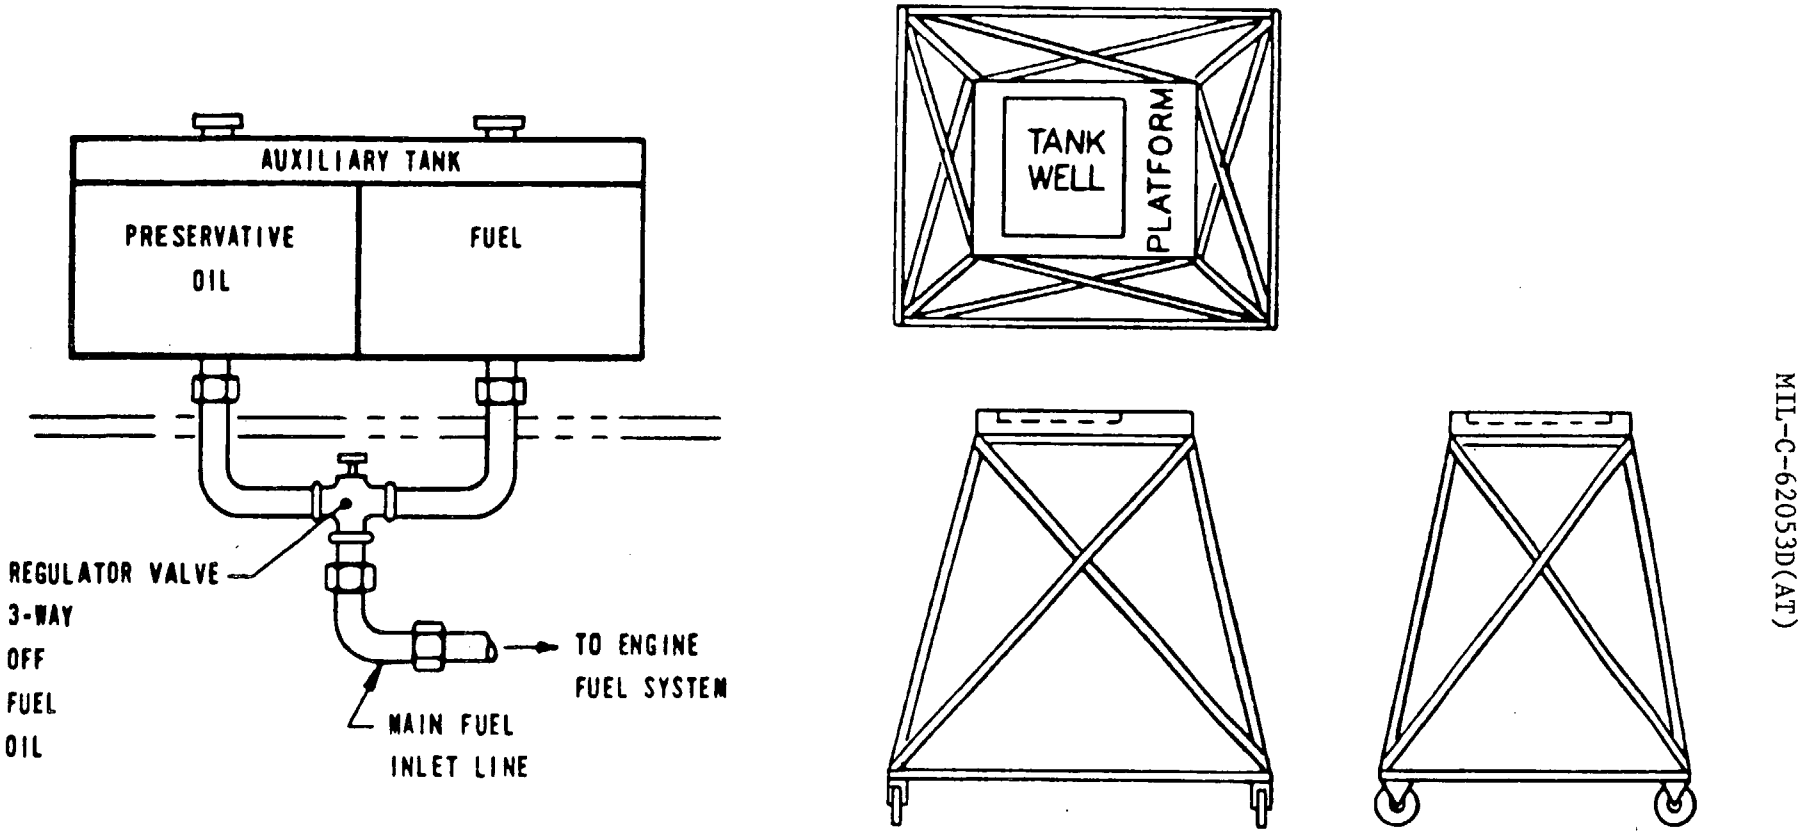


FIGURE 4. Auxiliary fuel container equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

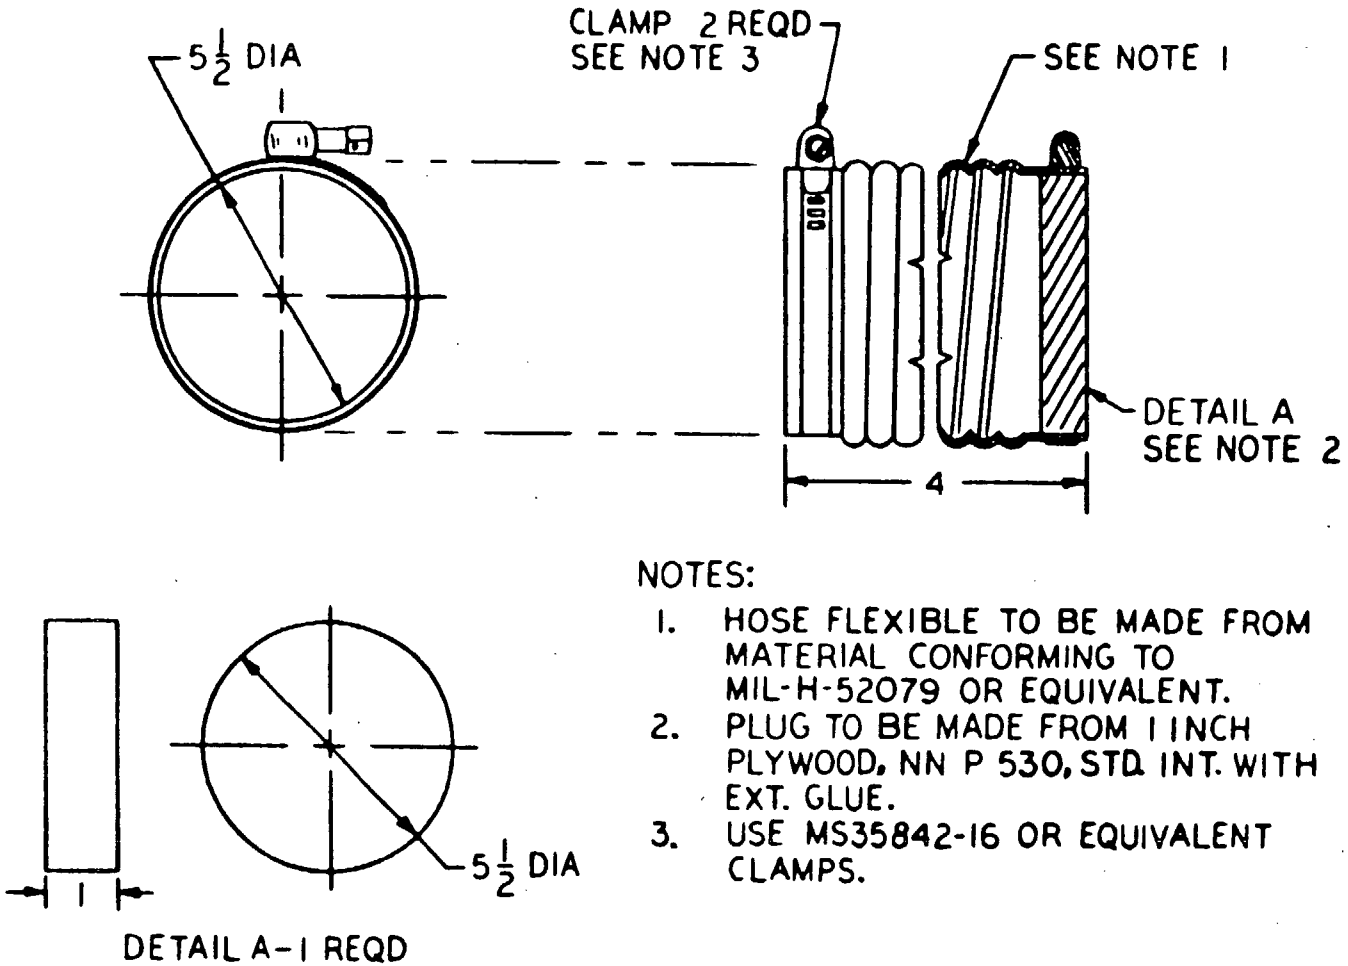

NOTES:

1. HOSE FLEXIBLE TO BE MADE FROM MATERIAL CONFORMING TO MIL-H-52079 OR EQUIVALENT.
2. PLUG TO BE MADE FROM 1 INCH PLYWOOD, NN P 530, STD. INT. WITH EXT. GLUE.
3. USE MS35842-16 OR EQUIVALENT CLAMPS.

FIGURE 5. Boot air restrictor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

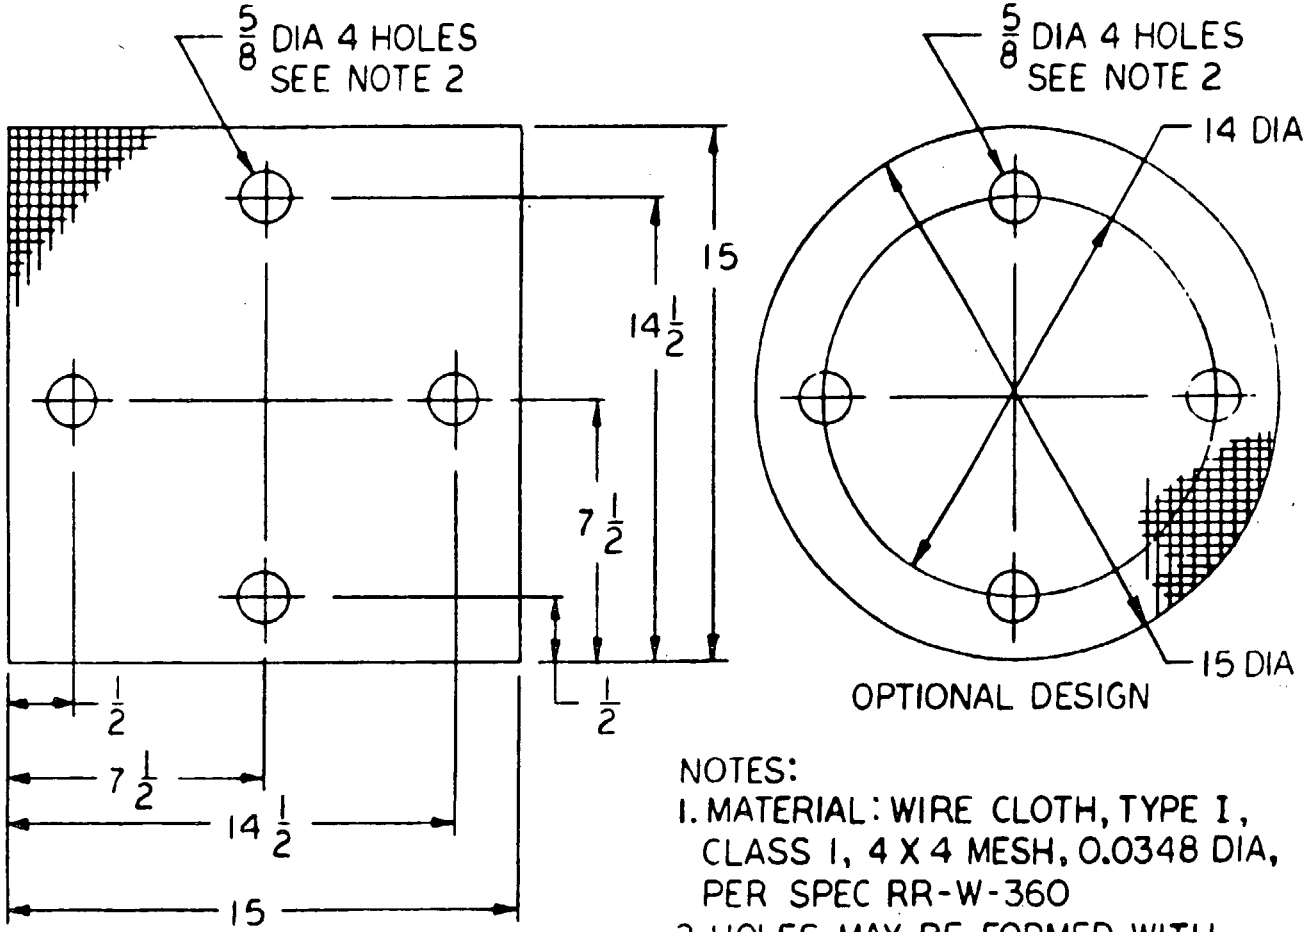


FIGURE 6. Screen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.


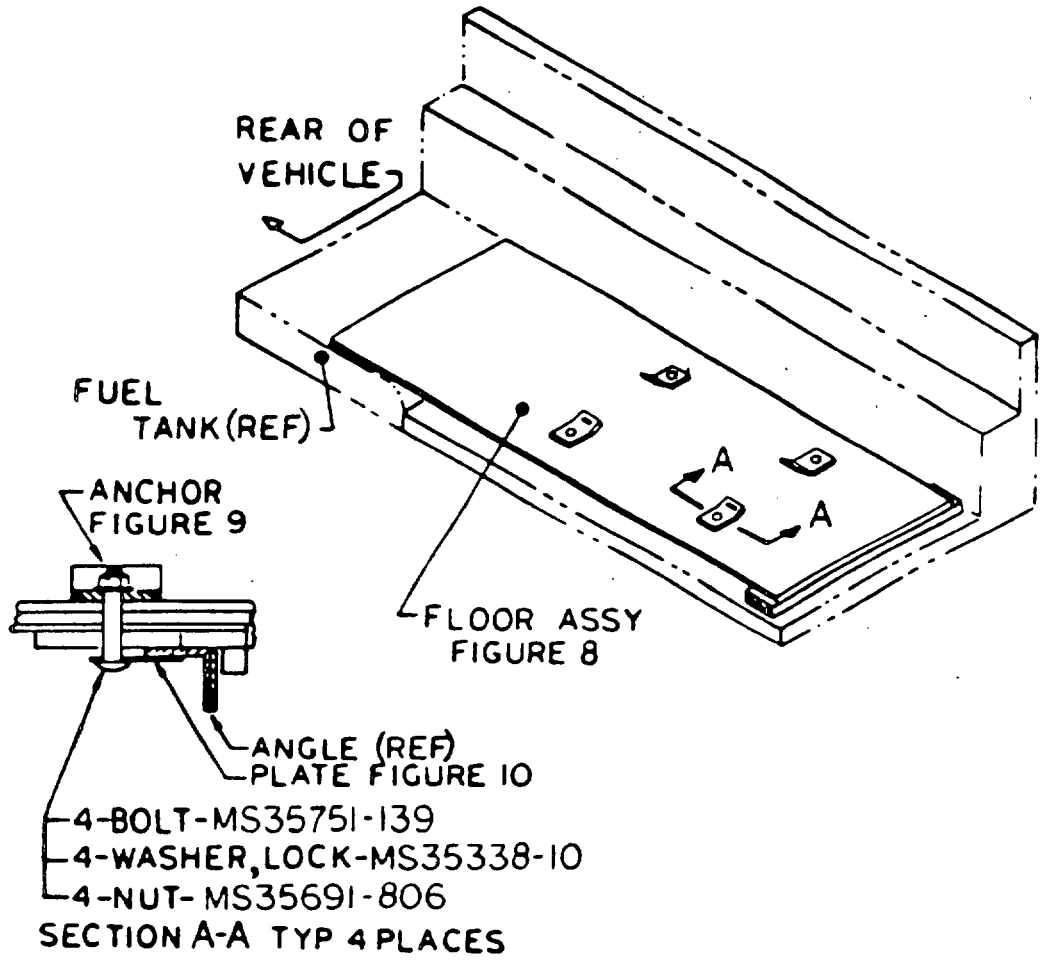


FIGURE 7. Floor assembly installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

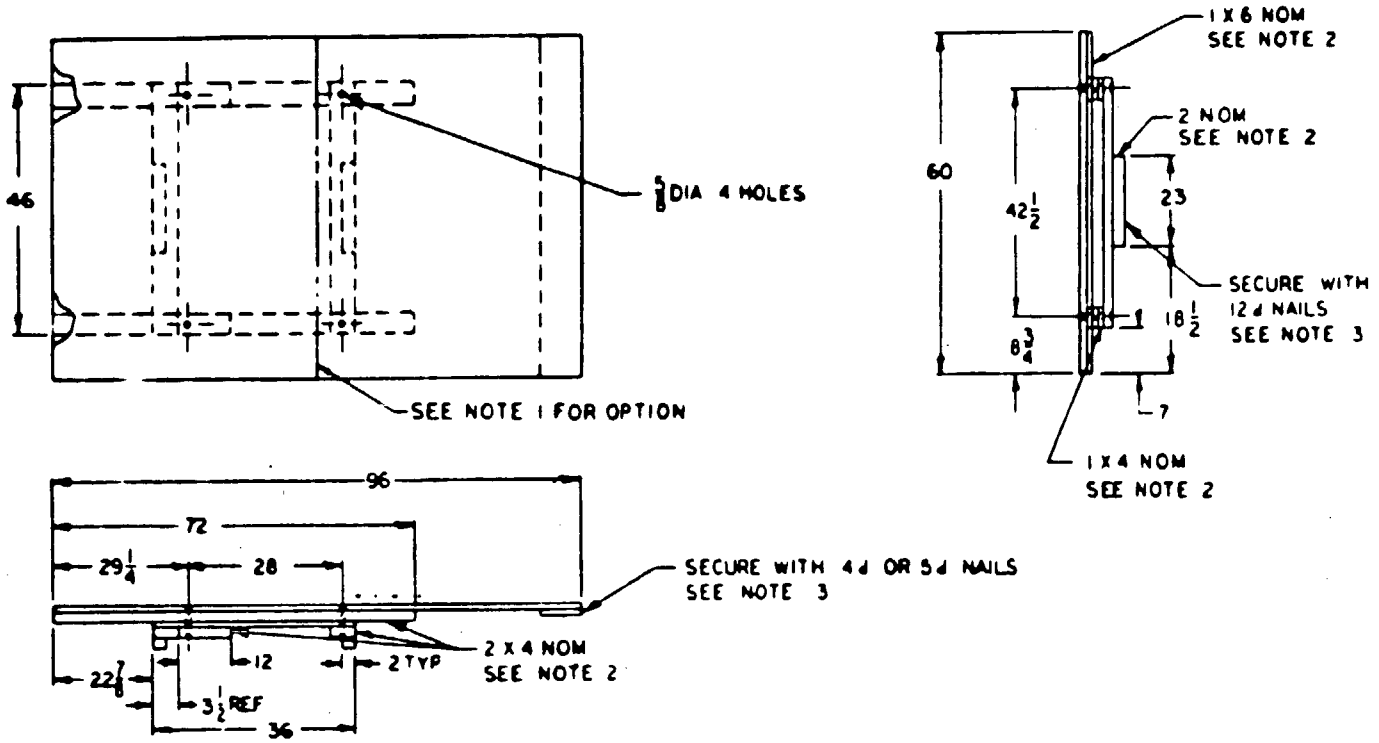

NOTES:

1. PLYWOOD, SPEC NN-P-530, GROUP B, PS 1, STD INT W/EXT GLUE, 3/4 THK. OPTIONAL: CUT AND SPLICED AS INDICATED.
2. LUMBER, MIL-STD-731, GROUP I OR II.
3. NAILS, SPEC FF-N-105, TYPE II, STYLE 4.
4. DIM IN INCHES TOL ± 1/16 UNLESS OTHERWISE SPECIFIED.

FIGURE 8. Floor assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.


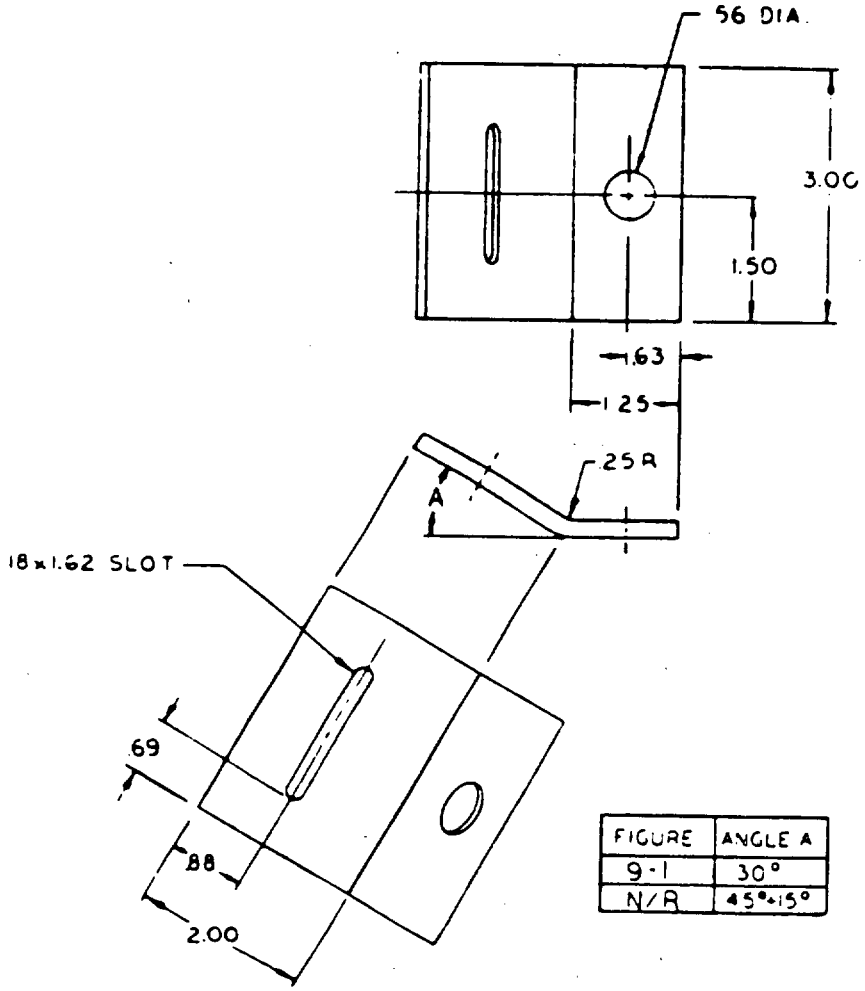


FIGURE	ANGLE A
9-1	30°
N/R	45°±15°

NOTES:
1. MATERIAL: STEEL, CARBON, QQ-S-741, .18 THK
2. REMOVE SHARP EDGES
3. FINISH: MIL-C-16173 GR.1.
4. DIM. IN INCHES TOL ±1/16 UNLESS OTHERWISE SPECIFIED.

FIGURE 9. Anchor, strapping.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

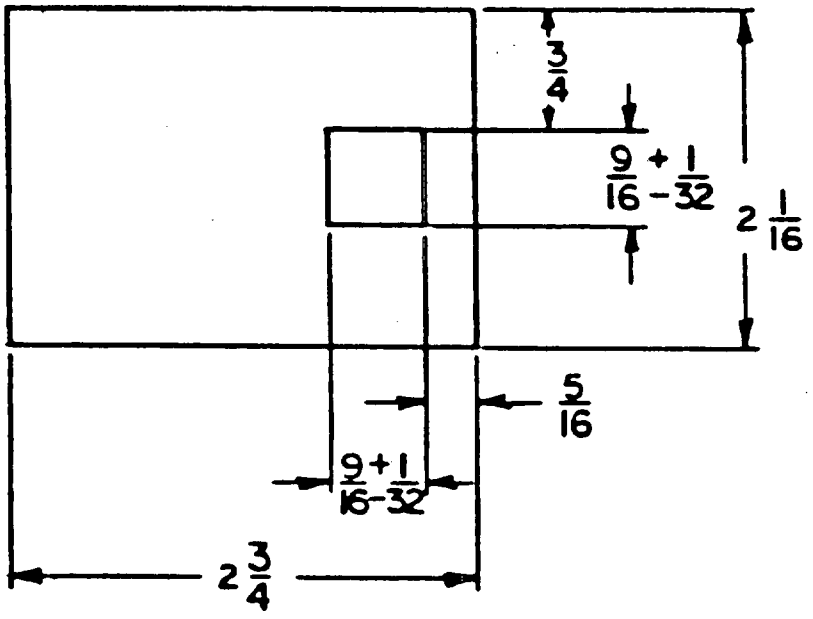

NOTES:
1. MATERIAL: STEEL, CARBON, QQ-S-741, 1/4 THK
2. REMOVE SHARP EDGES
3. FINISH: MIL-C-16173 GR.1.
4. DIM IN INCHES TOL ±1/16 UNLESS OTHERWISE SPECIFIED.

FIGURE 10. Washer, plate.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

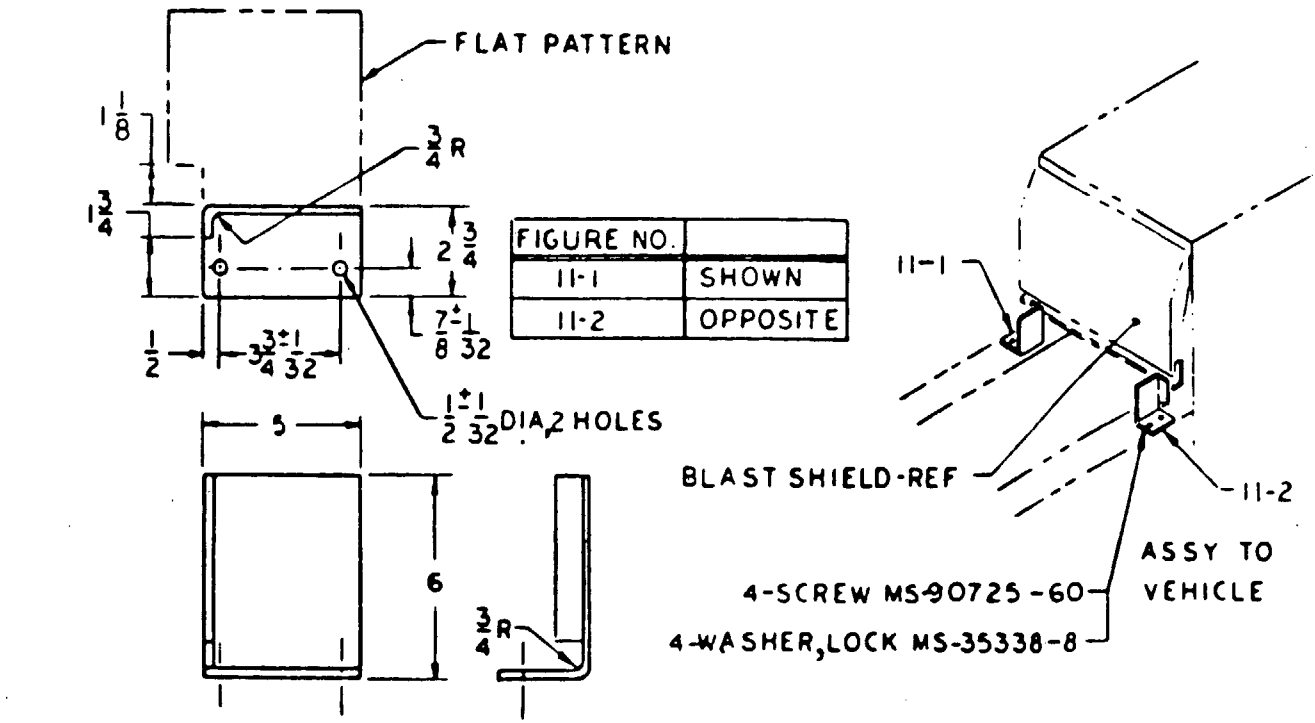

NOTES:
1. MATERIAL: STEEL, CARBON, QQ-S-741, 1/4 THK
2. REMOVE SHARP EDGES
3. FINISH: MIL-C-16173 GR.1.
4. DIM. IN INCHES TOL ±1/16 UNLESS OTHERWISE SPECIFIED.

FIGURE 11. Blast shield bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

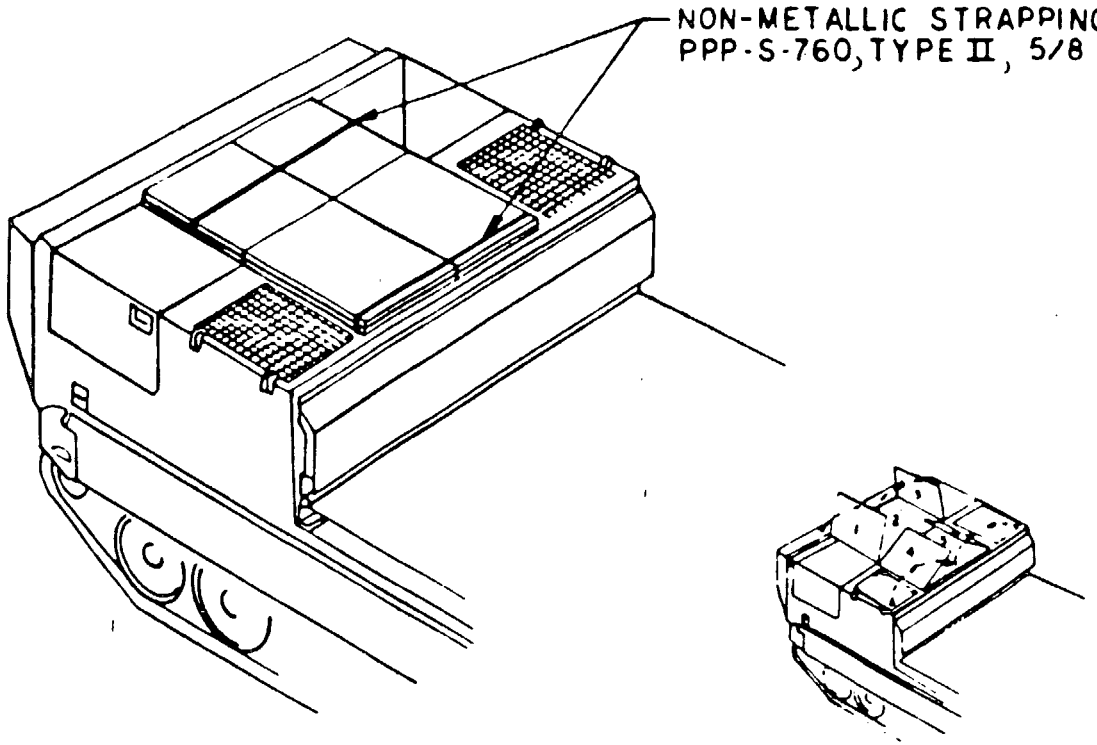

NOTE:
SIDE COVERS 1, 3, 4 AND 6 SHALL BE FOLDED BACK ONTO CENTER COVERS. THIS SHALL BE THE POSITION USED FOR BLAST COVER WHEN CLOSURE IS INSTALLED

FIGURE 12. Blast cover shipment position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

APPENDIX A

REQUIREMENTS FOR ASSEMBLY, INSTALLATION AND
REMOVAL OF VEHICLE CLOSURE FOR M730 AND M730A1 VEHICLES

10. SCOPE

10.1 Scope. This appendix covers requirements for assembly, installation and removal of the vehicle closure (see figure 13). This appendix is a mandatory part of the specification. The information contained herein is intended for compliance only.

20. APPLICABLE DOCUMENTS

20.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this appendix to the extent specified herein.

SPECIFICATIONS
FEDERAL

NN-P-530	- Plywood, Flat Panel.
QQ-S-741	- Steel, Carbon: Structural Shapes, Plates, and Bars.
RR-W-360	- Wire Fabric, Industrial.
TT-E-516	- Enamel, Lusterless, Quick-Drying Styrenated Alkyd Type.
TT-E-527	- Enamel, Alkyd, Lusterless.
PPP-B-1055	- Barrier Material, Woodproof, Flexible.

MILITARY

MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold-Application.

STANDARDS
FEDERAL

FED-STD-595	- Colors.

MILITARY

MIL-STD-731	- Quality of Wood Members for Containers and Pallets.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.
MS 27183	- Washer, Flat-Round, Steel, Cadmium Plated, General Purpose.
MS 90726	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Grade 5, Cadmium Plated, UNF-2A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

APPENDIX A

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

30. REQUIREMENTS

30.1 Installation of closure. Place the closure on the vehicle. Attach the lower ends of the tiedown straps to the track shroud, and remove the four track shroud bolts which will match the hole in the strap. Stow the bolts in the driver's compartment. Place three washers, MS 27183-19 (detail 15, figure 13), between the track shroud and the strap. Then, using existing washers and four screws, MS 90726-114 (detail 18, figure 13), fasten the strap to the vehicle. See section A-A, figure 13.

30.2 Removal of closure. Remove four screws which secure the tiedown straps to the vehicle. Replace washers and four bolts (stowed in the driver's compartment) in the track shroud. The closure is now free to lift from the vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

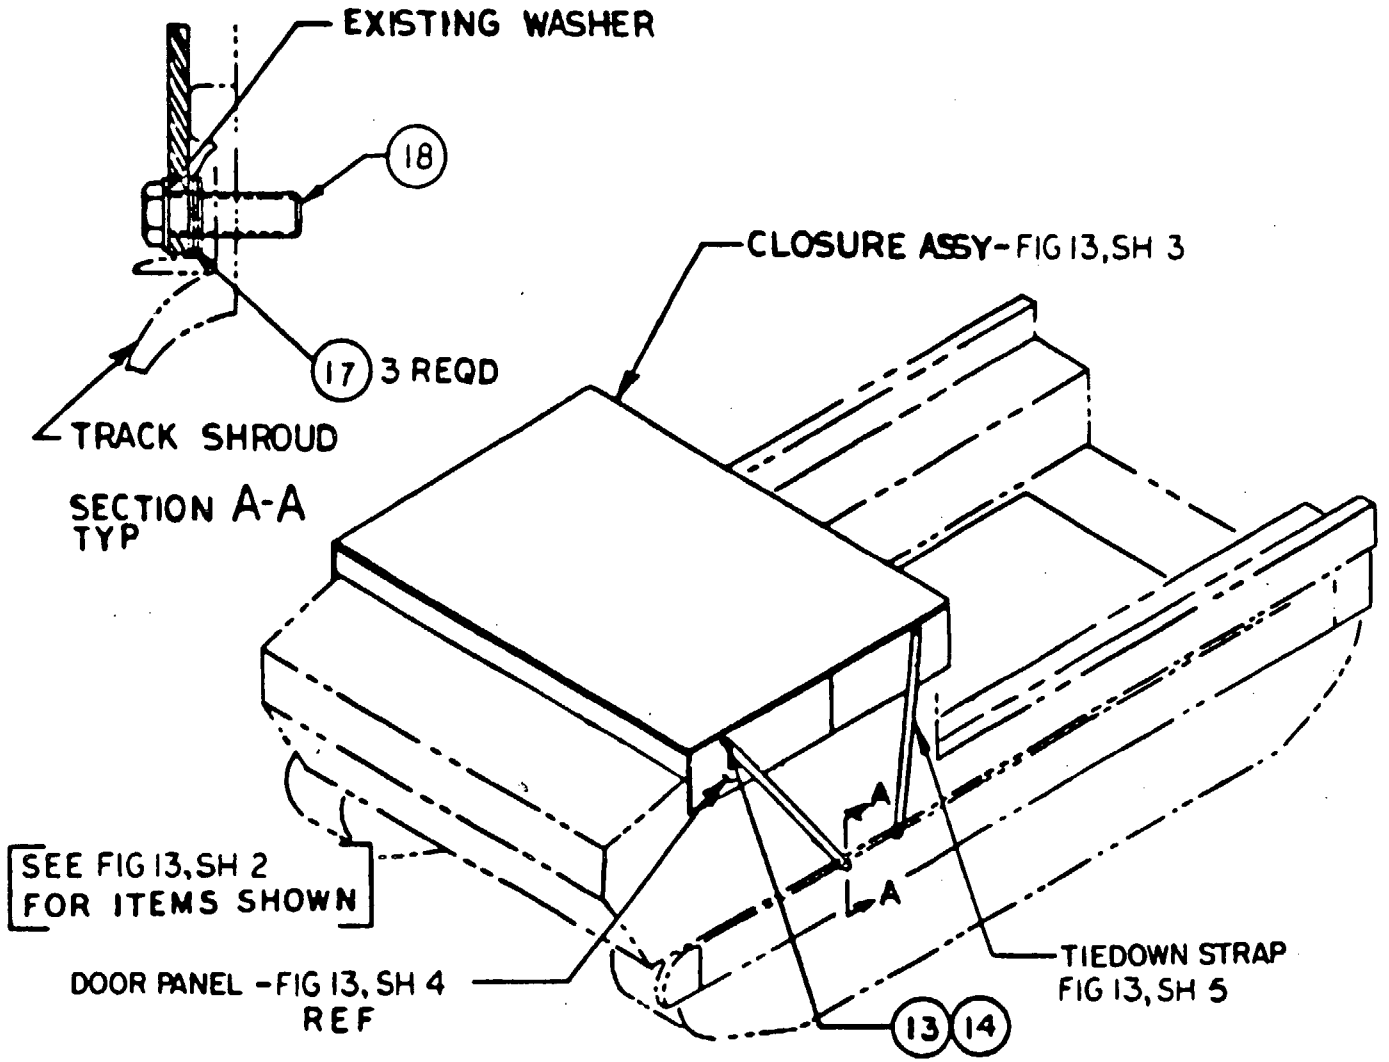


FIGURE 13. Closure kit installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

ITEM NO.	PART NAME	QTY REQD	DESCRIPTION	MATERIAL
1	TOP	2	1-1/2 X 40-1/16 X 102-1/2	NOTE 1
2	BACK	1	1/2 X 7-1/2 X 101-1/2	NOTE 1
3	SIDE	1	1/2 X 10 X 80-1/8	NOTE 1
4	SIDE	1	1/2 X 10 X 39-1/8	NOTE 1
5	DOOR PANEL	1	SEE DETAIL, FIG. 13, SH 4	NOTE 1
6	FRONT	1	1/2 X 4-3/4 X 101-1/2	NOTE 1
7	FRAME	4	2 NOM X 2-1/8 X 75-7/8	NOTE 2
8	FRAME	2	2 NOM X 2-1/8 X 101-1/2	NOTE 2
9	STRAP	2	2 NOM X 2-5/8 X 5-3/8	NOTE 2
10	STRAP	2	2 NOM X 2-5/8 X 2-3/4	NOTE 2
11	SCREEN	1	3-1/2 X 101-1/2	NOTE 3
12	SCREEN	1	2-3/4 X 101-1/2	NOTE 3
13	FRAME	1	2 NOM X 2-1/8 X 53-1/2	NOTE 2
14	FRAME	2	2 NOM X 2-1/8 X 21	NOTE 2
15	BOLT LAG	7	3/8 X 1/2	NOTE 4
16	WASHER	7	3/8 I.D	NOTE 4
17	WASHER	12	MS27183-19	
18	SCREW	4	MS90726-114	


NOTES:

1. PLYWOOD, NN-P-530, EXTERIOR, GRADE C-C.
2. LUMBER, MIL-STD-731, GROUP I OR II.
3. RR-W-360, TYPE 1, CLASS 1, 4X4 MESH, 0.0348 DIA WIRE.
4. STEEL, COAT WITH PRESERVATIVE MIL-C-18173, GRADE 1.
5. NAILING SHALL CONFORM TO MIL-STD-1186.
6. EXTERIOR SURFACES OF CLOSURE SHALL BE COVERED WITH ONE COAT OF PAINT CONFORMING TO TT-E-527 OR TT-E-516 AND TO CHIP NO. 34087 OF FEDERAL STANDARD NO. 595.

SHEET 2 OF 5

FIGURE 13. Closure kit installation. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

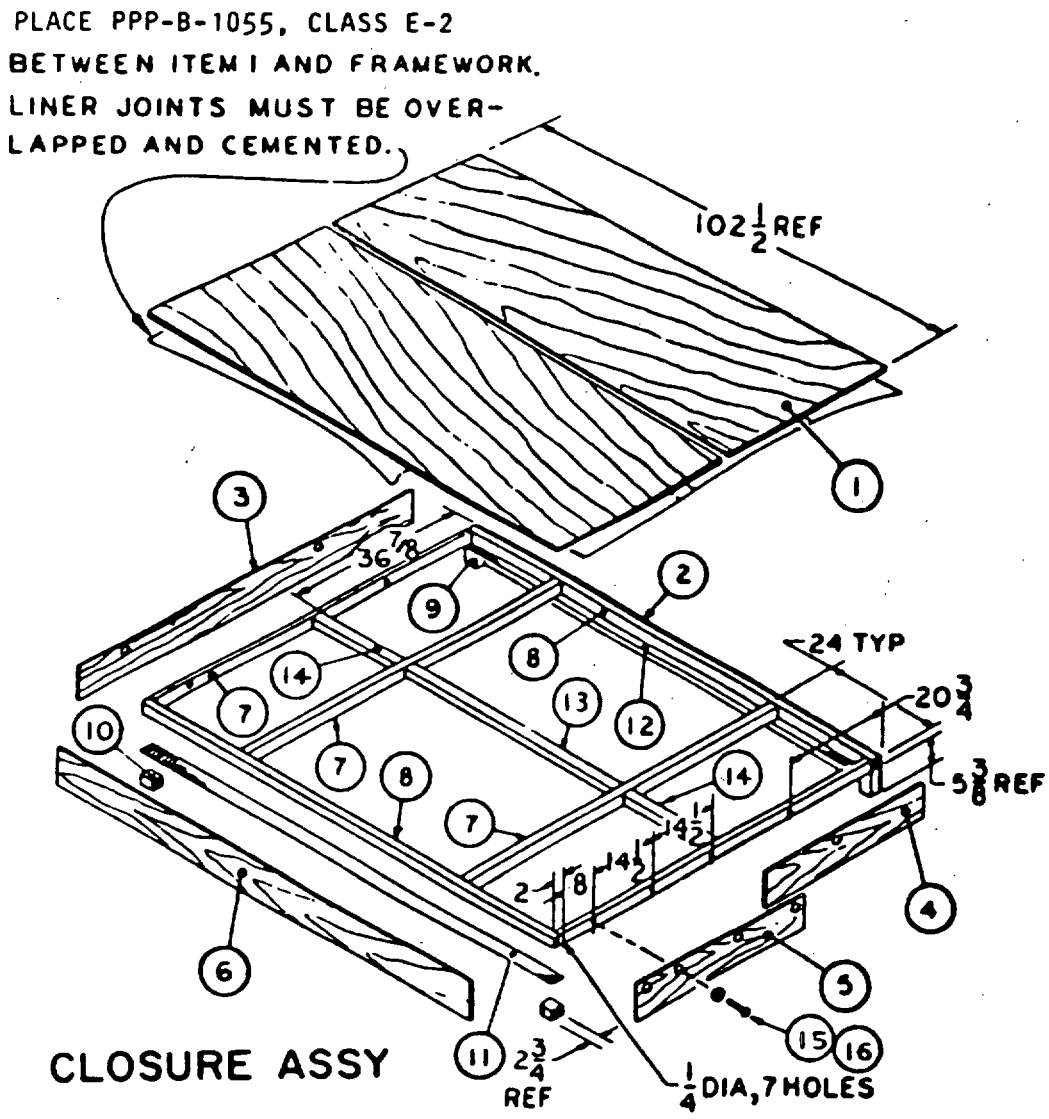


NOTES

1. SEE SHEET 2 FOR ITEMS SHOWN AND PAINTING REQUIREMENTS.
2. DIMENSIONS SHOWN ARE IN INCHES.

SHEET 3 OF 5

FIGURE 13. Closure kit installation. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

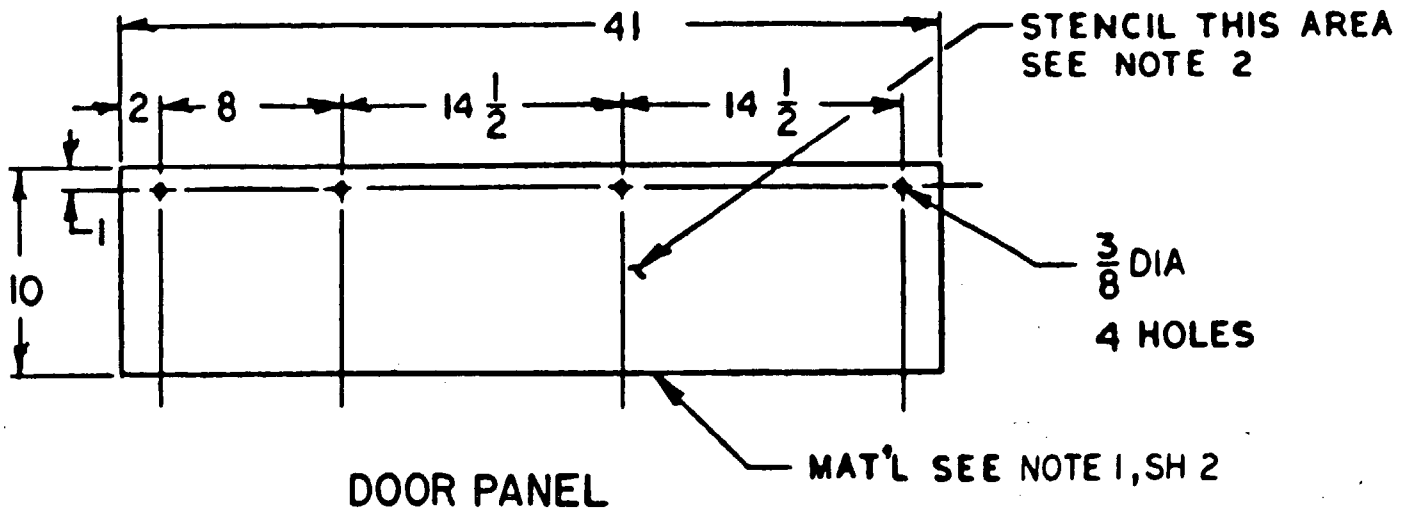

SHEET 4 OF 5


NOTES:

1. PAINT PER NOTE 6, SH 2
2. STENCIL "TO SET OR RELEASE BRAKES — REMOVE THIS PANEL". USE MINIMUM 1/2 IN. HIGH LETTERS PAINT SHALL CONFORM TO SPEC TT-E-527 AND TO CHIP NO. 33538 OF FEDERAL STANDARD NO. 595

DIM. IN INCHES TOL ±1/16 UNLESS OTHERWISE SPECIFIED.

FIGURE 13. Closure kit installation. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

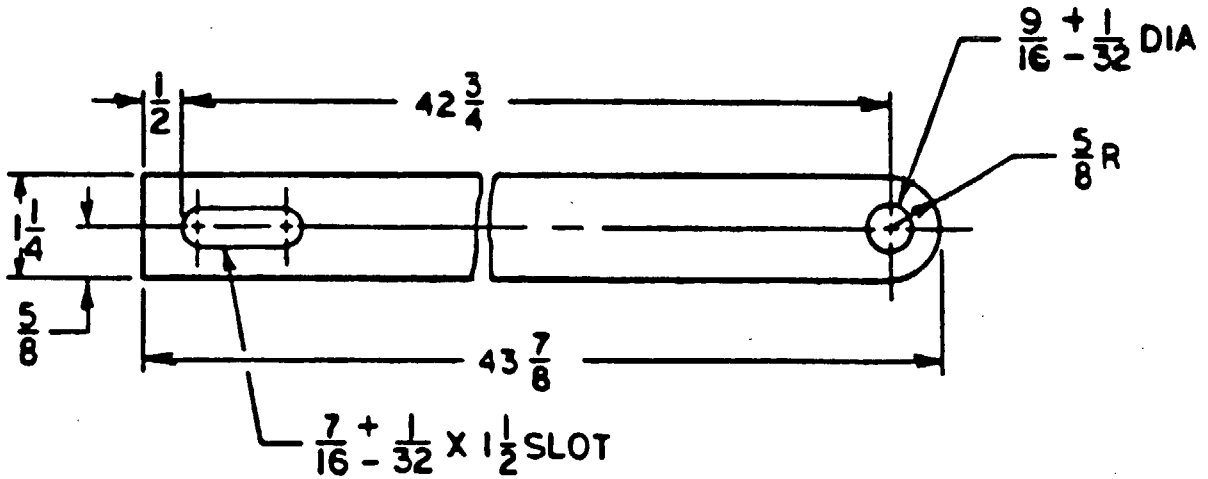

TIEDOWN STRAP

NOTES:

MATERIAL: STEEL, CARBON, QQ-S-741, .125 THK.

FINAL PROTECTIVE FINISH: MIL-C-16173, GR. 1

REMOVE SHARP EDGES

DIM. IN INCHES TOL±1/16 UNLESS SPECIFIED

FIGURE 13. Closure kit installation. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

APPENDIX B

REQUIREMENTS FOR LEVEL B VEHICLE PROTECTION
USING BARRIER MATERIAL AND TAPE FOR M730 AND M730A1 VEHICLES

10. SCOPE

10.1 Scope. This appendix covers requirements for closing of the blast cover and applying of barrier material and taping for the M730 and M730A1 vehicles. This appendix is a mandatory part of the specification. The information contained herein is intended for compliance only.

20. APPLICABLE DOCUMENTS

20.1 Issue of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this appendix to the extent specified herein.

SPECIFICATIONS
FEDERAL

PPP-B-1055	- Barrier Material, Waterproof, Flexible.
PPP-T-60	- Tape, Packaging, Waterproof.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

30. REQUIREMENTS

30.1 Blast cover position. The blast cover shall be secured in the unfolded position (see figure 14).

30.2 Preparation of surfaces. Prior to application of barrier material and tape, vehicle top surfaces shall meet the cleaning inspection requirements of 4.5.2.1.

30.3 Blast cover closure. The top surface of the blast cover shall be covered with PPP-B-1055, class E-2. The barrier material shall overlap and extend 3 inches over each side of the vehicle. Secure barrier material in place with tape in accordance with 30.4 (see figure 14).

30.4 Taping requirements. Tape shall conform to type IV, class 1 of PPP-T-60. Tape shall be 3 inches in width and applied in longest possible lengths to minimize overlapping. Extreme care shall be exercised in applying tape to eliminate wrinkles and loose edges. See figure 14 for taped areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

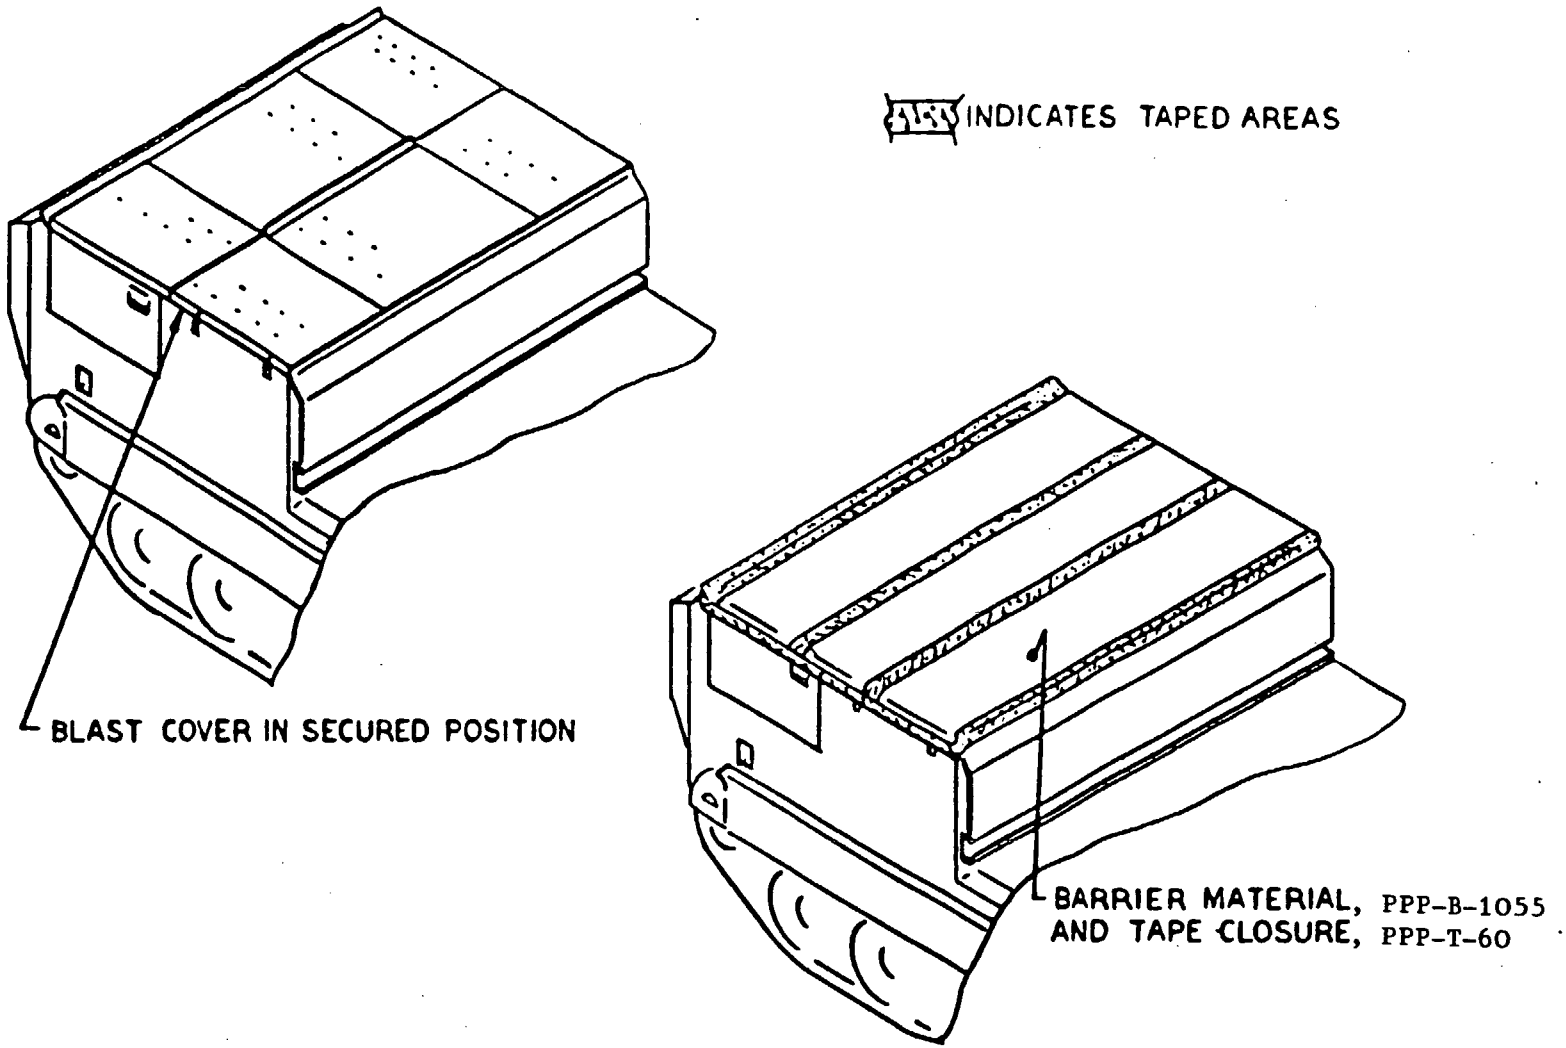


FIGURE 14. Blast cover closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commanding Officer
US Army Tank-Automotive Command
Attn: AMSTA-GSS
Warren, MI 48397-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.