INCH-POUND

MIL-C-62015F(AT)
24 August 1989
SUPERSEDING
MIL-C-62015E(AT)
16 June 1978

MILITARY SPECIFICATION

CARRIER, CARGO, FULL-TRACKED, M548 AND M548A1; AND CARRIER, ELECTRONIC WARFARE SYSTEMS, FULL-TRACKED, M1015 AND M1015A1; PROCESSING FOR STORAGE AND SHIPMENT OF

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the processing of the carrier, cargo, full-tracked, M548 and M548A1; and carrier, electronic warfare systems, full-tracked, M1015 and M1015A1 for domestic or overseas shipment, including carloading; meeting the requirements of levels A and B processing (see 1.2). All paragraphs within this specification are applicable to all models unless otherwise indicated.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 2350

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

1.2 Classification. Processing shall be of the following levels as specified (see 6.2).

Level A - Maximum military protection. Level A is the processing required for the protection of vehicle during shipment, handling and storage in excess of 90 days from date of actual processing. This level does not provide for driveaway capability; it does provide for domestic or overseas shipment, including open deck loading.

Level B - Minimum military protection. Level B is the limited processing for the protection of vehicle during shipment, handling and storage not to exceed 90 days from date of actual processing. This level provides for driveaway capability, when specified, and domestic or overseas shipment (excluding open deck loading).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-208	- Ink Marking, Stencil, Opaque (Porous and Nonporous Surfaces).
A-A-883	- Tape, Pressure Sensitive Adhesive, Masking.
O-S-576	- Sodium Bicarbonate, Technical.
O-S-801	- Sulfuric Acid, Electrolyte, for Storage Batteries.
P-D-220	- Detergent, General Purpose.
GG-T-250	- Tester, Antifreeze Solutions.
QQ-S-698	- Steel, Sheet and Strip, Low-carbon.
QQ-S-781	- Strapping, Steel, and Seals.
RR-W-360	- Wire Fabric, Industrial.
TT-V-121	- Varnish, Spar, Water-resisting.
UU-P-268	- Paper, Kraft, Wrapping.
UU-T-81	- Tag, Shipping and Stock.
VV-F-800	- Fuel Oil, Diesel.
VV-L-800	- Lubricating Oil, General Purpose, Preservative (Water-displacing, Low Temperature).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

WW-P-471	- Pipe-Fitting: Bushings, Locknuts, and Plugs; Iron, Steel, and Aluminum (Threaded); 125-150 Pounds.
ZZ-T-416	- Tire, Pneumatic, Retread and Repair Materials.
MMM-A-178	- Adhesive, Paper Label, Water-resistant.
PPP-B-601	- Box, Wood, Cleated Plywood.
PPP-B-621	- Box, Wood, Nailed and Lock-corner.
PPP-B-636	- Boxes, Shipping and Fiberboard.
PPP-T-60	- Tape: Packaging, Waterproof.
PPP-T-97	- Tape, Packaging/Industrial, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-117	- Bags, Sleeve and Tubing - Interior Packaging.
MIL-C-450	- Coating Compound, Bituminous Solvent Type, Black (for Ammunition).
MIL-L-2105	- Lubricating Oil, Gage, Multipurpose.
MIL-C-5501	- Cap and Plug, Protective Dust and Moisture Seal (Plug - Flared Tape End and Straight Threaded Boss).
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-B-11188	- Battery, Storage, Lead-acid.
MIL-A-11755	- Antifreeze, Arctic Type.
MIL-B-12841	- Basic Issue Items for Military Vehicles, Carriages and Equipment, Preparation for Shipment and Storage of.
MIL-P-13983	- Paint, Temporary, Lusterless, Gasoline Removable.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold Application.
MIL-D-16791	- Detergent, General Purpose (Liquid, Nonionic).
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservation and Break-in.
MIL-T-22085	- Tape, Pressure-Sensitive Adhesive, Preservation and Sealing.
MIL-B-22191	- Barrier Material, Transparent, Flexible, Heat Sealable.
MIL-P-46002	- Preservative Oil, Contact and Volatile Corrosion Inhibited.
MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy-Duty, Single Package.
MIL-I-46852	- Insulation Tape, Electrical, Self-Adhering, Unsupported Silicone Rubber.
MIL-T-50036	- Talc, Technical, T1 and T3.
MIL-H-52079	- Hose, Preformed, Semiflexible, Reinforced.
MIL-A-53009	- Additive, Antifreeze Extender, Liquid Cooling System.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

MIL-D-81298 - Dye, Liquid, for the Detection of Leaks in Aircraft Fuel Systems.
MIL-V-83148 - Varnish, Electrically Insulative, Moisture, Fungus and High-Temperature-Resistant.

STANDARDS

MILITARY

MIL-STD-129 - Marking, for Shipment and Storage.
MS35842 - Clamp, Hose, Low Pressure.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DEPARTMENT OF TRANSPORTATION (DOT)

Hazardous Materials Regulations

(Application for copies should be addressed to the Department of Transportation, Hazardous Materials Regulations Board, Washington, DC 20590.)

DEPARTMENT OF TRANSPORTATION (DOT)

Federal Motor Carrier Safety Regulations

(Applications for copies should be addressed to the Department of Transportation Commission, Bureau of Motor Carrier Safety, Washington, DC 20590.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issue of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

ASSOCIATION OF AMERICAN RAILROADS PUBLICATIONS

Section No. 1 - General rules Governing Loading of Commodities on Open Top Cars.
Section No. 6 - Rules Governing the Loading of Department of Defense Material on Open Top Cars.

(Applications for copies should be addressed to the Association of American Railroads, 59 East Van Buren, Chicago, IL 60605.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. Requirements

3.1 First article. When specified (see 6.2), sample vehicles shall be subjected to first article inspection (see 6.3) for each level of protection specified in accordance with 4.4.

3.2 Materials. All materials shall be inspected in accordance with the referenced materials, specifications, and drawings. Materials shall be free of defects which affect the performance or serviceability and appearance of the finished products.

3.2.1 Recycled, virgin and reclaimed materials. There are no requirements for the exclusive use of virgin materials. The use of recycled or reclaimed (recovered) materials is acceptable provided that all other requirements of this specification are met (see 6.5.1).

3.3 Processing levels. Level A processing shall be as specified in 3.4 and level B processing shall be as specified in 3.5.

3.4 Level A.

3.4.1 Processing records. Records of vehicle processing shall be maintained and shall be readily available for review by the Government representative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.1.1 Record forms. Two copies of DD Form 1397 shall be provided. Information on forms shall include preservation accomplished and depreservation instructions. The Equipment Log Book Binder and one copy of DD Form 1397 (see 6.4) shall be placed in a bag conforming to type I, class B, style 2 of MIL-B-117, 6 mil; bag shall be closed by heat sealing and securely attached in driver's compartment of vehicle. The other copy of DD Form 1397 shall be waterproofed with adhesive conforming to MMM-A-178 or sealed in a bag and securely attached in a conspicuous location on the exterior of the vehicle.

3.4.2 Disassembly. Projecting parts whose removal will accomplish desired cube reduction and parts susceptible to damage and pilferage shall be removed from the vehicle. Removed bolts, nuts, screws, pins, and washers shall be placed in one of the mating parts and secured. Removed parts shall be preserved, packaged, and packed. Packed parts shall be identified and stowed within the vehicle.

3.4.2.1 Matchmarking. Parts removed from the vehicle shall be matchmarked when necessary to facilitate reassembly. Matchmarking information shall be put on cloth shipping tags conforming to type A of UU-T-81. The marked cloth shipping tags shall be waterproofed with varnish. conforming to TT-V-121 or adhesive conforming to MMM-A-178.

3.4.3 Cleaning and drying.

3.4.3.1 Interior of vehicle. Interior surfaces of vehicle shall be cleaned with solution of detergent conforming to P-D-220 or type I of MIL-D-16791 and water. Solution temperature shall not exceed 210 degrees Fahrenheit (°F) and pressure shall not exceed 5 pounds per square inch (psi) measured 4 inches from the nozzle. After cleaning, cleaned surfaces shall be rinsed with clean water and dried. Care shall be taken during cleaning and rinsing operations to assure that no solution or water enters instruments, connections, or other components susceptible to water damage. Solution or water shall not accumulate and remain in cavaties that cannot be drained. Vehicles with decals, markers, straps, and floor plates installed shall only be hand-cleaned with solution of P-D-220 or type I of MIL-D-16791 and water to prevent damage to these components. Cleaned surfaces shall be hand-rinsed and dried.

3.4.3.2 Battery supports and retainers. Battery supports and retainers shall be cleaned with a solution of one-half pound of sodium bicarbonate conforming to O-S-576 per gallon of water. After cleaning, cleaned surfaces shall be flushed with clean water, then thoroughly dried. Dried surfaces shall then be preserved (see 3.4.4.2).

3.4.3.3 Backrests and seats. Backrest and seat cushions shall be cleaned with a solution of detergent conforming to P-D-220, or type I of MIL-D-16791, in warm water. After cleaning, cushions shall be wiped with cloths saturated with clean water to remove cleaning solution. Care shall be taken not to saturate the cushions with cleaning solution or water. After rinsing, cushions shall be dried, then protected (see 3.4.5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.3.4 Exterior of vehicle. The exterior of vehicle, including cargo bed, shall be cleaned using a solution of detergent conforming to P-D-220, or type I of MIL-D-16791, in warm water or steam. Cleaning shall remove all foreign matter. After cleaning, surfaces shall be rinsed with clean water or steam and thoroughly dried. Care shall be taken to avoid entry of water or steam into driver's or engine compartments and, on M1015s and M1015A1s, into the generator air intake or exhaust.

3.4.4 Preservation.

3.4.4.1 Relubrication. The vehicle shall be lubricated after having been driven more than 75 miles or has been exposed to contaminating environments which necessitate exterior cleaning (see 3.4.3.4). Lubricants shall conform to drawings, specifications or lubrication orders applicable to the vehicle.

3.4.4.2 Preservation of battery supports and retainers. Top battery supports and retainers shall be preserved with compound conforming to MIL-C-450.

3.4.4.3 Transmission, transfer assembly, control differential, final drives, and M1015 and M1015A1 speed increaser. The transmission shall contain lubricating oil conforming to type 1, grade 1 of MIL-L-21260 filled to operating level. Transfer assembly, control differential, final drives and M1015 and M1015A1 speed increaser shall contain lubricating oil conforming to type 1, grade 10 or 30, as applicable, of MIL-L-21260 filled to operating level. DD Form 1397 shall be annotated with type and grade of lubricant used.

3.4.4.4 Cooling system. The cooling system shall be protected by one of the following procedures:

a. For shipment to, and storage in, areas where temperature drops below minus (-) 40 degrees Fahrenheit (°F), systems shall be protected as specified in 3.4.4.4.3.
b. For shipment and storage within the bounds of 30° north latitude and 20° south latitude, except continental United States, systems shall be protected as specified in 3.4.4.4.2.
c. For all other shipments, cooling systems shall be protected as specified in 3.4.4.4.1.

NOTE: DD Form 1397 (see 3.4.1.1) shall be completed to indicate coolant used.

3.4.4.4.1 Water and antifreeze procedure. The cooling system shall be filled to operating level with a clean solution consisting of equal parts by volume of antifreeze (ethylene glycol) conforming to MIL-A-46153, and water. Engine shall be operated until a temperature has been reached that causes the thermostat to open, assuring complete mixing and even distribution of the antifreeze solution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH WATER AND ANTIFREEZE SOLUTION (ETHYLENE GLYCOL) IN EQUAL PARTS BY VOLUME - DO NOT DRAIN," shall be securely attached to radiator filler neck.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.4.4.2 Water and corrosion inhibitor procedure. The cooling system shall be filled with clear water up to, but not including, the radiator upper tank. A corrosion inhibitor conforming to MIL-A-53009 shall be added in the proportion of 5 ounces of the inhibitor for each 10 quarts of water. The inhibitor shall be dissolved in 2 quarts of warm water. More water shall be added, if necessary, to fill radiator to operating level. A warning tag, bearing the information "COOLING SYSTEM DOES NOT CONTAIN ANTIFREEZE - FILLED WITH WATER AND INHIBITOR," shall be securely attached to radiator filler neck.

3.4.4.4.3 Antifreeze compound procedure. The cooling system shall be filled to operating level with antifreeze compound conforming to MIL-A-11755. The compound shall be used without dilution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH ANTIFREEZE (ARCTIC-TYPE) - DO NOT DRAIN," shall be securely attached to radiator filler neck.

3.4.4.5 Engine crankcase. The crankcase of compression ignition engines shall be filled to operating level with lubricating oil conforming to type 1 of MIL-L-21260 of the seasonal grade specified on the applicable drawing, specification, or lubrication order. DD Form 1397 shall be annotated with the type and grade of lubricant used.

3.4.4.6 Compression ignition engine. The compression ignition engine preservation shall be as specified (see 3.4.4.6.1 and 3.4.4.6.2) in an uninterrupted sequence.

3.4.4.6.1 Fuel system and combustion chamber. Prior to processing, the engine shall be cooled to assure that cylinder head temperature, measured at injector nozzle flange surface of all cylinders, is not more than 100°F. Cooling shall be accomplished by induced air currents, circulation of engine coolant, or by waiting the period of time required to arrive at the above specified temperature. When the ambient temperature exceeds 100°F, engine shall be cooled to a temperature equivalent to the ambient. After the engine has been cooled, the fuel supply system from the fuel tank shall be shut off. A portable container with 2 compartments shall be positioned to provide gravity feed to the engine. One compartment shall be filled with lubricating oil conforming to grade 1 of MIL-P-46002 to which has been added an oil soluble red dye conforming to MIL-D-81298, in a concentration sufficient to impart a marked coloring to the oil. The second compartment shall be filled with diesel fuel conforming to VV-F-800 (The container shown in figure 1 has proven satisfactory for engine preservation). Disconnect the fuel line between the primary fuel filter and fuel pump at the primary fuel filter outlet. Drain the residual diesel fuel from the secondary fuel filter. Remove filter can and remove filter element. Fill filter can with oil, lubricating, grade 1, MIL-P-46002, and replace. Connect fuel line from the auxiliary fuel container to fuel pump supply line. Disconnect residual vehicle fuel return line at quick disconnect coupling. Connect a transparent plastic fuel line to the engine end of the disconnected fuel

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

return line. Insert the other end of the plastic fuel line into a recovery container to collect the residual returned oil. The fuel valve on the auxiliary fuel tank shall be turned to the lubricating oil (MIL-P-46002) position. The engine shall be started and operated not more than 1,200 revolutions per minute, until oil with red dye is observed flowing through the plastic fuel return line. Engine shall be stopped at the instant the dyed oil is observed. Disconnect air cleaner hose from the air inlet elbow. An air restrictor boot shall be installed on air inlet elbow and secured to assure that air to the engine is completely cut off (The air restrictor boot shown in figure 2 has proven satisfactory for engine preservation.). Place engine fuel control in RUN position. Crank engine with starter (NOTE: Engine may fire for approximately 5 seconds) for a minimum period of 30 seconds and not exceeding a maximum of 45 seconds. The fuel valve on the auxiliary fuel container shall be turned to the OFF position. Remove the filter can from to secondary fuel filter. Drain the oil, lubricating, grade 1, MIL-P-46002, from can. Wipe clean with the lint free cloth. Replace element, fill can with diesel fuel, as specified in VV-F-800, and replace filter can.

CAUTION: Special precautions shall be taken to assure that time limits specified shall not be exceeded, or the engine starter or starter solenoid may be damaged. Also, excessive cranking could cause hydrostatic lock.

3.4.4.6.2 Engine purging. Purge fuel return lines of all preservative oil, grade 1, MIL-P-46002, by turning the auxiliary fuel tank valve to the diesel fuel position and closing engine fuel control shut off. Crank engine with starter for a period of time to remove all traces of red colored lubricating oil from the plastic return line.

CAUTION: Do not operate starter for a period exceeding 45 seconds.

If preservative oil has not been purged, rest starter for 3 minutes and repeat purge procedure. Turn the auxiliary fuel container valve to the OFF position. Remove fuel line and reconnect to the outlet side of primary fuel filter. Turn on vehicle fuel supply system. Remove air restrictor boot. Disconnect plastic fuel return line, and reconnect vehicle fuel return at the quick disconnect coupling (see 4.6.2.4).

3.4.4.6.3 Air intake and exhaust system. After preservation in accordance with 3.4.4.6.1 and 3.4.4.6.2, one ounce of preservation oil conforming to grade 1 of MIL-P-46002 shall be atomized into exhaust opening. Opening shall then be sealed with tape conforming to type IV, class I of PPP-T-60 or type II of MIL-T-22085. The hose shall be disconnected at the air intake, and one ounce of preservative oil, conforming to grade 1, MIL-P-46002, shall be atomized into the air intake opening. The air intake opening and the engine crankcase breathers shall then be sealed with plastic plugs conforming to MIL-C-5501 or with tape conforming to type IV, class 1 of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

PP-T-60 or type II of MIL-C-5501 or with tape conforming to type IV, class 1 of PPP-T-60 or type II of MIL-T-22085. A red warning tag bearing the information "ENGINE PRESERVED WITH VCI - DO NOT CRANK" and "BEFORE CRANKING, REMOVE CAPS, TAPE, OR PLUGS, AND PLUGS, AND REINSTALL HOSE" shall be placed in a conspicuous location within driver's compartment. DD Form 1397 shall be annotated to show engine is preserved with VCI and oil.

3.4.4.6.3.1 Preservatives and atomized spray equipment. When atomized spraying of preservative oils is specified, equipment shown in figures 3 and 4, or equivalent, shall be used. Compressed air supply lines shall be equipped with moisture separators every 50 feet or fraction thereof.

3.4.4.6.4 Oil level gage rod opening. After preservation in accordance with 3.4.4.6.1 and 3.4.4.6.2, the oil level gage rod shall be removed, and 6 ounces of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomized into the crankcase through the oil level gage rod opening. An extension of sufficient length to permit the spray nozzle to be within the crankcase shall be used. Spray nozzle shall not be submerged in the crankcase oil. After spraying has been accomplished, oil level gage rod shall be reinstalled. All openings to the engine interior, including oil level gage rod opening and oil filter cap, shall be sealed with tape conforming to type IV, class 1 of PPP-T-60 or type II of MIL-T-22085.

3.4.4.6.5 Flywheel housing. Two ounces of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomized into the flywheel housing.

3.4.4.6.6 Air cleaner. Air cleaner openings shall be sealed with tape conforming to type IV, class 1 of PP-T-60 or type II of MIL-T-22085.

3.4.4.7 Personnel and engine compartment heaters and lines. Personnel and engine heaters shall have the fuel supply shutoff valve locked at the inlet side of fuel filters turned to the OFF position. The main fuel line supplying fuel to the heaters shall be disconnected at a point closest to shutoff valves. Fuel from the fuel lines shall be allowed to drain. Seal ends of disconnected fuel lines and shutoff valves with plastic plugs/caps conforming to MIL-C-5501 or with tape conforming to type IV, class 1 of PPP-T-60, or type II of MIL-T-22085. External exhaust opening shall have opening sealed with tape conforming to type IV, class 1 of PPP-T-60, or type II of MIL-T-22085. Prior to placing personnel or engine heaters in operation, remove plugs/caps or tape from fuel lines, exhaust stack and shutoff valves. Operate heater fuel pump and drain one quart of fuel through the fuel lines into a portable container. Reconnect heater fuel lines. Four warning tags, each bearing the information "HEATER FUEL LINES DISCONNECTED AND SEALED - REMOVE SEALS, RECONNECT FUEL LINES PRIOR TO STARTING HEATERS," shall be prepared. One tag each shall be secured to the personnel and engine heater operating switch, one each to the personnel and engine heaters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.4.8 Fuel tank. Fuel tank shall be drained to the maximum extent possible. Fuel tank cap and filler screen shall be removed and coated with lubricating oil conforming to type I, grade 10 of MIL-L-21260. One quart of lubricating oil conforming to type I, grade 10 of MIL-L-21260 shall be added to each 5 gallons or portion thereof of fuel that remains after draining tank. Tank cap and filler screen shall be reinstalled (see 4.6.2.2).

3.4.4.8.1 Fuel tank security. After processing the fuel tank as specified (see 3.4.4.8), the fuel cap shall be secured with a bracket fabricated and installed in accordance with figure 5.

3.4.4.9 Winch assembly. The winch gearcase shall be filled to operating level with lubricant conforming to grade 80W-90 of MIL-L-2105. Wire cable shall be unreeled and all its surfaces coated with preservative conforming to grade 1 of MIL-C-16173. The cable shall be rewound. While the cable is being rewound, it shall be inspected for damage to the preservative coating. Any breaks in coating shall be represerved prior to rewinding. All other moving, mating parts shall be coated with grease conforming to MIL-G-10924.

3.4.4.10 Doors and tailgate. Rubber seals around doors and tailgate shall be coated with powered talc conforming to type IV, class C of ZZ-T-416 or talc, technical, MIL-T-50036.

3.4.4.11 Ventilation.

3.4.4.11.1 Engine compartment access plate, drain plugs, and M1015 and M1015A1 float valve assembly. Engine compartment access plate, gasket, and attaching hardware shall be removed for ventilation. A screen conforming to figure 6 shall be installed in the access plate opening and secured with 4 of the existing mounting screws and washers. The 2 drain plugs (designed in accordance with WW-P-471) shall be removed for drainage. The M1015 and M1015A1 float valve assembly consisting of screen, retaining ring, diaphragm, cage, and attaching hardware shall be removed for storage. Base metal surfaces of drain plugs and M1015 and M1015A1 float assembly shall be preserved with compound conforming to grade 4 of MIL-C-16173. Rubber sections of M1015 and M1015A1 float assembly shall be dusted with talc conforming to type IV, class C of ZZ-T-416 or talc, technical, MIL-T-50036. Plate, gasket, preserved drain plugs, four access plate mounting screws and washers and M1015 and M1015A1 float assembly shall be packaged as specified in 3.4.5.6. M1015 and M1015A1 vehicles shall have the information "REMOVE SCREEN, INSTALL ACCESS PLATE, GASKET, FRONT DRAIN PLUGS, AND FLOAT VALVE ASSEMBLY BEFORE VEHICLE OPERATION" stenciled on the exterior of the vehicle using white or yellow paint conforming to MIL-P-13983. Stenciling shall be in characters not less than 3/4 inch high.

3.4.4.12 M1015 and M1015A1 unique equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.4.12.1 60 kilowatt (kW) generator. One half ounce of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomized into air exhaust openings. One half ounce of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomized into air intake openings. All openings shall then be sealed with tape conforming to type IV, class 1 of PPP-T-60 or type II of MIL-T-22085. A red warning tag bearing information "60 kW GENERATOR PRESERVED WITH VCI - DO NOT OPERATE" and "BEFORE OPERATING 60 kW GENERATOR REMOVE TAPE FROM AIR INTAKE AND EXHAUST" shall be placed in a conspicuous location on the driver's panel. DD Form 1397 shall be annotated to show 60 kW generator preserved with VCI and oil.

3.4.4.12.2 Shelter skid guides. Plastic cushioning pads on skid guides shall be covered with tape conforming to type IV, class 1 of PPP-T-60 or type II of MIL-T-22085.

3.4.4.12.3 Speed increaser oil level gage rod. After preservation in accordance with 3.4.4.3, the speed increaser oil level gage rod cap shall be sealed with tape conforming to type IV, class 1 of PPP-T-60 of type II of MIL-T-22085.

3.4.4.12.4 Ground rod driver assembly. Wire cable shall be unreeled and all its surfaces shall be coated with preservative conforming to grade 1 of MIL-C-16173. The cable shall be rewound. While the cable is being rewound, it shall be inspected for damage to the preservative coating. Any breaks in coating shall be represerved prior to rewinding. All other moving or mating parts shall be coated with grease conforming to MIL-G-10924.

3.4.4.12.5 Shelter pullers. Wire cables shall be unreeled and all its surfaces shall be coated with preservative conforming to grade 1 of MIL-C-16173. The cable shall be rewound. While the cable is being rewound, it shall be inspected for damage to the preservative coating. Any break in coating shall be represerved prior to rewinding. All other moving or mating parts shall be coated with grease conforming to MIL-G-10924.

3.4.4.12.6 Electrical connectors. After removal of power regulation unit (see 3.4.5.11.1), generator control box (see 3.4.5.11.2), communications equipment panel (see 3.4.5.11.3), and ground rod driver assembly (see 3.4.5.11.5), all electrical connectors, both connected and disconnected, shall be completely double-wrapped in tape conforming to MIL-T-22085, type II or optional MIL-I-46852 type I. Two coatings of preservative conforming to MIL-C-16173, grade 1, or optional varnish conforming to MIL-V-83148 type I, shall be applied by brush to taped electrical connectors. Coatings shall extend 1/2 to 3/4 inch beyond the end of the tape onto the electrical lead, wire, or mating connector.

3.4.4.13 Miscellaneous preservation. Except as otherwise specified herein, all exposed, unpainted metal surfaces on the exterior of the vehicle except the track shoes, shall be coated with compound conforming to grade 1 of MIL-C-16173. All exposed, unpainted, unplated metal surfaces on the interior of the vehicle shall be coated with compound conforming to grade 4 of MIL-C-16173.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.5 Packaging.

3.4.5.1 Dry charged batteries and cables. Dry charged batteries shall be installed and secured in the vehicle battery carrier. Battery cables shall be secured to battery carrier with 3/4-inch tape conforming to type IV of PPP-T-97. Battery filler cap openings shall be sealed by placing a 2-inch wide by 3-mil thick piece of film conforming to type II of MIL-B-22191 over each filler cap opening with cap removed. The sheet shall be of sufficient length to allow it to be depressed into the opening to the same depth as the filler plug. Filler caps shall be screwed or inserted into opening to form a complete seal without damaging the sheet. If batteries have been processed in accordance with MIL-B-11188, they need not to be reprocessed as above.

3.4.5.2 Electrolyte. Electrolyte shall be packaged and packed in accordance with O-S-801, except that the exterior container shall conform to PPP-B-621, class 2 or PPP-B-601, overseas type. Marking shall be in accordance with O-S-801. The packed electrolyte shall be stowed in the same location as the BII and secured independently to permit separate removal.

3.4.5.3 Packaging of backrests and seats. Cushions of backrests and seats (see 3.4.3.3) shall be covered with paper conforming to grade B of UU-P-268 with a minimum basis weight of 60 pounds. Paper shall be secured with tape conforming to type I of A-A-883.

3.4.5.4 Fire extinguishers. Fire extinguishers shall contain a minimum of 90 percent of rated full charge. All seals shall be intact. DA Form 253 shall be completed and attached securely to each extinguisher (see 6.6).

3.4.5.5 BII. BII, as applicable, shall be packaged and packed in accordance with MIL-B-12841 or other documents designated by the responsible agency. BII shall be stowed and secured as specified in 3.4.5.5.1.

3.4.5.5.1 Stowage and securement of BII. BII and items removed for shipment shall be identified to pertinent vehicle by serial number and, except during shipment, shall be stored inside buildings. Packed BII and removed items shall be placed within the cargo compartment of vehicle. Large wooden boxes shall be placed on the vehicle floor and shall be secured with 1-1/4 inch wide strapping conforming to type I, class B of QQ-S-781. Strapping shall be secured to holding devices within the compartment. Smaller wooden boxes shall be secured to the larger boxes with 3/4 inch wide strapping conforming to type I, class B of QQ-S-781. All boxes shall be secured in such a manner as to prevent any movement during transit and to prevent damage to containers or vehicle interior. Corner protectors shall be used under all strapping.

3.4.5.5.1.1 Government furnished equipment (GFE). Unless previously accomplished, GFE (other than installed) shall be packaged, packed and marked in accordance with the individual document for the specific item. GFE shall be stowed with basic issue items (BII).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.5.6 Access plate, gasket, drain plugs, M1015 and M1015A1 float valve assembly. Access plate, gasket, preserved drain plugs and M1015 and M1015A1 float valve assembly (see 3.4.4.11.1) shall be packaged in a box conforming to type CF, class weather-resistant of PPP-B-636. The box shall be closed with tape conforming to type III, class I of PPP-T-60, identified as to contents, and securely stowed within crew compartment.

3.4.5.7 Tow hooks and pintle. Tow hooks, pintle, and related hardware shall be removed for shipment and packaged in a type CF, class weather-resistant box conforming to PPP-B-636. Box shall be closed with tape conforming to type III, class 1 of PPP-T-60, identified as to contents, and securely stowed within crew compartment.

3.4.5.8 Exhaust pipe. The exhaust pipe and attaching clamps shall be removed for shipment and packaged in a box conforming to type CF, class weather-resistant of PPP-B-636. Box shall be closed with tape conforming to PPP-T-60, type III, class 1, identified as to contents, and securely stowed within crew compartment.

3.4.5.9 Cab cover, windshield, and door windows (M548 and M548A1 only). Cab cover, windshield and door windows shall be removed for shipment and storage. Unpainted metal surfaces shall be coated with preservative conforming to MIL-C-16173, grade 4. Removed bolts, nuts, screws, pins and washers shall be placed in one of the mating parts and secured. Fabric cover shall be thoroughly dried, folded and placed in a container conforming to type CF, weather-resistant of PPP-B-636. Box shall be closed with tape conforming to type III, class 1 of PPP-T-60. Windshield wipers shall be placed in a bag conforming to MIL-B-117, type I, class B, style 2, 4 mil. Rubber molding around windows shall be dusted with talc conforming to type IV, class C of ZZ-T-416 or talc, technical, MIL-T-50036. Packaged cab cover, windshield and door windows shall be packed in a box conforming to class 2 of PPP-B-621 or optional PPP-B-601, style I. Items shall be blocked, braced and cushioned in container. Box shall be identified and stowed with BII.

3.4.5.10 Cargo cover installation (M548 and M548A1 only). Cargo cover installation, except tiedown hooks, shall be removed for shipment. Unpainted metal surfaces shall be coated with preservative conforming to MIL-C-16173, grade 4. Removed screws, nuts and washers shall be packaged separately in bag conforming to MIL-B-117, type I, class B, style 2, 4 mil, and placed within cover assembly container. Cover assembly with ropes shall be thoroughly dried, folded and placed into container conforming to type CF, class weather-resistant of PPP-B-636. Box shall be closed with tape conforming to type III, class 1 of PPP-T-60, then placed with bows in wood box conforming to class 2 of PPP-B-621 or optional PPP-B-601, style I. Items shall be blocked, braced and cushioned in container. Box shall be identified and stowed with BII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.5.11 M1015 and M1015A1 unique equipment.

3.4.5.11.1 Power regulation unit (PRU). PRU shall be removed for shipment and storage. Removed bolts, nuts, screws, pins, and washers shall be placed in one of the mating parts and secured. PRU cover shall be removed and rubber seal shall be dusted with talc conforming to type IV, class C of ZZ-T-416 or talc, technical, MIL-T-50036 and reinstalled. PRU shall be preserved in accordance with MIL-P-116, method IIc, contact preservative not required. PRU shall be placed in a container conforming to class 2 of PPP-B-621 or optional PPP-B-601, style I. PRU shall be blocked, braced, and cushioned in container. Box shall be identified and stowed with BII.

3.4.5.11.2 Generator control box. Generator control box (GCB) shall be removed for shipment and storage. Removed bolts, nuts, screws, pins, and washers shall be placed in one of the mating parts and secured. GCB cover(s) shall be removed and rubber seal(s) shall be dusted with talc conforming to type IV, class C of ZZ-T-416 or talc, technical, MIL-T-50036 and reinstalled. GCB shall be preserved in accordance with MIL-P-116, method IIc, contact preservative not required. GCB shall be placed in a container conforming to class 2 of PPP-B-621 or optional PPP-B-601, style I. GCB shall be blocked, braced, and cushioned in container. Box shall be identified and stowed with BII.

3.4.5.11.3 Communications equipment panel. Communications equipment panel shall be removed for shipment and storage. Removed bolts, nuts, screws, pins, and washers shall be placed in one of the mating parts and secured. Communications equipment panel shall be preserved in accordance with MIL-P-116, method IIc, contact preservative not required. Communications equipment panel shall be placed in a container conforming to class 2 of PP-B-621 or optional PPP-B-601, style I. Communications equipment panel shall be blocked, braced, and cushioned in container. Box shall be identified and stowed with BII.

3.4.5.11.4 Rear shelter stops. Rear shelter stops shall be removed and lifting eyes reinstalled for storage and shipment. Removed screws and washers shall be packaged in a bag conforming to MIL-B-117, type I, class B, style 2, 4 mil. Rear shelter stops and bagged hardware shall be placed into a container conforming to type CF, class weather-resistant of PPP-B-636. Box shall be closed with tape conforming to type III, class 1 of PPP-T-60, then placed in wood box conforming to class 2 of PPP-B-621 or optional PPP-B-601, style I. Items shall be blocked, braced, and cushioned in container. Box shall be identified and stowed with BII.

3.4.5.11.5 Ground rod driver assembly. Ground rod assembly shall be removed and lifting eyes reinstalled for storage and shipment. Removed screws, washers, and nuts shall be packaged in bag conforming to MIL-B-117, type I, class B, style 2, 4 mil, and secured to ground rod driver assembly. Ground rod driver shall be packed in a box conforming to class 2 of PPP-B-621 or optional PPP-B-601, style I. Ground rod driver shall be blocked, braced, and cushioned in container. Care shall be taken to ensure hammer assembly is blocked to prevent movement on support column. Box shall be identified and stowed with BII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.4.5.11.6 Ground rod motor/generator. The motor/generator shall be removed for shipment and storage. The motor/generator shall be packaged in accordance with MIL-P-116, method IIb. No preservative shall be required. The container shall be identified and stowed with BII.

3.4.5.11.7 Instrument panel (compass/inclinometer). The instrument panel shall be removed for shipment and storage. The instrument panel shall be packaged in accordance with MIL-P-116, method IC-2. No preservative shall be required. The container shall be identified and stowed with BII.

3.4.5.11.8 CECOM equipment. CECOM equipment (head sets, microphone, amplifier, control box, speaker and cables) shall be removed for shipment and storage. CECOM equipment shall be packaged in accordance with MIL-P-116, method IC-2. No preservative shall be required. The container shall be identified and stowed with BII.

3.4.5.11.9 Cargo door latch and vehicle front steps. The door latch and steps shall be removed for shipment and storage. The door latch and steps shall be packaged in accordance with MIL-P-116, method I. Bare metal surfaces shall be preserved with MIL-C-16173, grade 4. The removed hardware shall be placed in a bag conforming to MIL-B-117, type I, class B, style 2, 4 mil and shall be placed in a container with door latch and steps. The container shall be identified and stowed with BII.

3.4.6 Vehicle closure. Unless otherwise specified (see 6.2), each vehicle shall be provided with a protective closure kit. Closure kit shall be fabricated and installed in accordance with appendix A and figure 7 for M548 and M548A1 vehicles and appendix B and figure 8 for M1015 and M1015A1 vehicles.

3.5 Level B. Vehicles shall be processed in the same manner as specified for level A, with the following exceptions:

3.5.1 Transmission, transfer assembly, control differential, final drives, and M1015 and M1015A1 speed increaser. Transmission, transfer assembly, control differential, final drives and M1015 and M1015A1 speed increaser shall contain operational lubricant as specified on applicable drawings, specifications, or lubrication orders, filled to operating level. If, however, these units contain lubricating oil conforming to MIL-L-21260. DD Form 1397 shall be annotated to indicate grade of lubricant or preservative oil used (see 3.4.4.3).

3.5.2 Engine crankcase. Engine crankcase shall contain normal operational lubricant as specified in lubrication order, filled to operational level. DD Form 1397 shall be annotated to indicate grade of lubricant used (see 3.4.4.5).

3.5.3 Compression ignition engine. The engine shall require no preservative for level B shipment and storage (see 3.4.4.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.5.4 Personnel heater and fuel pump. Unless otherwise specified (see 6.2), personnel heaters and fuel pumps shall be in ready-to-use condition (see 3.4.4.7).

3.5.5 Fuel tank. Unless otherwise specified (see 6.2), vehicles shall be shipped without draining residual fuel from the fuel tanks (see 3.4.4.8).

3.5.6 Winch assembly. Winch gear shall be filled with operational lubricant. Cable shall not be preserved (see 3.4.4.9).

3.5.7 Backrests and seats. Cushions of backrest and seats may be covered or uncovered (see 3.4.5.3).

3.5.8 Tow hooks and tow pintle. Tow hooks and tow pintle shall be removed for overseas shipment only (see 3.4.5.7).

3.5.9 Exhaust pipe. Exhaust pipe and clamps shall be removed and packaged for overseas shipment only (see 3.4.5.8).

3.5.10 Vehicle closure. Vehicle closure kit shall not be provided for level B shipment and storage. Opening to vehicle interior shall be sealed in accordance with appendix C, figure 9 for M548 and M548A1 vehicles and appendix C, figure 10 for M1015 and M1015A1 vehicles.

3.5.11 M1015 and M1015A1 unique equipment.

3.5.11.1 Shelter pullers. Cable shall not be preserved (see 3.4.4.12.5.).

3.6 Loading.

3.6.1 Loading flat cars. Loading of vehicles on open top railroad cars shall be in accordance with the applicable requirements of Section 1, General Rules Governing the Loading of Commodities on Open Top Cars, and figure 87 or 87A, section 6, Rules Governing the Loading of Department of Defense Material on Open Top Cars, of the Association of American Railroads publication.

3.6.2 Highway shipment. Loading of vehicles for shipment by haulaway and rules for shipment by driveaway or towaway shall be in accordance with Department of Transportation publication, "Federal Motor Carrier Safety Regulations," and applicable military publications.

3.6.3 Reprocessing engine after loading - Level A. If engine is operated in connection with the moving of vehicle to loading area or during the loading itself, the engine shall be reprocessed as specified (see 3.4.4.6 through 3.4.4.6.6 and 3.4.4.8).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.6.3.1 Reprocessing engine after loading - Level B. If engine is operated in connection with movement of vehicle for loading and unloading, there shall be no additional processing of engine.

3.7 Marking. In addition to any special marking required in the contract (see 6.2), vehicle shall be marked in accordance with MIL-STD-129.

3.7.1 Lifting points. The legend "LIFT HERE" with arrow pointing to the lifting eye shall be stenciled adjacent to each lifting eye using black ink conforming to A-A-208.

3.8 Drive-on - drive-off capability. When vehicles are to be operated for loading and unloading (see 6.2), the following provisions shall apply:

3.8.1 Fuel tanks. As specified (see 6.2), additional fuel shall be added, as required, to accomplish movement of vehicle.

3.8.2 Batteries and electrolyte. Batteries shall be filled with electrolyte, fully charged, and battery cables connected (see 3.4.5.1 and 3.4.5.2). After vehicle self-movement for loading or placement in storage, the ground cable at battery shall be disconnected and then secured to battery carrier with 3/4-inch tape conforming to type IV of PPP-T-97. A tag bearing the following message, "VEHICLE PRESERVED FOR DRIVE-AWAY CONDITION. BEFORE CRANKING, CONNECT GROUND CABLE TO BATTERY TERMINAL. ENGINE AND FUEL TANKS NOT PRESERVED", shall be located in a conspicuous place in the driver's compartment.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order (see 6.2), the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of section 3. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified herein, all inspections shall be performed under the following conditions:

a. Temperature: 77 ± 18°F.
b. Relative humidity: Uncontrolled room ambient.
c. Atmospheric pressure: Site pressure.

4.4 First article inspection. When first article is required (see 3.1), first article inspection shall be performed on one of the first ten production vehicles (see 6.2). Unless otherwise specified (see 6.2), first article inspection shall include the inspections specified in table I and 4.6.

4.5 Quality Conformance Inspections. Unless otherwise specified (see 6.2), all production processed vehicles shall be subjected to the inspection and tests specified in 4.6.2, 4.6.2.1, 4.6.2.2, and 4.6.2.3.

4.6 Methods of inspection.

4.6.1 Materials All materials to be used in processing of vehicles shall be inspected in accordance with the material specification or certified inspection. Furnished materials shall conform to the detailed specifications and when materials are listed on a Qualified Products List (QPL), they shall be obtained from one of the approved sources indicated.

4.6.2 Processing. Except as otherwise specified herein, vehicle processing shall be inspected to determine conformance to this specification. Inspection of processing shall include all items specified in table I, and as specified below.

4.6.2.1 Cleaning. To determine conformance to 3.4.3.1, interior of vehicles shall be examined for cleanliness. All vehicles shall be tested for cleanliness in accordance with the applicable provisions of MIL-P-116. To determine conformance to 3.4.3.4, exterior of vehicle shall be examined for cleanliness. Surfaces to which tape is to be applied shall be examined for cleanliness before application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Table I. Processing Inspection.

Component	Cleaning Levels A & B	Preservation Level A	Preservation Level B	Packaging/Stowage Level A	Packaging/Stowage Level B
Processing records				3.4.1	3.4.1
Record forms				3.4.1.1	3.4.1.1
Disassembly				3.4.2	3.4.2
Matchmarking				3.4.2.1	3.4.2.1
Interior of Vehicle	3.4.3.1				
Battery supports & retainers	3.4.3.2	3.4.4.2			
Backrests & seats	3.4.3.3			3.4.5.3	3.5.7
Exterior of vehicle	3.4.3.4				
Relubrication		3.4.4.1	3.4.4.1		
Transmission transfer assembly, control differential, final drives and speed increaser.		3.4.4.3	3.5.1		
Cooling system 1/		3.4.4.4	3.4.4.4		
Water & antifreeze procedure		3.4.4.4.1	3.4.4.4.1		
Water & corrosion inhibitor procedure		3.4.4.4.2	3.4.4.4.2		
Antifreeze compound procedure		3.4.4.4.3	3.4.4.4.3		
Engine crankcase 1/		3.4.4.5	3.5.2		
Compression ignition engine		3.4.4.6	3.5.3		
Fuel system & combustion chamber		3.4.4.6.1	3.5.3		
Engine purging		3.4.4.6.2	3.5.3		
Air intake & exhaust system 1/		3.4.4.6.3	3.5.3	3.4.4.6.3	
Oil level gage rod opening		3.4.4.6.4	3.5.3	3.4.4.6.4	
Flywheel housing		3.4.4.6.5			
Air cleaner		3.4.4.6.6		3.4.4.6.6	
Personnel & engine compartment heaters & lines		3.4.4.7	3.5.4	3.4.4.7	
Fuel tank		3.4.4.8	3.5.5		
Winch assembly		3.4.4.9	3.5.6		
Doors & tailgate		3.4.4.10	3.4.4.10		
Ventilation & screen		3.4.4.11.1	3.4.4.11.1	3.4.5.6	3.4.5.6
60kW generator 1/		3.4.4.12.1			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Table I. Processing Inspection. - Continued.

Component	Cleaning Levels A & B	Preservation		Packaging/Stowage	
		Level A	Level B	Level A	Level B
Shelter skid guides		3.4.4.12.2	3.4.4.12.2		
Speed increaser oil level rod		3.4.4.12.3	3.4.4.12.3		
Ground rod driver assembly		3.4.4.12.4		3.4.5.11.5	
Shelter pullers		3.4.4.12.5	3.5.11.1		
Electrical connectors		3.4.4.12.6			
Miscellaneous preservation		3.4.4.13	3.4.4.13		
Dry charged batteries and cables		3.4.5.1	3.4.5.1	3.4.5.1	3.4.5.1
Electrolyte				3.4.5.2	3.4.5.2
Fire extinguishers				3.4.5.4	3.4.5.4
BII, packaged/packed and stowed and secured				3.4.5.5 and 3.4.5.1	3.4.5.5 and 3.4.5.1
Tow hooks and pintle				3.4.5.7	3.5.8
Exhaust pipe				3.4.5.8	3.5.9
Cab cover, windshield and door windows		3.4.5.9	3.4.5.9	3.4.5.9	3.4.5.9
Cargo cover installation		3.4.5.10	3.4.5.10	3.4.5.10	3.4.5.10
Power regulation unit		3.4.5.11.1		3.4.5.11.1	
Generator control box		3.4.5.11.2		3.4.5.11.2	
Communications equipment panel		3.4.5.11.3		3.4.5.11.3	
Rear shelter stops		3.4.5.11.4	3.4.5.11.4	3.4.5.11.4	3.4.5.11.4
Ground rod motor/generator				3.4.5.11.6	
Instrument panel (compass/inclinometer)				3.4.5.11.7	
CECOM equipment				3.4.5.11.8	
Cargo door latch and vehicle front steps		3.4.5.11.9		3.4.5.11.9	
Vehicle closure				3.4.6	3.5.10
Loading flat cars				3.6.1	3.6.1
Highway shipment				3.6.2	3.6.2
Reprocessing engine after loading				3.6.3	3.6.3.1
Marking				3.7	3.7
Lifting points				3.7.1	3.7.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

4.6.2.2 Fuel tank. To determine conformance to 3.4.4.8, visual inspection of fuel tank interior shall assure that complete specified processing has been accomplished.

4.6.2.3 Cooling system. To determine conformance to 3.4.4.4, the engine coolant shall be tested using a hydrometer-thermometer type tester, with a range of minus 60°F to plus 160°F, conforming to GG-T-250.

4.6.2.4 Engine. To determine conformance to 3.4.4.6.1 through 3.4.4.6.6, as applicable, interior of the engine from one of the first ten production processed vehicles shall be examined for surface coverage. Engine shall be disassembled to the extent necessary to permit visual examination of all surfaces within the combustion chamber. The combustion chamber is all surfaces within the cylinder from the top of the piston to and including the surface of the head within the cylinder. All surfaces within the combustion chamber shall have a "wet" coating or preservative oil such as is obtained when an item is dipped or flushed with the oil. The processing method of the approved preserved engine shall be used in processing engines in all subsequent production vehicles.

5. PACKAGING

This section is not applicable to this specification.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This specification covers processing of the M548 and M548A1, M1015 and M1015A1 vehicle for storage outside of buildings, for immediate shipment and domestic or overseas shipment, including carloading (see 1.1).

6.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Level of processing required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. If first article inspection is required (see 3.1).
e. If protective closure kit should not be provided (see 3.4.6).
f. If fuel heater and fuel pump should not be in ready-to-use condition (see 3.5.4).
g. If residual fuel should not be drained from fuel tanks (see 3.5.5).
h. If special marking is required (see 3.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

i If vehicle should have drive-on, drive-off capability (see 3.8).
j. If additional fuel is required (see 3.8.1).
k. If responsibility for inspection and place of inspection should be other than the contractor's (see 4.1.1).
l. If first article inspection and type and number of samples should be other than specified (see 4.4).

6.3 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, a standard production item from the contractor's current inventory (see 3.1), and the number of items to be tested as specified in 4.7. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Forms. A copy of the "Equipment Log Book" and all required forms (see 3.4.1.1) will be furnished to the contractor by the Government at least 30 days before shipment of the vehicles required by the contract delivery schedule.

6.5 Definitions.

6.5.1 Recovered materials. "Recovered materials" means materials that have been collected or recovered from solid waste (see 6.5.1.1).

6.5.1.1 Solid waste. "Solid waste" means (a) any garbage, refuse, or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, commercial, mining, and agricultural operations, and from community activities. It does not include solid or dissolved material in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under section 402 of the Clean Water Act, (33 U.S.C. 1342 et seq.), or source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.) (Source: Federal Acquisition Regulations, section 23.402).

6.6 Safety precautions. Caution should be exercised in handling carbon dioxide (CO_2) fire extinguisher cylinders. Cylinders should not be dropped, be permitted to strike each other, or be handled roughly. Extreme care should be exercised during the reinstallation operation to avoid tripping fire extinguisher control system (see 3.4.5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

6.7 Subject term (key word) listing.

Basic issue items.
Cleaning and drying.
Driveaway capability.
Domestic, overseas shipment.
Disassembly.
Engine purging.
Loading.
Marking.
Miscellaneous preservation.
Match marking.
Moisture separators.
Packaging.
Preservation.
Ventilation.
Water and corrosion inhibitor.
Water and antifreeze.

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.9 AMC policy on AQLs/LTPDs. This specification is certified to be in compliance with current Army Materiel Command (AMC) policy for the elimination of AQLs/LTPDs (Acceptable Quality Levels/Lot Tolerance Percent Defectives) from Military specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

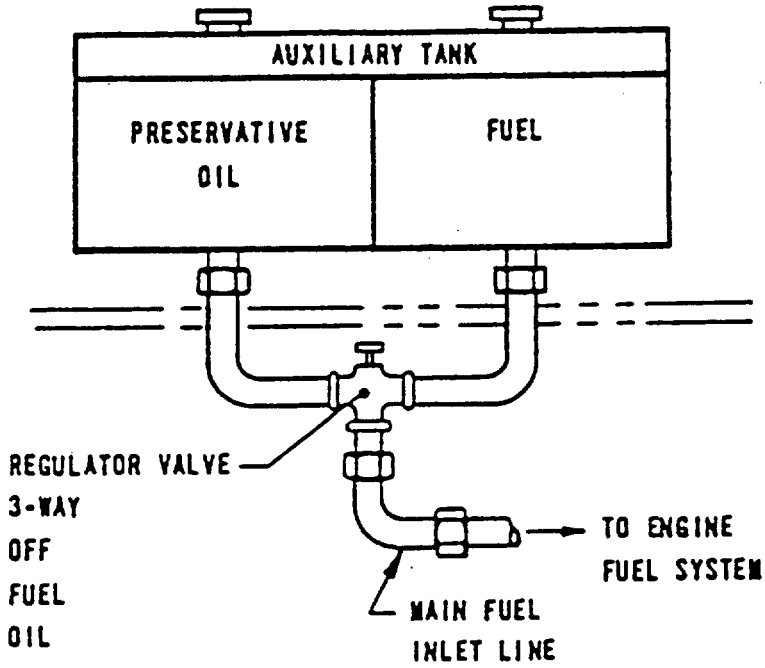


FIGURE 1. Auxiliary fuel container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.


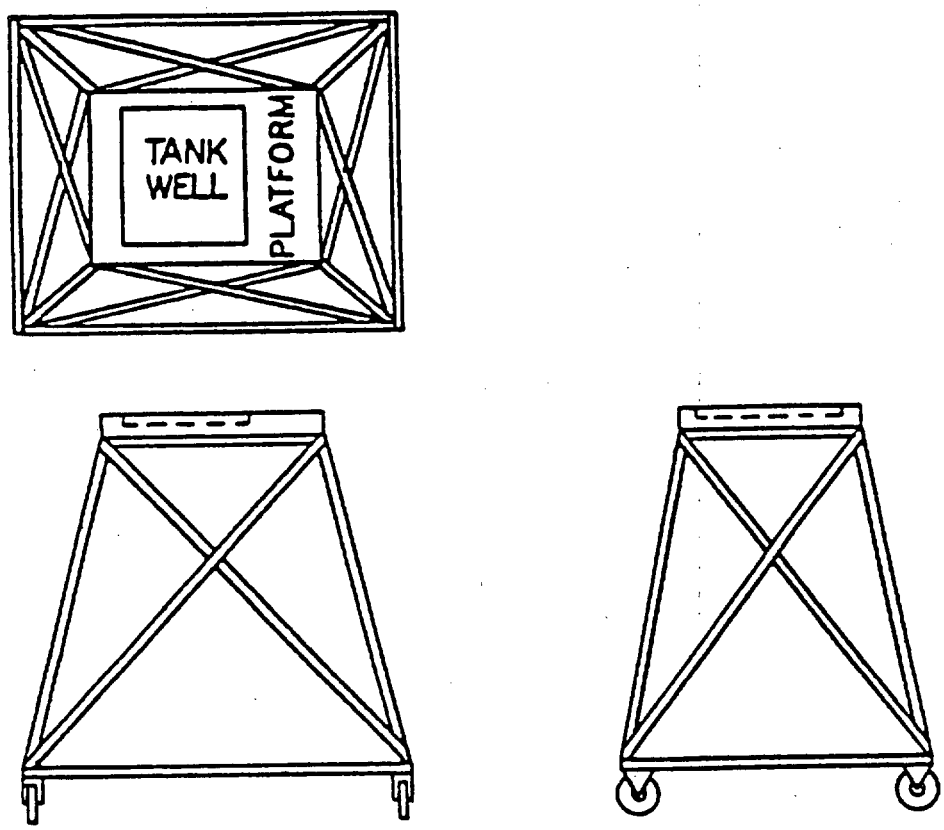


FIGURE 1. Auxiliary fuel container.-(cont'd)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

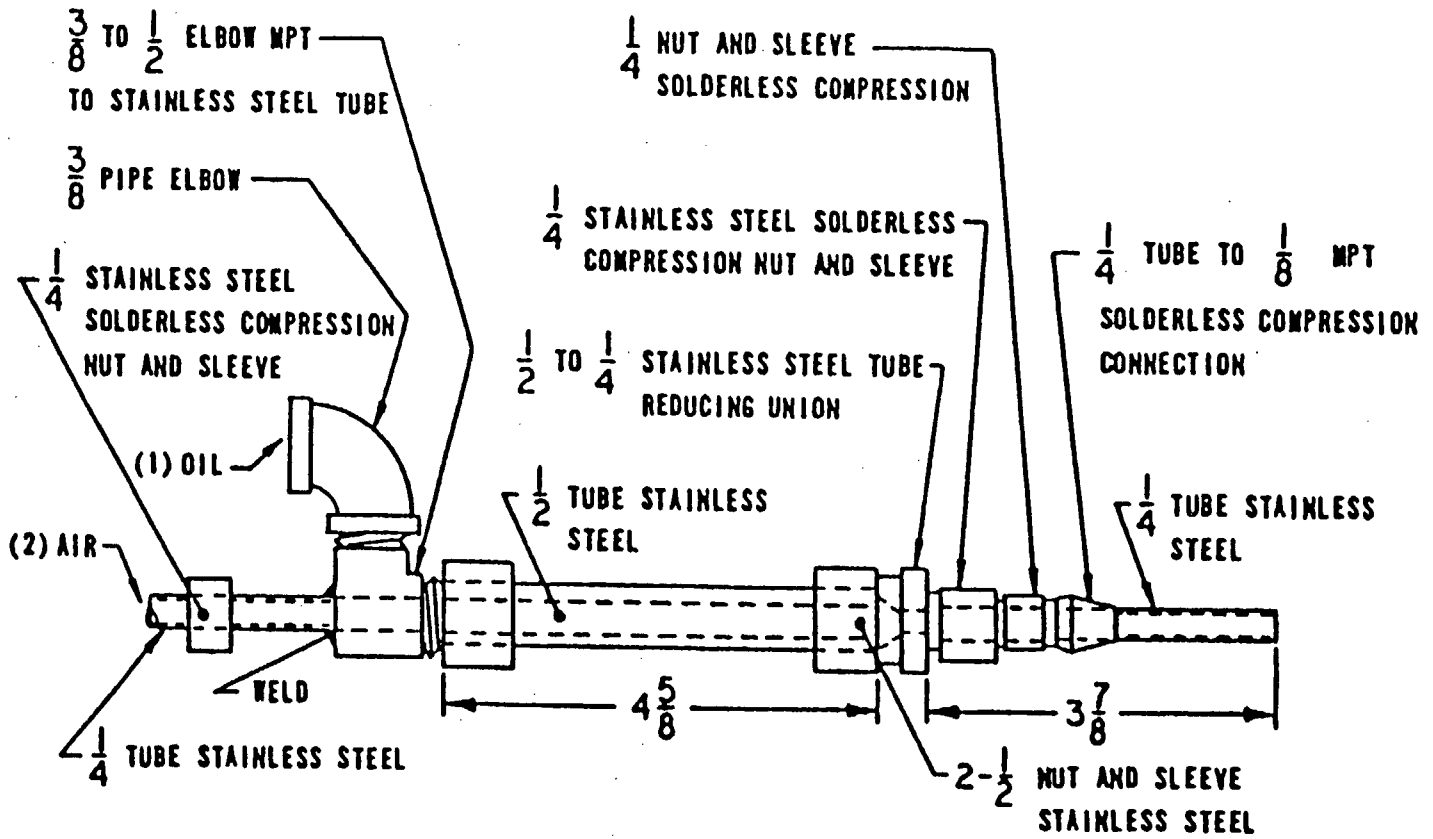


NOTE: (1) AND (2) CONNECT TO CORRESPONDING LINES ON FIGURE 3

FIGURE 2. Atomizing device.

FABRICATION DETAILS FOR OIL SPRAY ATOMIZING NOZZLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

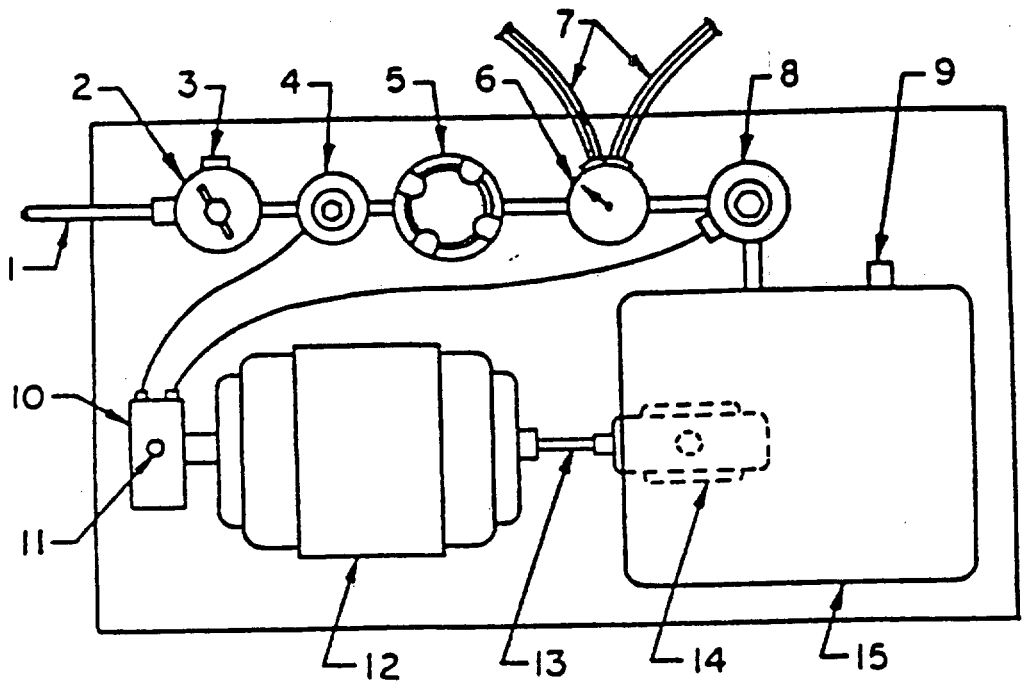

1. AIR LINE
2. AIR PRESSURE REGULATOR
3. AIR PRESSURE GAGE
4. SOLENOID VALVE
5. MOISTURE SEPARATOR
6. OIL PRESSURE GAGE
7. TWO DOUBLE TAPED LINES
8. SOLENOID VALVE
9. OIL TANK LEVEL GAGE
10. ELECTRIC JUNCTION BOX
11. ELECTRIC LINE
12. MOTOR 1/4 H P
13. SHAFT
14. POSITIVE DISPLACEMENT OIL PUMP
15. OIL TANK

NOTE:
THIS EQUIPMENT HAS PROVEN SATISFACTORY FOR ATOMIZED SPRAYING OF PRESERVATIVE OIL IN CONJUNCTION WITH FIGURE 2.

FIGURE 3. Pressure pump.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.


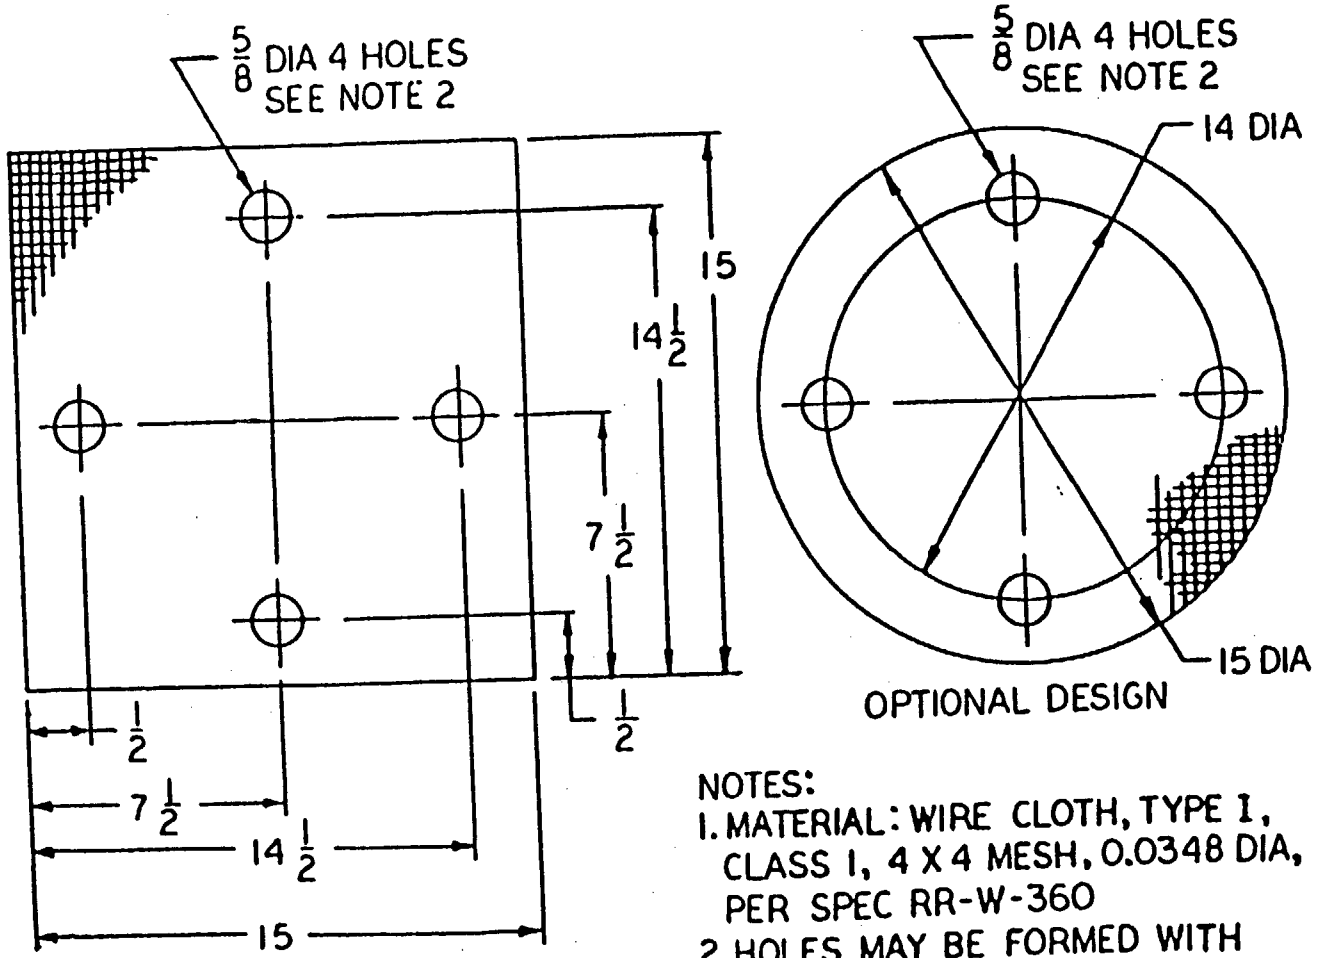


FIGURE 4. Screen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

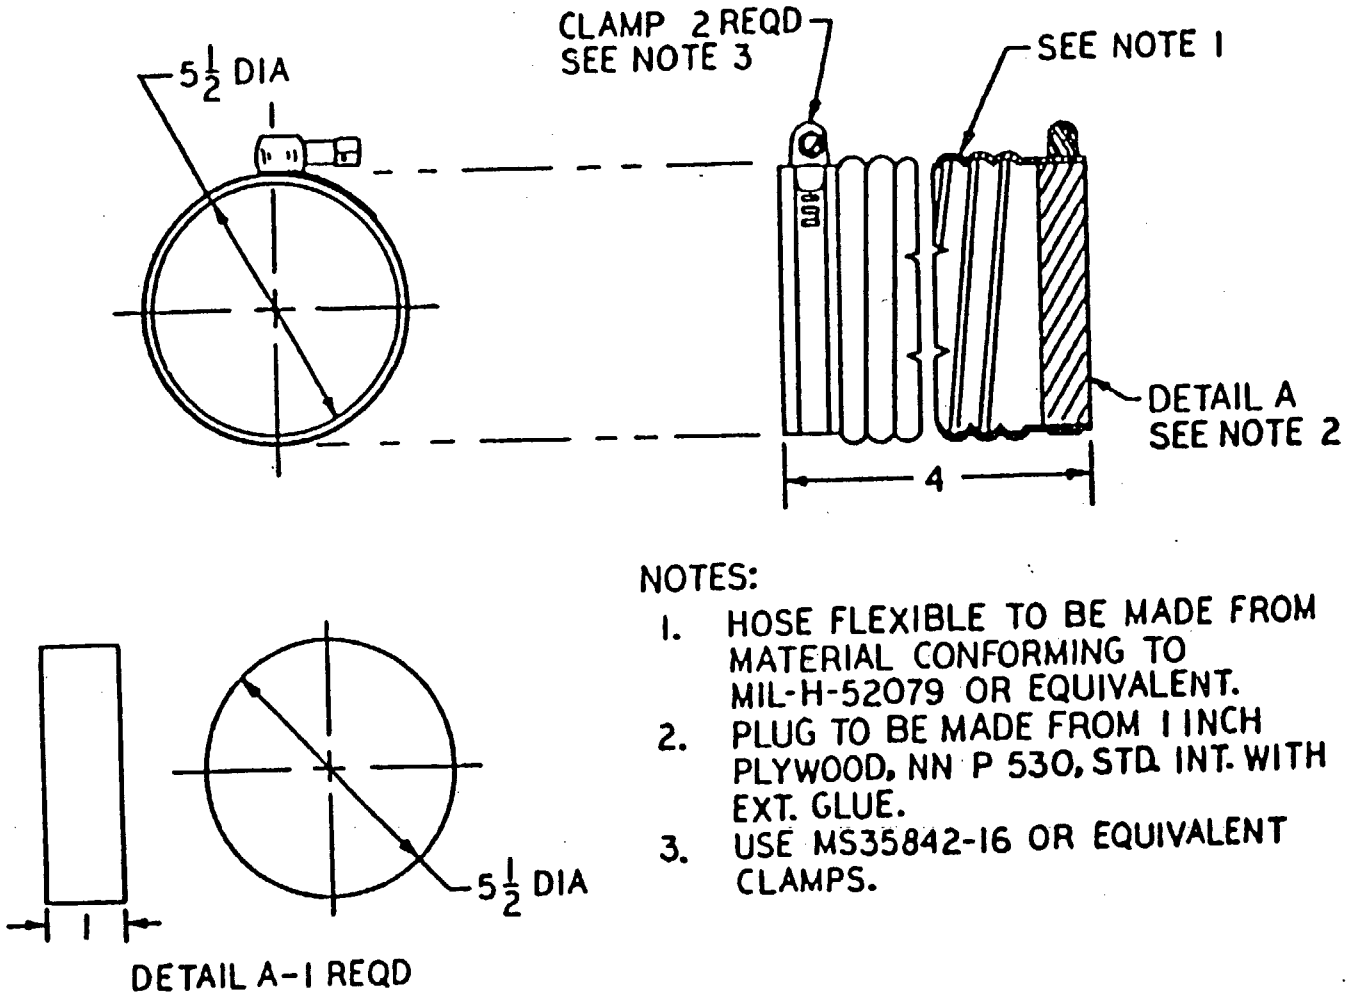


NOTES:


1. HOSE FLEXIBLE TO BE MADE FROM MATERIAL CONFORMING TO MIL-H-52079 OR EQUIVALENT.
2. PLUG TO BE MADE FROM 1 INCH PLYWOOD, NN P 530, STD. INT. WITH EXT. GLUE.
3. USE MS35842-16 OR EQUIVALENT CLAMPS.

FIGURE 5. Boot air restrictor.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.



REMOVE SCREW AND WASHER IN RELATIONSHIP WITH EAR'S OF GAS CAP



PLACE BRACKET ITEM 1 BETWEEN EAR'S OF GAS CAP AND SECURE WITH REMOVED SCREW AND WASHER

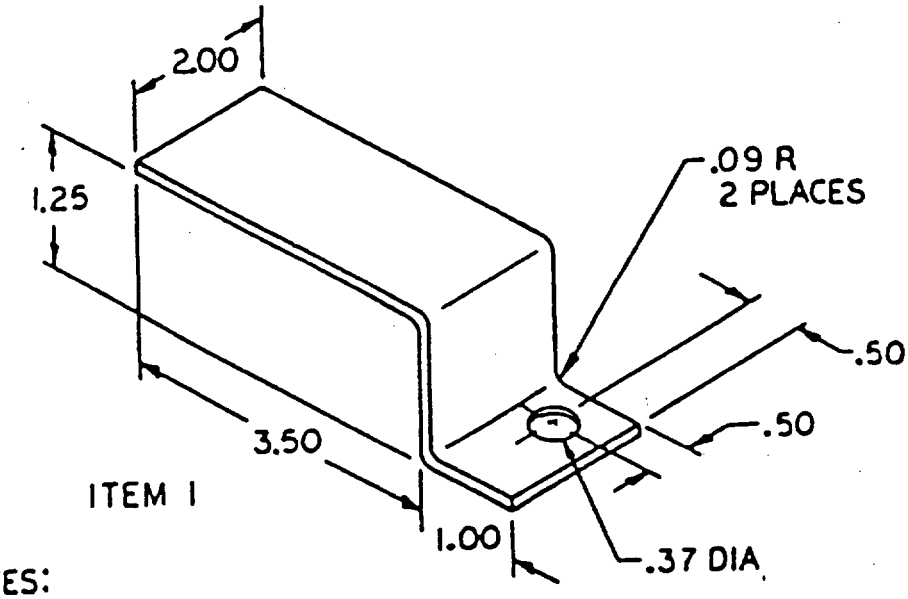

NOTES:

1. MATERIAL: STEEL, CARBON, HR, QQ-S-698, .125 THK.
2. FINISH: MIL-C-16173, GRADE 1.

FIGURE 6. Bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Appendix A

REQUIREMENTS FOR ASSEMBLY, INSTALLATION AND REMOVAL OF VEHICLE CLOSURE FOR M548 AND M548A1 VEHICLE

10. SCOPE.

10.1 Scope. This appendix covers requirements for assembly, installation and removal of the vehicle closure for M548 and M548A1 vehicles only (see figure 7). This appendix is a mandatory part of the specification. The information contained herein is intended for compliance.

20 APPLICABLE DOCUMENTS

20.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this appendix to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-530	- Plywood, Flat Panel.
RR-W-360	- Wire, Fabric, Industrial.
TT-E-527	- Enamel, Alkyd, Lusterless.
TT-P-636	- Primer Coatings, Alkyd, Wood and Ferrous Metal.
PPP-B-621	- Boxes, Wood, Nailed and Lock-corner.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-R-3065	- Rubber, Fabricated Products.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold Application.

STANDARDS

MILITARY

MIL-STD-731	- Quality of Wood Members for Containers and Pallets.
MS16992	- Bolt (Screw), Lag, Hex Head, Gimlet Point.
MS27183	- Washer, Flat (Round, Steel, Cadmium Plated) General Purpose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

MS51967	- Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNC-2B (in/mm).
MS51968	- Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNF-2B (in/mm).
MS90725	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Grade 5, Cadmium Plated, UNC-2A.

20.2 Other publications. The following documents form a part of the appendix to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-A576	- Standard Specification for Steel Bars, Carbon, Hot-Wrought Quality.
ASTM-A675/A675M	- Steel Bars, Carbon, Hot-Wrought, Special Quality, Mechanical Properties.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

30 REQUIREMENTS.

30.1 Vehicle closure.

30.1.1 Installation of closure.

a. Install two studs, detail 17, figure 7, into the two 1/2 inch diameter threaded holes in the top of the vehicle side panels at the engine compartment bulkhead.
b. Place closure on vehicle with the 3/4 inch diameter hoses at the rear located on the studs installed in step a. The two 5/8 inch diameter holes in the forward support are to be located over the windshield mounting holes.
c. Place a rubber washer, detail 22, figure 7, and a steel washer (MS27183-19), detail 21, figure 7, over each of the studs installed in step a. Install nut (MS51968-14), detail 24, figure 7, on each of the studs and torque securely.
d. Place a steel washer (MS27183-15), detail 20, figure 7, on each of the two screws (MS90725-74), detail 18, figure 7, to be next to the screw head. Place rubber washer, detail 22, figure 7, on

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

each of the screws. Install screws with washers through the 5/8 inch diameter holes in the forward support and through the windshield mounting holes in the vehicle. Install steel washer (MS27183-15), detail 20, figure 7, onto each of the screws. Install nut (MS51967-8), detail 23, figure 7, on each of the screws and torque securely.

30.1.2 Removal of closure.

a. Remove the nuts and washers from the two screws through the closure forward support and the vehicle windshield mounting holes. Withdraw the screws with the remaining washers.
b. Remove the nuts and washers from two studs at the rear of the closure.
c. The closure is now free to be lifted from the vehicle.
d. After removal of the closure, remove the two studs at the rear of the engine compartment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

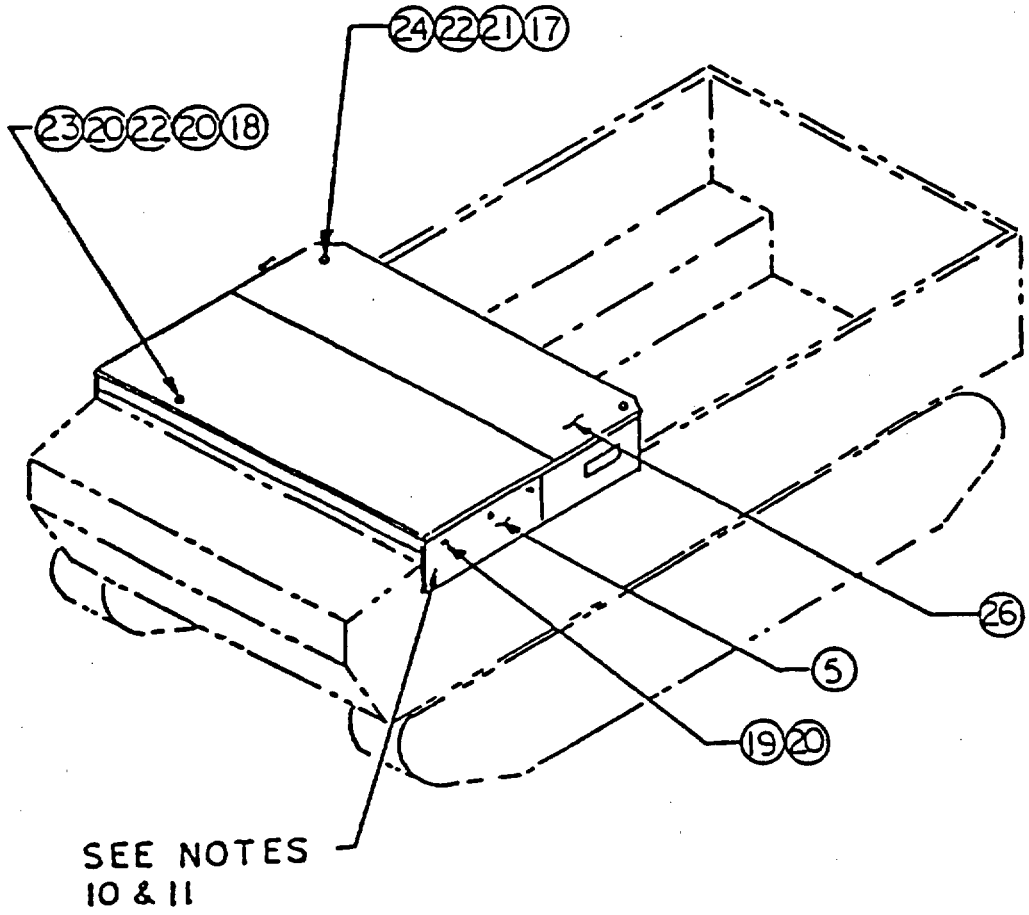


FIGURE 7. Vehicle closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

ITEM	PART NAME	NO. REQ	DESCRIPTION	MATERIAL
1	TOP FRONT	1	1/2 X 42-1/16 X 101-1/2	SEE NOTE 1
2	TOP REAR	1	SEE DETAIL 1	
3	BACK PANEL	1	1/2 X 8-1/2 X 93	
4	SIDE PANEL	2	SEE DETAIL 2	
5	SIDE PANEL	2	SEE DETAIL 4	
6	DEFLECTOR	2	SEE DETAIL 3	
7	END PANEL	4	1/2 X 2-3/4 X 5	
8	BLOCK	2	1/2 X 6-5/8 X 4	
9	BLOCK	2	1/2 X 6-5/8 X 7-1/4	
10	BLOCK	2	3/8 X 6-5/8 X 4	SEE NOTE 1
11	SUPPORT	3	2 NOM X 2-5/8 X 100-1/2	SEE NOTE 2
12	SPACER	2	2 NOM X 2-5/8 X 23-1/4	
13	SPACER	2	2 NOM X 2-5/8 X 15	
14	SPACER	2	2 NOM X 2-5/8 X 29-9/16	
15	BLOCK	2	2 NOM X 2-5/8 X 2-3/4	SEE NOTE 2
16	SCREEN VENT	2	SEE DETAIL 6	SEE NOTE 3
17	STUD	2	SEE DETAIL 7	SEE NOTE 4
18	SCREW	2	3/8-16 X 4 UNC-2A	MS90725-74
19	BOLT LAG	6	3/8 X 2 STEEL	MS16992-543
20	WASHER	10	.438 ID X 1.000 O.D	MS27183-15
21	WASHER	2	.562 ID X 1.375 O.D	MS27183-19
22	WASHER	4	SEE DETAIL 8	SEE NOTE 5
23	NUT	2	3/8-16 UNC-2B	MS51967-8
24	NUT	2	1/2-20 UNF-2B	MS51968-14
25	REAR ASSY	1	SEE DETAIL 5	--
26	COVER ASSY	1	SEE DETAIL 9	--

FIGURE 7. Vehicle closure.-(cont'd)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

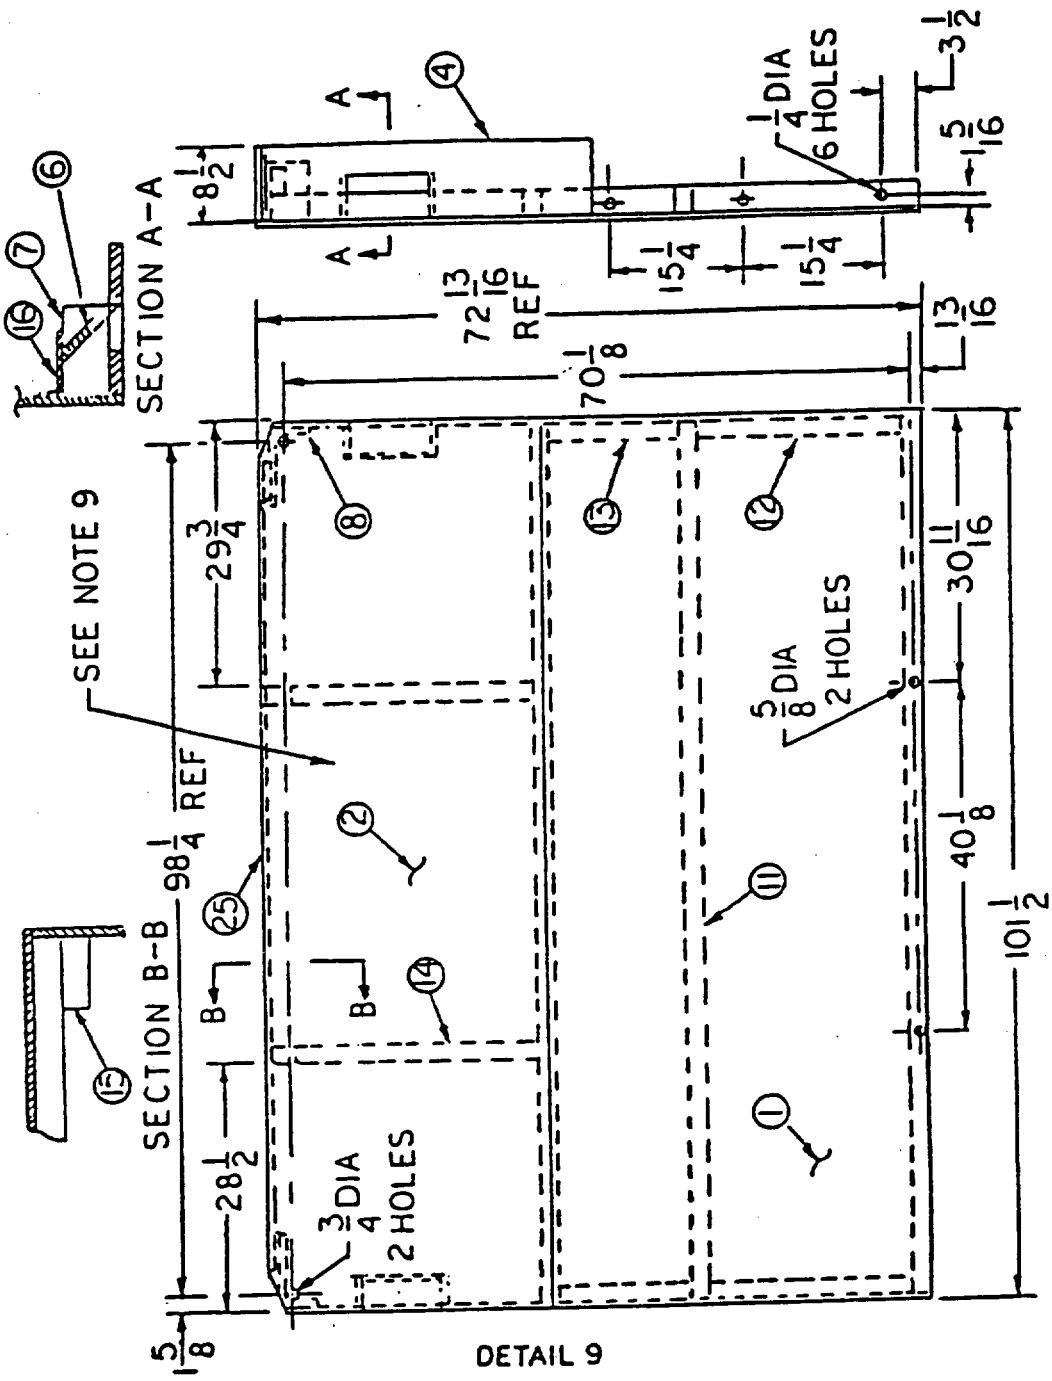


FIGURE 7. Vehicle closure.-(cont'd)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.



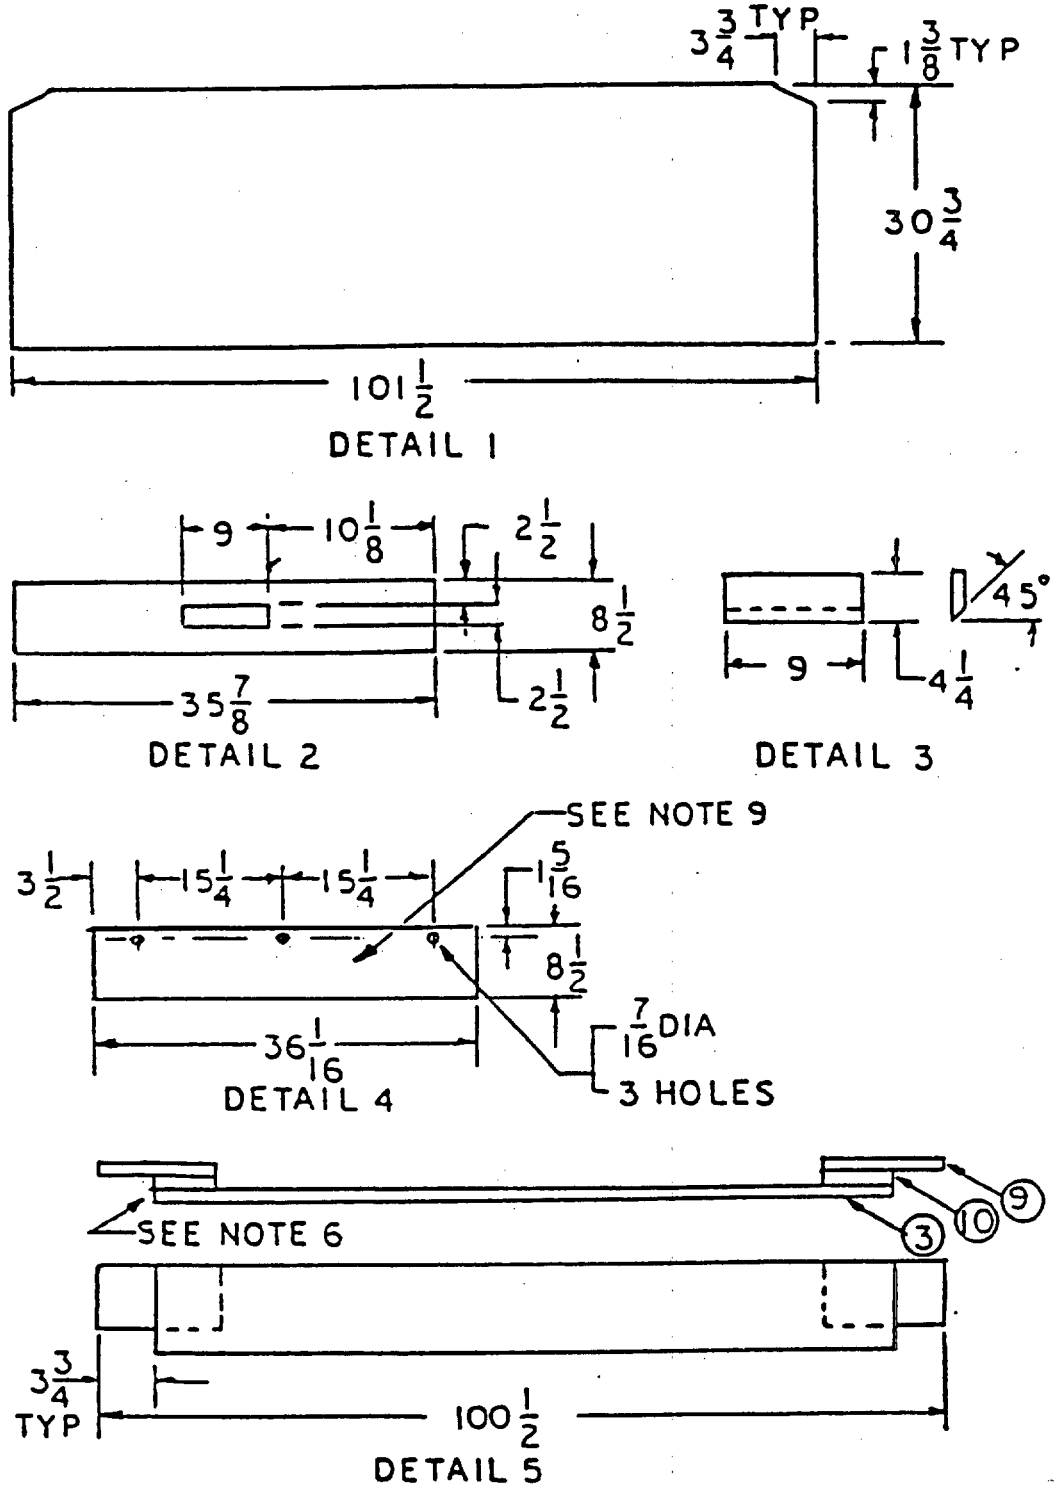


FIGURE 7. Vehicle closure.-(cont'd)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

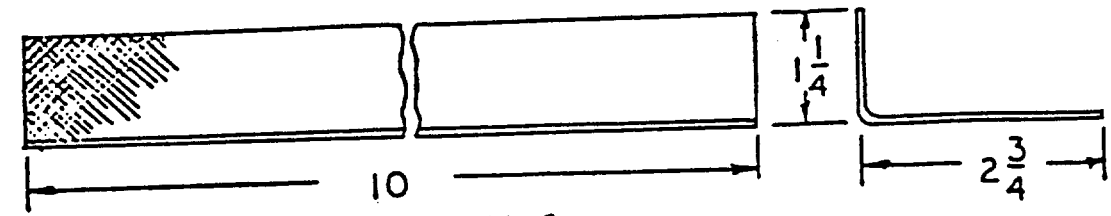

DETAIL 6
MATERIAL: NOTE 3

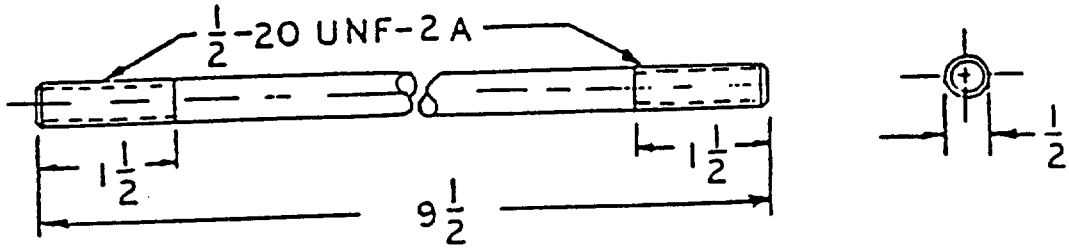

DETAIL 7
MATERIAL: NOTE 4

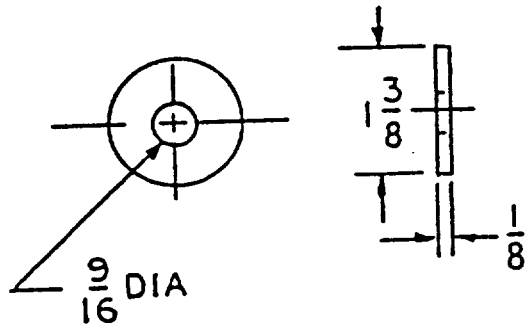

DETAIL 8
MATERIAL: NOTE 5

FIGURE 7. Vehicle closure.-(cont'd)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

NOTES:

1. PLYWOOD, SPEC NN-P-530, EXTERIOR TYPE, PS 1-66 B-C EXT-DFPA(4)
2. LUMBER, SPEC MIL-STD-731, GROUP I OR II
3. WIRE CLOTH, STEEL CARBON 0.0348 DIA 4 X 4 MESH TYPE I, CLASS I, SPEC RR-W-360
4. STEEL, CARBON, ASTM-A36/A36M OR ASTM A576, STEEL CARBON, OR ASTM, A675
5. RUBBER, GRADE SB515 A_1 B_1 C_1, SPEC MIL-R-3065
6. ITEMS 3, 9 & 10 SHALL BE LAMINATED TOGETHER WITH WATERPROOF GLUE
7. ALL UNPAINTED METAL PARTS (EXCEPT NAILS) SHALL BE COATED WITH MIL-C-16173, GRADE 1
8. NAILING SHALL CONFORM TO SPEC PPP-B-621
9. FINISH EXTERIOR SURFACES

   CLEAN PER PROCESS C-1, MIL-P-116

   APPLY PRIMER, CMPSN OPTL, SPEC TT-P-636 0.75 TO 1.25 MILS THICK

   APPLY ENAMEL, OLIVE DRAB, NO. 34087, CMPSN OPTL, SPEC TT-E-527
10. PAINT USED FOR MARKING SHALL CONFORM TO SPEC TT-E-527, COLOR YELLOW NO. 33538
11. STENCIL ON REMOVABLE PANEL AT LEFT DOOR "TO SET OR RELEASE BRAKES - REMOVE THIS PANEL"

FIGURE 7. Vehicle closure.-(cont'd)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Appendix B

REQUIREMENTS FOR ASSEMBLY, INSTALLATION AND REMOVAL
OF VEHICLE CLOSURE FOR M1015 AND M1015A1 VEHICLES

10. SCOPE.

10.1 Scope. This appendix covers requirements for assembly, installation and removal of the vehicle closure for M1015 and M1015A1 vehicles only (see figure 8). This appendix is a mandatory part of the specification. The information contained herein is intended for compliance.

20 APPLICABLE DOCUMENTS

20.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this appendix to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-530	- Plywood, Flat Panel.
TT-E-527	- Enamel, Alkyd, Lusterless.
TT-P-636	- Primer Coatings, Alkyd, Wood and Ferrous Metal.
PPP-B-621	- Boxes, Wood, Nailed and Lock-corner.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-R-3065	- Rubber, Fabricated Products.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold Application.

STANDARDS

FEDERAL

FED-STD-595	- Colors.

MILITARY

MIL-STD-731	- Quality of Wood Members for Containers and Pallets.
MS27183	- Washer, Flat (Round, Steel, Cadmium Plated) General Purpose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

MS51968 - Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNF-2B (in/mm).

20.2 Other publications. The following documents form a part of the appendix to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-A576 - Standard Specification for Steel Bars, Carbon, Hot-Wrought Quality.
ASTM-A675/A675M - Steel Bars, Carbon, Hot-Wrought, Special Quality, Mechanical Properties.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

30 REQUIREMENTS.

30.1 Vehicle closure.

30.1.1 Installation of closure.

a. Install two studs, detail 13, figure 8, into the two 1/2 inch diameter threaded holes in the top of the vehicle side panels at the engine compartment bulkhead.
b. Place closure on vehicle with the 3/4 inch diameter holes at the rear located on the studs installed in step a.
c. Place a rubber washer, detail 15, figure 8, and a steel washer (MS27183-19), detail 14, figure 8, over each of the studs installed in step a. Install nut (MS51968-14), detail 16, figure 8, on each of the studs and torque securely.

30.1.2 Removal of closure.

a. Remove the nuts and washers from the two studs at the rear of the closure.
b. The closure is now free to be lifted from the vehicle.
c. After removal of the closure, remove the two studs at the rear of the engine compartment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

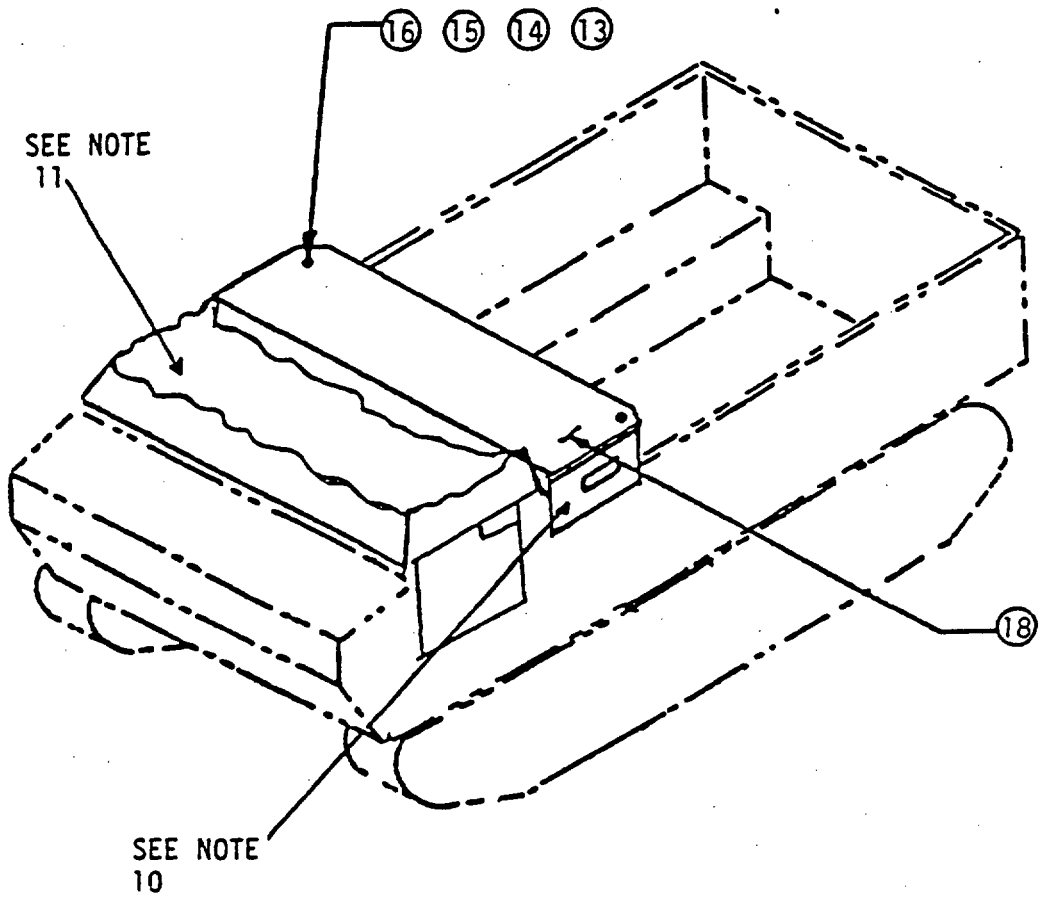


FIGURE 8. Vehicle closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

ITEM	PART NAME	NO. REQ	DESCRIPTION	MATERIAL
1	TOP REAR	1	SEE DETAIL 1	SEE NOTE 1
2	BACK PANEL	1	1/2 X 8-1/2 X 93	SEE NOTE 1
3	SIDE PANEL	2	SEE DETAIL 2	SEE NOTE 1
4	DEFLECTOR	2	SEE DETAIL 3	SEE NOTE 1
5	END PANEL	4	1/2 X 2-3/4 X 5	SEE NOTE 1
6	BLOCK	2	1/2 X 6-5/8 X 4	SEE NOTE 1
7	BLOCK	2	1/2 X 6-5/8 X 7-1/4	SEE NOTE 1
8	BLOCK	2	3/8 X 6-5/8 X 4	SEE NOTE 1
9	SUPPORT	1	2 NOM X 2-5/8 X 100-1/2	SEE NOTE 2
10	SPACER	2	2 NOM X 2-5/8 X 29-9/16	SEE NOTE 2
11	BLOCK	2	2 NOM X 2-5/8 X 2-3/4	SEE NOTE 2
12	SCREEN VENT	2	SEE DETAIL 5	SEE NOTE 3
13	STUD	2	SEE DETAIL 6	SEE NOTE 4
14	WASHER	2	.562 ID X 1.375 O.D	MS27183-19
15	WASHER	2	SEE DETAIL 7	SEE NOTE 5
16	NUT	2	1/2-20 UNF-2B	MS51968-14
17	REAR ASSY	1	SEE DETAIL 4	--
18	COVER ASSY	1	SEE DETAIL 8	--

FIGURE 8. Vehicle closure.-(cont'd)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.



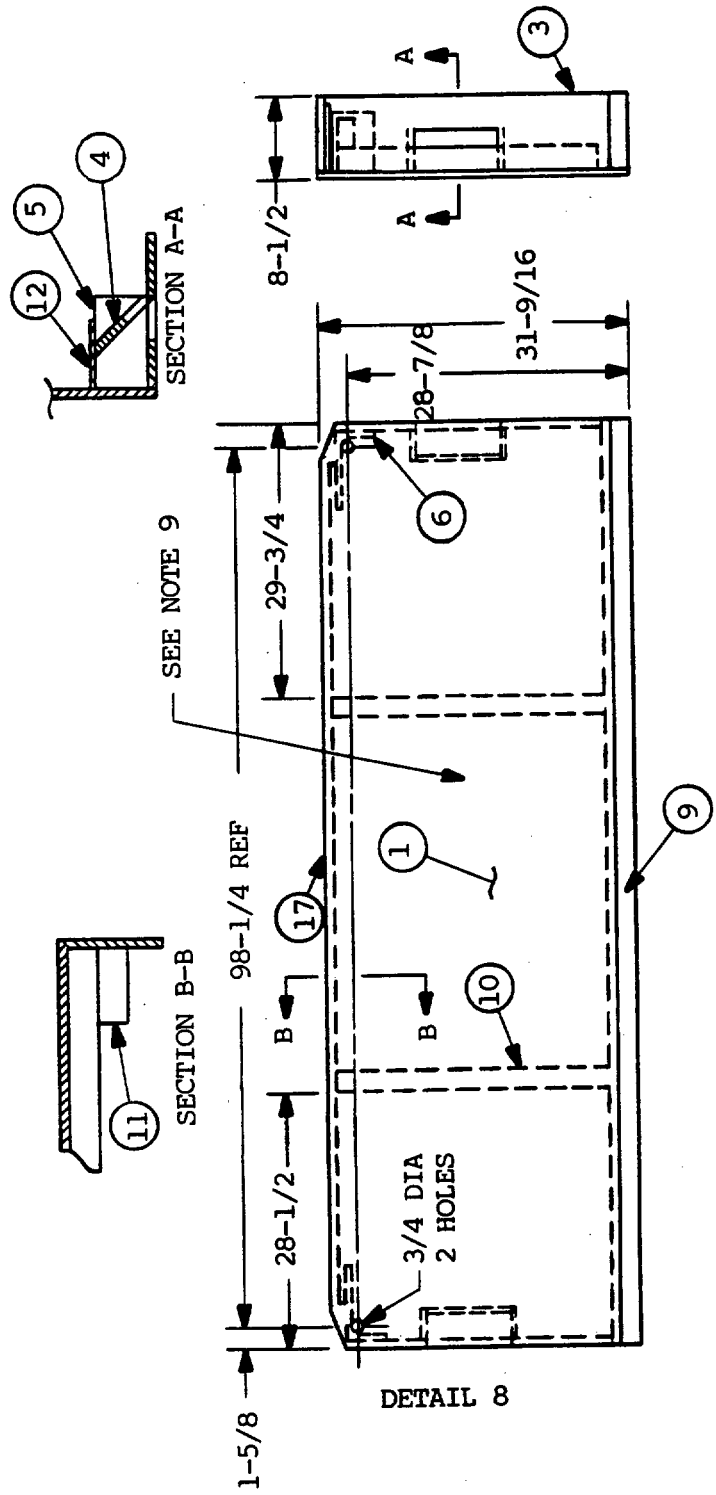


FIGURE 8. Vehicle closure. -cont'd


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

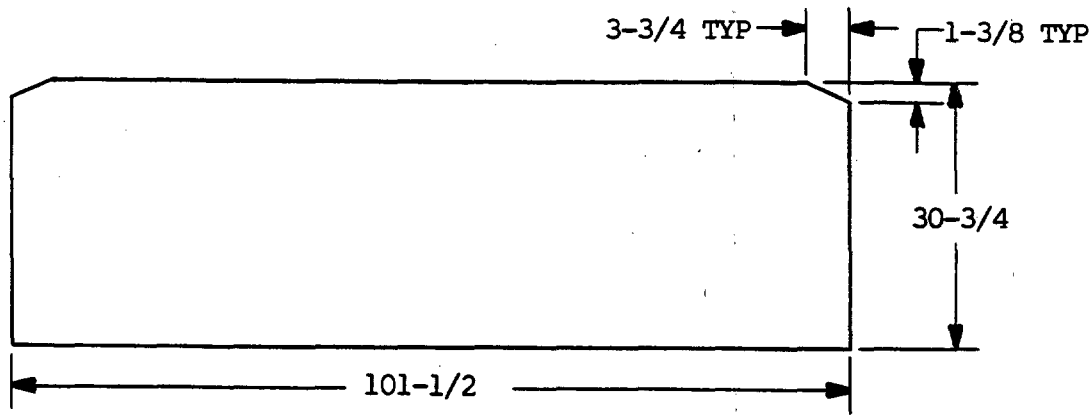


DETAIL 1

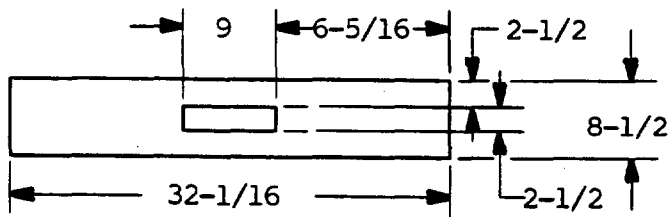

DETAIL 2




DETAIL 3

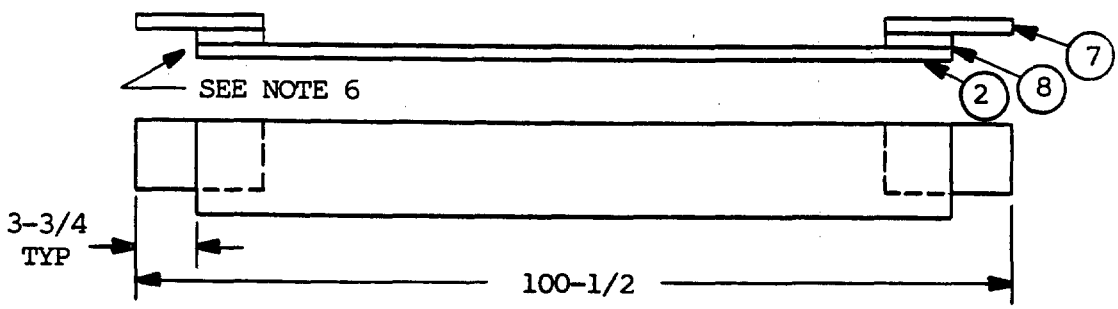


DETAIL 4

FIGURE 8. Vehicle closure. -cont'd


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

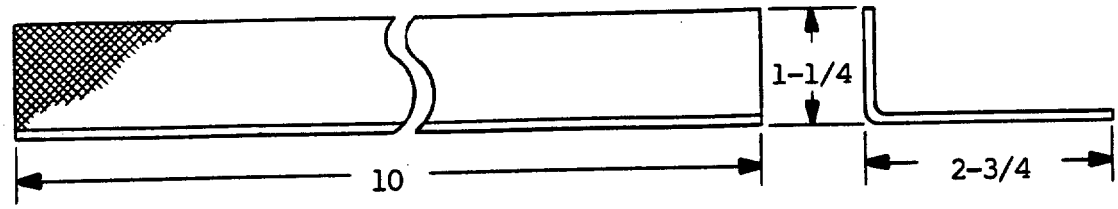

DETAIL 5
MATERIAL: NOTE 3

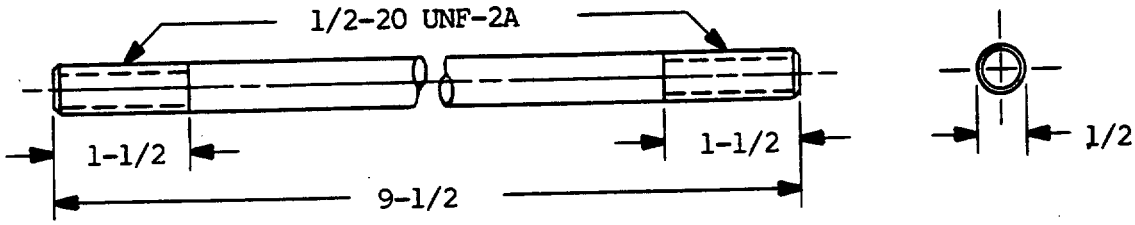

DETAIL 6
MATERIAL: NOTE 4

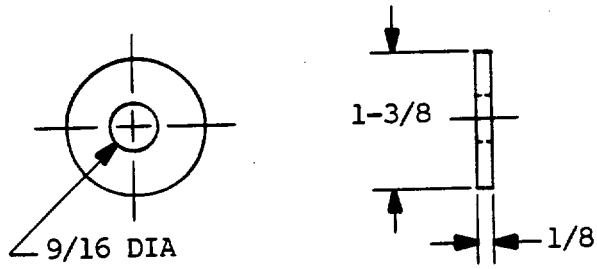

DETAIL 7
MATERIAL: NOTE 5

FIGURE 8. Vehicle closure. -cont'd

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

NOTES:

1. PLYWOOD, SPEC NN-P-530, EXTERIOR TYPE, PS 1-66 B-C EXT-DFPA(4).

2. LUMBER, SPEC MIL-STD-731, GROUP I OR II.

3. WIRE CLOTH, STEEL CARBON 0.0348 DIA 4 X 4 MESH TYPE I, CLASS I, SPEC RR-W-360.

4. STEEL, CARBON, ASTM A36/A36M, OR ASTM A576, STEEL CARBON, OR ASTM A675.

5. RUBBER, GRADE SB515 A_1 B_1 C_1 SPEC MIL-R-3065.

6. ITEMS 3, 9 & 10 SHALL BE LAMINATED TOGETHER WITH WATERPROOF GLUE.

7. ALL UNPAINTED METAL PARTS (EXCEPT NAILS) SHALL BE COATED WITH MIL-C-16173, GRADE 1.

8. NAILING SHALL CONFORM TO SPEC PPP-B-621.

9. FINISH EXTERIOR SURFACES.

   CLEAN PER PROCESS C-1, MIL-P-116.

   APPLY PRIMER, CMPSN OPTL, SPEC TT-P-636 0.75 TO 1.25 MILS THICK.

   APPLY ENAMEL, OLIVE DRAB, NO. 34087, CMPSN OPTL, SPEC TT-E-527.

10. PAINT USED FOR MARKING SHALL CONFORM TO SPEC TT-E-527. COLOR YELLOW NO. 33538.

11. CAB COVER CUT AWAY FOR CLARITY ONLY.

FIGURE 8. Vehicle closure. -cont'd

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Appendix C

REQUIREMENTS FOR FABRICATION, ASSEMBLING
LEVEL B VEHICLE CLOSURE FOR M548, M548A1,
M1015, AND M1015A1 VEHICLES

10. SCOPE.

10.1 Scope. This appendix covers requirements for assembly and installation of the vehicle closure for M548, M548A1, M1015 and M1015A1 vehicles (see figures 9 and 10). This appendix is a mandatory part of the specification. The information contained herein is intended for compliance.

20. APPLICABLE DOCUMENTS.

20.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this appendix to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-530	- Plywood, Flat Panel.
PPP-B-1055	- Barrier Material, Waterproofed, Flexible.
PPP-S-760	- Strapping, Non-metallic (and Connectors).
PPP-T-60	- Tape: Packaging, Waterproof.

MILITARY

MIL-T-22085	- Tape, Pressure-Sensitive Adhesive, Preservation and Sealing.

STANDARDS

MILITARY

MIL-STD-731	- Quality of Wood Members for Containers and Pallets.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Appendix C

30. REQUIREMENTS.

30.1 Heater intake grille. Heater grille shall be covered with PPP-B-1055, class E-2. The barrier material shall cover the entire grille and shall extend three inches over each side. Secure barrier material in place with tape in accordance with 30.5 (see figure 9 for M548 and M548A1 and figure 10 for M1015 and M1015A1).

30.2 Engine exhaust grille. Engine exhaust flange shall be sealed with type IV, class 1, PPP-T-60 tape or type II, MIL-T-22085. Grille shall be covered with PPP-B-1055, class E-2 barrier material. The barrier material shall cover the entire grille and shall extend three inches over each side. The barrier material shall have a slit applied at the exhaust flange area. Secure barrier material in place with tape in accordance with 30.5 (see figure 9 for M548 and M548A1 and figure 10 for M1015 and M1015A1).

30.3 Driver's compartment closure (M548 and M548A1 only). The driver's area shall be covered with a single piece of plywood conforming to NN-P-530, in accordance with figure 9, secured in place with tape in accordance with 30.5. Plywood closure shall be secured down with two non-metallic straps conforming to PPP-S-760 as shown in figure 9.

30.4 Driver's compartment closure (M1015 and M1015A1 only). The driver and passenger doors will be sealed with tape conforming to type IV, class 1, PPP-T-60 or type II, MIL-T-22085. Tape shall be applied in accordance with paragraph 30.5 (see figure 10).

30.5 Taping requirements. Tape shall conform to type IV, class 1, PPP-T-60, or type II, MIL-T-22085. Tape shall be 3 inches in width and applied in such a manner that a minimum of wrinkles occur. When, because of turns or irregular surfaces, wrinkles occur, the tape shall be cut through the wrinkles, and the cut edges overlapped. Tape shall be applied in longest possible lengths to minimize overlapping. Extreme care shall be exercised in applying tape to eliminate wrinkles and loose edges. See figures 9 and 10 for taped areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.


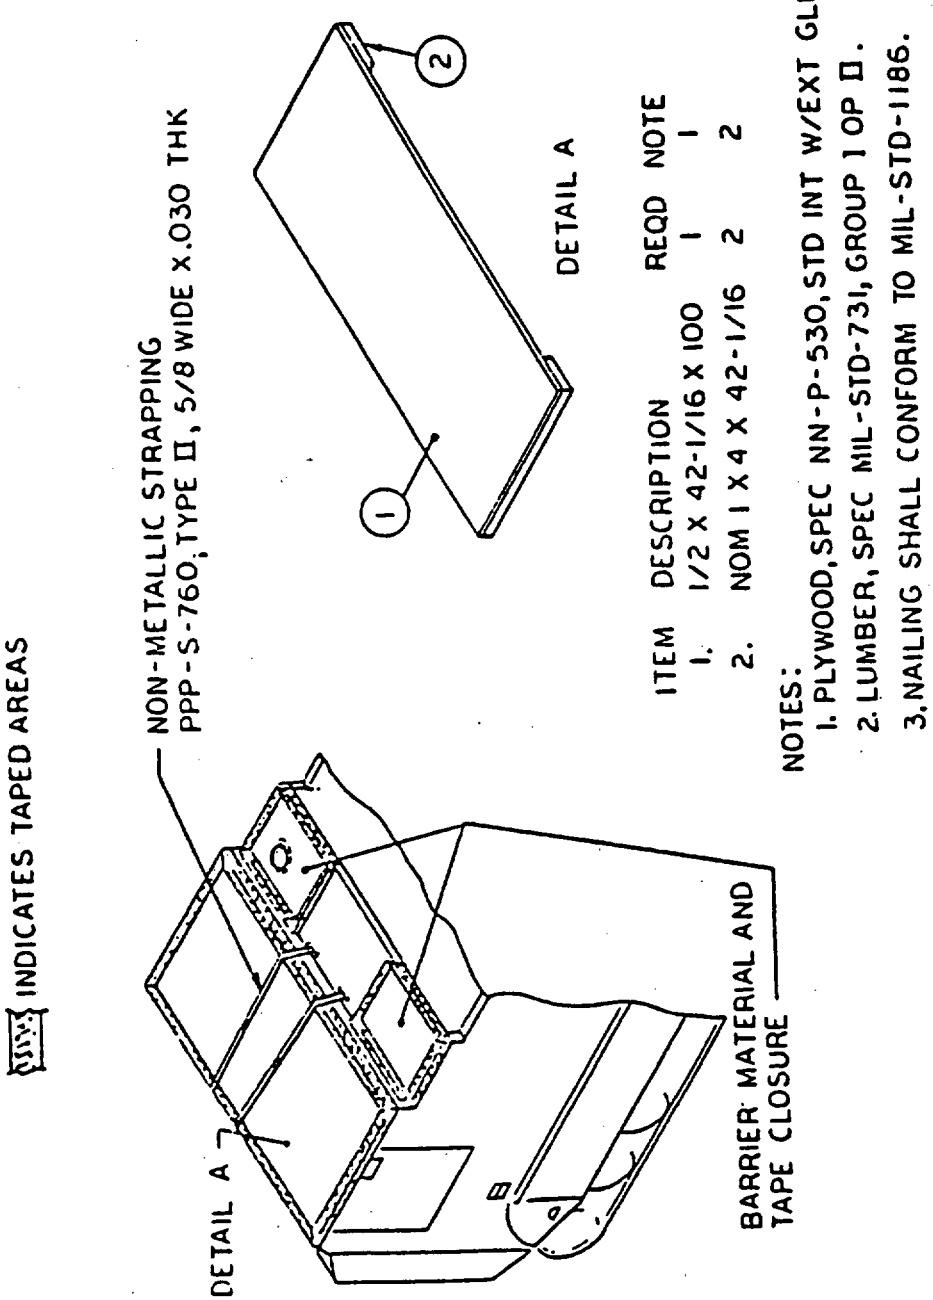


FIGURE 9. VEHICLE CLOSURE (M548 AND M548A1 only)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

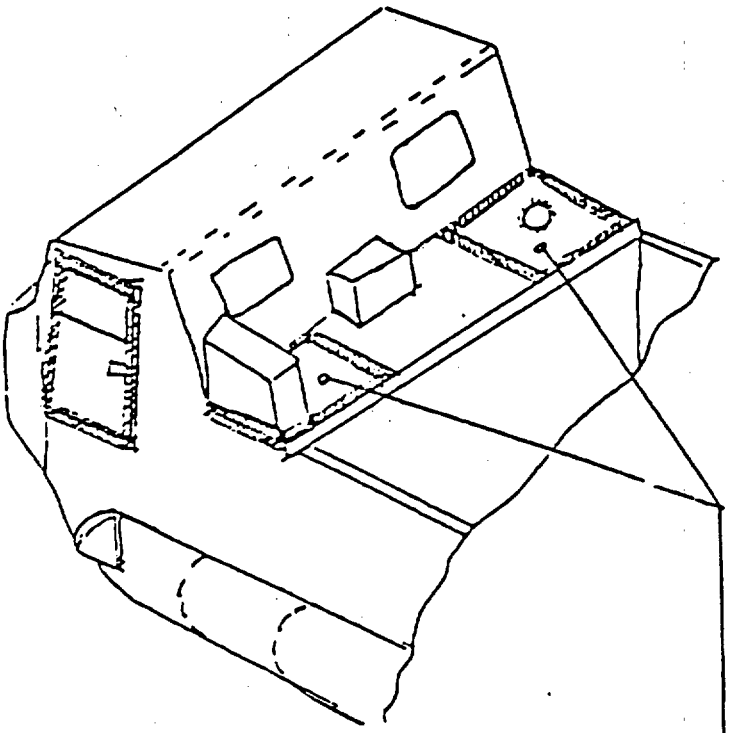

BARRIER MATERIAL AND TAPE CLOSURE.

INDICATES TAPED AREAS

FIGURE 10. VEHICLE CLOSURE(M1015 AND M1015A1 only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AT

Preparing activity:
Army - AT

(Project 2350-A392)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. FSC 2350

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C-62015F(AT), Carrier, Cargo, Full-Tracked, M548 and M548A1; and Carrier, Electronic Warfare Systems, Full-Tracked, M1015 and M1015A1; Processing for Storage and Shipment of

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

FOLD

U.S. ARMY TANK - AUTOMOTIVE COMMAND
ATTN: AMSTA-GDS
WARREN, MICHIGAN 48397-5000

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



Commander
U.S. Army Tank-Automotive
Command
ATTN: AMSTA-GDS
Warren, MI 48397-5000

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.