MILITARY SPECIFICATION

CARRIER, CARGO, TRACKED, 22-TON, AMMUNITION MEDIUM: M992; PROCESSING FOR STORAGE AND SHIPMENT OF

This specification is intended for use by US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers processing the Carrier, Cargo, Tracked, 22-Ton, Ammunition, Medium: M992 for domestic and overseas shipment and storage.

1.2 Classification. Processing shall be of the following levels of protection (see 3.4.2 and 6.2).

Level A: Maximum protection. Maximum protection, called level A, is processing for domestic and overseas shipment and any outside storage in excess of 90 days from the date of processing. (Periodic care and preservation during storage required.)

Level B: Intermediate protection. Intermediate protection, called level B, is processing for intermediate use shipment and for domestic and overseas shipment (excluding open deck loading) and for any storage not to exceed 90 days from the date of processing.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A AREA PACK

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS
FEDERAL

O-I-490	- Inhibitor, Corrosion, Liquid Cooling System.
O-S-576	- Sodium Bicarbonate, Technical.
O-S-801	- Sulfuric Acid, Electrolyte, For Storage Batteries.
P-D-220	- Detergent, General Purpose.
P-D-680	- Dry-Cleaning Solvent.
GG-T-250	- Tester, Antifreeze Solutions.
NN-P-40	- Paper, Lens.
NN-P-530	- Plywood, Flat Panel
QQ-S-781	- Strapping, Steel and Seals.
RR-W-360	- Wire Fabric, Industrial.
TT-E-529	- Enamel, Alkyd, Semi-Gloss.
UU-P-268	- Paper, Kraft, Wrapping.
UU-T-81	- Tag, Shipping and Stock.
VV-F-800	- Fuel Oil, Diesel.
VV-L-800	- Lubricating Oil, General Purpose Preservative (Water-Displacing, Low Temperature)
ZZ-H-601	- Hose and Hose Assemblies, Rubber (Wrapped or Braided) Water SErvice.
MMM-A-178	- Adhesive, Paper Label, Water Resistant.
PPP-B-601	- Boxes, Wood, Cleated Plywood.
PPP-B-621	- Box, Wood, nailed and Locked.
PPP-B-636	- Box, Shipping, Fiberboard.
PPP-C-1752	- Cushioning Material, Unicellular Polyethylene Form Flexible.
PPP-F-320	- Fiberboard; Corrugated and solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-42	- Tape, Packaging/Masking, Paper.
PPP-T-60	- Tape, Packaging, Waterproof.
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament reinforced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-117	- Bags, Sleeves, and Tubing - Interior Packaging.
MIL-B-121	- Barrier Material, Grease Proofed, Waterproofed, Flexible.
MIL-C-450	- Coating-compound, Bituminous Solvent Type, Black (for Ammunition).
MIL-L-2104	- Lubricating Oil, Internal Combustion Engine, Tactical Service.
MIL-L-2105	- Lubricating Oil, Gear Multipurpose.
MIL-C-5501	- Cap and Plug, Protective, Dust and Moisture Seal.
MIL-H-5606	- Hydraulic Fluids, Petroleum Base, Aircraft, Missile, and Ordnance.
MIL-H-6083	- Hydraulic Fluid Petroleum Base, For Preservation and Operation.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-B-11188	- Battery, Storage, Lead-Acid.
MIL-A-11755	- Antifreeze, Arctic-type.
MIL-B-12841	- Basic Issue Items for Military Vehicles, Carriages and Equipment, Preparation for Shipment and Storage of.
MIL-P-14232	- Parts, Equipment and Tools for Army Material Packaging of.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold-Application.
MIL-D-16791	- Detergent, General Purpose (Liquid Nonionic).
MIL-L-21260	- Lubrication Oil, Internal Combustion Engine, Preservative and Break-In.
MIL-T-22085	- Tape, Adhesive, Preservation and Sealing.
MIL-B-22191	- Barrier Material, Transparent, Flexible, Heat Sealable.
MIL-P-46002	- Preservative Oil, Contact and Volatile Corrosion-Inhibited.
MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package.
MIL-T-50036	- Talc, Technical, T1 and T3.
MIL-D-81298	- Dye, Liquid, For the Detection of Leaks in Aircraft Fuel Systems.

STANDARDS
MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-731	- Quality of Wood Members for Containers and Pallets.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

Department of Transportation (DOT)

Hazardous Materials Regulations

(Application for copies should be addressed to the Department of Transportation, Hazardous Materials Regulations Board, Washington, DC 20590.)

DRAWINGS
ARMY

7388571	- Coupler and Nipple.
8675112	- Coupler.
12260223	- Installation Instructions, Ventilation Kit.
12260224	- Installation Instructions, Ventilation Kit.
12351448	- Enclosure Kit Installation.
12330507	- Chart, Vehicle Lubrication.
12351447	- Saddle Installation, OVE.
E150-1-12-2-1-B	- Coupler.
E150-1-12-1-1-A	- Nipple.

PUBLICATIONS

LO 9-2350-267-12	- Lubrication Order.

TECHNICAL MANUALS

TM 9-2350-267-20	- Organizational Maintenance Manual.
TM 55-2350-267-14	- Transportability Guidance for.
TM 9-2350-267-10-HR	- Hand Receipt.

(Copies of specifications, standards, handbooks, drawings, publications, required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD-adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

ASSOCIATION OF AMERICAN RAILROAD

Section No. 1	- General Rules Governing Loading of Commodities on Open Top Cars.
Section No. 6	- Rules Governing the Loading of Department of Defense Material on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 1920 L Street N.W., Washington, D.C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified, one of the first 10 production processed vehicles shall be subjected to first article inspection (see 4.4 and 6.2). A separate processed vehicle shall be subjected to first article inspection for each level of protection specified. First article inspection vehicles, properly marked with identifying information, shall be representative of vheicles to be furnished to the Government. All subsequent processed vehicles delivered to the Government shall conform to the respective sample in all pertinent physical and performance attributes. The Government representative shall select the vehicle(s) to be inspected.

3.2 Materials. Materials used for processing of the vehicle shall be as specified herein. Materials not specified herein shall be selected which are sufficient and safe for the intended purpose. Selected materials shall be subject to approval and certification.

3.2.1 Detergent solution. Detergent for cleaning noncritical surfaces shall be in accordance with P-D-220, and shall be diluted with clean water.

3.2.2 Preservatives. Preservatives for coating exterior unpainted, ferrous surfaces shall be in accordance with grade 4 of MIL-C-16173. Interior component surfaces shall be preserved with the operational fluids and lubricants as specified in LO-9-2350-267-12. Battery box preservative shall conform to composition G, type II of MIL-C-450.

3.2.2.1 Preservative dye. An oil-soluble dye conforming to MIL-D-81298 shall be added to the preservative oil and used to facilitate first article inspection of combustion chamber processing. The concentration of dye shall be sufficient to impart a marked coloring of the oil.

3.2.3 Wraps and barrier material. Barrier material and wraps for packaging shall be in accordance with type II, grade A, class 2 of MIL-B-121.

3.2.4 Bags. Bags shall conform to style 2, type I, class B of MIL-P-117 for preservation of items in accordance with method IC of MIL-P-116.

3.2.5 Cushioning. Cushioning material shall be in accordance with PPP-C-1752 and shall conform to MIL-STD-1186.

3.2.6 Blocking and bracing. Fiberboard material for blocking and bracing shall be in accordance with type CF and class WR of PPP-F-320. The domestic class of fiberboard may be used within bags in lieu of the weather-resistant class. Lumber for blocking and bracing shall be in accordance with MIL-STD-731. Plywood shall be in accordance with NN-P-530. All blocking and bracing shall conform to MIL-STD-1186.

3.2.7 Containers. Fiberboards boxes for unit packaging shall be in accordance with type CF and class WR of PPP-B-636. The domestic class of box may be used within bags in lieu of the weather-resistant class. Boxes for packing and stowage shall be in accordance with overseas types of PPP-B-601 or PPP-B-621.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.2.8 Tape and closure material. Tape shall be in accordance with type II of MIL-T-22085. Containers shall be closed in accordance with closure requirements of the box specification. Caps and plugs shall be in accordance with MIL-C-5501.

3.2.9 Ventilation kit. Ventilation Kit 12260223 shall be provided for level A and level B processing of vehicle.

3.2.10 Closure kit. Closure Kit 12351448 shall be supplied for level A processing of the vehicle.

3.3 Equipment. Equipment for processing of the vehicle shall be as specified herein. Equipment not specified herein shall be selected which is sufficient and safe for the intended purpose. Selected equipment shall be subject to certification and approval.

3.3.1 Preservative container assembly. A preservative container assembly shall be provided for level A processing of the fuel system (see figure 1).

3.3.1.1 Preservative container. A preservative container with valves for flow regulation and fittings for connection to the filter assembly shall be provided for level A processing of the fuel system (see figure 1).

3.3.1.2 Filter assembly. A fuel filter assembly with connecting hoses, appropriate fittings, and filtering element shall be provided for level A processing of the fuel system (see figure 1).

3.3.2 Air restrictor boots. Air restrictor boots shall be provided for level A processing of combustion chambers. The air restrictor boots shall be sufficient to restrict air flow at the air intakes of the main engine and at the air intake of the Auxiliary Power Unit (APU) engine.

3.3.3 Atomizer. An atomizer shall be provided for level A processing of lubricant gage openings, air intake openings and exhaust openings.

3.4 Procedures and operations. Procedures and operations consist of general requirements and special requirements. General requirements shall apply to all levels of protection. Special requirements shall apply for the specified level of protection (see 3.4.2 and 6.2).

3.4.1 General requirements. DA Form 2258 shall be completed to record the preservation applied and deprocessing required for each vehicle. Completed forms shall be sealed within a bag conforming to type I, Class B, Style 2 of MIL-B-117 and attached within the driver's compartment.

3.4.1.1 Disassembly. Except as specified herein, each vehicle shall be completely assembled for shipment and storage. Equipment shall be installed and all adjustments and repairs completed to allow the vehicle to be placed into service with the minimum of delay consistent with the specified level of protection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.1.1 Disassembly for normal transport. The Basic Issue Items (BII) and Components of End Item (COEI) listed in the vehicle's hand receipt shall be disassembled and uninstalled for normal transport (see TM9-2350-267-10-HR). Disassembly shall be in accordance with the applicable technical manuals. Items removed from the vehicle for normal transport shall be configured for packaging, stowage, and securement within the vehicle.

3.4.1.1.2 Disassembly for special transport modes. When specified (see 6.2), additional disassembly shall be in accordance with the vehicle transportability guidance technical manual for the specified mode of transport (see TM 55-2350-267-14).

3.4.1.1.3 Disassembly for component processing. Disassembly of selected components processing shall be in accordance with the applicable technical manuals. Except as specified herein, selected components disassembled for processing shall be reassembled in accordance with the applicable technical manuals.

3.4.1.2 Cleaning. Except as specified herein, each vehicle and each component item shall be cleaned in accordance with selected cleaning processes as specified in MIL-P-116. Cleaning materials, equipment and processes shall be sufficient and safe for the intended purpose.

3.4.1.2.1 Exterior of vehicle. Exterior surfaces of the vehicles shall be cleaned with a solution of water and detergent conforming to P-D-220, or type I of MIL-D-16791. After cleaning, surfaces shall be rinsed with clean water. The cleaning process shall not allow liquid to enter interior or engine compartments and cause damage or deterioration. If pressure spraying equipment is used in the cleaning process, the control regulation of the spraying equipment, and the method of spray cleaning, shall be sufficient to prevent damage.

3.4.1.2.2 Engine compartment. The interior of the engine compartment shall be cleaned with a solution of water and detergent conforming to P-D-220 or type I of MIL-D-16791. After cleaning, surfaces shall be rinsed with clean water. The cleaning process shall not allow liquid to enter the engine, connections, or other components susceptible to water damage.

3.4.1.2.3 Driver's and crew compartment. Interior surfaces of the driver's and crew compartments shall be cleaned with a solution of water and detergent conforming to P-D-220 or type I of MIL-D-16791. After cleaning, surfaces shall be rinsed with clean water. The cleaning process shall not allow liquid to enter the instruments, connections, or other components susceptible to water damage. The cleaning process shall not allow the driver's seat cushion to absorb liquid.

3.4.1.2.4 Vehicle components. Unless otherwise specified, component systems containing operational fluids shall be examined for evidence of contamination. If contaminants are found, the interior surfaces of components containing opertional fluids shall be cleaned by flushing with operational fluid. Additional processing shall be applied to restore components to operational condition.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.2.4.1 Cooling system. The cooling system shall be examined for rust and contamination, and flushed as required for cleaning.

3.4.1.2.4.2 NBC filters. NBC filters shall be checked and replaced as specified in 14-4 and 14-5 of TM 9-2350-267-20.

3.4.1.2.4.3 Automatic fire extinguishing system (AFES). The sensor elements of the optical fire sensing assembly shall be cleaned with lens tissue paper conforming to NN-P-40.

NOTE: Care should be taken to ensure that the maintenance switch on AFES control box is in the OFF position before cleaning the sensor elements.

3.4.1.2.4.4 Breather caps. Breather caps shall be cleaned using dry-cleaning solvent conforming to P-D-680.

3.4.1.2.4.5 Battery terminals and connections. Battery terminals and connections shall be cleaned with a solution of sodium bicarbonate and water. After cleaning, surfaces shall be rinsed with clean water. Batteries and electrolyte shall be processed in accordance with the specified level of protection. (See 3.4.2 for special requirements.)

3.4.1.3 Drying. Except as specified herein, the cleaned vehicle and components parts shall be dried as specified in MIL-P-116. Drying procedures and operations shall be sufficient and safe for the purpose intended.

3.4.1.3.1 Breather caps. Breather caps shall be dried in accordance with procedure D-1 and MIL-P-116.

3.4.1.3.2 Vehicle components. Component systems containing operational fluids which are flushed for cleaning shall be refilled with operational fluid. Drying is not required for interior surfaces of these component systems.

3.4.1.4 Preservation. Each vehicle surface and component susceptible to corrosion or deterioration by environmental conditions shall be protected by application of selected preservatives in accordance with MIL-P-116. Selected preservative materials, equipment, and processes shall be sufficient for the specified level of protection. Selected preservatives shall be compatible with the item's compositon and intended use.

3.4.1.4.1 Disassembled and uninstalled items. The BII and COEI shall be protected by methods of preservation in accordance with MIL-P-116 (see table I).

3.4.1.4.2 Door and hatch seals. Door and hatch seals shall be coated with talc conforming to MIL-T-50036 prior to closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.4.3 Backrests, seats. Immediately after drying, cushioned components of backrests and seats shall be covered with paper having a minimum basis weight of 40 pounds conforming to grade B of UU-P-268. Paper shall be secured with tape conforming to PPP-T-42.

3.4.1.4.4 Bilge pump. Bilge pump shall be clean and free of contaminants. Surfaces of the bilge pump shall not be coated with preservative.

3.4.1.4.5 Cooling system. Unless arctic or tropic processing is specified (see 6.2), the cooling system contain water and antifreeze solution conforming to MIL-A-46153. The coolant solution shall provide protection from freezing at -40 degrees Fahrenheit(°F) [-40 degrees Celsius (°C)].

3.4.1.4.5.1 Tropic preparation of cooling system. When specified for shipment and storage in a tropic environment, the cooling system shall contain the coolant specified in the contract or order (see 6.2).

3.4.1.4.5.2 Arctic preparation of cooling system. When specified for shipment and storage in an arctic environment, the cooling system shall contain the coolant specified in the contract or order (see 6.2).

3.4.1.4.6 Lubrication. Lubricant shall be applied to fittings and surfaces in accordance with LO 9-2350-267-12. Lubricant shall be applied to oil can points in accordance with LO 9-2350-267-12.

3.4.1.4.7 Operational fluids and lubricants. Unless otherwise specified (see 6.2), each vehicle and component shall conform to their respective operational fluid or run in lubricant requirements. Contaminated fluids and lubricants shall be removed, and properly disposed. Operational fluids and lubricants shall be applied in accordance with LO 9-2350-267-12. Any excess operational fluid or lubricant shall be removed and properly disposed.

3.4.1.4.7.1 Engine crankcase. The main engine crankcase shall contain lubricating oil conforming to grade 30W of MIL-L-21260 filled to operating level.

3.4.1.4.7.2 Roadwheel and idler arm bearings. Roadwheel and idler arm bearings shall contain lubricating oil conforming to grade 30W of MIL-L-2104 filled to operating level..

3.4.1.4.7.3 Hydraulic systems. Hydraulic systems shall be filled to operating level with hydraulic oil conforming to MIL-H-6083.

3.4.1.4.7.4 Transmission. Transmission shall contain lubricating oil conforming to grade 10W of MIL-L-21260 filled to operating level.

3.4.1.4.7.5 Auxiliary power unit (APU) engine crankcase. The APU crankcase shall contain lubricating oil conforming to grade 30W of MIL-L-21260 filled to operating level.

3.4.1.4.7.6 Conveyor. Grease fittings shall be filled with grease conforming to MIL-G-10924. Coat other unplated, unpainted metallic surfaces with grease conforming to MIL-G-10924 including gears, chains, shafts and exposed threaded fittings.

Source: https://assist.dla.mil -- Downloaded: 2026-01-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.4.7.7 Final drive. Each final drive shall contain lubricating oil conforming to grade 30W of MIL-L-21260 filled to operating level.

3.4.1.4.8 Fuel system preservation. Fuel system shall be processed in accordance with the specified level of protection (see 3.4.2 for special requirements).

3.4.1.5 Packaging. Items of the current Hand Receipt, TM 9-2350-267-10-HR, and additional items shipped with the vehicle shall be processed in accordance with the methods of MIL-P-116 specified herein (see tables 1 and 2). The processing activity shall minimize repackaging of items and shall present appropriate government furnished packaging for First Article Inspection (see 3.1).

3.4.1.5.1 Items of the current hand receipt. COEI and BII shipped with the vehicle shall be processed in accordance with MIL-P-12841.

3.4.1.5.2 Additional items. Additional items shipped with the vehicle shall be processed in accordance with the following guidance:

3.4.1.5.2.1 Application of preservatives. Except where application of preservative would cause damage, each item's unpainted, unplated ferrous surfaces shall be coated with preservative conforming to grade 4 of MIL-C-16173 immediately after cleaning and drying.

3.4.1.5.2.2 Method of preservation. Items with preserved critical surfaces and other items which require protection from water or dust shall be processed in accordance with method IC of MIL-P-116. Other preserved items without critical surfaces shall be processed in accordance with method I of MIL-P-116. Each large item which requires only physical and mechanical protection shall be processed in accordance with method III of MIL-P-116.

3.4.1.5.2.3 Cushioning, blocking and bracing. Item packaging shall include cushioning, blocking, and bracing sufficient to immobilize and prevent damage to the item.

3.4.1.5.2.4 Packing. Items shall be consolidated and packed into exterior shipping containers as specified for BII in MIL-P-12841.

3.4.1.5.3 Battery and electrolyte. Batteries, connecting cables, and battery electrolyte shall be processed in accordance with the specified level of protection (see 3.4.2 for special requirements).

3.4.1.6 Marking. In addition to the marking specified in the contract or order, marking shall be applied as specified herein. Marking shall indicate the applied level of protection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.6.1 Marking of vehicle. Vehicles shall be marked in accordance with MIL-STD-129.

3.4.1.6.2 Marking of Basic Issue Items (BII). Each unit package shall be marked in accordance with MIL-STD-129. Exterior shipping containers shall be marked in accordance with MIL-STD-129 and shall contain the identification data: ASSORTED BII FOR (NSN), (US Army registration number). Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

3.4.1.6.3 Marking of Components of End Item (COEI). The unit packaging of each item shall be marked in accordance with MIL-STD-129. Exterior marking of assorted items packed together shall contain the identification data: ASSORTED COEI FOR (NSN), (US Army registration number). Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

3.4.1.6.4 Marking of additional items. The unit packaging of and additional items shipped with the vehicle shall be marked in accordance with MIL-STD-129. Exterior packs shall be marked in accordance with MIL-STD-129. Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

3.4.1.7 Stowage. Stowage and securement shall conform to the requirements specified herein and shall meet carrier and transportation requirements. Stowage and securement methods shall be sufficient and safe for the intended purpose. Stowage and securement, including blocking and bracing shall provide clearance for sling cables, and shall meet the weight and clearance requirements of the shipment medium.

3.4.1.7.1 Conveyor securement. The conveyors shall be stowed and secured in travel position (see figure 2).

3.4.1.7.2 Stacker securement. The stacker shall be placed in travel lock position and locked in place (see figure 2).

3.4.1.7.3 Stowage of items shipped with the vehicle. Items of the current Hand Receipt, TM 9-2350-267-10-HR, and additional items shipped with the vehicle shall be stowed in accordance with MIL-B-12841 and the requirements specified herein.

3.4.1.7.3.1 Items of the current hand receipt. COEI and BII shipped with the vehicle shall be stowed and secured in the locations specified in Table I. The stowage locations specified in Table I are shown in figures 3-6. The right side double crew seat shall be removed and installed on the left side double crew seat mounts to allow space fo stowage of BII. The consolidated BII shall be loaded through the right side personnel door and secured between the stacker and conveyor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.7.3.2 Additional items. Additional items shipped with the vehicle shall be stowed as specified for BII in MIL-B-12841. The additional items shall be stowed and secured in the location specified in Table II. The stowage locations specified in Table II are shown in Figures 3-6. Other additional items shall be stowed and secured within the vehicle. When specified, additional items shall be stowed and secured aboard the On Vehicle Equipment Saddle (see 6.2). Installation of the On Vehicle Equipment Saddle shall be in accordance with 12351447.

3.4.1.8 Closure. Specified openings of the vehicle and components shall be blocked to prevent deterioration. In addition, other specified openings of the vehicle and component shall remain open to allow drainage or ventilation. Processing for closure and ventilation shall meet carrier and transportation requirements. Special requirements for closure shall be in accordance with the specified level of protection (see 3.3.2).

3.4.1.8.1 Ventilation. Ventilation Kit 12260223 shall be installed in accordance with Installation Instructions - Ventilation Kit 12260224 (see figure 7). Items removed for installation of the ventilation kit shall be processed as specified for COEI. Unpainted, ferrous surfaces exposed for installation of the ventilation kit shall be coated with preservative conforming to grade 4 of MIL-C-16173.

3.4.1.8.2 Exterior control of fire extinguishers. The recess opening for the fire extinguisher handle shall be closed with tape conforming to type II of MIL-T-22085.

3.4.1.8.3 Bilge pump discharge. The bilge pump discharge opening shall be closed with tape conforming to type II of MIL-T-22085.

3.4.1.8.4 Doors and hatches. All doors and hatches shall be closed and latched. Top rear door shall be closed first, before level A processing of the APU. Commander's hatch, driver's hatch, and side doors shall be closed and locked from the inside. Bottom rear door shall be closed last from the outside. Rear door shall be secured using an approved railroad type, cone lock seal assembly, placed through the locking ring.

3.4.1.9 Loading. Vehicle and components shall be loaded and secured for transport. Loading and securement methods shall be sufficient and safe for transport. Loading and securement shall conform to carrier requirements and applicable transportation regulations.

3.4.1.9.1 Vehicle lifting and towing. Lifting and towing of the vehicle after processing shall be in accordance with approved methods. Any movement of partially processed vehicles which interferes or conflicts with vehicle processing is not recommended.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.9.2 Loading for commericial shipment.

3.4.1.9.2.1 Loading for commercial rail shipment. Loading and securement of commercial rail shipment within the US and Canada shall conform to the General Rules governing loading of Commodities on Open Top Cars and Rules governing the loading of DOD Material on Open Top Cars of the American Association of Railroads. Other foreign rail shipments shall conform to the vehicle's transportability guidance technical manual, TM 55-2350-267-14, and the applicable transportation regulations.

3.4.1.9.2.2 Loading for other commercial shipment. Loading and securement shall conform to carrier requirements and applicable transportation regulations.

3.4.1.9.3 Loading for military shipment. Guidance for all modes of military shipments is provided by the vehicle's transportability guidance technical manual (see TM 55-2350-267-14).

3.4.2 Special requirements. Special requirements for processing shall be of the specified level of protection (see 6.2). Special requirements for level A shall be as specified in 3.4.2.1. Special requirements for level B shall be as specified in 3.4.2.2.

3.4.2.1 Level A. When level A processing is specified, the following special procedures and operations are required:

3.4.2.1.1 Fuel system. After completion of all actions which require fuel system operation, the fuel system shall be processed for level A. Preservative material for fuel system processing shall be in accordance with grade 10W of MIL-L-21260. Oil soluble red dye conforming to MIL-D-81298 shall be dissolved in the preservative when processing the combustion chambers of the main engine and auxiliary power unit for first article inspection. Procedures and operations shall be in accordance with the sequence of steps described below:

a. Fuel Tank:

1. Drain the fuel tank.
2. Preserve metallic drain assembly and reinstall plug.
3. Apply preservative to the interior surface of the fuel tank cap and to the filler screen.
4. Add 15 gallons of preservative without dye to the fuel tank.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

b. Fuel lines and pump:

1. Disconnect the main engine fuel return line at the quick-disconnect coupling (see figure 8). Connect a transparent plastic return line using nipple 7388571. Insert the end of the transparent plastic return line into a recovery container.
2. Disconnect the (APU) fuel return line at the quick-disconnect coupling (see figure 9). Connect a transparent plastic return line into a recovery container.
3. Start and run the main engine and APU until remaining diesel fuel is flushed from the fuel lines and both the main engine and APU are using the preservative as fuel. Continue until 3 gallons are collected from the main engine APU fuel return line.

c. Main engine combustion chambers.

1. Allow main engine and Auxiliary power unit to cool for six hours.
2. Prepare the preservative container assembly (see figure 1). Position the selector valve to "Off". Add preservative (and dye if required) to one compartment. Reserve second compartment for diesel fuel required for deprocessing.
3. Disconnect the fuel supply line from the primary fuel filter at the quick-disconnect coupling (see figure 8). Connect the preservative container assembly to the primary fuel filter using coupler 7388571.
4. Position the selector valve on the preservative container assembly for flow of preservative. Place engine fuel control to run position. Restrict air flow to main engine with air restrictor boot. Crank engine for 20 seconds only (Engine may fire briefly).
5. Allow starter to cool for 10 minutes.
6. Repeat steps 4 and 5 until approximately 1 1/2 to 2 quarts are collected in the recovery container and until 5 repetitions of steps 4 and 5 are completed.
7. Position the selector valve of the preservative container assembly to "off". Disconnect the preservative container assembly from the primary fuel filter. Reassemble the fuel supply line to the primary fuel filter.
8. Disconnect the transparent plastic return line. Reassemble the fuel return line.

d. APU combustion chambers.

1. Disconnect the fuel supply line from the secondary filter outlet at the quick-disconnect coupling (see figure 9). Connect the preservative container assembly to the fuel supply line using nipple 7388571 and coupler E150-1-12-2-1-B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

2. Position the selector valve on the preservative container assembly for flow of preservative. Restrict air flow to the APU engine with air restrictor boot. Crank engine for 20 seconds only (Engine may fire briefly).
3. Allow starter to cool for 10 minutes.
4. Repeat steps 2 and 3 until approximately 1/2 to 1 pint is collected in the recovery container and until 5 repetitions of step 2 and 3 are completed.
5. Position the selector valve of the preservative container to "off". Disconnect the preservative container assembly from the fuel supply line. Reassemble th fuel supply to the secondary filter outlet.
6. Disconnect the transparent plastic return line. Reassemble the fuel return line.

e. Heater fuel lines:

1. Disconnect the fuel supply line from the heater fuel pump at the quick disconnect coupling (see figure 6). Connect the preservative container assembly to the fuel pump using coupler 8675112 and nipple 10866592.
2. Position a recovery container at the heater bleed valve.
3. Position the selector valve on the preservative container assembly for flow of preservative. Open the heater bleed valve. Run the heater fuel pump by apply 24 volts (V) direct current (dc) from auxiliary power supply until 1 quart is collected in the recovery container.

3.4.2.1.2 Oil level gage opening. After preservation of the fuel system, the oil level gage rod shall be removed. Six ounces of preservative oil conforming to grade 1 of MIL-L-46002 shall be fogged into crankcase through oil level gage rod opening. Spray nozzle shall not be submerged in crankcase oil. After spraying has been accomplished, oil level gage rod shall be reinstalled. The oil level gage rod and the oil filler cap shall be sealed with tape conforming to type II of MIL-T-22085.

3.4.2.1.3 Air intake and exhaust openings. After preservation of the fuel system, 1 ounce of preservative oil conforming to grade 1 of MIL-L-46002 shall be fogged into engine and APU exhaust openings. The main engine air induction hose shall be disconnected at air intake, and 1 ounce of preservative oil conforming to grade 30W of MIL-L-21260, shall be fogged into the air intake opening. Remove APU air cleaner cover and filter element, and fog 1 ounce of preservative oil conforming to grade 30W of MIL-L-21260 through air intake tube. The air intake and exhaust openings shall be closed with tape conforming to type II of MIL-T-22085.

3.4.2.1.4 Closure kit. A Closure Kit shall be supplied in accordance with closure kit installation 12351448. Items removed for installation of the closure kit shall be processed as specified in tables I and II. Unpainted, ferrous surfaces exposed for installation of the closure kit shall be coated with preservative conforming to grade 4 of MIL-C-16173.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.2.1.5 Batteries and electrolyte. Dry charge batteries shall be installed without electrolyte. Electrolyte shall be separately packaged and stowed. Terminal leads shall be restrained with tape conforming to PPP-T-97.

3.4.2.2 Level B. When level B processing is specified, the following special procedures and operations are required:

3.4.2.2.1 Fuel system preservation. The fuel system shall be prepared for vehicle operation. Unless otherwise specified, the fuel tank shall be filled with 40 gallons of diesel fuel conforming to the selected seasonal grade of VV-F-800.

3.4.2.2.2 Special fuel volume requirement. When specified, an increased or decreased volume of fuel shall be placed in the fuel tank (see 6.2).

3.4.2.2.3 Air intake and exhaust openings. The air intake and exhaust openings shall be prepared for vehicle operation.

3.4.2.2.4 Battery terminals and connections. Batteries shall be installed with electrolyte and charged for vehicle operation.

TABLE I. Preservation and Stowage of Items Listed in the Vehicle Hand Receipt.

1. Components of End Item (COEI).

Stock Number	Item Description	Method of Preservation	Stowage Location
5820-01-128-6184	Intercom Kit (AN/VIC-1)	NA	Installed
	w/Cables and Hardware	III	A (fig 3)
1005-00-704-6650	Mount, Machine Gun	I	B (fig 4)
	Cal 0.50		
1240-00-344-4643	Periscope, M27	IA-14	C (fig 5)
1240-00-509-2743	Periscope, M45	IA-14	C (fig 5)

2. Basic Issue Items.

5935-00-322-8959	Adapter	IC-3	C (fig 5)
4930-00-204-2550	Adapter, Grease Gun	IC-3	C (fig 5)
4933-99-087-1267	Adapter, Gun, Oil Filling	IC-3	C (fig 5)
2540-00-670-2459	Bag Assembly, Pamphlet:	III	C (fig 5)
	w/o cont.		
5120-00-473-6256	Bag, Tool Satchel:	III	C (fig 5)
	w/o cont.		
2590-00-363-7102	Cable Kit, NATO: w/o cont.	IC-2	C (fig 5)
5120-00-224-1390	Crowbar	III	C (fig 5)
5110-00-595-8229	Cutter, Wire Rope, Hand	IC-3	C (fig 5)
7510-00-889-3494	Equipment Log Book Binder	IC-3	D (fig 4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE I. Preservation and Stowage of Items Listed in the Vehicle Hand Receipt - Continued.

5120-00-243-7326	Extension, Socket Wrench 5-Inch, 1/2 Dr	IC-3	C (fig 5)
4210-00-555-8837	Extinguisher, Fire	III	C (fig 5)
5110-00-156-0059	File, Hand: smooth	IC-3	C (fig 5)
6545-00-922-1200	First Aid Kit	IC-2	C (fig 5)
5120-00-605-3926	Fixture, Track Connecting	I	C (fig 5)
6130-00-264-8261	Flashlight	IC-2	C (fig 5)
DA Form 2408	Forms, Equipment Log Book	IC-3	D (fig 4)
5120-00-061-8546	Hammer, Hand: ball-peen	I	C (fig 5)
5120-00-236-7590	Handle, Socket Wrench: 1/2 Dr hinged	IC-3	C (fig 5)
5120-00-198-5390	Key, Socket Head Screw: 3/8 Inch hex	IC-3	C (fig 5)
5120-00-198-5274	Key, Socket Head Screw: 5/16 Inch hex	IC-3	C (fig 5)
5120-00-240-5300	Key, Socket Head Screw: 3/16 Inch hex	IC-3	C (fig 5)
6240-00-266-9940	Lamp, Incandescent	IC-2	C (fig 5)
4390-00-766-3545	Lubricating Gun, Hand	I	C (fig 5)
LO-9-2350-267-12	Lubrication Order	IC-3	D (fig 4)
TM-9-2350-267-10	Manual Operator's	IC-3	D (fig 4)
8415-00-092-0039	Mitten, Cloth	IC-3	C (fig 5)
4930-00-262-8868	Oiler, Hand: pump type, 1 pt. capacity	IC-3	C (fig 5)
5340-00-682-1505	Padlock Set: five locks and seven keys	IC-2	C (fig 5)
8345-00-174-6865	Panel Marker	IC-3	C (fig 5)
5120-00-239-8251	Pliers	IC-3	C (fig 5)
5120-00-918-0596	Puller, Connector	I	C (fig 5)
5120-00-596-8502	Screwdriver, Flat-Tip	IC-3	C (fig 5)
5120-00-189-7927	Socket, Socket Wrench, 1 Inch 1/2 Dr	IC-3	C (fig 5)
5120-00-189-7932	Socket, Socket Wrench, 9/16 Inch 1/2 Dr	IC-3	C (fig 5)
5120-00-189-7985	Socket, Socket Wrench, 3/4 Inch 1/2 Dr	IC-3	C (fig 5)
5120-00-189-7917	Socket, Socket Wrench, 1-1/4 Inch 1/2 Dr	IC-3	C (fig 5)
5120-00-237-0984	Socket, Socket Wrench, 1/2 Inch 1/2 Dr	IC-3	C (fig 5)
2540-00-653-7589	Tarpaulin	III	C (fig 5)
5110-00-221-1499	Wire Nippers	IC-3	C (fig 5)
4010-00-202-2425	Wire Rope Assembly	I	C (fig 5)
5120-00-240-5328	Wrench, Adjustable, 8 Inch	IC-3	C (fig 5)
5120-00-264-3796	Wrench, Adjustable, 10 Inch	IC-3	C (fig 5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE I. Preservation and Stowage of Items Listed in the Vehicle Hand Receipt - Continued.

3. Contractor Furnished Basic Issue Items			
5120-01-179-8995	Breaker, Chain	IC-3	E (fig 3)
5120-01-179-8997	Cargo Hook, Projectile Rack	IC-3	E (fig 3)
5340-01-179-8994	Handle Assembly, Conveyor Motor Override	I	E (fig 3)
2590-01-199-9941	Handle, Projectile Lock Extension	IC-3	E (fig 3)
3950-01-179-8996	Repair Kit, Chain	IC-3	E (fig 3)
5130-01-184-4893	Rivet Gun, POP	IC-2	E (fig 3)

TABLE II. Preservation and stowage of additional items shipped with the vehicle.

Stock Number	Item Description	Method of Preservation	Stowage
2910-00-837-1580	Access Plate (10895801)	I	F (fig 3)
	Access Plate (10811929-F)	I	F (fig 3)
2510-00-986-8674	Access Plate (10925838)	I	F (fig 3)
5330-00-080-1492	Gasket (10921234)	IC-3	F (fig 3)
5330-00-878-6179	Gasket (10903594)	IC-3	F (fig 3)
	Packing (M529561-291)	IC-3	F (fig 3)
	Tow Hooks (7068719)	III	G (fig 6)
2590-01-158-3093	Stowage Box (12329788)	III	H (fig 6)
2540-01-079-3087	Stowage Box (11643993-1)	III	H (fig 6)
2540-01-077-2003	Stowage Basket (11644009-1)	III	H (fig 6)
2590-01-216-8642	Shroud Kit (12330491)	III	I (fig 3)
	Outside Strap Kit (BML 29214)	III	J (fig 3)
2540-01-179-9037	Duffle Bag Net Assembly (12332642)	III	K (fig 3)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE II. Preservation and stowage of additional items shipped with the vehicle - Continued.

2540-01-179-8961	Duffle Bag Net Assembly (12332644)	III	K (fig 3)
2540-00-177-7808	Telephone Crank Assembly (10888628)	IC-2	L (fig 3)
3990-01-179-9141	Hoist	I	M (fig 4)
2590-01-720-0123	Lifting Fixture	III	N (fig 4)

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform or witness any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of section 3. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Test equipment and inspection facilities. The contractor shall insure that test and inspection facilities of sufficient accuracy, quality and quantity are established and maintained to permit performance of required inspections. Inspection equipment must be capable of repetitive measurements to an accuracy of 10 percent of the measurement tolerance. Calibration of inspection equipment shall be in accordance with MIL-STD-45662.

4.1.3 Government verification. All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of (a) surveillance of the operation to determine that practices, methods, and procedures of the written quality assurance system plan are being properly applied, and (b) Government product inspection to measure the quality of the product offered for acceptance. Deviation from the prescribed or agreed upon procedure, or

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

instances of poor practices which might have an adverse effect upon quality of the product, will immediately be called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies shall be cause for suspension of acceptance until corrective action has been made, or until the conformance of the product to prescribed criteria has been demonstrated.

4.1.4 Qualified products. When a part or component is specified to conform to a specification having a Qualified Products List (QPL), the contractor shall make available to the Government documentation of item acquisition from such QPL. The documentation shall include the QPL date and identification of the supplier, purchase order, and quantity.

4.1.5 Quality assurance provisions. In the conduct of inspection, the contractor shall adhere to Quality Assurance Provisions (QAP) and General Quality Assurance Provision (STA Form 458) as applicable and as required by the documents forming part of this specification.

4.1.6 Inspection records. Contractor shall maintain records of all inspection performed and such records shall be readily available for review by the Government representative.

4.2 Classification of inspection:

a. Qualification inspection (see 4.4).
b. Quality conformance inspections (QCI) (see 4.5).

4.3 Inspection conditions and precautions.

4.3.1 Conditions. Unless otherwise specified (see 6.2), all inspections shall be conducted under the following conditions:

a. Air temperature 73 $\pm$ 18°F
b. Barometric pressure 28.5 + 2.0 inches of mercury
- 4.5
c. Relative humidity 50 $\pm$ 30 percent

4.3.2 Precautions. Care should be taken to ensure that the maintenance switch on the Automatic Fire Extinguishing System (AFES) is in the "OFF" position before inspection.

4.4 First article inspection. First article inspection shall be performed at the contractor's facilities or at other facilities acceptable to the Government on sample vehicles processed with materials, equipment, procedures, and operations normally used in production.

4.4.1 Sample. One of the first 10 production vehicles processed to each level of protection shall be subjected to first article inspection. The sample processed vehicle(s) shall have been subjected to and passed the requirements of quality conformance inspection (see 4.5).

4.4.2 Inspection routine. Sample vehicles shall be inspected in accordance with 4.6 for conformance to the requirements of table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.4.3 Failure. Failure of a sample processed vehicle to meet quality conformance inspection requirements or failure of a sample processed vehicle to meet first article inspection requirements specified in table III shall be cause for rejection. Acceptance of first article shall not be granted until objective evidence is shown that the contractor has corrected the condition(s) causing failure.

4.5 Quality conformance inspection. Quality conformance inspection shall be performed at the contractor's facilities or at other facilities acceptable to the Government on each lot of processed vehicles.

4.5.1 Inspection lot. The inspection lot shall be defined as one vehicle and shall consist of each vehicle processed to the specified level of protection.

4.5.2 Inspection routine. Each processed vehicle shall be subjected to the quality conformance inspection in table III. Equipment, materials, procedures, and operations shall be monitored for conformance.

4.5.2.1 Monitoring of equipment. Processing equipment shall be identified and inspected monthly or at the beginning of each vehicle processing to ensure proper operation.

4.5.2.2 Monitoring of material. Each material shall be identified and inspected monthly or at the beginning of each vehicle processing to ensure conformance to material specification requirements. Materials which have been Government inspected at the source and materials which have been previously certified shall require monitoring only if subject to deterioration or contamination.

4.5.2.3 Monitoring of procedures and operations. Procedures and operations shall be reviewed peridically to ensure conformance with prescribed procedures and operations. Records of personnel training for vehicle processing and records of personnel certified to prepare hazardous material shipments shall be reviewed periodically to ensure adequate current training and certification.

4.5.3 Rejection. Failure of a processed vehicle to meet quality conformance inspection requirements or failure of a processed vehicle to conform to the applicable requirements of this specification shall be cause of rejection. If a processed vehicle is rejected, the contractor may rework it to correct the defects and resubmit for inspection. The former rejection or requirements for correction shall be disclosed with the resubmittal for inspection.

4.6 Methods of inspection.

4.6.1 First article inspection of level A fuel system processing. For first article inspection, the fuel system, including the fuel lines, fuel pumps, main engine, auxiliary power unit, and personnel heater, shall be disassembled to the extent necessary to permit visual examination of preserved surfaces. Exposed surfaces shall have a coating of preservative. Oil soluble red dye conforming MIL-D-81298 shall be dissolved in the preservative to permit visual examination of preserved combustion chambers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.6.2 First article inspection of BII and COEI processing. For first article inspection, the method of preservation for BII and COEI shall be inspected in accordance with MIL-P-116. Inspection of the methods of preservation shall include cleaning, preservation, packaging and marking. Cyclic exposure testing shall not apply. Rough handling testing shall apply only to exterior containers.

4.6.2.1 Quality conformance inspection of BII and COEI processing. For quality conformance inspection, the method of preservation for BII and COEI shall be inspected in accordance with the quality assurance provisions specified in MIL-P-116. Inspection of the methods of preservation shall include cleaning, preservation, packaging, and marking. Inspection of the methods of preservation shall not include cyclic exposure testing and rough handling testing.

4.6.3 Quality conformance inspection of processing. The vehicle processing shall be inspected visually for conformance to the requirements listed in table III. The cooling system processing shall be tested using a hydrometer conforming to GG-T-250.

TABLE III. First article and quality conformance inspection.

Inspection	Requirement paragraph	Inspection method paragraph
a. First article inspection:		
Fuel system (level A) preservation	3.4.2.1.1	4.6.1
BII/COEI packaging	3.4.1.5	4.6.2
BII & COEI stowage	3.4.1.7 & 3.4.1.7.3	4.6.2
b. Quality conformance inspection:		
Disassembly	3.4.1.1	4.6.3
Cleaning	3.4.1.2	4.6.3
Drying	3.4.1.3	4.6.3
Preservation	3.4.1.4	4.6.3
Packaging	3.4.1.5	4.6.2.1 & 4.6.3
Marking	3.4.1.6	4.6.3
Stowage	3.4.1.7	4.6.3
Closure	3.4.1.8	4.6.3
Loading	3.4.1.9	4.6.3

5. Packaging. This section is not applicable to this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. This document specifies processing of the Carrier, Cargo, Tracked, 22-Ton, Ammunition for shipment and storage. This document is cited in a contract or order to obtain protection from known or anticipated conditions of shipment, handling and storage.

6.1.1 Use of level A, maximum protection. Maximum protection, called level A, is processing for the most severe conditions and for shipment, handling and storage. Maximum protection, called level A, should be applied to protect vehicles where the period of shipment, handling and storage will exceed 90 days from the date of processing. Level A protection should be applied for long-term open storage and for deck loaded marine shipment. Level A protection should be applied to vehicles shipped to Support Agreement (SA) customers except when a lower level of protection is designated in accordance with AR 746-1.

6.1.2 Use of level B, intermediate protection. Intermediate protection, called level B, is processing for known favorable conditions of shipment, handling and storage. Intermediate protection, called level B, should be applied when level A protection is not required and when the period of shipment, handling and storage will not exceed 90 days from the date of processing. Level B protection should be applied for domestic shipment and known favorable overseas shipment excluding marine deck loading. Level B protection shall be applied for domestic shipment to CONUS storage activities and for short term open storage or long term covered storage in accordance with AR 700-15.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition requirements should specify the following:

a. Title, number, and date of this specification.
b. Applicable level of protection (see 1.2 and 3.4.2).
c. If first article sample is not required (see 3.1).
d. If disassembly for special transport mode is required (see 3.4.1.1.2).
e. Preparation of the cooling system if shipment to an arctic or tropic environment is required (see 3.4.1.4.5).
f. If operational fluids and lubricants shall be other than as specified (see 3.4.1.4.7).
g. If fuel volume shall be other than as specified (see 3.4.2.2.2).
h. When installation of the On Vehicle Equipment Saddle is required for stowage of additional items (see 3.4.1.7.3.2).
i. If inspection conditions shall be other than as specified (see 4.3.1).
j. If responsibility for inspection and inspection facilities shall be other than as specified (see 4.1).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

6.3 Recycled materials. The use of recycled materials which meet the requirements of the applicable material specification without jeopardizing the intended use of the item shall be encouraged (see 3.2).


6.4 Subject term (key word) listing.

Ammunition Carrier, Tracked M922; Processing for Storage and Shipment.
Carrier, Tracked, 22-Ton Ammunition: M922; Processing for Storage and Shipment.
Processing for Storage and Shipment, Carrier, Tracked, Ammunition: M922.
Storage and Shipment of Carrier, Tracked M992.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

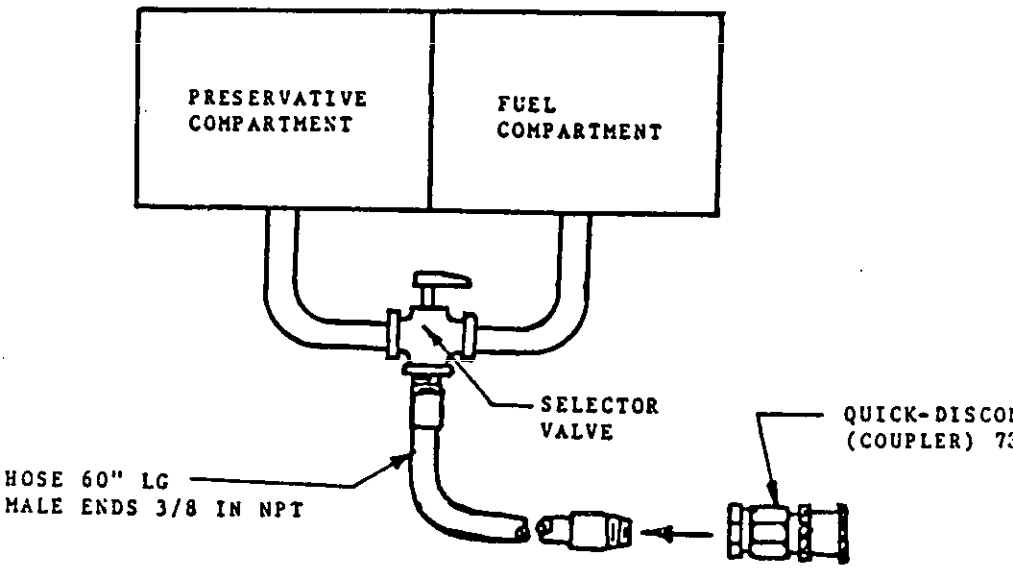

Preservative container

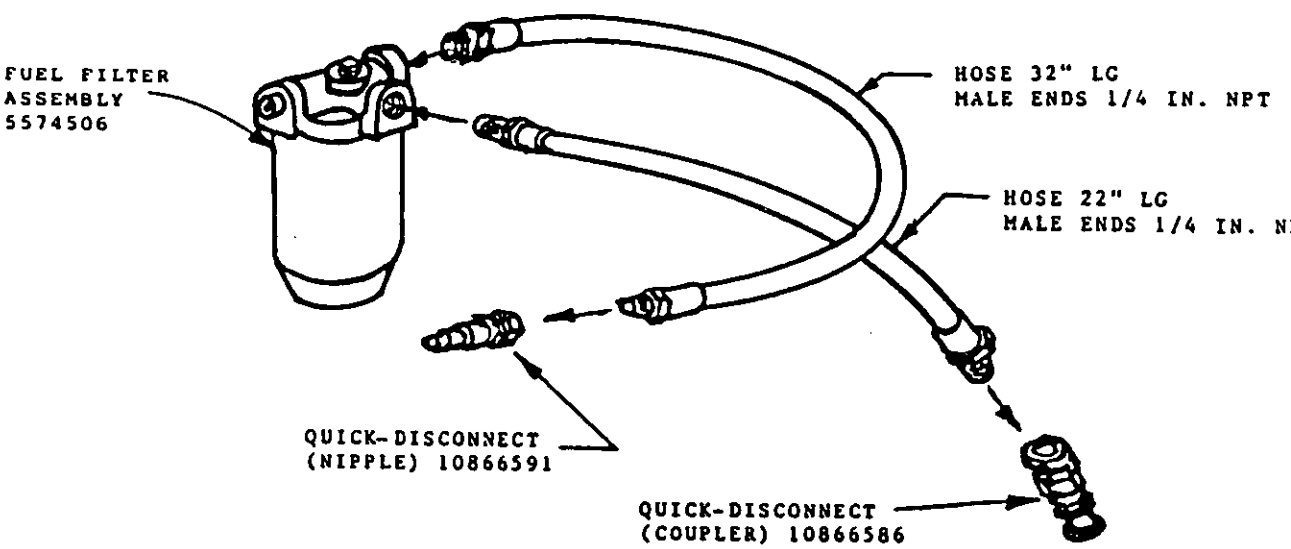

Filter assembly.

FIGURE 1. Preservative container assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

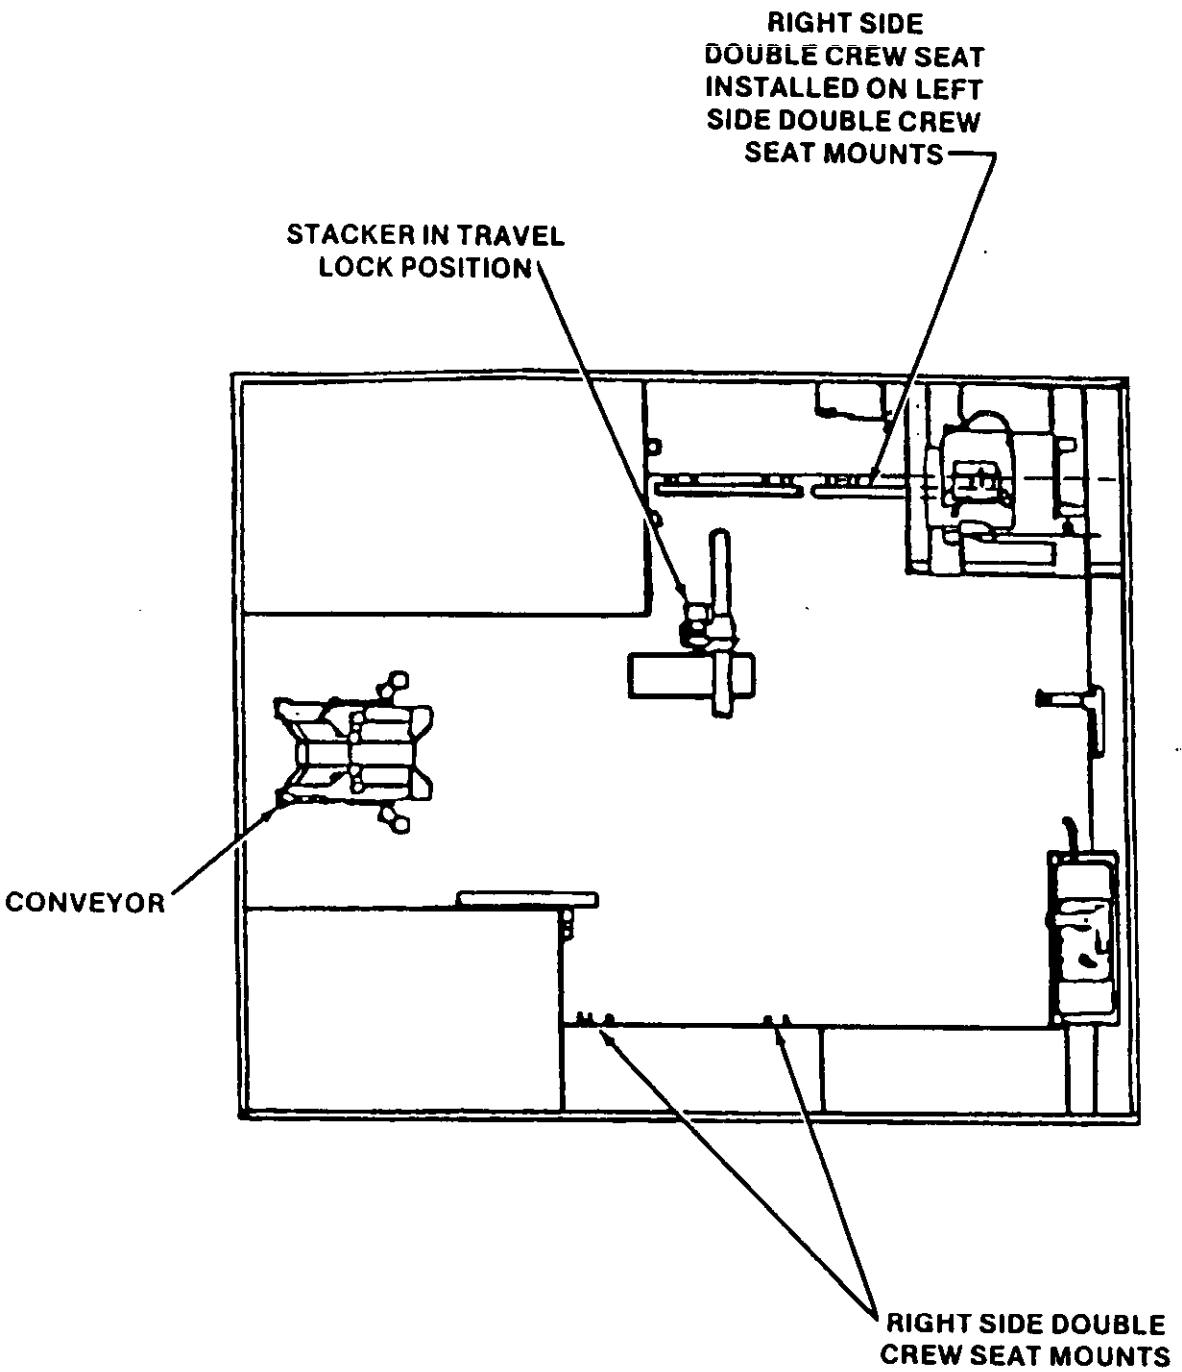


FIGURE 2. Interior top view stowage of stacker and conveyer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

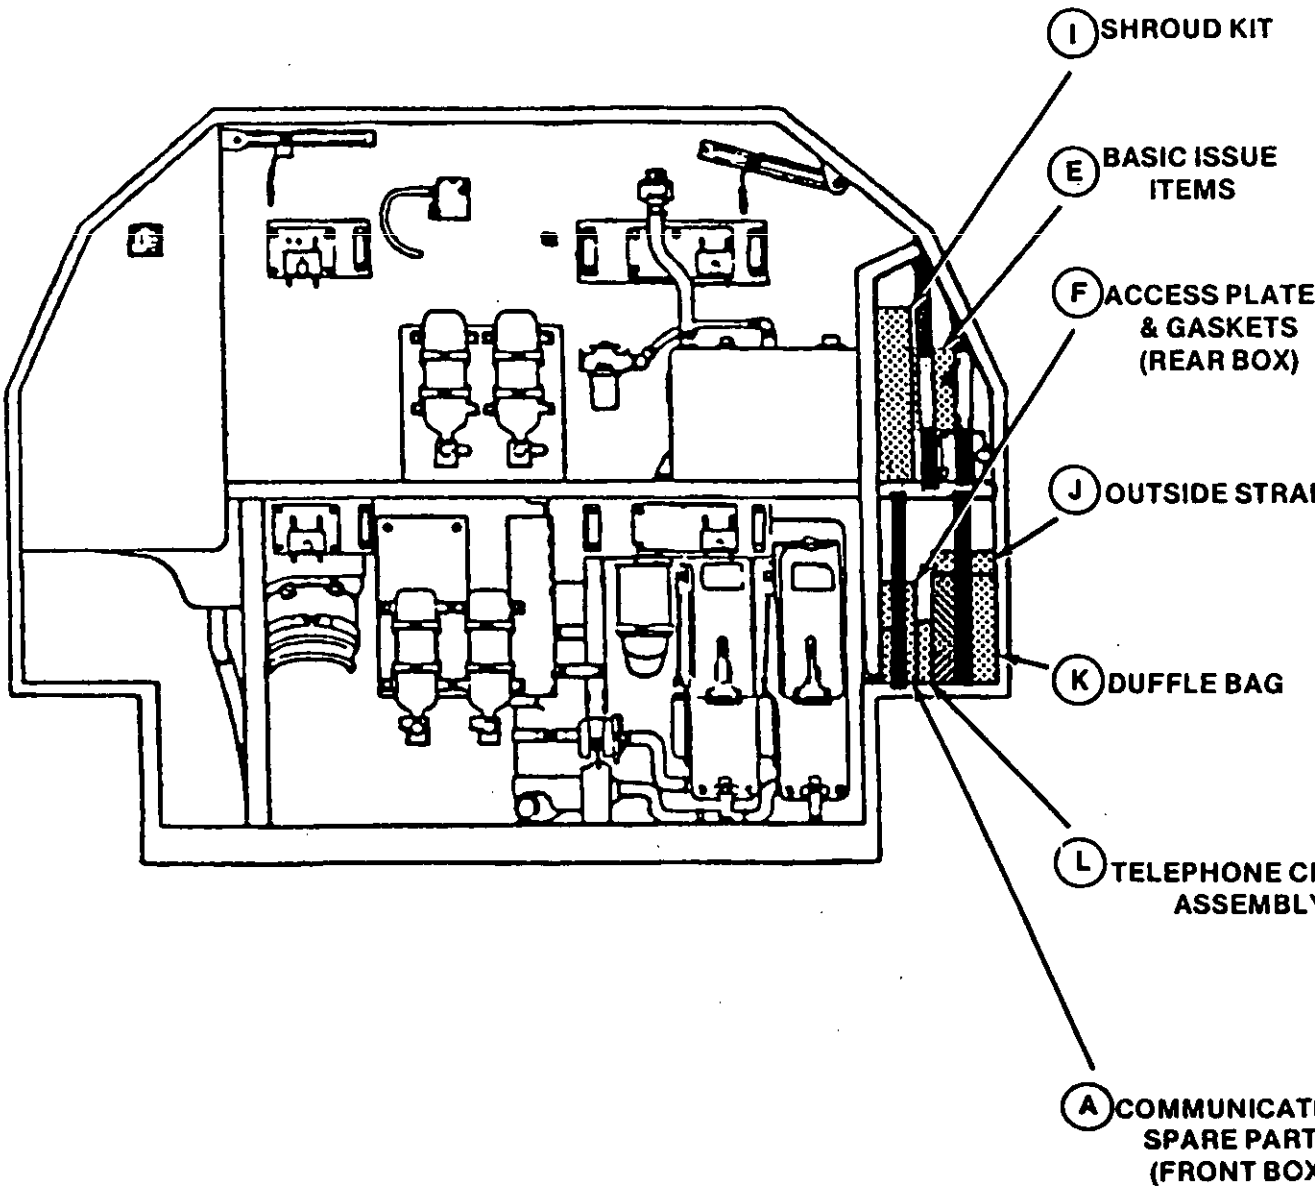


FIGURE 3. Interior front view stowage locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

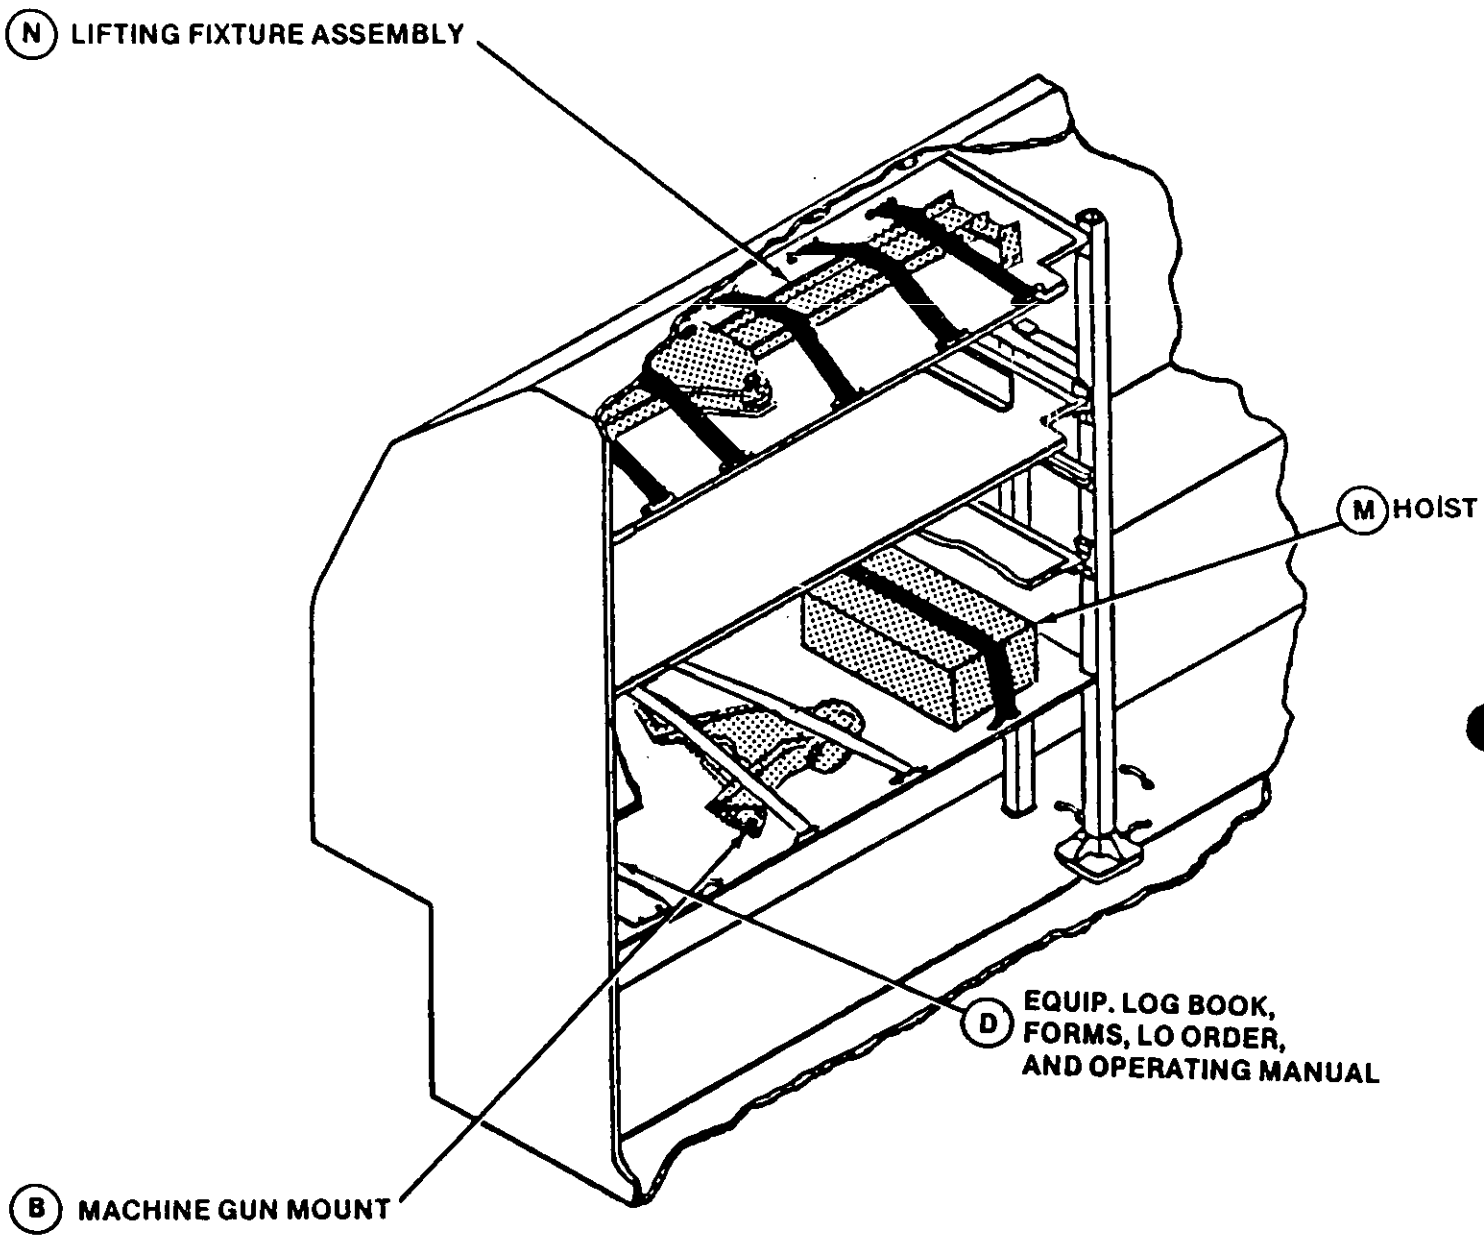


FIGURE 4. Interior left side view stowage locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

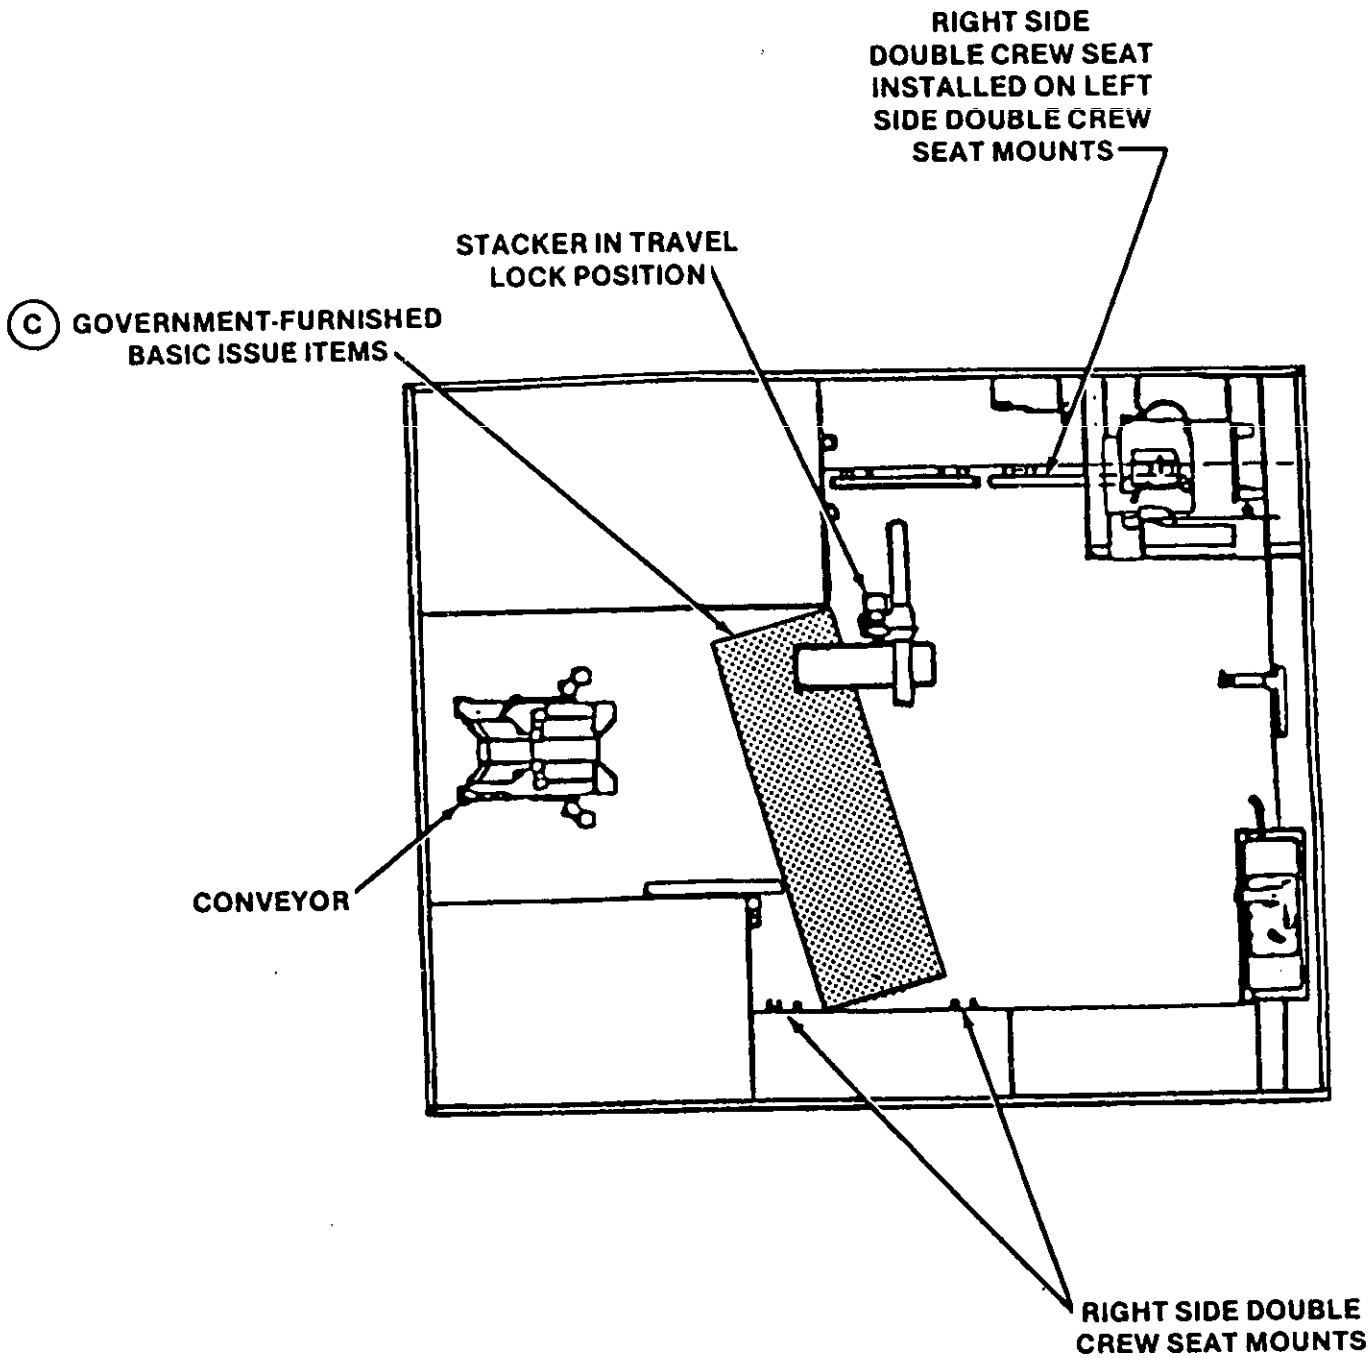


FIGURE 5. Interior top view stowage locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

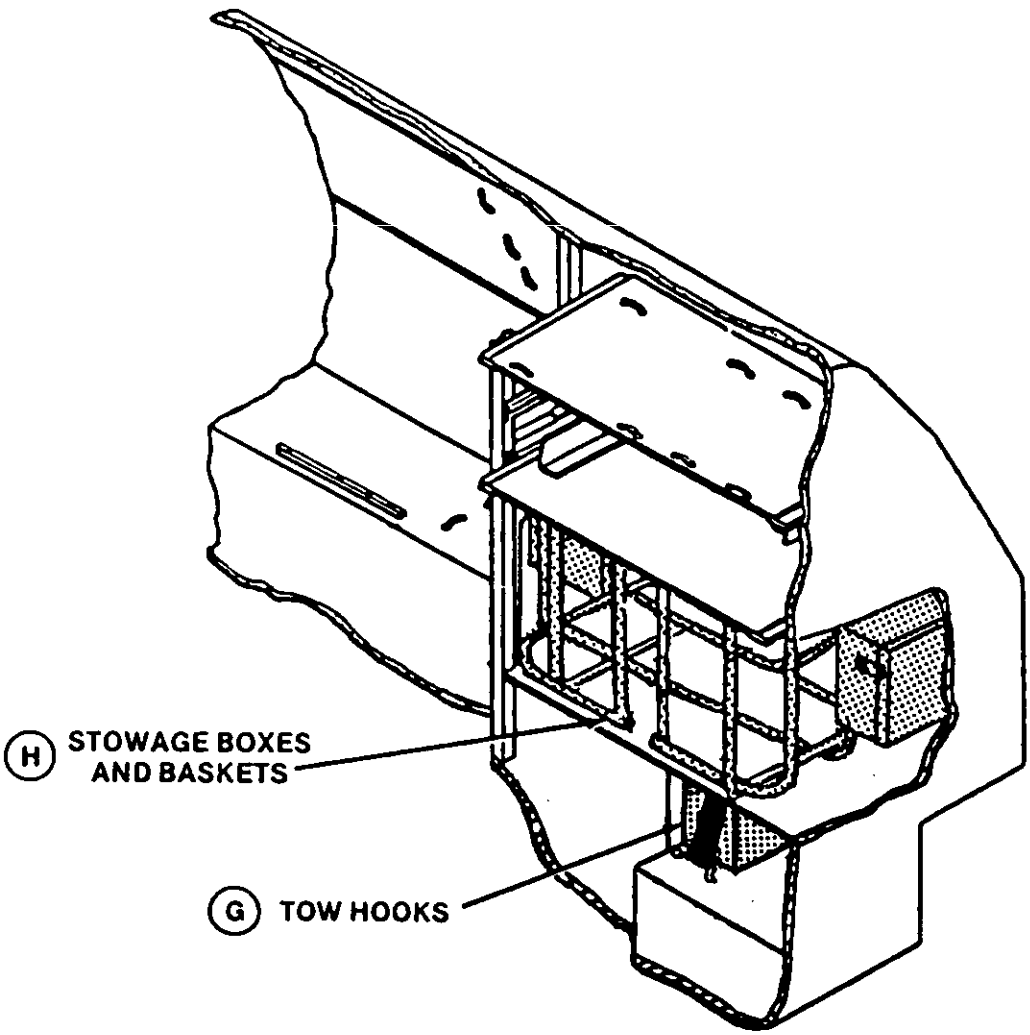


FIGURE 6. Interior right side view stowage locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

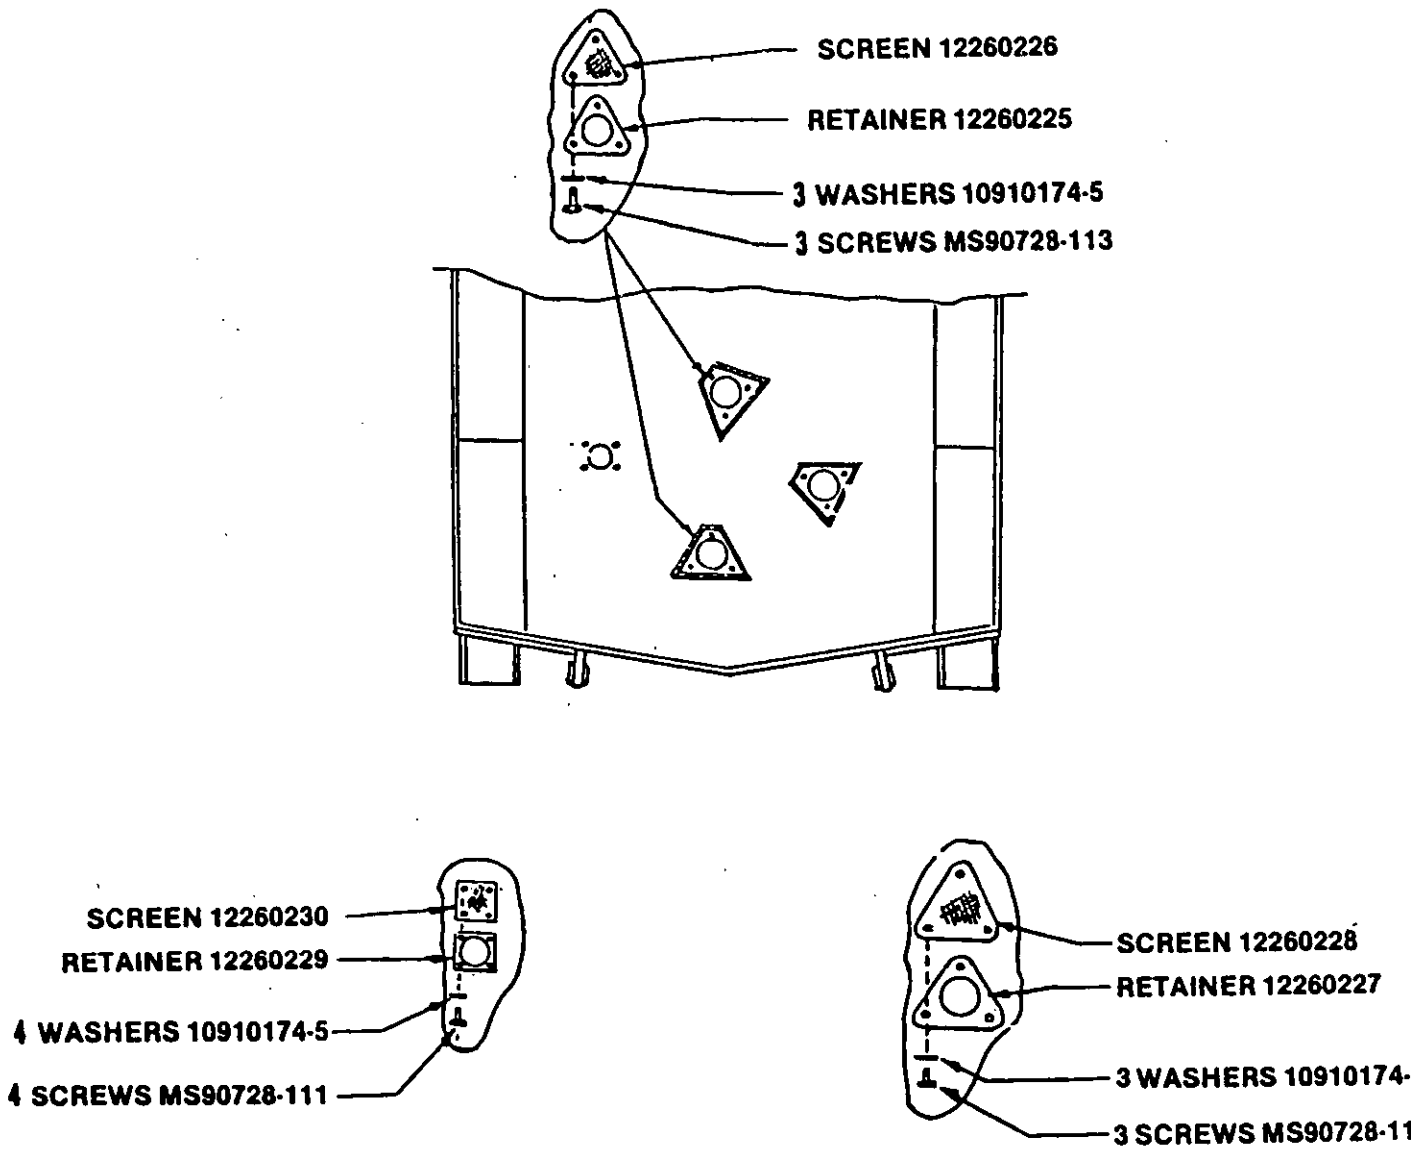


FIGURE 7. View of vehicle underside ventilation kit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

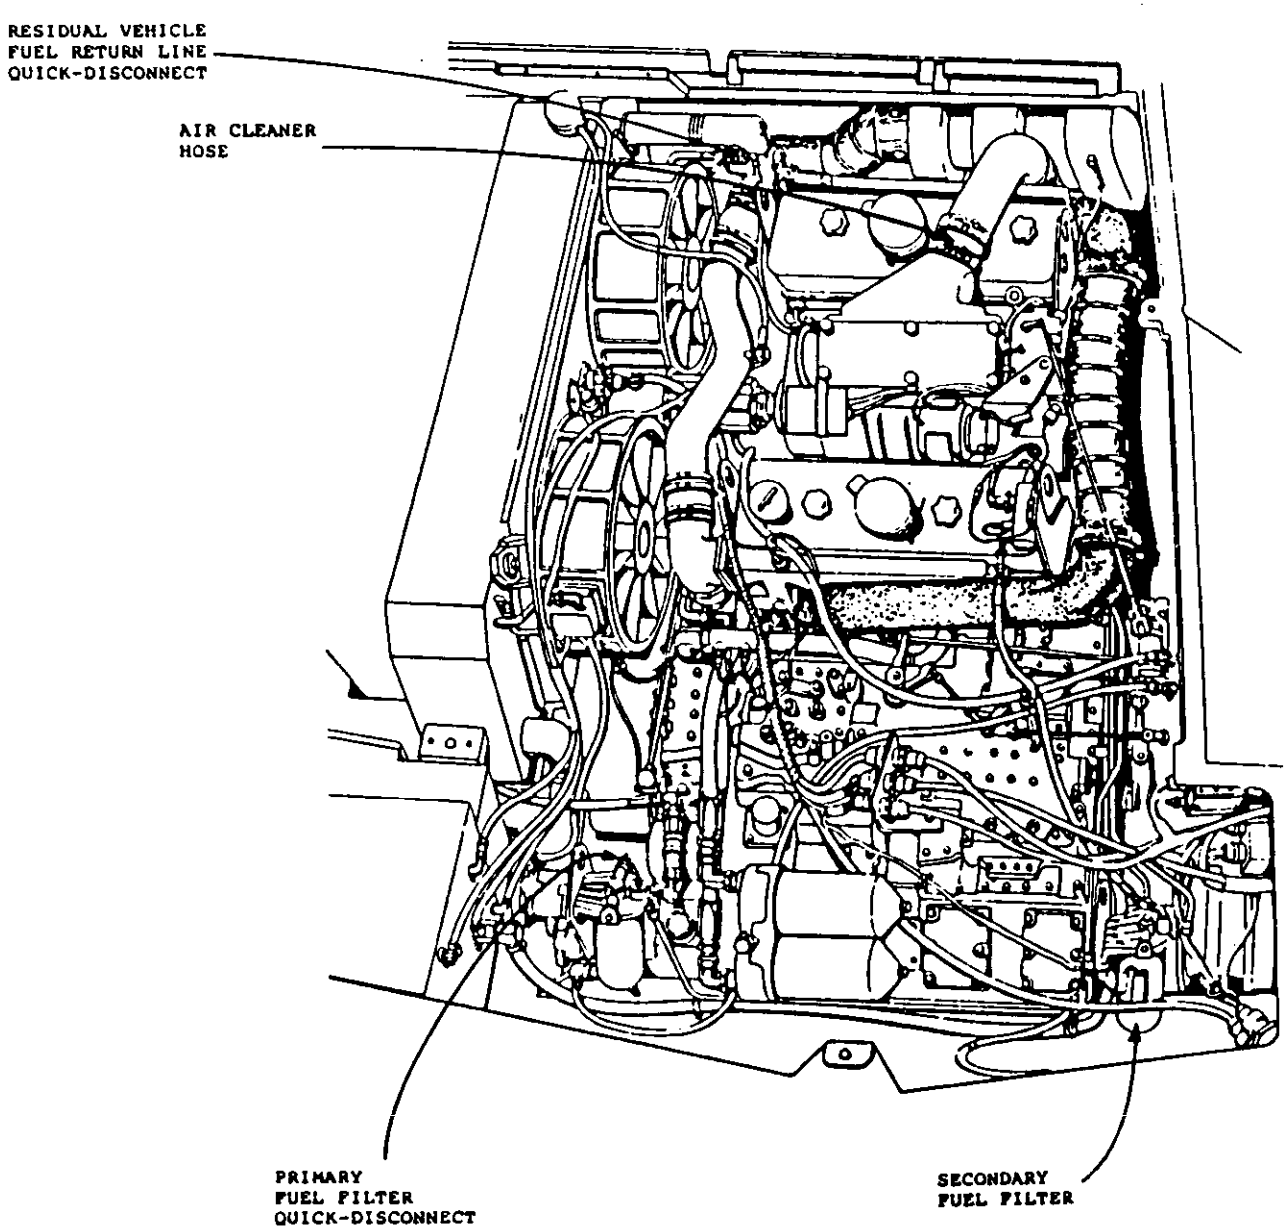
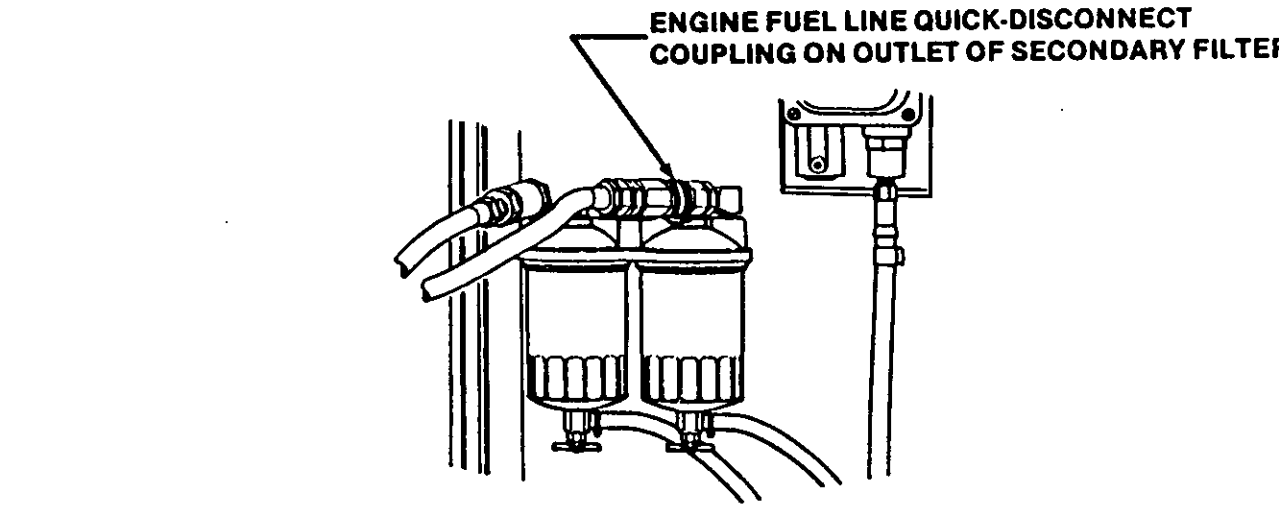


FIGURE 8. Engine compartment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.



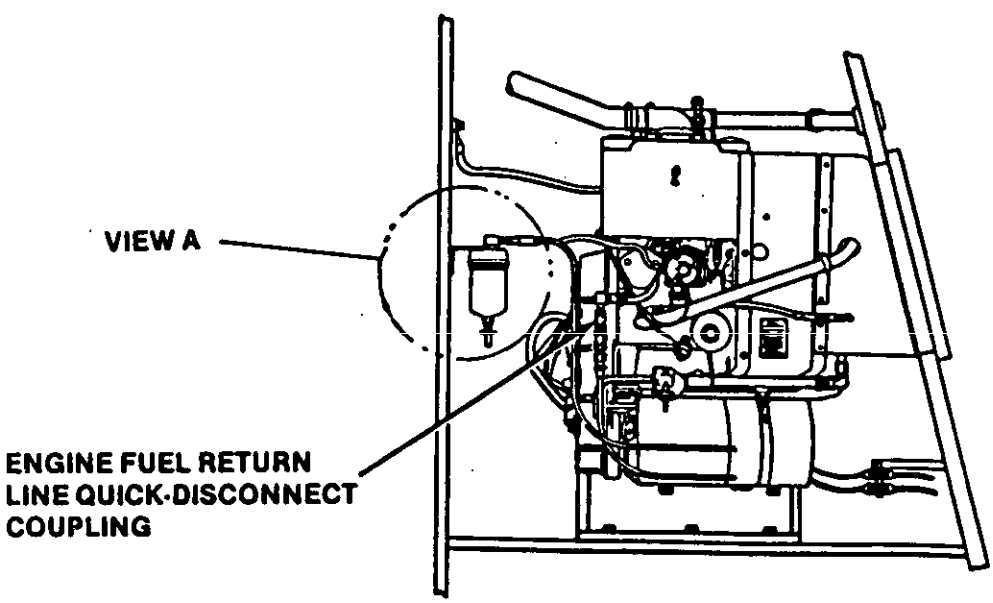


FIGURE 9. APU compartment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

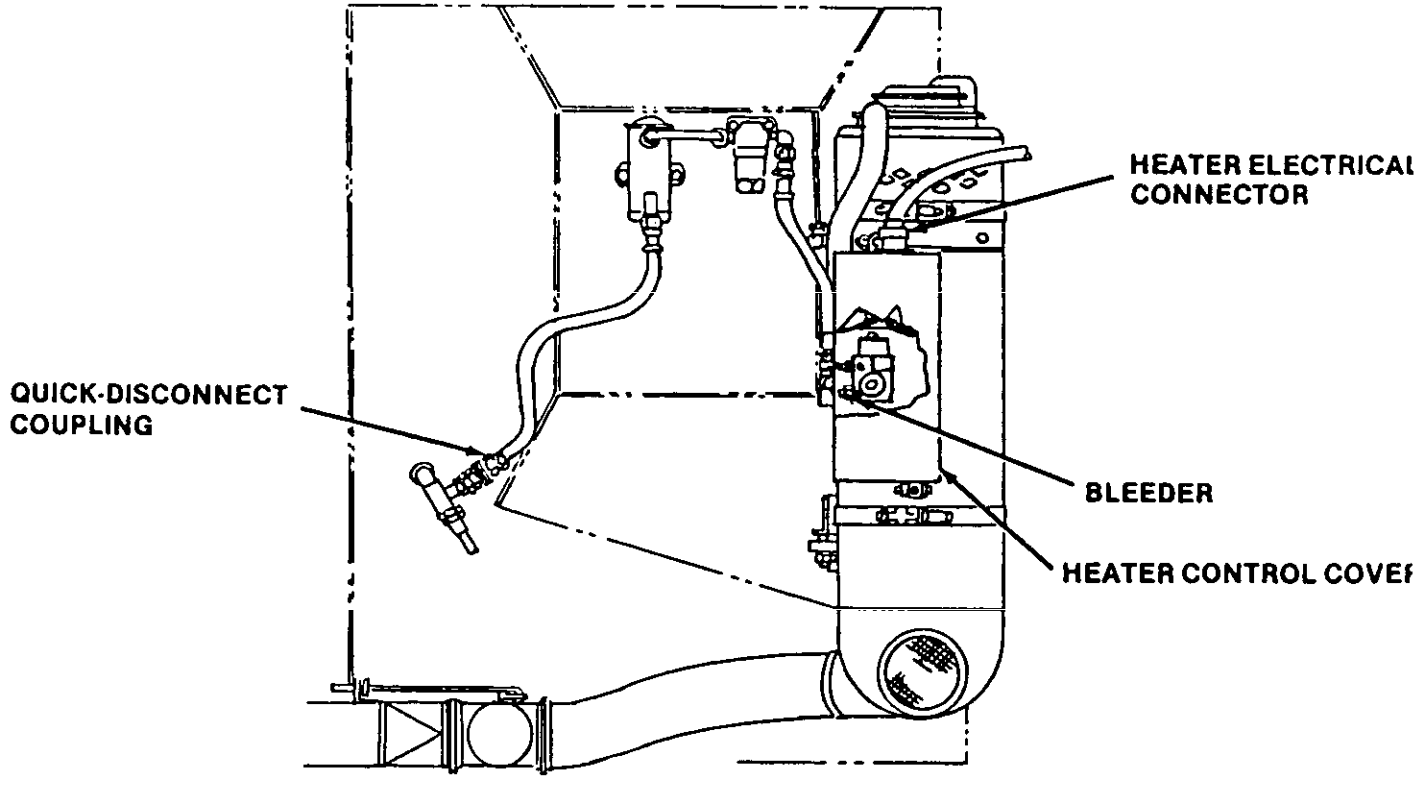


FIGURE 10. Heater.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Tank-Automotive Command
ATTN: DRSTA-GSS
Warren, MI 48080

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-62533	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)