INCH-POUND
MIL-DTL-62533A(AT)
16 June 1995
SUPERSEDING
MIL-C-62533(AT)
7 November 1986

DETAIL SPECIFICATION

CARRIER, CARGO, TRACKED, 22-TON, AMMUNITION MEDIUM: M992/A1/A2; PROCESSING FOR STORAGE AND SHIPMENT OF

This specification is approved for use within U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers processing of the Carrier, Cargo, Tracked, 22 Ton, Ammunition, Medium: M992/A1/A2 for domestic and overseas shipment and storage.

1.2 Classification. Processing shall be of the following levels of protection (see 3.4.2 and 6.2).

Level A: Maximum protection. Maximum protection, called Level A, is processing for domestic and overseas shipment and for any outside storage in excess of 90 days from the date of processing (periodic care and additional preservation are required during storage).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-T, Warren, MI 48397-5000 by using the Standardization Document Improvement Proposal (DD Form 1426), appearing at the end of this document, or by letter.

AMSC N/A AREA PACK

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

Level B: Intermediate protection. Intermediate protection, called Level B, is processing for immediate use shipment and for domestic and overseas shipment (excluding open deck loading) and for any storage not to exceed 90 days from the date of processing.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are needed to meet the requirements specified in sections 3, 4 and 5 of this specification. This section does not include documents in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all requirement documents cited in sections 3, 4, and 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks, form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

P-D-220	- Detergent, General Purpose.
P-D-680	- Dry Cleaning and Degreasing Solvent.
UU-P-268	- Paper, Kraft, Wrapping.
VV-F-800	- Fuel Oil, Diesel.
VV-L-800	- Lubricating Oil, General Purpose Preservative (Water-Displacing, Low Temperature).
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Box, Wood, Nailed and Locked-Corner.
PPP-B-636	- Box, Shipping, Fiberboard.
PPP-C-1752	- Cushioning Material, Packaging, Polyethylene Foam.
PPP-F-320	- Fiberboard: Corrugated and solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-97	- Tape, Packaging/Industrial, Filament Reinforced.

DEPARTMENT OF DEFENSE

MIL-P-116	- Preservation, Methods of.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

MIL-B-117	- Bags, Sleeves and Tubing.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-C-450	- Coating Compound, Bituminous Solvent Type, Black (For Ammunition).
MIL-C-5501	- Caps and Plugs, Protective, Dust and Moisture Seal.
MIL-H-6083	- Hydraulic Fluid, Petroleum Base, for Preservation and Operation.
MIL-S-8660	- Silicone Compound NATO Code Number S-736.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-P-14232	- Parts, Equipment and Tools for Army Materiel, Packaging of.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold-Application.
MIL-D-16791	- Detergents, General Purpose (Liquid, Nonionic).
MIL-O-16898	- Optical Elements; Packaging of.
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative and Break-in.
MIL-T-22085	- Tapes, Pressure-Sensitive, Adhesive, Preservation and Sealing.
MIL-B-22191	- Barrier Materials, Transparent, Flexible, Heat Sealable.
MIL-T-37402	- Tester, Antifreeze Solutions.
MIL-P-46002	- Preservative Oil, Contact and Volatile Corrosion-Inhibited.
MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package.
MIL-T-50036	- Talc, Technical, T1 and T3.
MIL-S-53021	- Stabilizer Additive, Diesel Fuel.
MIL-D-81298	- Dye, Liquid For The Detection of Leaks in Aircraft Fuel Systems.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-129	- Marking for Shipment and Storage (Part 1 of 4 Parts).
MIL-STD-731	- Wood Members for Containers and Pallets, Quality of.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MIL-STD-45662	- Calibration Systems Requirements.
MS3367	- Strap, Tiedown, Electrical Components, Adjustable, Self-Clinching, Plastic, Type I, Class I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

MS21316-56	- Thumbscrew (Shouldered), Flat Point, Carbon Steel, Cadmium Plated, UNC-2A.
MS51525	- Fittings, Hydraulic Tube, Flared 37 Degree and Flareless, Steel; Adapter, Straight, Tube to Boss, O-Ring, 37 Degree Flared.
MS51850-64	- Screw, Tapping - Thread Forming, Type AB, Hexagon Head, Slotted.

Commercial Item Description

A-A-203	- Paper, Kraft, Untreated.
A-A-374	- Sodium Bicarbonate, Technical.
A-A-883	- Tape, Pressure-Sensitive Adhesive, Masking.
A-A-50177	- Paper, Lens.
A-A-55057	- Panels, Wood/Wood Based; Construction and Decorative.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Documents Order Desk, 700 Robbins Avenue, Bldg. 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DEPARTMENT OF TRANSPORTATION (DOT)

Hazardous Materials Regulations.

(Applications for copies should be addressed to the Department of Transportation, Hazardous Materials Regulations Board, Washington, DC 20590).

DRAWINGS

ARMY

7388571	- Coupler Assembly
8675112	- Coupling Assembly
12260223	- Ventilation Kit
12260224	- Installation Instructions Ventilation Kit 12260223
12330507	- Chart Lubrication
12351447	- Saddle Installation, OVE
12351448	- Enclosure Kit, Installation

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

E150-1-12-2-1-B - Coupler
E150-1-12-1-1-A - Nipple

PUBLICATIONS

LUBRICATION ORDER

LO 9-2350-267-12 - Lubrication Order

TECHNICAL MANUALS

TM 9-2350-267-10 - Operator's Manual, M992
TM 9-2350-287-10 - Operator's Manual, M992A1
TM 9-2350-293-10 - Operator's Manual, M992A2
TM 9-2350-267-10-HR - Hand Receipt
TM 9-2350-287-10-HR - Hand Receipt
TM 9-2350-293-10-HR - Hand Receipt
TM 55-2350-267-14 - Transportability Guidance Manual
TM 9-2350-267-20 - Organizational Maintenance Manual
TM 9-2350-287-20-1 - Organizational Maintenance Manual (Vol. 1)
TM 9-2350-287-20-2 - Organizational Maintenance Manual (Vol. 2)
TM 9-2350-293-20-1 - Organizational Maintenance Manual (Vol. 1)
TM 9-2350-293-20-2 - Organizational Maintenance Manual (Vol. 2)

(Copies of drawings, publications, and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.3 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents that are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the non-government documents that are current on the date of the solicitation.

ASSOCIATION OF AMERICAN RAILROADS

Section No. 1 - General Rules Governing Loading of Commodities on Open Top Cars.
Section No. 6 - Rules Governing the Loading of Department of Defense Material on Open Top Cars.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

(Applications for copies should be addressed to the Association of American Railroads, 1920 L Street N.W., Washington, DC 20036.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM D3953	- Standard Specification for Strapping, Flat Steel and Seals
ASTM E437	- Standard Specification for Industrial Wire Cloth and Screens (Square Opening Series)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government Standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.4 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specification, specification sheets, or MS standards), the text of this specification takes precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a vehicle shall be subjected to first article inspection (see 4.3 and 6.2). A separate processed vehicle shall be subjected to first article inspection in accordance with 4.2.

3.2 Equipment. Equipment for processing of the vehicle shall be as specified herein. Equipment not specified herein shall be sufficient and safe when used for the intended purpose.

3.2.1 Preservative container assembly. A preservative container assembly shall be provided for Level A processing of the fuel system (see Figure 1).

3.2.1.1 Preservative container. A preservative container with valves for flow regulation, fittings, and a hose with a fitting for connection to the filter assembly shall be provided for Level A processing of the fuel system (see Figure 1).

3.2.1.2 Filter assembly. A fuel filter assembly with connecting hoses, appropriate fittings, and a filtering element shall be provided for Level A processing of the fuel system (see Figure 1).

3.2.2 Air restrictor boots. Air restrictor boots shall be provided for Level A processing of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

combustion chambers. The air restrictor boots shall be sufficient to restrict air flow at the air intakes of the main engine and at the air intake of the Auxiliary Power Unit (APU) engine.

3.2.3 Atomizer. An atomizer shall be provided for Level A processing of the fuel tank, air intake opening, exhaust opening, and oil level gage lubricant gage openings.

3.3 Materials. Materials selected for processing of the vehicle shall be sufficient and safe when used for the intended purposes.

3.3.1 Recycled, reclaimed, and virgin materials. There are no requirements for the exclusive use of virgin materials. The use of recycled or reclaimed (recovered) materials is acceptable provided that all other requirements of this specification are met (see 6.3.2).

3.3.2 Detergent solution. Detergent for the cleaning of noncritical surfaces shall be in accordance with P-D-220 or Type I of MIL-D-16791. Detergent shall be in solution form with clean water.

3.3.3 Optical glass cleaning. Optical cleaning materials shall be in accordance with the requirements of MIL-O-16898.

3.3.3.1 Lens paper. Paper conforming to A-A-50177 shall be used to cover optical glass surfaces after cleaning (see 3.4.1.3.6.1 and 3.4.1.3.6.3).

3.3.4 Tape. Tape conforming to type II of A-A-883 shall be used for securing paper to backrests and seats. Tape conforming to type II of MIL-T-22085 shall be used to close air intake, exhaust, and oil level gage rod openings, secure cushioning material to the vehicle, and other exterior taping requirements as specified herein. Tape conforming to type IV of PPP-T-97 shall be used to secure battery cables to the battery carrier.

3.3.5 Bags. Bags conforming to type I, class B or C, style 2 of MIL-B-117 shall be used for preservation of items in accordance with method IC of MIL-P-116.

3.3.6 Lubricating oil. Lubricating oil conforming to VV-L-800 shall be used for bare metallic surfaces and oil can points. Lubricating oil conforming to MIL-L-21260 shall be used for the transmission, transfer assembly, final drives, engine crankcase, inaccessible machined metal surfaces, fuel tank cap, and filler screen and shall be used with residual fuel that remains after draining the tank.

3.3.7 Antifreeze solution. Antifreeze solution shall consist of equal parts by volume of water and antifreeze (ethylene glycol) conforming to MIL-A-46153.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.8 Preservatives. Preservatives for fuel system processing (Level A) shall be in accordance with grade 10W of MIL-L-21260. Preservatives for coating exterior unpainted, unplated, ferrous surfaces shall be in accordance with the grade 4 of MIL-C-16173. Interior component surfaces shall be preserved with the operational fluids and lubricants specified in LO 9-2350-267-12, TM 9-2350-287-20-2, and TM 9-2350-293-10. Preservatives for the battery box shall conform to composition G, type II of MIL-C-450.

3.3.8.1 Preservative dye. When first article provisions are required by the procuring activity, an oil soluble red dye conforming to MIL-D-81298 shall be added to the preservative oil and be used for fuel system and combustion chamber processing. The concentration of dye shall be sufficient to impart a marked coloring of the oil. Preservative dye shall be used for first article and as required for inspection only (see 3.5).

3.3.9 Ventilation screen. Ventilation screens (four pieces) shall be provided for Level A and Level B processing of the vehicle (see 3.4.1.8.1).

3.3.10 Paper. Paper having a minimum burst basis weight of 40 pounds conforming to type I, grade B of UU-P-268 or A-A-203 Kraft paper shall be used to cover backrests and seats after drying.

3.3.11 Silicone grease. Silicone grease conforming to MIL-S-8660 shall be used on battery supports and retainers.

3.3.12 Talc. Talc conforming to MIL-T-50036 shall be used to coat rubber seals around hatches and doors.

3.3.13 Boxes. A box conforming to type CF and class weather-resistant of PPP-B-636 shall be used to pack and ship the tow hooks and related hardware. A box conforming to PPP-B-636 shall be used to stow ventilation covers and gaskets that are removed.

3.3.14 Wraps and barrier material. Wraps and barrier material for packaging shall be in accordance with type II, grade A, Class 2 of MIL-B-121.

3.3.15 Cushioning. Cushioning materials shall be in accordance with PPP-C-1752. Cushioning shall conform to MIL-STD-1186.

3.3.16 Blocking and bracing. Fiberboard material for blocking and bracing shall be in accordance with type CF and class WR of PPP-F-320. The domestic class of fiberboard may be used within bags in lieu of the weather-resistance class. Lumber for blocking and bracing shall be in accordance with MIL-STD-731. Plywood shall be in accordance with A-A-55057. All blocking and bracing shall conform to MIL-STD-1186.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.17 Containers. Fiberboard boxes for unit packaging shall be in accordance with type CF and Class WR of PPP-B-636. The domestic class of box may be used within bags in lieu of the weather-resistance class. Boxes for exterior packing and stowage shall be in accordance with overseas types of PPP-B-601 or overseas types of PPP-B-621.

3.3.18 Tape and closure material. Tape shall be in accordance with type II of MIL-T-22085. Containers shall be closed in accordance with closure requirements of the box specifications. Caps and plugs shall be in accordance with MIL-C-5501.

3.3.19 Ventilation kit. Ventilation kit 12260223 shall be provided for Level A and Level B processing of vehicle.

3.3.20 Closure kit. Closure kit 12351448 shall be supplied for Level A processing of the vehicle.

3.4 Procedures and operations. Procedures and operations consist of general requirements and special requirements. General requirements shall apply to all levels of protection (see 3.4.1). Special requirements shall apply to the specified level of protection (see 3.4.2 and 6.2).

3.4.1 General requirements. DA Form 2258 shall be completed to record the preservation applied and deprocessing required for each vehicle. Completed forms shall be sealed within a bag conforming to type I, class B, style 2 of MIL-B-117 and be attached within the driver's compartment.

3.4.1.1 Disassembly. Except as specified herein, each vehicle shall be prepared for shipment and storage in a completely assembled condition after test runs and completion and approval of all necessary repairs. Equipment shall be installed and all adjustments and repairs shall be completed to allow the vehicle to be placed into service with the minimum of delay consistent with the specified level of protection.

3.4.1.1.1 Disassembly for normal transport. The Basic Issue Items (BII), Components of End Item (COEI), and disassembled items listed in Tables I, II, and III shall be removed from the vehicle and configured for packaging, stowage and securement aboard the vehicle. Disassembly shall be in accordance with the applicable technical manuals.

3.4.1.1.2 Disassembly for special transport. When specified (see 6.2), additional disassembly shall be in accordance with the vehicle transportability guidance technical manual for the specified mode of transport (see TM 55-2350-267-14).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.1.3 Disassembly for component processing. Components specified in Tables I and II shall be disassembled for processing in accordance with the applicable technical manuals. Except as specified herein, selected components disassembled for processing shall be reassembled in accordance with the applicable technical manuals.

TABLE I. Preservation and Stowage of Components of End Item.

IDENT-IFICA-TION NUMBER	ITEM DESCRIPTION	METHOD OF PRESER-VATION	PACKING REQUIRE-MENTS	STOWAGE LOCATION	M992	M992 A1	M992 A2
5820-01-128-6184	AN-VIC-1 INTERCOM SYSTEM	III	BOX 1	A FIGURE 3	X	X	X
3990-01-179-9141	BINDER, LOAD, HOIST	I	BOX 1	M FIGURE 4	X	X	X
1005-00-704-6650	MOUNT MACHINE GUN, 50 CAL.	I	BOX 1	B FIGURE 4	X	X	X
12357792	PERISCOPE, M27	IA-8	BOX 1	C FIGURE 5	X	X	X
12370033	PERISCOPE, M45	IA-8	BOX 1	C FIGURE 5	X	X	X

CC = Consolidation Carton for COEI - PPP-B-636, Style RSC, Grade W5c, Class WR, Type CF.

CCS = Consolidation Carton for COEI on Board Spares - PPP-B-636, Style RSC, Grade W5c, Class WR, Type CF. Size 15 X 15 X 3. Closure IAW PPP-B-636.

Plywood Box for COEI - PPP-B-601, Style A, Overseas, Size I.D. - 43-1/2 X 28-1/2, 3/8" thick sides, ends & bottom panels. ½" thick top panel cleat material 1" nom. X 1-3/4" wide.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE II. Preservation and Stowage of Disassembled Items Shipped with Vehicle.

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESER-VATION	STOWAGE LOCATION	M992	M992 A1	M992 A2
2910-00-837-1580	ACCESS PLATE	I	F FIGURE 3	X	X	X
2510-00-986-8674	ACCESS PLATE	I	F FIGURE 3	X	X	X
5330-00-080-1492	GASKET	IC-3	F FIGURE 3	X	X	X
5330-00-878-6179	GASKET	IC-3	F FIGURE 3	X	X	X
MS29561-291	PACKING	IC-3	F FIGURE 3	X	X	X
7068719	TOW HOOKS	III	G FIGURE 6	X	X	X
2590-01-158-3093	STOWAGE BASKET	III	H FIGURE 6	X	X	X
2540-01-079-3087	STOWAGE BOX	III	H FIGURE 6	X		
2540-01-077-2003	STOWAGE BOX	III	H FIGURE 6	X		
2590-01-216-8642	SHROUD KIT	III	I FIGURE 3	X	X	X
BML 29214	OUTSIDE STRAP KIT	III	J FIGURE 3	X	X	X
2540-01-179-9037	DUFFLE BAG NET ASSEMBLY	III	K FIGURE 3	X	X	X
2540-01-179-8961	DUFFLE BAG NET ASSEMBLY	III	K FIGURE 3	X	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE II. Preservation and Stowage of Disassembled Items Shipped with Vehicle - Continued.

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESER-VATION	STOWAGE LOCATION	M992	M992 A1	M992 A2
2540-00-177-7808	TELEPHONE CRANK ASSEMBLY	IC-2	L FIGURE 3	X	X	X
2590-01-720-0123	LIFTING FIXTURE	III	N FIGURE 4	X	X	X

3.4.1.2 Cleaning and drying. Unless otherwise specified, each vehicle and each component item shall be cleaned in accordance with selected cleaning processes as specified in MIL-P-116. Materials, equipment, and processes that are sufficient and safe when used for the intended purpose shall be selected. Any item damaged by cleaning or drying shall be replaced or repaired.

3.4.1.2.1 Exterior of Vehicle. Exterior surfaces of the vehicle shall be cleaned with a solution of water and detergent conforming to P-D-220, or type I of MIL-D-16791. After cleaning, surfaces shall be rinsed with clean water. The cleaning process shall not permit liquid to enter interior or engine compartments and cause damage or deterioration. If pressure spraying equipment is used in the cleaning process, the control regulation of the spraying equipment and the method of spray cleaning shall be sufficient to prevent damage.

3.4.1.2.2 Driver's and crew compartments. Interior surfaces of the driver's and crew compartments shall be cleaned with a solution of water and detergent conforming to P-D-220, or type I of MIL-D-16791. After cleaning, surfaces shall be rinsed with clean water. The cleaning process shall not permit liquid to enter the instruments, connections, or other components susceptible to water damage. The cleaning process shall not permit the cushioning materials of the driver's seat to absorb liquid. Draining of any accumulated water under the floor plates shall be accomplished by removal of the 17 drain plugs located on underside of the vehicle hull.

3.4.1.2.3 Engine compartment. The interior of the engine compartment shall be cleaned with a solution of water and detergent conforming to P-D-220, or type I of MIL-D-16791. After cleaning, surfaces shall be rinsed with clean water. The cleaning process shall not allow liquid to enter the engine, connections or other components susceptible to water damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.2.4 Vehicle components. Unless otherwise specified, component systems containing operational fluids shall be examined for evidence of contamination. If contaminants are found, the interior surfaces of components containing operational fluids shall be cleaned by flushing with operational fluid. Additional processing shall be applied to restore components to operational condition.

3.4.1.2.4.1 Battery supports, retainers, terminals, and connections. Battery supports, retainers, terminals, and connections shall be cleaned with a solution of sodium bicarbonate and water conforming to A-A-374. After cleaning, surfaces shall be rinsed with clean water. Batteries and electrolyte shall be processed in accordance with the specified level of protection (see 3.4.2 for special requirements).

3.4.1.2.4.2 Cooling system. The cooling system shall be examined for rust and contamination and shall be flushed as required for cleaning.

3.4.1.2.4.3 Transfer case breathers. The transfer case breathers shall be removed and cleaned with dry-cleaning solution conforming to P-D-680.

3.4.1.2.4.4 Final drive breathers The final drive breathers shall be removed and cleaned with dry-cleaning solution conforming to P-D-680.

3.4.1.2.4.5 NBC Filters. NBC filters shall be checked and replaced as specified in TM 9-2350-267-20/-287-20/-293-20.

3.4.1.2.4.6 Automatic fire extinguishing system (AFES). The sensor elements of the optical fire sensing assembly shall be cleaned as specified in MIL-O-16898.

NOTE: Before cleaning the sensor elements, care should be taken to ensure that the maintenance switch on the AFES control box is in the OFF position.

3.4.1.2.5 Drying. Unless otherwise specified, the cleaned vehicle and component parts shall be dried by selected drying processes as specified in MIL-P-116. Drying procedures and operations shall be sufficient and safe for the purpose intended.

3.4.1.2.5.1 Breathers. Breathers for the transfer case and final drive shall be dried in accordance with procedure D-1 of MIL-P-116. Breathers shall be reinstalled after cleaning and drying.

3.4.1.2.5.2 Vehicle components containing fluids. Components systems containing operational fluids that are flushed for cleaning shall be refilled with operational fluid. Drying is not required for interior surfaces of these component systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.3 Preservation. Unless otherwise specified, each vehicle surface and component that is susceptible to corrosion or deterioration by environmental conditions shall be protected by the application of selected preservatives in accordance with MIL-P-116 (see 6.2). Preservative materials, equipment, and processes that are sufficient and safe when used for the purpose intended shall be selected. Selected preservatives shall be compatible with the item composition and intended use. Preservation shall be completed immediately after cleaning and drying. Any item damaged by preservation shall be replaced or repaired.

3.4.1.3.1 COEI, BII, and disassembled items. The Components of End Item (COEI), Basic Issue Items (BII), and disassembled items shall be protected by methods of preservation in accordance with MIL-P-116 (see tables I, II, and III).

3.4.1.3.2 Bilge pump. The bilge pump shall be clean and free of contaminants. Surfaces of the bilge pump shall not be coated with preservative.

3.4.1.3.3 Seals. The rear door seal, hatch cover seal, and access plate seals shall be coated with talc conforming to MIL-T-50036 prior to closure.

TABLE III. Preservation and Stowage of Basic Issue Items (BII).

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	PACKING REQUIREMENTS	STOWAGE LOCATION	M992	M992 A1	M992 A2
5935-00-322-8959	ADAPTER, CONNECTOR, CABLE	IC-3	CC BOX 2	C FIGURE 5	X		X
4930-00-204-2550	ADAPTER, GREASE GUN	IC-3	CC BOX 2	C FIGURE 5	X	X	X
4933-00-087-1267	ADAPTER, GUN, OIL FILLING	IC-3	CC BOX 2	C FIGURE 5	X	X	X
2540-00-670-2459	BAG ASSEMBLY, PAMPHLET	III	CC BOX 2	C FIGURE 5	X	X	X
2540-00-906-4741	BOX ASSEMBLY, SPARE BULBS	III	CC BOX	C FIGURE 5	X	X	X
5120-01-179-8995	BREAKER, CHAIN ASSEMBLY	IC-3	BOX 2	C FIGURE 5	X	X	X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Preservation and Stowage of Basic Issue Items (BII) - Continued

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	PACKING REQUIREMENTS	STOWAGE LOCATION	M992	M992 A1	M992 A2
5110-00-221-1499	NIPPERS, END CUTTING WIRE	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-240-5328	WRENCH, ADJUSTABLE, 8-INCH	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-264-3796	WRENCH, ADJUSTABLE, 12-INCH	IC-3	CC BOX 2	C FIGURE 5	X	X	X
6150-01-248-9555	CABLE ASSEMBLY, POWER, INTER-VEHICULAR	IC-3	BOX 2	C FIGURE 5	X	X	X
4010-00-202-2425	CABLE, TOWING, 10 FOOT	I	BOX 2	C FIGURE 5	X		
4010-01-041-9752	CABLE, TOWING, 15 FOOT	I	BOX 2	C FIGURE 5		X	X
12351678	CAN, WATER, MILITARY, 5-GALLON	III	TAPED				X
12351678	CONNECTING LINK ASSEMBLY, COUPLING	IC-2	CC BOX 2	C FIGURE 5	X		X
5340-01-179-8994	CRANK, HAND, CONVEYOR MOTOR OVERRIDE	I	CC BOX 2	C FIGURE 5	X	X	X
5120-00-224-1390	CROWBAR	III	BOX 2	C FIGURE 5	X	X	X

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:24Z
Check the source to verify that this is the currentversion before use.

The Military Symbol shall be the identifying ... Military Symbol.

TABLE III. Preservation and Stowage of Basic Issue Items (BII) - Continued

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	PACKING REQUIREMENTS	STOWAGE LOCATION	M992	M992 A1	M992 A2
5110-00-595-8229	CUTTER, WIRE ROPE, HAND	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-243-7326	EXTENSION, SOCKET WRENCH, 5-INCH, ½-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-227-8074	EXTENSION, SOCKET WRENCH, 10-INCH, ½-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5		X	X
4210-00-555-8837	EXTINGUISHER, FIRE	III	BOX 1	C FIGURE 5	X	X	X
4210-01-388-7854	EXTINGUISHER, FIRE	III	BOX 1	C FIGURE 5	X	X	X
5110-00-156-0059	FILE, HAND	IC-3	CC BOX 2	C FIGURE 5	X	X	X
6545-00-922-1200	FIRST, AID KIT, GENERAL	IC-2	CC BOX 2	C FIGURE 5	X	X	X
5120-00-605-3926	FIXTURE, TRACK CONNECTING	I	CC BOX 2	C FIGURE 5	X	X	X
6230-00-264-8261	FLASHLIGHT	IC-2	CC BOX 2	C FIGURE 5	X	X	X
7510-01-065-0166	FOLDER, RECORD	IC-3	CC BOX 2	C FIGURE 5			X
5130-01-184-4893	GUN, RIVET PIN	IC-2	BOX 2	C FIGURE 5			X
5120-00-061-8546	HAMMER, HAND	I	CC BOX 2	C FIGURE 5	X	X	X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Preservation and Stowage of Basic Issue Items (BII) - Continued

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	PACKING REQUIREMENTS	STOWAGE LOCATION	M992	M992 A1	M992 A2
5340-01-199-9941	HANDLE, EXTENSION	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-249-1076	HANDLE, SOCKET WRENCH, RATCHET, 3/4-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5		X	X
5120-00-236-7590	HANDLE, SOCKET WRENCH, HINGED, ½ DRIVE	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-01-179-8997	HOOK, CARTRIDGE REMOVER	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-240-5300	KEY, SOCKET HEAD SCREW, 3/16-INCH HEX	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-240-5274	KEY, SOCKET HEAD SCREW 5/16-INCH HEX	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-198-5390	KEY, SOCKET HEAD SCREW, 3/8-INCH HEX	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-224-2510	KEY, SOCKET HEAD SCREW, 5/8-INCH HEX	IC-3	CC BOX 2	C FIGURE 5		X	X
5180-01-388-7855	KIT, PULLER, CONNECTOR, TRACK, CONSISTING OF:	III	CC BOX 2	C FIGURE 5		X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Preservation and Stowage of Basic Issue Items (BII) - Continued

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	PACKING REQUIREMENTS	STOWAGE LOCATION	M992	M992 A1	M992 A2
12438987	PULLER, CONNECTOR	IC-3	PART OF KIT			X	X
12438988	PIN, THREADED	IC-3	PART OF KIT			X	X
5120-00-918-0596	PULLER, CONNECTOR, TRACK	I	CC BOX 2	C FIGURE 5	X		
6240-00-015-4813	LAMP, INCANDESCENT	IC-2	CC BOX 2	C FIGURE 5	X		
6240-00-266-9940	LAMP, INCANDESCENT	IC-2	CC BOX 2	C FIGURE 5	X	X	X
5980-01-296-2793	LIGHT EMITTING DIODE (LED)	IC-2	CC BOX 2	C FIGURE 5	X	X	X
3020-01-251-7713	LINK, ROLLER CHAIN, CONVEYOR	IC-2	CC BOX 2	C FIGURE 5	X	X	X
4930-00-766-3545	LUBRICATING GUN, HAND	I	BOX 2	C FIGURE 5	X	X	X
TM 9-2350-267-10	MANUAL, OPERATOR'S	IC-3	BOX 2	C FIGURE 5	X		
TM 9-2350-287-10	MANUAL, OPERATOR'S	IC-3	BOX 2	C FIGURE 5		X	
TM 9-2350-293-10	MANUAL, OPERATOR'S	IC-3	BOX 2	C FIGURE 5			X
8415-01-092-0039	MITTEN, CLOTH	IC-3 BOX 2	CC	C FIGURE 5	X	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Preservation and Stowage of Basic Issue Items (BII) - Continued.

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	PACKING REQUIREMENTS	STOWAGE LOCATION	M992	M992 A1	M992 A2
4930-00-262-8868	OILER, HAND	IC-3	BOX 2	C FIGURE 5	X	X	X
5340-01-269-9345	PADLOCK SET	IC-3	BOX 2	C FIGURE 5	X		X
5315-00-829-1480	PIN, COTTER	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5340-01-158-7092	PLATE TOP, CONNECTING CHAIN	IC-2	CC BOX 2	C FIGURE 5	X		
12376413	PLATE, MENDING CONVEYOR PAD	IC-2	CC BOX 2	C FIGURE 5		X	X
5120-00-239-8251	PLIERS	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5320-01-193-6934	RIVET, BLIND	IC-2	BOX 2	C FIGURE 5		X	X
5120-00-596-8502	SCREWDRIVER, FLAT TIP, 1 ½-INCH .250 x .040-INCH HEAD	IC-3	CC BOX 2	C FIGURE 5	X	X	X
12438986	SHACKLE, CHAIN	III	BOX 2	C FIGURE 5			X
2540-01-381-2587	SHROUD, DOOR ASSEMBLY	III	BOX 1	C FIGURE 5		X	X
5120-00-237-0984	SOCKET, SOCKET WRENCH ½-INCH, ½-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5	X	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Preservation and Stowage of Basic Issue Items (BII) - Continued

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	PACKING REQUIREMENTS	STOWAGE LOCATION	M992	M992 A1	M992 A2
5120-00-189-7932	SOCKET, SOCKET WRENCH 9/16-INCH, ½-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-189-7985	SOCKET, SOCKET WRENCH 3/4-INCH, ½-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-189-7946	SOCKET, SOCKET WRENCH 5/8-INCH, ½-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5			X
5120-00-189-7934	SOCKET, SOCKET WRENCH 7/8-INCH, ½-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5		X	X
5120-00-935-7425	SOCKET, SOCKET WRENCH 15/16-INCH ½-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5		X	X
5120-00-189-7927	SOCKET, SOCKET WRENCH 1-INCH, ½-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-239-0021	SOCKET, SOCKET WRENCH 1 1/8-INCH, 3/4-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5		X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Preservation and Stowage of Basic Issue Items (BII) - Continued

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	PACKING REQUIREMENTS	STOWAGE LOCATION	M992	M992 A1	M992 A2
5120-00-189-7917	SOCKET, SOCKET WRENCH 1 1/4-INCH, ½-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5	X	X	X
5120-00-293-0094	SOCKET, SOCKET WRENCH 1½ INCH, 3/4-INCH DRIVE	IC-3	CC BOX 2	C FIGURE 5		X	X
2540-00-653-7589	TARPAULIN	III	BOX 1	C FIGURE 5	X	X	X
2540-00-346-9233	TRACK SHOE ASSEMBLY T154	I	BOX 1	C FIGURE 5			X

CC = Consolidation Container - PPP-B-636, Style RSC, Grade V3c, Type CF, Class WR, Size 26 X 12 X 10.

Plywood Box 1 - PPP-B-601, Style A, Overseas, Size I.D. 54 X 27-3/4 X 18-3/4.

Plywood Box 2 - PPP-B-601, Style A, Overseas, Size I.D. 61 X 28 X 16. Use 3/8" thick plywood for sides, ends, and bottom panel. ½" thick plywood top. Cleat Material 1" nom. X 1-3/4" wide.

Plywood Box 3 - MIL-B-2427, Size 35 X 13-3/4 X 6-7/8 with hinged top, locking latch rope handles - vendor supplied. Alternate container, PPP-B-601 overseas type, style 4.

3.4.1.3.4 Backrests and seats. Immediately after drying, cushioned components of the backrests and seats shall be covered with paper having a minimum basis weight of 40 pounds conforming to type I, grade B of UU-P-268. Paper shall be secured with tape conforming to A-A-883.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.3.5 Operational fluids and lubricants. Unless otherwise specified (see 6.2), each vehicle and components shall conform to their respective operational fluid and lubricant requirements. Contaminated fluids and lubricants shall be removed and properly disposed. Operational fluids and lubricants shall be applied in accordance with LO 9-2350-267-12/ TM 9-2350-287-20-1 & -20-2/-293-20-1 & 20-2. Any excess operational fluid or lubricant shall be removed and properly disposed.

3.4.1.3.6 Level of lubricant for various components.

3.4.1.3.6.1 Transmission. The transmission shall be filled to operating level with lubricant conforming to grade 10W of MIL-L-21260. Breathers shall be ready for operation and shall not be covered.

3.4.1.3.6.2 Transfer assembly. The transfer assembly shall be filled to operating level with lubricant conforming to the expected temperature range requirements of the lubrication order (see LO 9-2350-267-12/TM 9-2350-287-20-1 & 20-2/-293-20-1 & -20-2). Excess lubricating oil shall be removed, and properly disposed. Breathers shall be ready for operation and shall not be covered.

3.4.1.3.6.3 Final drives. Final drives shall be filled to operating level with lubricating oil conforming to grade 30W of MIL-L-21260. Breathers shall be ready for operation and shall not be covered.

3.4.1.3.6.4 Hydraulic systems. Hydraulic systems shall contain an operating level of lubricant fluid conforming to MIL-H-6083. Exposed piston surfaces of hydraulic cylinders shall be coated with preservative conforming to MIL-G-10924 and shall be wrapped with barrier material conforming to type II, grade A, class 2 of MIL-B-121. Barrier material shall be completely wrapped with tape conforming to type II of MIL-T-22085. Breathers shall be ready for operation and shall not be covered.

3.4.1.3.6.5 Engine crankcase. The engine crankcase shall contain an operating level of lubricant-preservative conforming to grade 30W of MIL-L-21260.

3.4.1.3.6.6 Roadwheel and idler arm bearings. Roadwheel and idler arm bearings shall contain an operating level of lubricating grease conforming to grade 30W of MIL-L-21260.

3.4.1.3.6.7 Auxiliary Power Unit (APU) engine crankcase. The APU crankcase shall contain an operating level of lubricating oil conforming to grade 30W of MIL-L-21260.

3.4.1.3.6.8 Conveyor. Grease fittings shall be filled with grease conforming to MIL-G-10924. Coat other unplated, unpainted metallic surfaces with grease conforming to MIL-G-10924 including gears, chains, shafts, and exposed threaded fittings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.3.7 Lubrication. Lubricant shall be applied to fittings, surfaces, and oil can points in accordance with LO 9-2350-267-12/TM 9-2350-287-20-1 & 20-2/-293-20-1 & 20-2.

3.4.1.3.7.1 Lubrication of fittings and surfaces. Lubrication shall be applied to fittings and surfaces after cleaning and drying. Lubrication points shall include the following.

a. Elevating cylinder exposed piston rod
b. Elevating cylinder hinge
c. Engine mounting clamping screw
d. Engine mounting bracket lock pin
e. Pintle
f. Roadwheels hub studs
g. Speedometer adapter housing
h. Sprocket hub, final drive
i. Torision bar anchor
j. Torision bar plugs
k. Tow cable
l. Track adjusters
m. Transmission and final drive breathers
n. Universal joint--transmission to final drive

3.4.1.3.7.2 Lubrication of oil can points. Lubrication shall be applied to oil can points after cleaning and drying. Oil can points shall include the following:

a. Accelerator and throttle linkage
b. Access cover (fuel, radiator, and engine oil)--hinges, latches, and pins (3 places).
c. Access door and grilles--hinges and latches (18 places)
d. Ammunition racks--hinges
e. Brake linkage
f. Cable reel (telephone)
g. Commander's seat--moving parts
h. Cupola hatch--operating lever
i. Driver's hatch--hold open latch, cover lock
j. Driver's hatch--operating lever
k. Driver's hatch--moving parts
l. Crew seats--hinges
m. Periscope covers--hinges
n. Periscope retaining latches
o. Portable fire extinguisher bracket
p. Projectile rack caps and spacers (31 places)
q. Steering linkage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

r. Stowage boxes--latches and handles.
s. Tows cable mounting bracket
t. Transmission shifting linkage

3.4.1.3.8 Cooling system. Unless arctic or tropic processing is specified (see 6.2), the cooling system shall contain a clean solution of equal parts by volume of antifreeze (ethylene glycol) conforming to MIL-A-46153 and water, filled to capacity. The engine shall be operated until a temperature has been reached that causes the thermostat to open and ensures complete mixing and even distribution of the antifreeze solution. When tested as specified in 4.5.3., the coolant shall show protection from freezing at -40 degrees Fahrenheit (°F) (-40 degrees Celsius [°C]).

3.4.1.3.8.1 Tropic preparation of cooling system. When specified for shipment and storage in a tropic environment, the cooling system shall contain the coolant specified in the contract or order (see 6.2 and TM 9-2350-267-10/-287-10/-293-10).

3.4.1.3.8.2 Arctic preparation of cooling system. When specified for shipment and storage in an arctic environment, the cooling system shall contain the coolant specified in the contract or order (see 6.2 and TM 9-2350-267-10/-287-10/-293-10).

3.4.1.3.9 Periscope. After cleaning, optics shall be covered with a four-layer thickness of lens tissue conforming to A-A-50177. The lens tissue shall be secured with tape conforming to A-A-883. All exposed, unpainted metal surfaces shall be coated with grease conforming to MIL-G-10924.

3.4.1.3.10 Elevating mechanism. Exposed, unpainted surfaces of the elevating rod and connecting pin, and the elevating hand crank shaft, shall be coated with grease conforming to MIL-G-10924.

3.4.1.3.11 Fire extinguishers. Fire extinguishers shall have a minimum of 90 percent of the rated full charge. All seals shall be intact. All exterior emergency handles shall be covered with tape conforming to type II of MIL-T-22085. DA Form 253 or Appropriate documentation that will state the latest inspection data shall be completed and securely attached to each extinguisher (see 6.2.1).

3.4.1.3.12 Commander's cupola and adapter ring. when specified (see 6.2), remove the commander's cupola and adapter ring. After removal of the cupola and adapter ring, the opening shall be closed with a plywood cover 33 inches in diameter by one-half inch thick, and shall be secured utilizing existing cupola hardware. The plywood shall conform to type B, A-A-55057 exterior grade. The gasket shall remain in place. The commander's cupola and adapter ring are attached to the bustle, as shown in Figure 3. TM 55-2350-267-14 contains specific procedures for this special transport removal requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.3.13 Battery supports and retainers. Battery supports, retainers, and hardware shall be coated with silicone grease compound conforming to MIL-S-8660.

3.4.1.4 Packaging. Unless otherwise specified (see 6.2), each Component of End Item (COEI), each Basic Issue Item (BII), and each item disassembled from the vehicle shall be processed in accordance with the methods of MIL-P-116 specified herein (see Tables I, II, and III).

3.4.1.4.1 Batteries and electrolyte. Batteries, connecting cables, and battery electrolyte shall be processed in accordance with the specified level of protection (see 3.4.2 for special requirements).

3.4.1.4.2 Additional items. Additional items shipped with the vehicle shall be processed in accordance with the following guidance:

3.4.1.4.2.1 Application of preservatives. Each item's unpainted, unplated ferrous surface shall be coated with preservative conforming to grade 4 of MIL-C-16173 immediately after cleaning and drying, except where application of preservative would cause damage.

3.4.1.4.2.2 Method of preservation. Items with preserved critical surfaces and other items that require protection from water or dust shall be processed in accordance with Method IC of MIL-P-116. Other preserved items without critical surfaces shall be processed in accordance with Method I of MIL-P-116. Each large item that requires only physical and mechanical protection shall be processed in accordance with Method III of MIL-P-116.

3.4.1.4.2.3 Cushioning, blocking and bracing. Item packaging shall include cushioning, blocking, and bracing sufficient to immobilize and prevent damage to the item.

3.4.1.5 Packing. Unless otherwise specified (see 6.2), all COEI, BII, and disassembled items shall be consolidated and packed into three shipping containers conforming to the specifications listed in Table I and II.

3.4.1.5.1 Stowage baskets. Left and right stowage baskets shall not be packed for shipment. Stowage baskets shall remain installed on the vehicle, folded back, and secured to prevent movement (see TM 55-2350-267-14). To prevent damage, sufficient cushioning and blocking shall be applied to immobilize the items that are not packed.

3.4.1.5.2 Access covers and gaskets. The driver's compartment access cover, the transmission access covers, and the gaskets shall be packed in a box conforming to type CF, Class WR of PPP-B-636. Blocking, cushioning, and immobilization of the items shall meet the requirements of MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.5.3 Antennas. Antennas shall be removed for shipment and packed in a box conforming to type CF, class WR of PPP-B-636. The box shall be closed in accordance with PPP-B-636.

3.4.1.6 Marking. In addition to the marking specified in the contract or order (see 6.2), marking shall applied as specified herein. Marking shall indicate the applied level of protection.

3.4.1.6.1 Marking of vehicle. Vehicles shall be marked in accordance with MIL-STD-129.

3.4.1.6.2 Marking of Basic Issue Items (BII). Each unit package and each item not provided with unit packaging shall be marked in accordance with MIL-STD-129. The exterior of shipping containers shall be marked in accordance with MIL-STD-129 and shall contain the following identification data: ASSORTED BII FOR (National Stock Number [NSN]), (U.S. ARMY REGISTRATION NUMBER). The NSN and registration number of the vehicle shall be used. Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

3.4.1.6.3 Marking of Components of the End Item (COEI). The unit packaging of each item shall be marked in accordance with MIL-STD-129. Exterior marking of assorted items packed together shall contain the following identification data: ASSORTED COEI FOR (NSN), (U.S. ARMY REGISTRATION NUMBER). The NSN and registration number of the vehicle shall be used. Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

3.4.1.6.4 Marking of disassembled items. The unit packaging of each item shall be marked in accordance with MIL-STD-129. Exterior marking of assorted items packed together shall contain the identification data: ASSORTED ITEMS FOR (NSN), (U.S. ARMY REGISTRATION NUMBER). The NSN and registration number of the vehicle shall be used. Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

3.4.1.6.5 Marking of additional items. The unit packaging of additional items shipped with the vehicle shall be marked in accordance MIL-STD-129. Exterior packs shall be marked in accordance with MIL-STD-129. Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

3.4.1.6.6 Marking of closure kit. When a vehicle closure kit is specified (see 6.2 and 3.4.2.1.8), marking of the closure kit shall be in accordance with MIL-STD-129. Additional marking of the closure kit shall be as specified in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.6.7 Marking of battery electrolyte. Battery electrolyte shall be marked in accordance with MIL-STD-129, including requirements of special handling.

3.4.1.7 Stowage. Unless otherwise specified (6.2), stowage and securement shall conform to the requirements specified herein and shall meet carrier and transportation requirements. Stowage and securement methods shall be sufficient and safe for the intended purposes. Stowage and securement, including blocking, and bracing shall provide clearance for sling cables and lifting eyes and shall meet the weight and clearance requirements of the shipment medium. Blocking and securement by banding shall prevent movement within the vehicle.

3.4.1.7.1 Stowage of COEI, BII, and disassembled items. COEI, BII, and disassembled items shipped with the vehicle shall be stowed and secured in the locations specified in tables I, II, and III (the locations are shown in figures 3-6). For the M992, the consolidated BII shall be loaded through the right side personnel door and secured between the stacker and conveyor. For the M992A1 and M992A2, the consolidated BII shall be secured next to the conveyor. Blocking, bracing and securement of items shall be sufficient to prevent movement.

3.4.1.7.2 Stowage of items shipped with vehicle. Additional items shipped with the vehicle shall be stowed and secured within the vehicle. When specified, additional items shall be stowed and secured aboard the On Vehicle Equipment Saddle (see 6.2). Installation of the On Vehicle Equipment Saddle shall be in accordance with 12351447.

3.4.1.7.3 Conveyor securement. The conveyor shall be stowed and secured in travel position (see Figure 2).

3.4.1.7.4 Stacker securement. For the M992, the stacker shall be placed in travel lock position and locked in place (see figure 2).

3.4.1.8 Closure. Specified openings of the vehicle and components shall be blocked to prevent deterioration. In addition, other specified openings of the vehicle shall remain open to allow drainage or ventilation Processing for closure and ventilation shall meet carrier and transportation requirements. Special requirements for closure shall be in accordance with the specified level of protection (see 3.4.2).

3.4.1.8.1 Ventilation. Ventilation kit 12260223 shall be installed in accordance with Installation Instructions--Ventilation Kit 12260224 (see Figure 7). Items removed for installation of the ventilation kit shall be processed as specified for COEI. Unpainted, ferrous surfaces exposed for installation of the ventilation kit shall be coated with preservative conforming to grade 4 of MIL-C-16173.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.8.2 Door and hatches. All doors and hatches shall be closed and latched. The top rear door shall be closed first, before Level A processing of the APU. The commander's hatch, driver's hatch, and side doors shall be closed and locked from the inside. The bottom rear door shall be closed last from the outside. The rear door shall be secured using an approved railroad type, cone lock seal assembly, placed through the locking ring.

3.4.1.8.3 Bilge pump discharge. The bilge pump discharge opening shall be sealed with tape conforming to type II of MIL-T-22085.

3.4.1.8.4 Exterior control of fire extinguisher. The recess opening for the fire extinguisher handle shall be closed with tape conforming to type II of MIL-T-22085.

3.4.1.8.5 Hull drain valve. The hull drain valve shall be open for shipment.

3.4.1.9 Loading. Vehicle and components shall be loaded and secured for transport. Loading and securement methods shall be sufficient and safe. Loading and securement shall conform to carrier requirements and applicable transportation regulations.

3.4.1.9.1 Vehicle lifting and towing. Lifting and towing of the vehicle after processing shall be in accordance with approved methods. Any movement of partially processed vehicles that interferes or conflicts with vehicle processing is not recommended.

3.4.1.9.2 Loading for commercial shipment.

3.4.1.9.2.1 Loading for commercial rail shipment. Loading and securement for commercial rail shipment within the U.S. and Canada shall conform to the general rules governing the loading of commodities on open top cars and to the rules governing the loading of DOD material on open top cars of the American Association of Railroads (AAR Section No. 6, Figure 79). Other foreign rail shipments shall conform to the vehicle's transportability guidance technical manual, TM 55-2350-267-14 and to the applicable transportation regulations.

3.4.1.9.2.2 Loading for other commercial shipment. Loading and securement shall conform to carrier requirements and to applicable transportation regulations. Shipments shall also conform to the vehicle's transportability guidance technical manual, TM 55-2350-267-14.

3.4.1.9.3 Loading for military shipment. Guidance for all modes of military shipments is provided by the vehicle's transportability guidance technical manual (see TM 55-2350-267-14).

3.4.2 Special requirements. Special requirements for processing shall be of the specified level of protection (see 6.2). Special requirements for Level A shall be as specified in 3.4.2.1. Special requirements for Level B shall be as specified in 3.4.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.2.1 Level A. When Level A processing is specified, the following special procedures and operations are required:

3.4.2.1.1 Fuel system. After completion of all actions that require fuel system operation, the fuel system shall be processed for Level A. Preservation material for fuel system processing shall be in accordance with grade 10W of MIL-L-21260. Oil soluble red dye conforming to MIL-D-81298 shall be dissolved in the preservative when processing the combustion chambers of the main engine and auxiliary power unit for first article inspection. Procedures and operations shall be in accordance with the sequence of steps described below:

a. Fuel tank.

1. Fuel tank shall be drained by removing the access cover and fuel drain plug located under front of the vehicle (see Figure 7).
2. Fuel tank cap and filler screen shall be removed and coated with lubricating oil conforming to grade 30 of MIL-L-21260.
3. One quart of preservative oil conforming to grade 10 of MIL-L-21260 shall be atomizer sprayed into the lower fuel tank through the fuel drain plug. Reinstall plug and access cover.
4. One quart of grade 10 of MIL-L-21260 shall be atomizer sprayed into the upper fuel tank. Reinstall the filler screen and fuel tank cap.

b. Engine.

1. Prepare the preservative container assembly (see Figure 1). Position the selector valve to "OFF". Preservative conforming to grade 1 of MIL-P-46002 (and dye conforming to MIL-D-81298 in a sufficient quantity to impart a marked coloring to the fuel) shall be added to one compartment.
2. Disconnect the fuel supply line from the fuel filter at the inlet adapter (see Figure 8). Connect the preservative container assembly to the fuel filter (see Figure 8).
3. Drain the fuel filters and fill with preservative oil.
4. Disconnect the engine fuel return line at the quick-disconnect to the vehicle's quick-disconnect coupler (see Figure 8). Insert the end of the recovery line into a recovery container.
5. Position the selector valve on the preservative container assembly for flow of preservative.
6. Start and run the engine until remaining diesel is flushed from the fuel lines and the engine is using preservative as fuel. Continue until 2.5 gallons are collected from the recovery line in the recovery container. Dispose off fuel mixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

c. Engine combustion chambers.

1. Allow main engine to cool to ambient temperature.
2. The hose shall be removed at air inlet housing (see Figure 8). Restrict the air flow to the engine.
3. Crank engine for 20 seconds only (engine may fire briefly).
4. Allow starter to cool for 10 minutes.
5. Repeat steps 3 and 4 until approximately one quart of preservative oil is collected in the recovery container or until three repetitions of steps 3 and 4 are completed.
6. Position the selector valve of the preservative container assembly to "OFF". Disconnect the preservative container assembly from the fuel filter. Reassemble the fuel supply line to the primary fuel filter.
7. Disconnect the preservative return line at the quick-disconnect coupling and reassemble the fuel return line.

d. APU combustion chambers.

1. Disconnect the fuel supply line from the secondary filter outlet at the quick-disconnect coupling (see Figure 9). Connect the preservative container assembly to the fuel supply line using nipple 7388571 and coupler E150-1-12-2-1-B.
2. Position the selector valve on the preservative container assembly for flow of preservative. Restrict air flow to the APU engine with air restrictor boot. Crank engine for 20 seconds only (engine may fire briefly).
3. Allow starter to cool for 10 minutes.
4. Repeat steps 2 and 3 until approximately 1/2 to 1 pint is collected in the recovery container and until 5 repetitions of steps 2 and 3 are completed.
5. Position the selector valve of the preservative container to "OFF". Disconnect the preservative container assembly from the fuel supply line. Reassemble the fuel supply line to the secondary filter outlet.
6. Disconnect the transparent plastic return line. Reassemble the fuel return line.

e. Heater fuel lines.

1. Disconnect the fuel supply line from the heater fuel pump at the quick-disconnect coupling (see Figure 6). Connect the preservative container assembly to the fuel pump using coupler 8675112 and nipple 10866592.
2. Position a recovery container at the heater bleed valve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3. Position the selector valve on the preservative container assembly for flow of preservative. Open the heater bleed valve. Run the heater fuel pump by applying 24 volts (V) direct current (dc) from the auxiliary power supply until one quart is collected in the recovery container.

3.4.2.1.2 Oil level gage rod opening. After preservation of the fuel system and combustion chamber, the oil level gage rod shall be removed. Six ounces of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomizer sprayed into the crankcase through the oil level gage rod opening. An extension of sufficient length to permit the spray nozzle to be within the crankcase shall be used. The spray nozzle shall not be submerged in crankcase oil. After spraying has been accomplished, oil level gage rod shall be reinstalled. The oil level gage rod and the oil filler cap shall be sealed with tape conforming to type II of MIL-T-22085.

3.4.2.1.3 Air intake and exhaust openings. After the hose has been disconnected from the air inlet housing, one ounce of preservative oil conforming to grade 30 of MIL-L-21260 shall be atomizer sprayed into the air intake opening. The hose shall be reconnected to the air intake opening. After preservation of the fuel system, one ounce of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomizer sprayed into the engine exhaust opening. Remove APU air cleaner cover and filter element, and atomizer spray one ounce of preservative oil conforming to grade 30W of MIL-L-21260 through air intake tube. The air intake and exhaust openings shall be closed with tape conforming to type II of MIL-T-22085. The following deprocessing instruction shall be marked on DA form 2258: "REMOVE TAPE FROM EXHAUST OPENING BEFORE STARTING ENGINE".

3.4.2.1.4 Batteries, cables, and retainers.

3.4.2.1.4.1 Battery supports and retainers. Battery lugs supports, retainers, and hardware shall be coated with silicone grease compound conforming to MIL-S-8660.

3.4.2.1.4.2 Dry charged batteries and cables. Dry charged batteries (electrolyte) shall be installed in the vehicle battery carrier. Remove the screw caps from the batteries and place a plastic sheet conforming to MIL-B-22191 over the top. The caps shall be screwed back down, entrapping the barrier. Battery cables shall be secured to the battery carrier with 3/4 inch wide tape conforming to type IV of PPP-T-97.

3.4.2.1.4.3 Electrolyte. The electrolyte shall be packaged, packed and marked in accordance with O-S-801 (see table III). The packed electrolyte shall be stowed within the vehicle and be independently secured to permit separate removal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.2.1.5 Air Breather on engine heads. Disconnect the air breather hoses on the engine heads (see Figure 8) and apply tape conforming to type II of MIL-T-22085. Reconnect the air breather hoses. The following deprocessing instructions shall be marked on DA Form 2258: "REMOVE TAPE COVERING AIR BREATHER ENGINE HEADS BEFORE STARTING ENGINE."

3.4.2.1.6 Closure kit. When specified (see 6.2), a closure kit shall be supplied in accordance with closure kit installation 12351448. Items removed for installation of the closure kit shall be processed as specified in Tables I and II. Unpainted, ferrous surfaces exposed for installation of the closure kit shall be coated with preservative conforming to grade 4 of MIL-C-16173.

3.4.2.2 Level B. When Level B processing is specified, the following special procedures and operations are required:

3.4.2.2.1 Fuel system preservation. The fuel system shall be prepared for vehicle operation. Unless otherwise specified, the fuel tank shall be filled with 40 gallons of diesel fuel conforming to the selected seasonal grade of VV-F-800 (see 6.2). Fuel additive MIL-S-53021 shall be added to the fuel to prevent microbiological growth in the fuel system.

3.4.2.2.1.1 Special fuel volume requirement. When specified, an increased or decreased volume of fuel shall be placed in the fuel tank (see 6.2). Fuel additive MIL-S-53021 shall be added to the fuel to prevent microbiological growth in the fuel system.

3.4.2.2.2 Air intake and exhaust. The air intake and exhaust openings shall be prepared for vehicle operation. The exhaust system shall not be sealed. All breathers shall be open.

3.4.2.2.3 Battery, cables, and retainers. Batteries, cables, and retainers shall be installed for vehicle operation. Batteries shall be installed with electrolyte and be fully charged.

4. VERIFICATION

4.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance Inspections (see 4.3).

4.2 First article inspection. When required (see 3.1), first article inspection shall be performed at the contractor's facilities or at other facilities acceptable to the Government on sample vehicles processed with materials, equipment, procedures, and operations normally used in production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.2.1 Sample. One of the first 10 production vehicles processed to each level of protection shall be subjected to first article inspection. Each sample processed vehicle shall have been subjected to and shall have passed the requirements of quality conformance inspection (see 4.3).

4.2.2 Inspection routine. Sample vehicles shall be inspected in accordance with 4.3 for conformance to the requirements of Table IV. First article inspection vehicles, properly marked with identifying information, shall be representative of vehicles to be furnished to the Government. All subsequent processed vehicles delivered to the Government shall conform to the respective sample in all pertinent physical and performance attributes.

4.2.3 Failure. Failure of a sample processed vehicle to meet conformance inspection requirements or failure of a sample processed vehicle to meet first article inspection requirements specified in Table IV shall be cause for rejection. Acceptance of first article shall not be granted until objective evidence is shown that the contractor has corrected the condition(s) causing failure.

4.3 Conformance inspection. Conformance inspection shall be performed at the contractor's facilities or at other facilities acceptable to the Government on each lot of processed vehicles.

4.3.1 Inspection lot. The inspection lot shall be defined as one vehicle and shall consist of each vehicle processed to the specified level of protection.

4.3.2 Inspection routine. Each processed vehicle shall be subjected to the quality conformance inspection in Table IV. Equipment, materials, procedures, and operations shall be monitored for conformance.

4.3.2.1 Monitoring of equipment. Processing equipment shall be identified and inspected monthly or at the beginning of each vehicle processing to ensure proper operation.

4.3.2.2 Monitoring of material. Each material shall be identified and inspected monthly or at the beginning of each vehicle processing to ensure conformance to the material specification requirements. Materials that have been government inspected at the source and materials that have been previously certified shall require monitoring only if subject to deterioration or contamination.

4.3.2.3 Monitoring of procedures and operations. Procedures and operations shall be reviewed periodically to ensure conformance with prescribed procedures and operations. Records of personnel training for vehicle processing and records of personnel certified to prepare hazardous material shipments shall be reviewed periodically to ensure adequate current training and certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.3.3 Rejection. Failure of a processed vehicle to meet conformance inspection requirements or failure of a processed vehicle to conform to the applicable requirements of this specification shall be cause for rejection. If a processed vehicle is rejected, the contractor may rework it to correct the defects and then resubmit it for inspection. The former rejection or requirements for correction shall be disclosed with the resubmittal for inspection.

4.4 Methods of inspection.

4.4.1 First article inspection of Level A fuel system processing. For first article inspection, the fuel system, including the fuel lines, fuel pumps, main engine, auxiliary power unit, and personnel heater shall be disassembled to the extent necessary to permit visual examination of preserved surfaces. Exposed surfaces shall have a coating of preservative. Oil soluble red dye conforming to MIL-D-81298 shall be dissolved in the preservative to permit visual examination of preserved combustion chambers.

4.4.2 First article inspection of COEI, BII, and disassembled items. For first article inspection, the method of preservation for COEI, BII, and disassembled items shall be inspected in accordance with MIL-P-116. Inspection of the methods of preservation shall include cleaning, preservation, packaging and marking. Cyclic exposure testing shall not apply. Rough handling testing shall apply only to exterior containers.

4.4.2.1 Conformance inspection of COEI, BII, and disassembled items processing. For conformance inspection, the method of preservation for BII and COEI shall be inspected in accordance with the quality assurance provisions specified in MIL-P-116. Inspection of the methods of preservation shall include cleaning, preservation, packaging, and marking. Inspection of the methods of preservation shall not include cyclic exposure testing and rough handling testing.

4.4.3 Conformance inspection of processing. The vehicle processing shall be inspected visually for conformance to the requirements listed in table IV. The cooling system processing shall be tested using a hydrometer conforming to MIL-T-37402.

4.5 Inspection conditions and precautions.

4.5.1 Conditions. Unless otherwise specified (see 6.2), all inspections shall be conducted under the following conditions:

a. Air temperature 73 $\pm$ 18°F
b. Barometric pressure 28.5 + 2.0 inches of mercury
   - 4.5 inches of mercury
c. Relative humidity 50 $\pm$ 30 percent

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.5.2 Precautions. Care should be taken to ensure that the maintenance switch on the Automatic Fire Extinguishing System (AFES) is in the "OFF" position before inspection.

TABLE IV. First article and quality conformance inspection.

INSPECTION	REQUIREMENT PARAGRAPH	INSPECTION METHOD PARAGRAPH
First Article Inspection:		
Fuel System (Level A) Preservation	3.4.2.1.1	4.4.1
COEI/BII/disassembled Item Packaging	3.4.1.4	4.4.2
COEI/BII/disassembled Item Stowage	3.4.1.7.1	4.4.2
Conformance Inspection:		
Disassembly	3.4.1.1	4.4.3
Cleaning and Drying	3.4.1.2	4.4.3
Preservation	3.4.1.3	4.4.3
Packaging	3.4.1.4	4.4.2.1/4.4.3
Packing	3.4.1.5	4.4.3
Marking	3.4.1.6	4.4.3
Stowage	3.4.1.7	4.4.3
Closure	3.4.1.8	4.4.3
Loading	3.4.1.9	4.4.3

5. PACKAGING. This section is not applicable to this specification.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This document specifies processing of the Carrier, Cargo, Tracked, 22-ton, Ammunition for shipment and storage. This document is cited in a contract or purchase order to obtain protection from known or anticipated conditions of shipment, handling, and storage.

6.1.1 Use of Level A, maximum protection. Maximum protection, called Level A, is processing for the most severe conditions of shipment, handling, and storage. Maximum protection should be applied to protect vehicles where the period of shipment, handling, and storage will exceed 90 days from the date of processing. Level A protection should be applied to Support Agreement (SA) customers except when a lower level of protection is designated in accordance with AR 746-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

6.1.2 Use of Level B, intermediate protection. Intermediate protection, called level B, is precessing for known favorable conditions of shipment, handling, and storage. Intermediate protection should be applied when Level A protection is not required and when the period of shipment, handling, and storage will not exceed 90 days from the date of processing. Level B protection should be applied for domestic shipment and known favorable overseas shipment excluding marine deck loading. level B protection shall be applied for domestic shipment to CONUS storage activities and for short term open storage or long term covered storage in accordance with AR 700-15.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.
b. Applicable level(s) of protection (see 1.2 and 3.4.2).
c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.2.1).
d. If first article provisions are required (3.1).
e. The mode(s) of transport and transportability guidance if shipment by special transport mode is required (3.4.1.1.2).
f. If vehicle surfaces and components shall be preserved other than as specified (see 3.4.1.3).
g. In preparation of the cooling system for shipment and storage if a tropic or arctic environment is required (see 3.4.1.3.8, 3.4.1.3.8.1, and 3.4.1.3.8.2).
h. If commander's cupola and adapter ring shall be removed (see 3.4.1.3.12).
i. If packaging or packing of COEI and BII shall be other than as specified (see 3.4.1.4 and 3.4.1.5).
j. If special marking is required (see 3.4.1.6).
k. If a closure kit is required (see 3.4.2.1.6).
l. If an increased or decreased volume of fuel is required (see 3.4.2.2.1.1).

6.2.1 Safety precaution. Caution should be exercised in handling fire extinguisher cylinders. Cylinders should not be dropped, permitted to strike each other, or handled roughly. Extreme care should be exercised during the reinstallation operation to avoid tripping the fire extinguisher control system (see 3.4.1.3.11).

6.3 Definitions.

6.3.1 Packaging. The application or use of adequate protective measures to prevent deterioration including, as applicable, the use of appropriate cleaning procedures, preservatives, protective wrappings, cushioning, containers, and complete identification marking.

Source: https://assist.dla.mil - Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

6.3.2 Solid waste. "Solid waste" is (a) any garbage, refuse, or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, mining, commercial, and agricultural operations and from community activities. Solid waste does not include solid or dissolved material in domestic sewage; solid or dissolved material in irrigation return flows or industrial discharges that are point sources subject to permits under section 402 of the Clean Water Act (33 U.S.C. 1342 et seq.); or source, special nuclear, or by-product material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.). (Source: Federal Acquisition Regulations, section 23.402)

6.3.3 Unit Package. The first tie, wrap, or container applied to a single item, or multiple thereof, or to a group of identical items, that provides a complete and properly identified package.

6.3.4 Recovered materials. "Recovered materials" means material that has been collected or recovered from solid waste (see 6.3.2).


6.4 Forms. A copy of the equipment logbook and all required forms shall be furnished to the contractor by the Government at least 30 days before shipment of the equipment as required by the contract delivery schedule.

6.5 Subject term (key word) listing.


Air restrictor boots
Atomizer
Basic Issue Items (BII)
Carrier, Cargo, Tracked, 22-Ton, Ammunition
Closure
Components of End Item (COEI)
Container
Disassembled
Loading
Packaging
Preservation
Stowage

6.6 Recycled materials. The use of recycled materials which meet the requirements of the applicable material specification without jeopardizing the intended use of the item shall be encouraged (see 3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

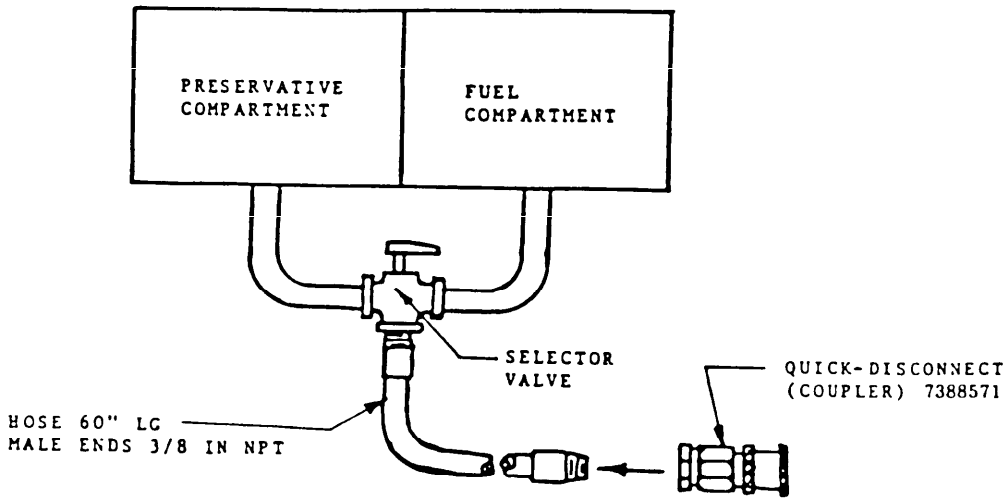

Preservative container

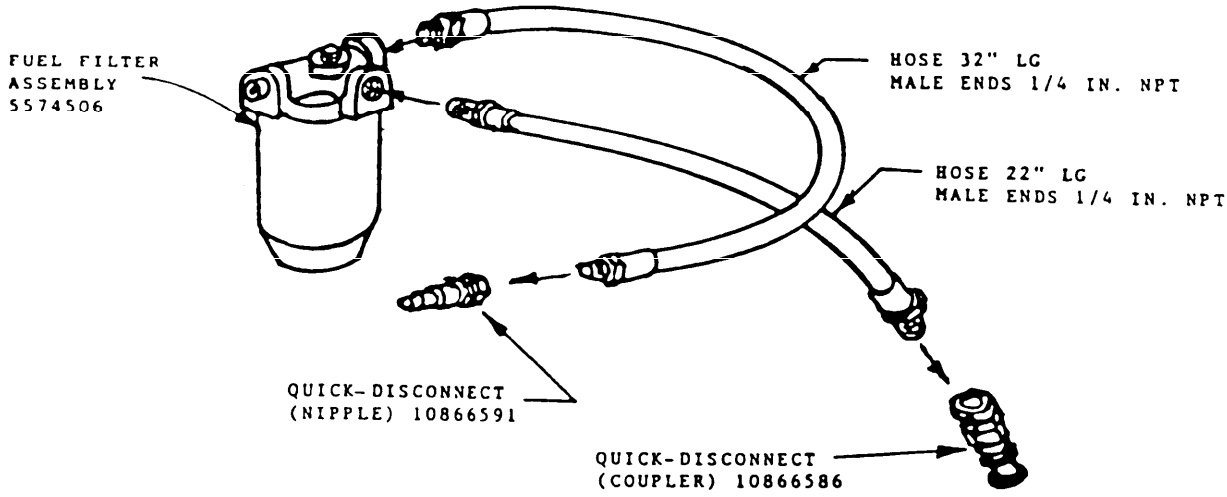

Filter assembly.

FIGURE 1. Preservative container assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

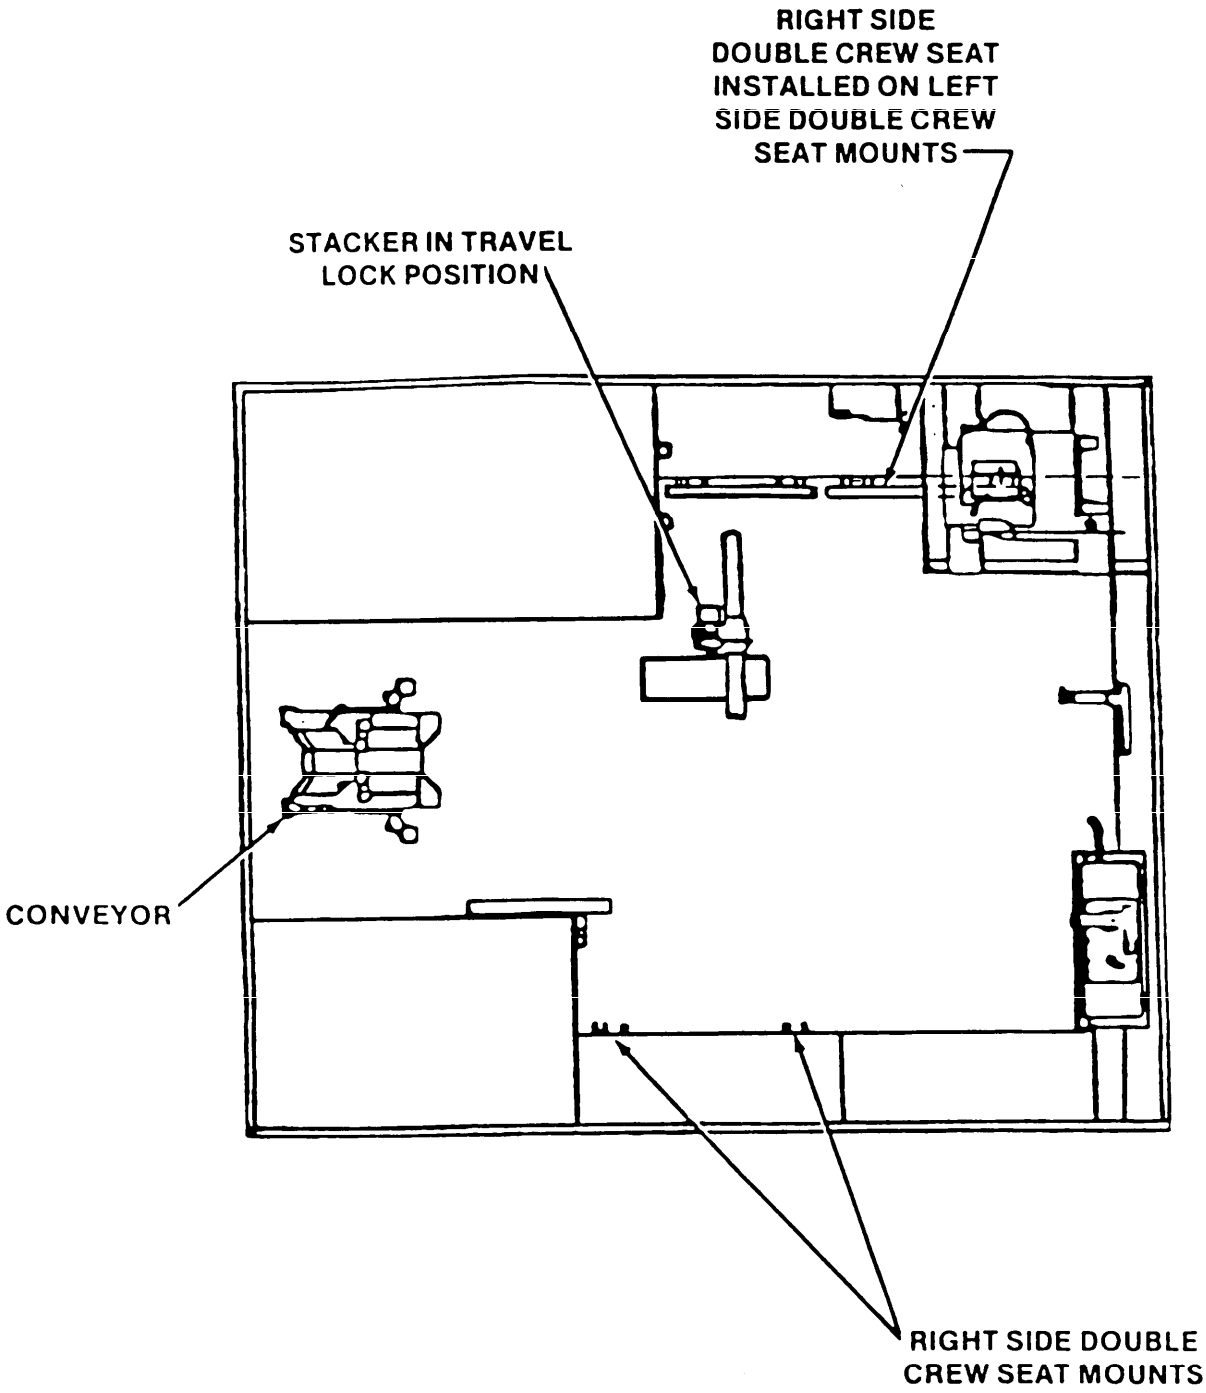


FIGURE 2. Interior top view stowage of stacker and conveyor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

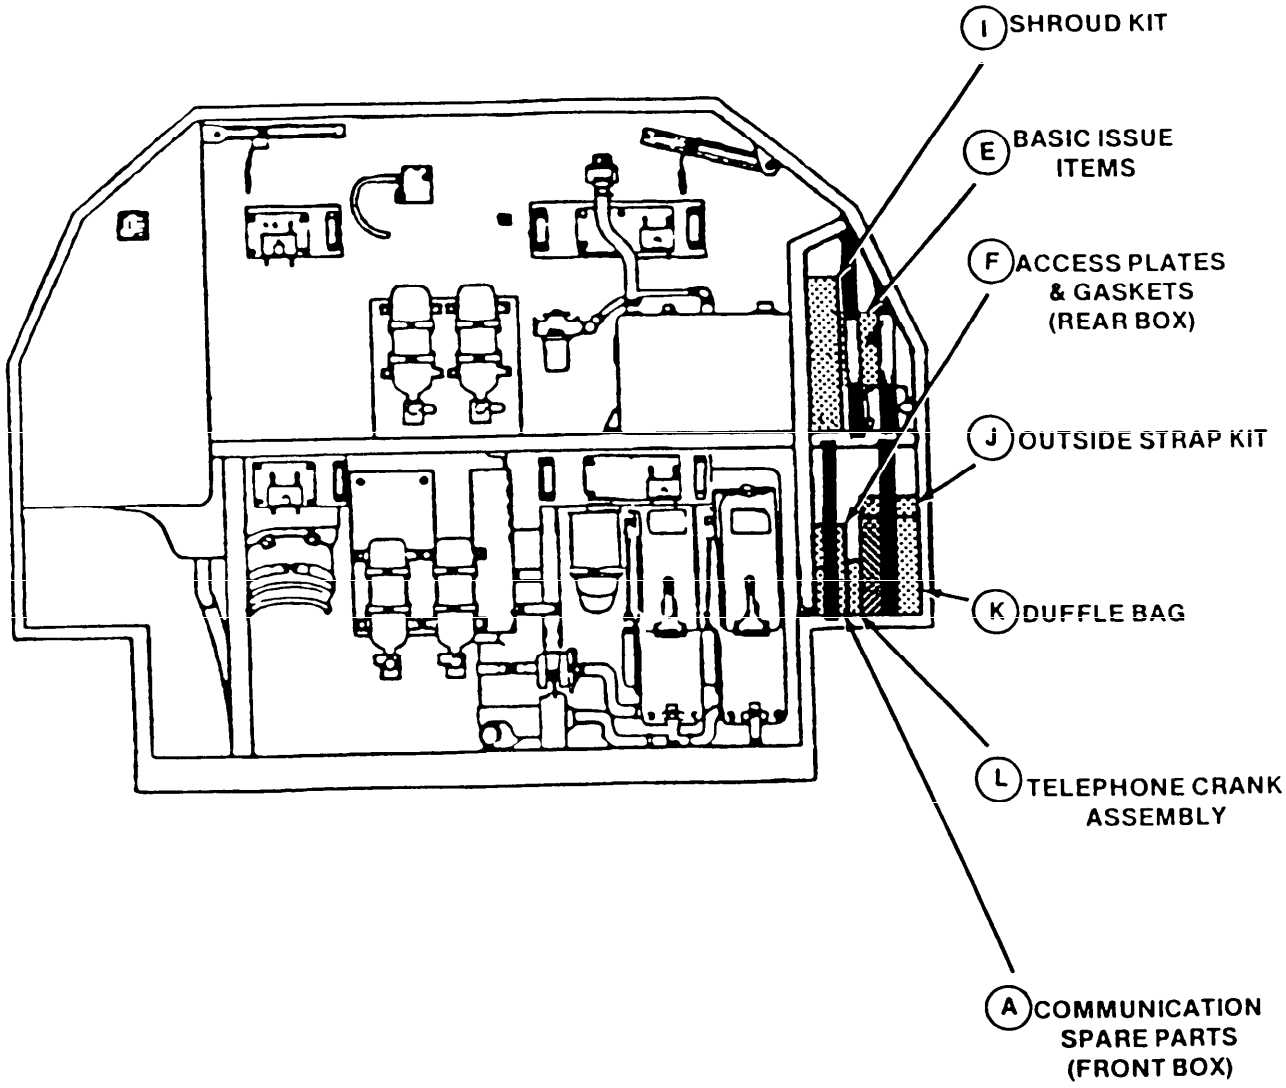


FIGURE 3. Interior front view stowage locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

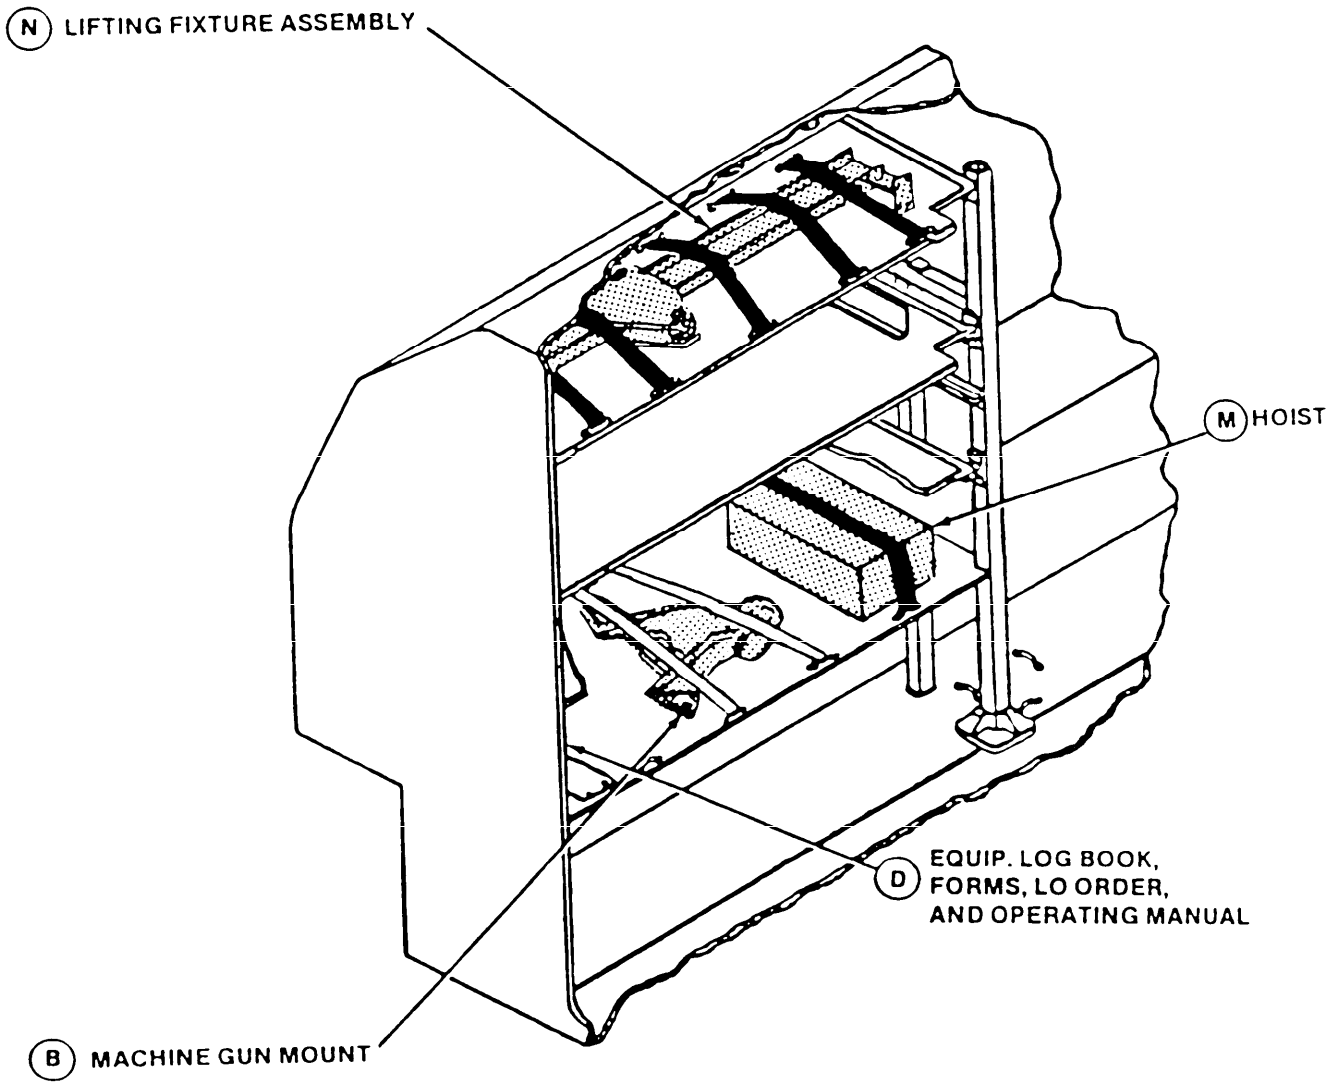


FIGURE 4. Interior left side view stowage locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

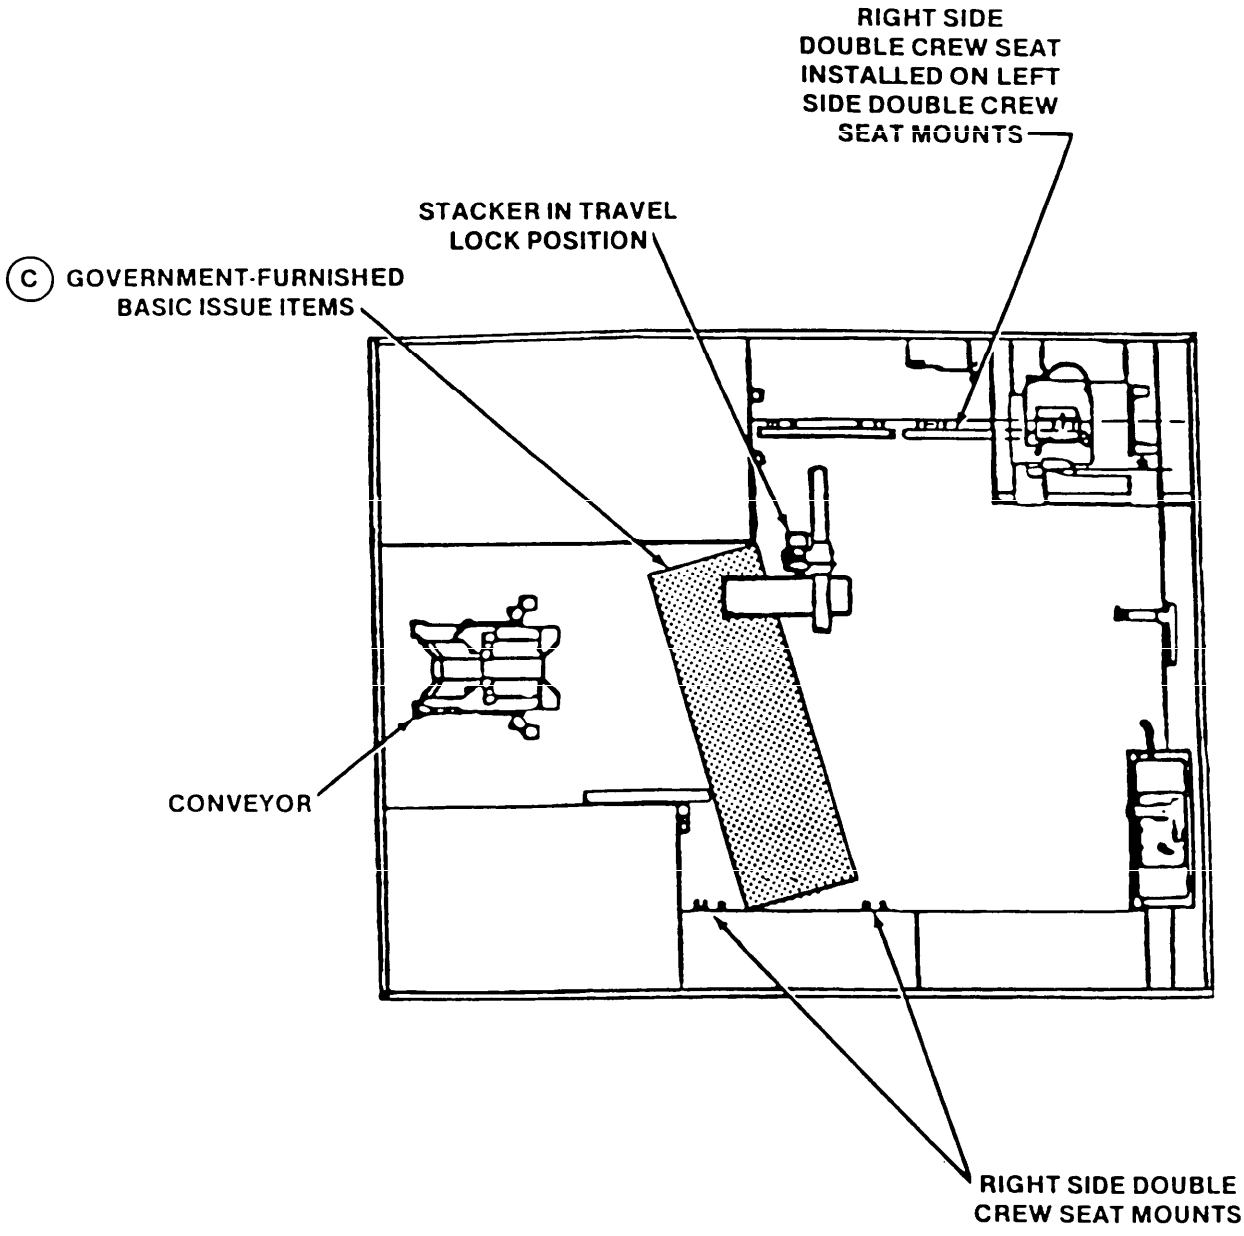


FIGURE 5. Interior top view stowage locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

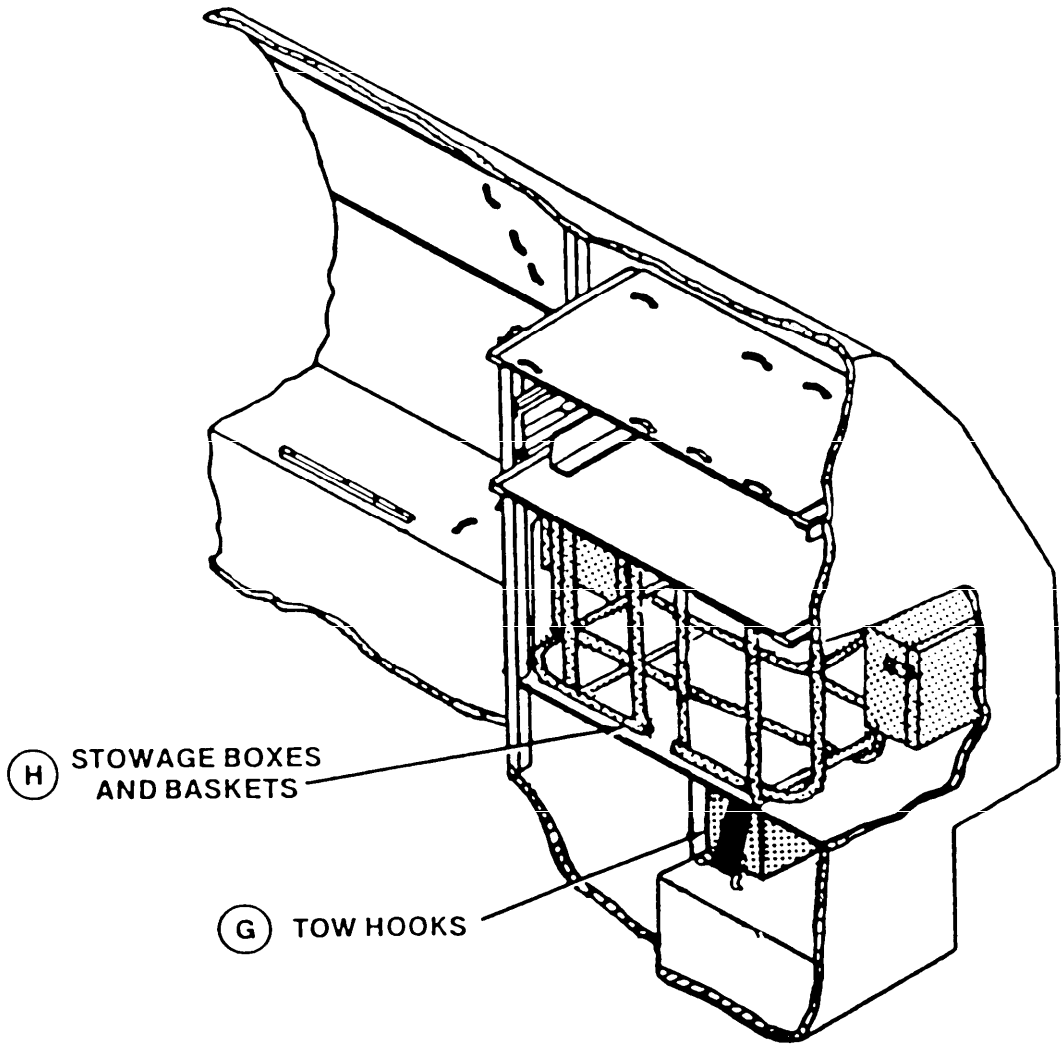


FIGURE 6. Interior right side view stowage locations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

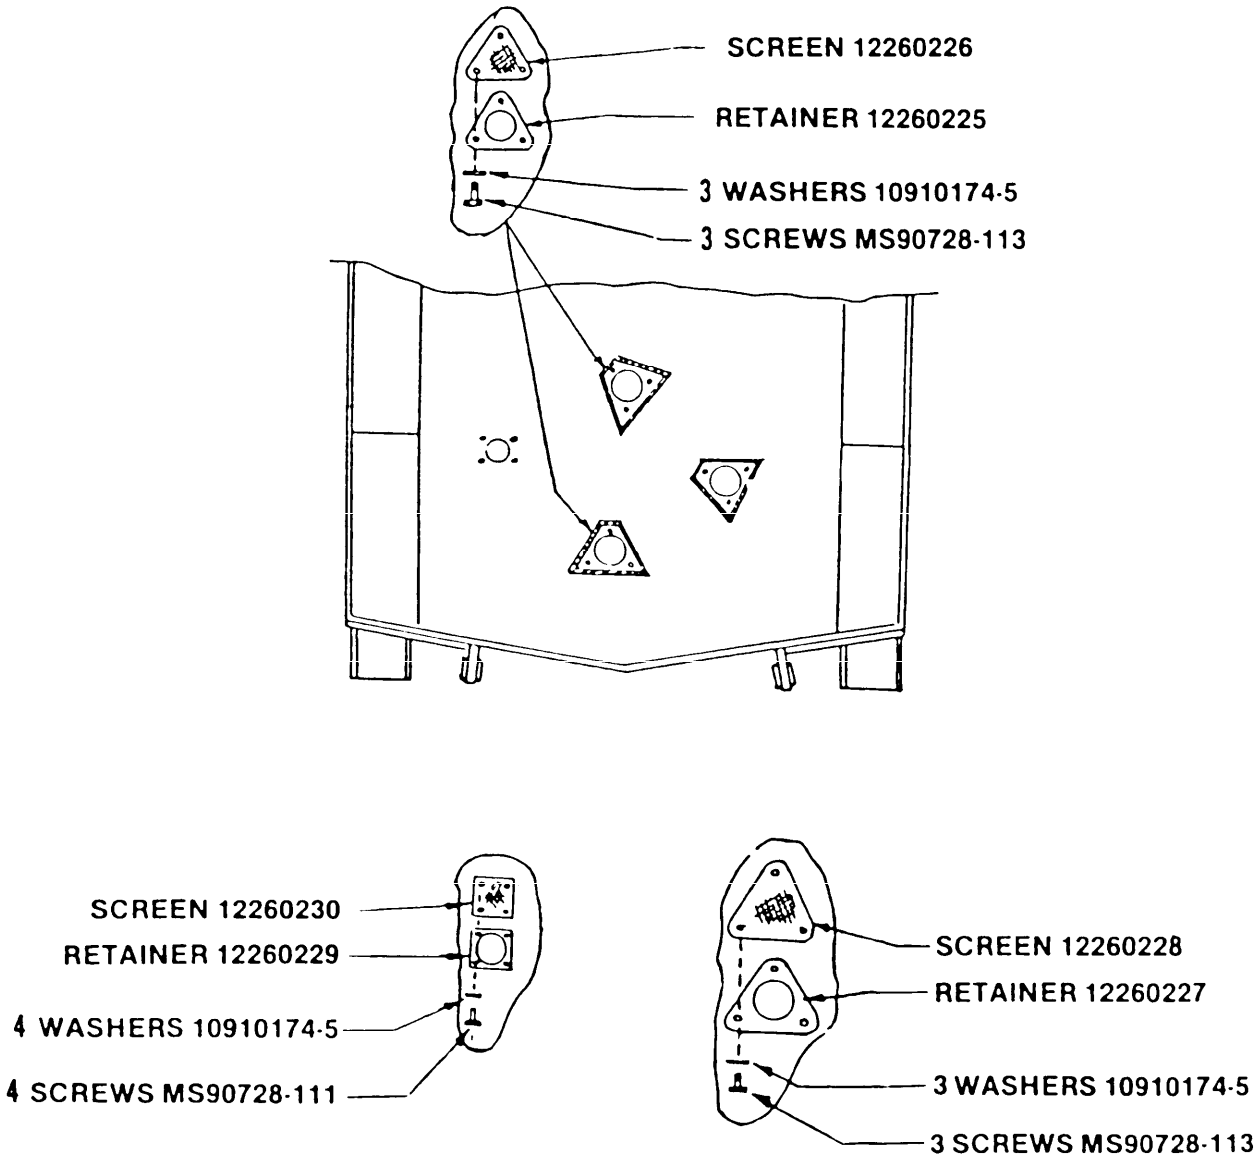


FIGURE 7. View of vehicle underside ventilation kit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

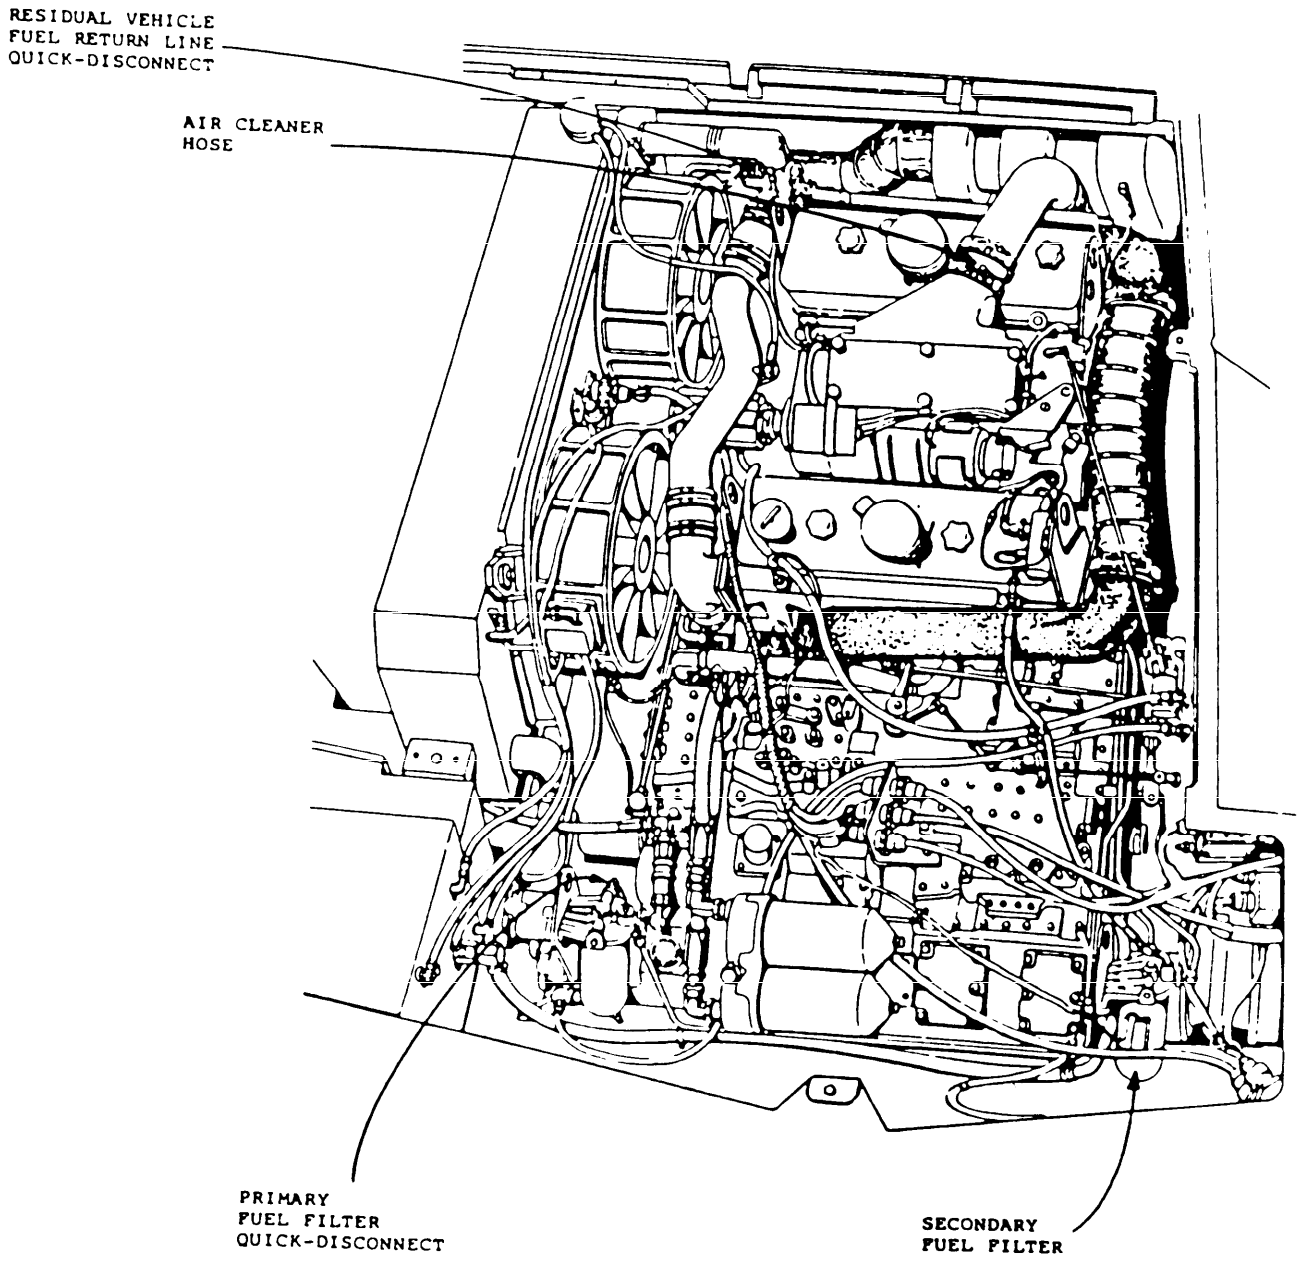
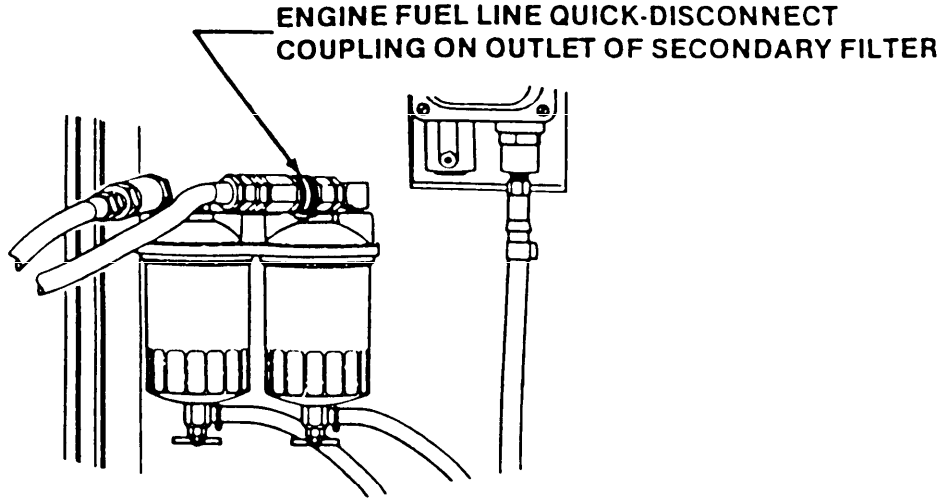


FIGURE 8. Engine compartment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.



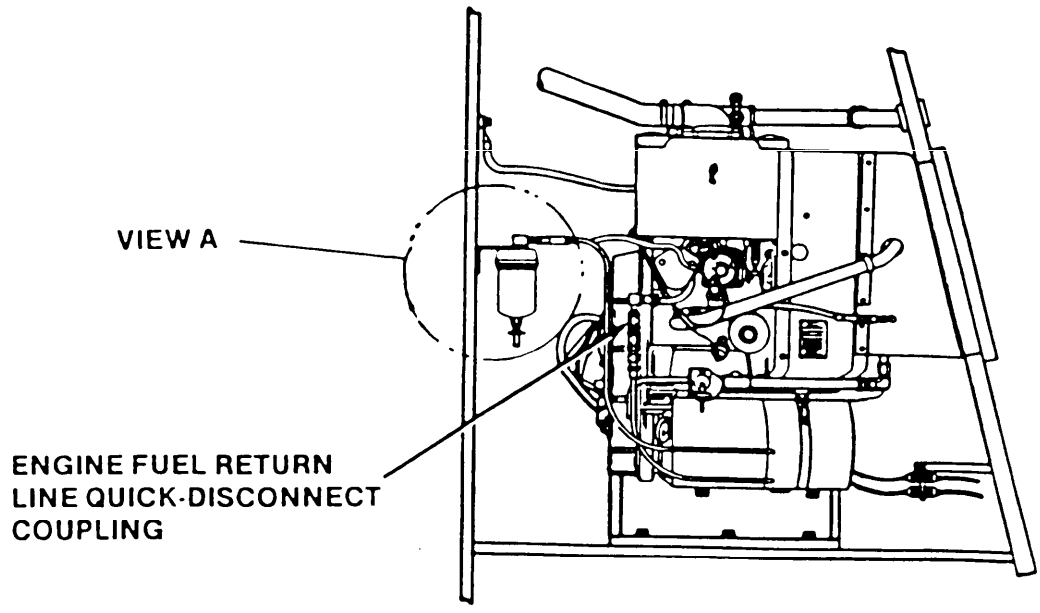


FIGURE 9. APU compartment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

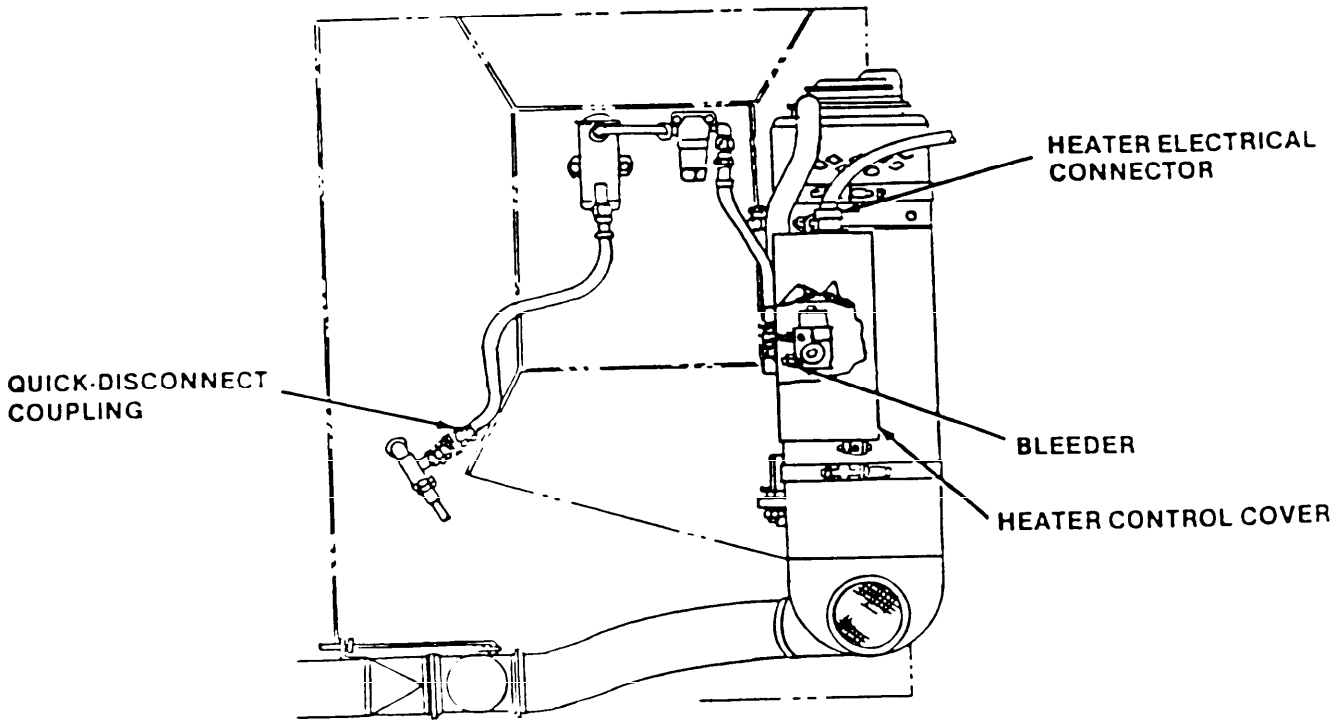


FIGURE 10. Heater

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AT

PREPARING ACTIVITY:
Army - AT

(Project PACK-A391)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-DTL-62533A(AT)	2. DOCUMENT DATE (YYMMDD) 950616

3. DOCUMENT TITLE Carrier, Cargo, Tracked, 22-Ton, Ammunition Medium: M992/A1/A2; Processing for Storage and Shipment of

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME AMSTA-TR-T	b. TELEPHONE (Include Area Code) (1) Commercial: (810) 574-5508 (2) AUTOVON: 786-5508
c. ADDRESS (Include Zip Code) U.S. Army Tank-automotive and Armaments Command, Attn: AMSTA-TR-T Warren, MI 48397-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.