INCH-POUND

MIL-E-62484C(AT)
25 January 1990
SUPERSEDING
MIL-E-62484B(AT)
8 November 1985

MILITARY SPECIFICATION

EARTHMOVER, ARMORED COMBAT, M9
PROCESSING FOR SHIPMENT AND STORAGE OF

This specification is approved for use by U.S. Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers processing of the Earthmover, Armored Combat, M9 for domestic and overseas shipment and storage.

1.2 Classification. Processing shall be of the following levels of protection (see 3.4.2 and 6.2).

Level A: Maximum protection. Maximum protection, called Level A, is processing for domestic and overseas shipment and any outside storage in excess of 90 days from the date of processing (periodic care and additional preservation is required during storage).

Level B: Intermediate protection. Intermediate protection, called Level B, is processing for immediate use shipment and for domestic and overseas shipment (excluding open deck loading) and for any storage not to exceed 90 days from the date of processing.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A AREA PACK

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-883	- Tape, Pressure Sensitive Adhesive, Masking.
O-S-576	- Sodium Bicarbonate, Technical.
P-D-220	- Detergent, General Purpose.
P-D-680	- Dry Cleaning Solvent.
GG-T-250	- Tester, Antifreeze Solutions.
NN-P-71	- Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way.
NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel and Seals.
RR-W-360	- Wire Fabric, Industrial.
UU-P-268	- Paper, Kraft, Wrapping.
VV-F-800	- Fuel Oil, Diesel.
MMM-A-260	- Adhesive, Water-Resistant.
NNN-P-40	- Paper, Lens, Tissue.
PPP-T-60	- Tape, Packaging, Waterproof.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.
PPP-B-601	- Boxes, Wood, Cleated Plywood.
PPP-B-621	- Box, Wood, Nailed and Locked Corner.
PPP-B-636	- Box, Shipping, Fiberboard.
PPP-C-1752	- Cushioning Material, Packaging, (Unicellular Polyethylene Foam, Flexible).

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-117	- Bags, Sleeves and Tubing - Interior Packaging.
MIL-B-121	- Barrier Material, Grease Proofed, Waterproofed, Flexible.
MIL-C-450	- Coating-Compound, Bituminous Solvent Type, Black (for Ammunition).
MIL-L-2105	- Lubricating Oil, Gear, Multipurpose.
MIL-C-5501	- Cap and Plug, Protective, Dust And Moisture Seal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

MIL-G-10924	- Grease, Automotive and Artillery.
MIL-B-12841	- Basic Issue Items for Military Vehicles, Carriages And Equipment, Preparation For Shipment And Storage Of.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold-Application.
MIL-D-16791	- Detergent, General Purpose (Liquid, Nonionic).
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative And Break-in.
MIL-T-22085	- Tape, Adhesive, Preservation And Sealing.
MIL-P-46002	- Preservative Oil, Contact and Volatile Corrosion-Inhibited.
MIL-A-46153	- Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package.
MIL-T-50036	- Talc, Technical, T1 and T3.
MIL-D-81298	- Dye, Liquid, For The Detection of Leaks in Aircraft Fuel Systems.

STANDARDS

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-731	- Quality of Wood Members for Containers and Pallets.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MIL-STD-45662	- Calibration System Requirements.
MS3367	- Strap, Tiedown, Electrical Components.
MS21316-56	- Thumbscrew (Shouldered), Flat Point, Carbon Steel, Cadmium.
MS51525	- Adapter, Straight, Tube to Boss.
MS51850-64	- Screw, Tapping - Thread Forming, Type AB, Hexagon Head, Slotted.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF TRANSPORTATION (DOT)

Hazardous Materials Regulations.

(Applications for copies should be addressed to the Department of Transportation, Hazardous Materials Regulations Board, Washington, DC 20590.)

DRAWINGS

ARMY

12331969	- Window.
12331973	- Strip.
12335057	- Window.
12357232-2	- Coupler, Quick Disconnect.
12357237-2	- Nipple, Quick Disconnect.
12362119	- Cover, Canopy.
12362126	- Support, Canopy.
12362132	- Window.
12362135	- Installation, Canopy.
12362136	- Strip.
12362137	- Strip.
13211E9018-8	- Elbow, Tube to Boss.
13211E9579	- Support, Canopy.
13214E2478	- Hose Assembly.

PUBLICATIONS

LUBRICATION ORDER

LO 5-2350-262-12	- Armored Combat Earthmover (ACE)

TECHNICAL MANUALS

TM 5-2350-262-10	- Operator's Manual for Armored Combat Earthmover (ACE), M9.
TM 5-2350-262-10-HR	- Hand Receipt Covering Content of Components of End Item (COEI), Basic Issue Item (BII), and Additional Authorization List (AAL) for Armored Combat Earthmover (ACE), M9.
TM 55-2350-262-14	- Transportability Guidance, M9.

(Copies of drawings, publications, and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

ASSOCIATION OF AMERICAN RAILROADS

Section No. 6 - Rules Governing the Loading of Department of Defense Material on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 1920 L Street N.W., Washington, DC 20036.)

(Non-Government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specification, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified, one of the first 10 production processed vehicles shall be subjected to first article inspection (see 4.3 and 6.2). A separate processed vehicle shall be subjected to first article inspection for each level of protection specified. First article inspection vehicles, properly marked with identifying information, shall be representative of vehicles to be furnished to the Government. All subsequent processed vehicles delivered to the Government shall conform to the respective sample in all pertinent physical and performance attributes. The Government representative shall select the vehicle(s) to be inspected.

3.2 Equipment. Equipment for processing of the vehicle shall be as specified herein. Equipment not specified herein shall be selected which is sufficient and safe when used for the intended purpose.

3.2.1 Preservative container assembly. A preservative container assembly shall be provided for Level A processing of the fuel system (see figure 1).

3.2.1.1 Preservative container. A preservative container with valves for flow regulation, fittings and a hose with a fitting for connection to the filter assembly shall be provided for Level A processing of the fuel system (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.2.2 Air restrictor plate. An air restrictor plate shall be provided for use in processing of the fuel system and combustion chambers for Level A. The air restrictor plate shall be sufficient to prevent the flow of air at the engine air intake (see figure 2).

3.2.3 Atomizer. An atomizer shall be provided for Level A processing of lubricant gage openings, air intake opening and exhaust opening.

3.3 Materials. Materials used for processing for the vehicle shall be selected which are sufficient and safe when used for the intended purpose.

3.3.1 Recycled, virgin and reclaimed materials. There are no requirements for the exclusive use of virgin materials. The use of recycled or reclaimed (recovered) materials is acceptable provided that all other requirements of this specification are met (see 6.3.2).

3.3.2 Detergent solution. Detergent for cleaning of non-critical surfaces shall be in accordance with P-D-220. Detergent shall be in solution with clean water.

3.3.3 Preservatives. Preservative for fuel system processing (Level A) shall be in accordance with grade 10W of MIL-L-21260. Preservative for coating, exterior unpainted, unplated, ferrous surfaces shall be in accordance with grade 4 of MIL-C-16173. Interior component surfaces shall be preserved with the operational fluids and lubricants specified in LO 5-2350-262-12. Preservative for the battery box shall conform to composition G, Type II of MIL-C-450.

3.3.3.1 Preservative dye. When first article provisions are required by the procuring activity, an oil soluble red dye conforming to MIL-D-81298 shall be added to the preservative oil used for fuel line processing. The concentration of dye shall be sufficient to impart a marked coloring of the oil. Preservative dye shall be used for first article and as required for inspection only (see 3.5).

3.3.4 Wraps and barrier material. Barrier material and wraps for packaging shall be in accordance with Type II, Grade A, Class 2 of MIL-B-121.

3.3.5 Bags. Bags shall conform to Style 2, Type I, Class B (6 MIL) of MIL-B-117 for preservation of items in accordance with Method IC of MIL-P-116.

3.3.6 Cushioning. Cushioning materials shall be in accordance with PPP-C-1752. Cushioning shall conform to MIL-STD-1186.

3.3.7 Blocking and bracing. Fiberboard material for blocking and bracing shall be in accordance with Type CF and Class WR of PPP-F-320, the domestic class of fiberboard may be used within bags in lieu of the water-resistance class. Lumber for blocking and bracing shall be in accordance with MIL-STD-731. Plywood shall be in accordance with NN-P-530. All blocking and bracing shall conform to MIL-STD-1186.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.8 Containers. Fiberboard boxes for unit packaging shall be in accordance with Type CF and Class WR of PPP-B-636. The domestic class of box may be used within bags in lieu of the weather-resistance class. Boxes for exterior packing and stowage shall be in accordance with overseas types of PPP-B-601 or overseas types of PPP-B-621.

3.3.9 Tape and closure material. Tape shall be in accordance with Type II of MIL-T-22085. Containers shall be closed in accordance with closure requirements of the box specifications. Caps and plugs shall be in accordance with MIL-C-5501.

3.3.10 Ventilation screens. Ventilation screens (4 pieces) shall be provided for Level A and Level B processing of the vehicle (see figures 3, 4 and 5). Screens shall be constructed of galvanized wire fabric, 4 X 4 mesh conforming to Type I, Class 1 of RR-W-360.

3.4 Procedures and operations. Procedures and operations consist of general requirements and special requirements. General requirements shall apply to all levels of protection. Special requirements shall apply for the specified level of protection (see 3.4.2 and 6.2).

3.4.1 General requirements. DA Form 2258 shall be completed to record the preservation applied and deprocessing required for each vehicle. Completed forms shall be sealed within a bag conforming to Type I, Class B, Style 2 of MIL-B-117 and affixed within the drivers compartment.

3.4.1.1 Disassembly. Except as specified herein, each vehicle shall be prepared for shipment and storage in a completely assembled condition. Equipment shall be installed and all adjustments and repairs shall be completed to allow the vehicle to be operated and placed into service with a minimum of delay consistent with the specified level of protection.

3.4.1.1.1 Disassembly for normal transport. Unless otherwise specified (see 6.2), the items listed in tables I and II shall be removed from the vehicle. Disassembly shall be in accordance with the applicable technical manuals. Items removed from the vehicle for normal transport shall be configured for packaging, stowage, and securement aboard the vehicle.

3.4.1.1.2 Disassembly for special transport modes. When specified (see 6.2), additional disassembly shall be in accordance with the vehicles transportability guidance technical manual for the specified mode of transport (see TM 55-2350-262-14).

3.4.1.1.3 Disassembly for component processing. Components specified in tables I and II shall be disassembled for processing in accordance with the applicable technical manuals. Except as specified herein, selected components disassembled for processing shall be reassembled in accordance with the applicable technical manuals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE I. Preservation and Stowage of Components of End Item.

1. Components of End Item (COEI).			
IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	STOWAGE LOCATION FIGURE 7
3830-01-184-4776	Bit End, R. H.	I	A
3830-01-184-4775	Bit End, L. H.	I	A
12362135	Canopy (Kit)	See Note A Below	A
12367559-1	Extension, Apron, L. H.	I	A
12367559-2	Extension, Apron, R. H.	I	A
12367560-1	Extension, Dozer, L. H.	I	A
12367560-2	Extension, Dozer, R. H.	I	A
5305-01-194-3001	Screw, Cap, Hexagon (8)	IC-3	A
5310-00-809-8541	Washer, Flat (8)	IC-3	A
A. CANOPY ASSEMBLY INSTALLATION COMPONENTS:			
IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	
MS21316-56	Thumbscrew (2)	IC-3	
MS51850-64	Screw, Tapping (11)	IC-3	
MS51850-66	Screw, Tapping (1)	IC-3	
12331969	Window	III	
12331973	Strip	IC-3	
12335057	Window	III	
12362119	Cover, Canopy	III	
12362126	Support, Canopy	III	
12362132	Window	III	
12362135	Installation Drawing	IC-3	
12362136	Strip	IC-3	
12362137	Strip	IC-3	
13211E9579	Support, Canopy	III	

TABLE II. Preservation and Stowage of Disassembled Items Shipped with Vehicle.

Preservation and Stowage of Disassembled Items Shipped with the Vehicle.			
IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	STOWAGE LOCATION FIGURE 7
2540-00-065-1922	Arm, Windshield Wiper	IC-3	D
2540-01-183-6840	Blade, Windshield Wiper	IC-3	D
5340-01-183-8469	Cover, Access	I	E
5340-01-183-8468	Cover, Access	I	E
5340-01-183-8467	Cover, Access	I	E
5340-01-183-8466	Cover, Access	I	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.2 Cleaning and drying. Unless otherwise specified, each vehicle and each component item shall be cleaned in accordance with selected cleaning processes as specified in MIL-P-116. Materials, equipment, and processes shall be selected which are sufficient and safe when used for the intended purpose. Any item damaged by cleaning or drying shall be replaced or repaired.

3.4.1.2.1 Exterior of vehicle. Exterior surfaces of the vehicle shall be cleaned with a solution of water and detergent conforming to P-D-220, or Type I of MIL-D-16791. After cleaning, surfaces shall be rinsed with clean water. The cleaning process shall not permit liquid to enter interior compartments and cause damage or deterioration. If pressure spraying equipment is used in the cleaning process, the control regulation of the spraying equipment and the method of, spray cleaning shall be sufficient to prevent damage.

3.4.1.2.2 Drivers compartment. Interior surfaces of the drivers compartment shall be cleaned with a solution of water and detergent conforming to P-D-220, or Type I of MIL-D-16791. After cleaning, surface shall be rinsed with clean water. The cleaning process shall not permit liquid to enter the instruments, connections, or other components susceptible to water damage. The cleaning process shall not permit the cushioning materials of the driver's seat to absorb liquid.

3.4.1.2.3 Engine compartment. The interior of the engine compartment shall be cleaned with a solution of water and detergent conforming to P-D-220, or Type I of MIL-D-16791. After cleaning, surfaces shall be rinsed with clean water. The cleaning process shall not allow liquid to enter the engine, connections, or other components susceptible to water damage.

3.4.1.2.4 Steering unit and winch compartment. The steering unit and winch compartment shall be cleaned with a solution of water and detergent conforming to P-D-220, or Type I of MIL-D-16791. After cleaning, surfaces shall be rinsed with clean water. The cleaning process shall not allow liquid to enter the steering unit, winch, connections, or other components susceptible to water damage.

3.4.1.2.5 Vehicle components. Unless otherwise specified, component systems containing operational fluids shall be examined for evidence of contamination. If contaminants are found, corrective maintenance shall be performed in accordance with the applicable technical manual. The exterior surfaces of vehicle components shall be cleaned by selected cleaning processes as specified in MIL-P-116. The cleaning process shall include each component which is subject to contamination.

3.4.1.2.5.1 Battery supports, retainers, terminals and connections. Battery supports, retainers, terminals, and connections shall be cleaned with a solution of water and sodium bicarbonate conforming to O-S-576. After cleaning, surfaces shall be rinsed with clean water. Batteries and electrolyte shall be processed in accordance with the specified level of protection (see 3.4.2 for special requirements).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

3.4.1.2.5.2 Cooling system. The cooling system shall be examined for evidence of rust and contamination. The cooling system shall be flushed and drained as required for cleaning.

3.4.1.2.5.3 Hydraulic tank and transfer case breathers. The hydraulic tank and transfer case breathers shall be removed and cleaned with dry cleaning solution conforming to P-D-680.

3.4.1.2.5.4 Steering unit, final drive and winch breathers. The steering unit, final drive and winch breathers shall be removed and cleaned with dry cleaning solution conforming to P-D-680.

3.4.1.2.6 Drying. Unless otherwise specified, the cleaned vehicle and component parts shall be dried by selected drying processes as specified in MIL-P-116. Drying processes shall be completed immediately after cleaning. Liquids used for cleaning shall not be allowed to remain in undrained areas of the vehicle or components for periods exceeding 24 hours.

3.4.1.2.6.1 Breathers. Breathers for the hydraulic tank, transfer case, steering unit, final drive, and winch shall be dried in accordance with procedure D-1 of MIL-P-116. Breathers shall be reinstalled after cleaning and drying.

3.4.1.2.6.2 Vehicle components containing fluids. Component systems containing operational fluids which are flushed for cleaning shall be refilled with operational fluid. Drying is not required for interior surfaces of these component systems.

3.4.1.3 Preservation. Unless otherwise specified, each vehicle surface and component which is susceptible to corrosion or deterioration by environmental conditions shall be protected by application of selected preservatives in accordance with MIL-P-116. Preservative materials, equipment, and processes shall be selected which are sufficient and safe when used for the purpose intended. Selected preservatives shall be compatible with the item composition and intended use. Preservation shall be completed immediately after cleaning and drying. Any item damaged by preservation shall be replaced or repaired.

3.4.1.3.1 Disassembled and uninstalled items. The Components of End Item (COEI), disassembled items and Basic Issue Items (BII) shall be protected by methods of preservation in accordance with MIL-P-116 (see tables I, II, and III).

3.4.1.3.2 Bilge pump. Bilge pump shall be clean and free of contaminants. Surfaces of the bilge pump shall not be coated with preservative.

3.4.1.3.3 Seals. The rear door seal, hatch cover seal, access plate seals, apron seal, and windshield extrusion shall be coated with talc conforming to MIL-T-50036 prior to closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Preservation and Stowage of Basic Issue Items.

2. Basic Issue Items (BII).

IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	STOWAGE LOCATION FIGURE 7
8105-01-185-5932	Bag, Canopy Stowage W/O Cont.	IC-3	B
8105-01-185-0514	Bag, Pin Stowage W/O Cont.	IC-3	B
8105-01-185-0515	Bag, Rivet Stowage W/O Cont.	IC-3	B
5140-00-473-6256	Bag, Tool W/O Cont.	IC-3	B
8105-01-185-5933	Bag, Window W/O Cont.	IC-3	B
7510-00-889-3494	Binder, Loose Leaf	IC-3	C
DAFORMS 2408, 2409	Binder, Loose Leaf	IC-3	C
1005-00-722-5087	Brush	IC-2	B
5340-01-113-0879	Cap	IC-2	B
7520-00-559-9618	Case, O & M Manuals W/O Cont.	IC-3	B
4010-01-185-0406	Chain Assembly	III	B
5120-00-224-1390	Crowbar	III	B
5120-00-706-3639	Drift Pin	I	B
5120-00-227-8074	Extension, Socket Wrench	IC-2	B
4210-00-555-8837	Extinguisher, Fire Cylinder, W/Brkt	IC-2	B
5110-00-241-7675	File, Type XIX, Style A, 3/4 X 8 LG	IC-2	B
5120-00-605-3926	Fixture, Track Connecting	I	B
5120-00-265-7462	Hammer, Double Faced, 6 LB.	I	B
5120-00-061-8543	Hammer, Hand, Ball Peen	I	B
5120-00-288-6574	Handle, Mattock	III	B
5120-00-221-7959	Handle, Socket, 3/4 Drive	IC-2	B
5120-00-236-7590	Handle, Socket Wrench	IC-2	B
5120-00-230-6385	Handle, Socket Wrench	IC-2	B
5120-00-243-2395	Hoe, Mattock Pick	I	B
TM 5-2350-262-10-HR	HR Manual	IC-3	B
5120-00-198-5390	Key, Socket Head Screw	IC-2	B
5120-00-198-5409	Key, Socket Head Screw	IC-2	B
6545-00-922-1200	Kit, First Aid	IC-2	B
6540-00-044-6914	Lamp, Incandescent	IC-2	B
6230-00-558-5880	Light Extension	IC-2	B
4930-00-253-2478	Lubricating Gun	IC-2	B
LO 5-2350-262-12	Lube Order	IC-3	B
TM 5-2350-262-10	Operator Manual	IC-3	B
5340-00-912-4086	Padlock Set	IC-2	B
5315-01-186-7991	Pin, Alignment Armor	IC-2	B
5365-01-186-8009	Plate	IC-2	B
5120-00-223-7396	Pliers, Slip Joint	IC-2	B
5120-00-293-3509	Punch	IC-2	B

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE III. Preservation and Stowage of Basic Issue Items - Continued.

2. Basic Issue Items (BII).			
IDENTIFICATION NUMBER	ITEM DESCRIPTION	METHOD OF PRESERVATION	STOWAGE LOCATION FIGURE 7
5320-00-051-8618	Rivet, Solid	IC-2	B
2530-01-125-5771	Roll, Apron Seal	IC-3	B
5120-00-182-9656	Rule, Stl. Machinists	IC-2	B
5120-00-234-8912	Screwdriver, Crosstip	IC-2	B
5120-00-278-1283	Screwdriver, Flat Tip	IC-2	B
5330-01-185-0491	Seal, Apron Center	IC-3	B
5330-01-185-0492	Seal, Apron End	IC-3	B
5120-00-293-3336	Shovel, Hand	III	B
5120-00-242-3349	Socket, 1/2 Drive, 3/4	IC-2	B
5120-00-935-7427	Socket, 1/2 Drive, 1-1/16	IC-2	B
5120-00-239-0021	Socket, 3/4 Drive, 1-1/8	IC-2	B
5120-00-239-0094	Socket, 3/4 Drive, 1-1/2	IC-2	B
5120-00-189-7932	Socket, 1/2 Drive, 9/16	IC-2	B
5120-00-189-7946	Socket, 1/2 Drive, 5/8	IC-2	B
4220-00-555-9006	Vest, 24 Inch	IC-3	B
9905-00-534-8376	Warning Device	III	B
5120-00-449-8083	Wrench, Adjustable	IC-2	B
5120-00-228-9513	Wrench, Comb., .94	IC-2	B
5120-00-228-9509	Wrench, Comb., .69	IC-2	B
5120-00-228-9512	Wrench, Comb., .88	IC-2	B
5120-00-228-9514	Wrench, Comb., 1.00	IC-2	B
5120-00-228-9510	Wrench, Comb., .75	IC-2	B
5120-00-228-9517	Wrench, comb., 1.25	IC-2	B
5120-01-229-9134	Wrench Spanner	IC-2	B
5120-00-423-6728	Wrench, Adjustable	IC-2	B

3.4.1.3.4 Winch cable. The winch cable shall be extended and coated with preservative conforming to Grade 1 of MIL-C-16173. After drying, the cable shall be retracted to the storage position.

3.4.1.3.5 Backrest and seat. Immediately after drying, cushioned components of the backrest and seat shall be covered with paper having a minimum basis weight of 40 pounds conforming to Grade B of UU-P-268. Paper shall be secured with tape conforming to Type II of A-A-883.

3.4.1.3.6 Windshield. The windshield shall be protected with plywood conforming to NN-P-530. Plywood shall be of 1/2 inch thickness and shall be suitable for exterior exposure. The cover shall be secured to the windshield with strapping conforming to Type I, Finish B, 3/4 X 0.035 inches of QQ-S-781. Fiberboard strips, Class WR shall be placed between the windshield and the strapping. The windshield shall be secured in the down position (see figure 6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.3.7 Operational fluids and lubricants. Each vehicle and components shall conform to their respective operational fluid and lubricant requirements. Contaminated fluids and lubricants shall be removed and properly disposed. Operational fluids and lubricants shall be applied in accordance with LO 5-2350-262-12, drawings and documents applicable to the vehicle components. Any excess operational fluid or lubricant shall be removed and properly disposed.

3.4.1.3.7.1 Transmission and steering unit assembly. The transmission and steering unit assembly shall be filled to operating level with lubricant conforming to the expected temperature range requirements of the lubrication order (see LO 5-2350-262-12).

3.4.1.3.7.2 Transfer case. The transfer case shall be filled to operating level with lubricant conforming to the expected temperature range requirements of the lubrication order (see LO 5-2350-262-12). Excess lubricating oil shall be removed, and properly disposed.

3.4.1.3.7.3 Final drives. Final drives shall be filled to operating level with lubricating oil conforming to Grade GO-80/90 of MIL-L-2105.

3.4.1.3.7.4 Hydraulic systems. Hydraulic systems shall contain an operating level of lubricant fluid conforming to the expected temperature range requirements of the lubrication order (see LO 5-2350-262-12). Exposed piston surfaces of hydraulic cylinders shall be coated with preservative conforming to MIL-G-10924 and wrapped with barrier material conforming to Type II, Grade A, Class 2 of MIL-B-121. Barrier material shall be completely wrapped with tape conforming to Type II of MIL-T-22085.

3.4.1.3.7.5 Engine crankcase. The engine crankcase shall contain an operating level of lubricant-preservative conforming to grade 15-40 of MIL-L-21260.

3.4.1.3.7.6 Roadwheel hub bearings. Roadwheel hub bearings shall contain lubricating grease conforming to the requirements of the lubrication order (see LO 5-2350-262-12).

3.4.1.3.7.7 Winch. The winch shall contain an operating level of lubricant conforming to the expected temperature range requirement of the lubrication order (see LO 5-2350-262-12).

3.4.1.3.8 Lubrication. Lubricant shall be applied to fittings and surfaces in accordance with LO 5-2350-262-12. Lubricant shall be applied to oil can points in accordance with LO 5-2350-262-12.

3.4.1.3.8.1 Lubrication of fittings and surfaces. Lubrication shall be applied to fittings and surfaces after cleaning and drying. Lubrication points shall include the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

a. Ejector Cylinder Rod Ends.
b. Ejector Guide Rollers.
c. Apron Hinge Pins.
d. Apron Cylinder Rod.
e. Speedometer Adapter.
f. Towing Pintle.
g. Tachometer Adapter.
h. Track Adjusting Cylinder Pins.
i. Brake Control Shaft and Levers.

3.4.1.3.8.2 Lubrication of oil can points. Lubrication shall be applied to oil can points after cleaning and drying. Oil can points shall include the following:

a. Trailer Receptacle Hinge.
b. Winch Cable Clevis Pin.
c. Towing Shackle Pins.
d. Pintle Hook Latch.
e. Dozer Latch.
f. Lifting Eye Shackles.
g. Apron Lockpin and Screw.
h. Dozer Lockpin.
i. Dozer Blade Shackle and Pin.
j. Dozer Pivot Pins.
k. Windshield Braces.
l. Fire Extinguisher Handle.
m. Operator's Hatch Holdopen Latch.
n. Operator's Hatch Lever.
o. Hatch Hinge.
p. Hull Drain Valve.
q. Hand Brake Handle.
r. Operator's Seat.
s. Brake Linkage.

3.4.1.3.9 Cooling system. Unless arctic or tropic processing is specified (see 6.2), the cooling system shall contain water and antifreeze solution conforming to MIL-A-46153. The coolant solution shall provide protection from freezing at -40 degrees Fahrenheit (°F) [-40 degrees Celsius (°C)].

3.4.1.3.9.1 Tropic preparation of cooling system. When specified for shipment and storage in a tropic environment, the cooling system shall contain the coolant specified in the contract or order (see 6.2 and TM 5-2350-262-10).

3.4.1.3.9.2 Arctic preparation of cooling system. When specified for shipment and storage in an arctic environment, the cooling system shall contain the coolant specified in the contract or order (see 6.2 and TM 5-2350-262-10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.4 Packaging. Unless otherwise specified, each Component of End Item (COEI), each Basic Issue Item (BII) and each item disassembled from the vehicle shall be processed in accordance with the methods of MIL-P-116 specified herein (see tables I, II, and III).

3.4.1.4.1 Batteries and electrolyte. Batteries, connecting cables, and battery electrolyte shall be processed in accordance with the specified level of protection (see 3.4.2 for special requirements).

3.4.1.4.2 Additional items. Additional items shipped with the vehicle shall be processed in accordance with the following guidance:

3.4.1.4.2.1 Application of preservatives. Except where application of preservative would cause damage, each item's unpainted, unplated ferrous surfaces shall be coated with preservative conforming to Grade 4 of MIL-C-16173 immediately after cleaning and drying.

3.4.1.4.2.2 Method of preservation. Items with preserved critical surfaces and other items which require protection from water or dust shall be processed in accordance with Method IC of MIL-P-116. Other preserved items without critical surfaces shall be processed in accordance with Method I of MIL-P-116. Each large item which requires only physical and mechanical protection shall be processed in accordance with Method III of MIL-P-116.

3.4.1.4.2.3 Cushioning, blocking and bracing. Item packaging shall include cushioning, blocking, and bracing sufficient to immobilize and prevent damage to the item.

3.4.1.5 Packing. Items shall be consolidated and packed into exterior shipping containers as specified for BII in MIL-B-12841.

3.4.1.6 Marking. In addition to the marking specified in the contract or order, marking shall be applied as specified herein. Marking shall indicate the applied level of protection.

3.4.1.6.1 Marking of vehicle. Vehicles shall be marked in accordance with MIL-STD-129.

3.4.1.6.2 Marking of Basic Issue Items (BII). Each unit package and each item not provided with unit packaging shall be marked in accordance with MIL-STD-129. Exterior shipping containers shall be marked in accordance with MIL-STD-129 and shall contain the identification data: ASSORTED BII FOR (NSN), (U.S. ARMY REGISTRATION NUMBER). The NSN and registration number of the vehicle shall be used. Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the currentversion before use.

3.4.1.6.3 Marking of Components of the End Item (COEI). The unit packaging of each item shall be marked in accordance with MIL-STD-129. Exterior marking of assorted items packed together shall contain the identification data: ASSORTED COEI FOR (NSN), (U.S. ARMY REGISTRATION NUMBER). The NSN and registration number of the vehicle shall be used. Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

3.4.1.6.4 Marking of disassembled items. The unit packaging of each item shall be marked in accordance with MIL-STD-129. Exterior marking of assorted items packed together shall contain the identification data: ASSORTED ITEMS FOR (NSN), (U.S. ARMY REGISTRATION NUMBER). The NSN and registration number of the vehicle may be used. Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

3.4.1.6.5 Marking of additional items. The unit packaging of additional items shipped with the vehicle shall be marked in accordance with MIL-STD-129. Exterior packs shall be marked in accordance with MIL-STD-129. Special handling marking shall be applied and packing lists shall be prepared in accordance with MIL-STD-129.

3.4.1.7 Stowage. Unless otherwise specified, stowage and securement shall conform to the requirements specified herein and meet carrier and transportation requirements. Stowage and securement methods shall be sufficient and safe for the intended purpose. Stowage and securement, including blocking, and bracing shall provide clearance for sling cables and lifting eyes, and shall meet weight and the clearance requirements of the shipment medium.

3.4.1.7.1 Stowage of COEI, BII, and disassembled items. COEI, BII, and disassembled items shipped with the vehicle shall be stowed and secured in the locations specified in tables I, II, and III. The stowage locations specified in tables I, II, and III are shown in figure 7. The COEI, BII, and disassembled items shall be secured to a pallet conforming to Type III modified, Group 2 wood of NN-P-71. Size of the pallet shall be modified to 67 inches long by 62-1/4 inches wide. The shipping containers for the BII and COEI shall be placed on the pallet so the skid runners of each container rest across one (1) outside and one (1) inside stringer of the Type III modified pallet. The palletized cargo shall be loaded in the vehicle bowl between the retracted ejector assembly and the fully raised and locked apron assembly. The palletized cargo may be loaded as shown in the operators manual (see TM 5-2350-262-10) or with a fork lift. Blocking shall be placed between the pallet and the apron assembly (see figure 7). The wood blocking shall be of 4X4 (nominal) X 62-1/4 inch lumber conforming to Group II of MIL-STD-731. The ejector assembly shall be moved forward to hold the palletized cargo and blocking in place once the apron assembly is in the closed position. The blocking shall prevent the palletized cargo from being caught on the apron wear plate when raising the apron assembly during the palletized cargo unloading operation.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the currentversion before use.

3.4.1.7.2 Stowage of additional items. Additional items shipped with the vehicle shall be stowed as specified for BII in MIL-B-12841.

3.4.1.8 Closure. Specified openings of the vehicle and components shall be blocked to prevent deterioration. In addition, other specified openings of the vehicle shall remain open to allow drainage or ventilation. Processing for closure and ventilation shall meet carrier and transportation requirements. Special requirements for closure shall be in accordance with the specified level of protection (see 3.4.2).

3.4.1.8.1 Ventilation screens. After removal of engine and actuator access plates and subsequent cleaning, drying, and preservation, wire screens shall be installed as shown in figures 3, 4, and 5. Unpainted metal surfaces exposed by removal of these plates shall be coated with preservative conforming to Grade 4 of MIL-C-16173. Plates shall be packaged and stowed as specified for disassembled items (see table II and figure 7).

3.4.1.8.2 Windshield wiper arm and wiper blade. The windshield wiper arm and wiper blade shall be removed to prevent pilferage and shall be packed and stowed as specified for disassembled items (see table II and figure 7).

3.4.1.8.3 Vision blocks. The driver's vision blocks shall be protected with lens paper conforming to Type II of NNN-P-40. The lens paper shall be secured and covered with tape conforming to Type II of MIL-T-22085.

3.4.1.8.4 Driver's hatch cover. Driver's hatch cover shall be secured in the closed and latched position with a lock. Keys shall be handled in accordance with applicable security requirements.

3.4.1.8.5 Bilge pump discharge. The bilge pump discharge opening shall be sealed with tape conforming to Type II of MIL-T-22085.

3.4.1.8.6 Exterior control of fire extinguisher. The recess opening shall be sealed with tape conforming to Type II of MIL-T-22085.

3.4.1.9 Loading. Vehicle and components shall be loaded and secured for transport. Loading and securement methods shall be sufficient and safe. Loading and securement shall conform to carrier requirements and applicable transportation regulations.

3.4.1.9.1 Vehicle lifting and towing. Lifting and towing of the vehicle after processing shall be in accordance with approved methods. Any movement of partially processed vehicles which interferes or conflicts with vehicle processing is not recommended.

CAUTION: BEFORE VEHICLE SECUREMENT THE VEHICLE MUST BE IN THE UNSPRUNG MODE (SEE TM 5-2350-262-10).

CAUTION: BEFORE VEHICLE TOWING THE VEHICLE MUST BE IN THE SPRUNG MODE, AND THE FINAL DRIVES DISCONNECTED (SEE TM 5-2350-262-10).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.1.9.2 Loading for commercial shipment.

3.4.1.9.2.1 Loading for commercial rail shipment. Loading and securement of commercial rail shipment within the U.S. and Canada shall conform to the general rules governing loading of commodities on open top cars and rules governing the loading of DOD material on open top cars of the American Association of Railroads (AAR Section No. 6, Figure 79). Other foreign rail shipments shall conform to the vehicle's transportability guidance technical manual, TM 55-2350-262-14, and the applicable transportation regulations.

CAUTION: BEFORE VEHICLE LOADING AND SECUREMENT, THE VEHICLE MUST BE IN THE UNSPRUNG MODE.

3.4.1.9.2.2 Loading for other commercial shipment. Loading and securement shall conform to carrier requirements and to applicable transportation regulations. Shipments shall also conform to the vehicle's transportability guidance technical manual, TM 55-2350-262-14.

3.4.1.9.3 Loading for military shipment. Guidance for all modes of military shipments is provided by the vehicle's transportability guidance technical manual (see TM 55-2350-262-14).

3.4.2 Special requirements. Special requirements for processing shall be of the specified level of protection (see 6.2). Special requirements for Level A shall be as specified in 3.4.2.1. Special requirements for Level B shall be as specified in 3.4.2.2.

3.4.2.1 Level A. When Level A processing is specified, the following special procedures and operations are required:

3.4.2.1.1 Fuel system. After completion of all actions which require fuel system operation, the fuel system shall be processed for Level A. Procedures and operations shall be in accordance with the sequence of steps described below:

a. Fuel tank.

1. Drain the fuel tank and fuel filter by opening the fuel drain shutoff cock located at the rear of the vehicle.
2. Close the fuel drain shutoff cock and extract the remaining fuel from the fuel tank.
3. Remove fuel access cover and fuel tank cap. Apply preservative to the interior surface of the fuel tank cap and strainer element and replace fuel tank cap.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

b. Fuel lines and pump.

1. Prepare the preservative container assembly (see figure 1). Position the selector valve to "off". Add preservative (and dye if required) to one compartment. Reserve second compartment for diesel fuel required for deprocessing.
2. Disconnect the fuel supply line from the fuel filter at the inlet adapter (see figure 9). Connect the preservative container assembly to the fuel filter using a female hose barb fitting, 7/8 - 14 thread for 1/2 inch I.D. hose (see figure 1).
3. Disconnect the engine fuel return line at the quick-disconnect coupling (see figure 9). Connect the preservative recovery line to the vehicles quick disconnect coupler, 12357232-2 (see figure 10). Insert the end of the recovery line into a recovery container.
4. Position the selector valve on the preservative container assembly for flow of preservative.
5. Start and run the engine until remaining diesel fuel is flushed from the fuel lines and the engine is using preservative as fuel. Continue until 2 gallons are collected from the recovery line in the recovery container.

c. Engine combustion chambers.

1. Allow engine to cool to the ambient temperature.
2. Restrict air flow to the engine with air restrictor plate (see figure 2). Crank engine for 20 seconds only (engine may fire briefly).
3. Allow starter to cool for 10 minutes.
4. Repeat Steps 2 and 3 until approximately one (1) quart of preservative oil is collected in the recovery container or until four (4) repetitions of Steps 2 and 3 are completed.
5. Position the selector valve of the preservative container assembly to "off". Disconnect the preservative container assembly from the fuel filter. Reassemble the fuel supply line to the fuel filter.
6. Disconnect the preservative return line at the quick disconnect coupling and reassemble the fuel return line.
7. Drain excess preservative oil by opening the fuel drain shutoff cock located at rear of vehicle (see figure 1).
8. Preserve exterior of fuel drain shutoff cock and return to closed position.

3.4.2.1.2 Engine oil level indicator. After preservation of the fuel system, the engine oil level gauge rod shall be removed. Six ounces of preservative oil conforming to Grade 1 of MIL-P-46002 shall be fogged into crankcase through engine oil level gauge rod opening. Spray nozzle shall not be submerged in crankcase oil. After spraying has been accomplished, engine oil level gauge rod shall be reinstalled. The engine oil level gauge rod and the engine oil filler cap shall be sealed with tape conforming to Type II of MIL-T-22085.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the currentversion before use.

3.4.2.1.3 Steer unit oil level indicator. After preservation of the fuel system, the steer unit oil level gauge rod shall be removed. Six ounces of preservative oil conforming to Grade 1 of MIL-P-46002 shall be fogged into steer unit through the steer unit oil level gauge rod opening. Spray nozzle shall not be submerged in steer unit oil. After spraying has been accomplished, steer unit oil level gauge rod shall be reinstalled. The steer unit oil level gauge rod shall be sealed with tape conforming to Type II of MIL-T-22085.

3.4.2.1.4 Air intake and exhaust openings. After preservation of the fuel system, 1 ounce of preservative oil conforming to Grade 1 of MIL-P-46002 shall be fogged into engine exhaust opening. The engine air induction hose shall be disconnected at air intake, and 1 ounce of preservative oil conforming to Grade 30W of MIL-L-21260, shall be fogged into the air intake opening. The engine air induction hose shall be reconnected at the air intake. The air exhaust opening shall be closed with tape conforming to Type II of MIL-T-22085.

3.4.2.1.5 Air cleaner assembly. After preservation of the fuel system, place a bag conforming to Style 2, Type I, and Class B (6 MIL) of MIL-B-117 over air intake on the air cleaner assembly. Secure bag in place using tape conforming to Type II of MIL-T-22085 (see figure 8).

3.4.2.1.6 Batteries and electrolyte. Dry charge batteries shall be installed without electrolyte. Electrolyte shall be separately packaged and stowed (see figure 7). Terminal leads shall be preserved with grease conforming to MIL-G-10924 and overwrapped with barrier material conforming to Type II, Grade A, Class 2 of MIL-B-121. Barrier material shall be secured in place and completely covered with tape conforming to Type III, Class 1 of PPP-T-60. Terminal leads shall be restrained with two (2) strap tiedowns, MS3367 (see figure 11).

3.4.2.1.7 Marking of battery electrolyte. Battery electrolyte shall be marked in accordance with MIL-STD-129, including requirements for special handling.

3.4.2.2 Level B. When Level B processing is specified, the following special procedures and operations are required:

3.4.2.2.1 Fuel system preservation. The fuel system shall be prepared for vehicle operation. Unless otherwise specified, the fuel tank shall be filled with 40 gallons of diesel fuel conforming to the selected seasonal grade of VV-F-800 (see 6.2).

3.4.2.2.1.1 Special fuel volume requirement. When specified, an increased or decreased volume of fuel shall be placed in the fuel tank (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.2.2.2 Air intake, exhaust, and air cleaner assembly. The air intake and exhaust openings, as well as the air cleaner assembly shall be prepared for vehicle operation.

3.4.2.2.3 Battery terminals, connections, and electrolyte. Battery terminals and connections shall be installed for vehicle operation. Batteries shall be installed with electrolyte and charged for vehicle operation.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform or witness any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of section 3. The inspection set forth in this specification shall become a part of the contract's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Inspection equipment. Unless otherwise specified in the contract (see 6.2), the contractor is responsible for the provision and maintenance of all inspection equipment necessary to assure that supplies and services conform to contract requirements. Inspection equipment must be capable of repetitive measurements to an accuracy of 10 percent of the measurement tolerance. Calibration of inspection equipment shall be in accordance with MIL-STD-45662.

4.1.3 Inspection records. Contractor shall maintain records of all inspections performed and such records shall be readily available for review by the Government representative.

4.2 Classification of inspection:

a. First article inspection (see 4.3).
b. Quality conformance inspections (QCI) (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. First article inspection shall be performed at the contractor's facilities or at other facilities acceptable to the Government on sample vehicles processed with materials, equipment, procedures, and operations normally used in production.

4.3.1 Sample. One of the first 10 production vehicles processed to each level of protection shall be subjected to first article inspection. The sample processed vehicle(s) shall have been subjected to and passed the requirements of quality conformance inspection (see 4.4).

4.3.2 Inspection routine. Sample vehicles shall be inspected in accordance with 4.4 for conformance to the requirements of table IV.

4.3.3 Failure. Failure of a sample processed vehicle to meet quality conformance inspection requirements or failure of a sample processed vehicle to meet first article inspection requirements specified in table IV shall be cause for rejection. Acceptance of first article shall not be granted until objective evidence is shown that the contractor has corrected the condition(s) causing failure.

4.4 Quality conformance inspection. Quality conformance inspection shall be performed at the contractors facilities or at other facilities acceptable to the Government on each lot of processed vehicle.

4.4.1 Inspection lot. The inspection lot shall be defined as one vehicle and shall consist of each vehicle processed to the specified level of protection.

4.4.2 Inspection routine. Each processed vehicle shall be subjected to the quality conformance inspection in table IV. Equipment, material, procedures, and operations shall be monitored for conformance.

4.4.2.1 Monitoring of equipment. Processing equipment shall be identified and inspected monthly or at the beginning of each vehicle processing to ensure proper operation.

4.4.2.2 Monitoring of material. Each material shall be identified and inspected monthly or at the beginning of each vehicle processing to ensure conformance to material specification requirements. Materials which have been Government inspected at the source and materials which have been previously certified shall require monitoring only if subject to deterioration or contamination.

4.4.2.3 Monitoring of procedures and operations. Procedures and operations shall be reviewed periodically to ensure conformance with prescribed procedures and operations. Records of personnel training for vehicle processing and records of personnel certified to prepare hazardous material shipments shall be reviewed periodically to ensure adequate current training and certification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

4.4.3 Rejection. Failure of a processed vehicle to meet quality conformance inspection requirements or failure of a processed vehicle to conform to the applicable requirements of this specification shall be cause for rejection. If a processed vehicle is rejected, the contractor may rework it to correct the defects and resubmit for inspection. The former rejection or requirements for correction shall be disclosed with the resubmittal for inspection

4.5 Methods of inspection.

4.5.1 First article inspection of Level A fuel system processing. For first article inspection, the fuel system, including the fuel lines, fuel pump, and engine shall be disassembled to the extent necessary to permit visual examination of preserved surfaces. Exposed surfaces shall have a coating of preservative. Oil soluable red dye conforming to MIL-D-81298 shall be dissolved in the preservative to permit visual examination of preserved combustion chambers.

4.5.2 First article inspection of BII, COEI, and disassembled items. For first article inspection, the method of preservation for BII, COEI, and disassembled items shall be inspected in accordance with MIL-P-116. Inspection of the methods of preservation shall include cleaning, preservation, packaging, and marking. Rough handling testing shall apply only to exterior containers.

4.5.2.1 Quality conformance inspection of BII, COEI, and disassembled item processing.
For quality conformance inspection, the method of preservation for BII, COEI, and disassembled items shall be inspected in accordance with the quality assurance provisions specified in MIL-P-116. Inspection of the methods of preservation shall include cleaning, preservation, packaging and marking. Inspection of the methods of preservation shall not include rough handling testing.

4.5.3 Quality conformance inspection of processing. The vehicle processing shall be inspected visually for conformance to the requirements listed in table IV. The cooling system processing shall be tested using a hydrometer conforming to GG-T-250.

TABLE IV. First article and quality conformance inspection.

INSPECTION	REQUIREMENT PARAGRAPH	INSPECTION METHOD PARAGRAPH
a. First Article Inspection:		
Fuel System (Level A) Preservation	3.4.2.1.1	4.5.1
BII/COEI/Disassembled Item Packaging	3.4.1.4	4.5.2
BII/COEI/Disassembled Item Stowage	3.4.1.7 and 3.4.1.7.2	4.5.2

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE IV. First article and quality conformance inspection - Continued.

INSPECTION	REQUIREMENT PARAGRAPH	INSPECTION METHOD PARAGRAPH
b. Quality Conformance Inspection:		
Disassembly	3.4.1.1	4.5.3
Cleaning & Drying	3.4.1.2 and 3.4.1.2.6	4.5.3
Preservation	3.4.1.3	4.5.3
Packaging	3.4.1.4	4.5.2.1 and 4.5.3
Packing	3.4.1.5	4.5.3
Marking	3.4.1.6	4.5.3
Stowage	3.4.1.7	4.5.3
Closure	3.4.1.8	4.5.3
Loading	3.4.1.9	4.5.3

5. PACKAGING. This section is not applicable to this specification.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This document specifies processing of the M9 Armored Combat Earthmover (ACE) for shipment and storage. This document is cited in a contract or purchase order to obtain protection from known or anticipated conditions of shipment, handling and storage.

6.1.1 Use of Level A, maximum protection. Maximum protection, called Level A, is processing for the most severe conditions of shipment, handling and storage. Maximum protection should be applied to protect vehicles where the period of shipment, handling and storage will exceed 90 days from the date of processing. Level A protection should be applied for long-term open storage and for deck loaded marine shipment.

6.1.2 Use of Level B, intermediate protection. Intermediate protection, called Level B, is processing for known favorable conditions of shipment, handling, and storage. Intermediate protection should be applied when Level A protection is not required and when the period of shipment, handling, and storage will not exceed 90 days from the date of processing. Level B protection should be applied for domestic shipment and known favorable overseas shipment excluding marine deck loading.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of the specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).
c. Applicable level(s) of protection (see 1.2 and 3.4.2).
d. The mode(s) of transport and transportability guidance if shipment by special transport mode is required (see 3.4.1.1.1, 3.4.1.1.2, 3.4.1.7, and 3.4.1.9).
e. If preparation of the cooling system for shipment and storage in a tropic or arctic environment is required (see 3.4.1.3.9.1 and 3.4.1.3.9.2).
f. If an increased or decreased volume of fuel is required (see 3.4.2.2.2).
g. If first article provisions are not required (see 3.1).
h. If responsibility for inspection equipment shall be other than as specified (see 4.1.2).

6.3 Definitions.

6.3.1 Packaging. The application or use of adequate protective measures to prevent deterioration including, as applicable, the use of appropriate cleaning procedures, preservatives, protective wrappings, cushioning, containers, and complete identification marking.

6.3.2 Recovered materials. "Recovered materials" means materials that have been collected or recovered from solid waste (see 6.3.3).

6.3.3 Solid waste. "Solid waste" means (a) any garbage, refuse, or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, mining, commercial, and agricultural operations, and from community activities. It does not include solid or dissolved material in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under section 402 of the Clean Water Act, (33 U.S.C. 1342 et seq.), or source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.) (Source: Federal Acquisition Regulations, section 23.402).

6.3.4 Unit Package. The first tie, wrap, or container applied to a single item, multiple thereof, or a group of identical items which provides a complete and properly identified package.

6.4 Forms. A copy of the equipment log book and all required forms shall be furnished to the contractor by the Government at least 30 days before shipment of the equipment as required by the contract delivery schedule.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Air Restrictor Plate
Atomizer
Containers
Disassembly
Preservatives

6.6 AMC policy on AQLs/LTPDs. This specification is certified to be in compliance with current Army Materiel Command (AMC) policy for the elimination of AQLs/LTPDs (Acceptable Quality Levels/Lot Tolerance Percent Defectives) from military specifications.

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.


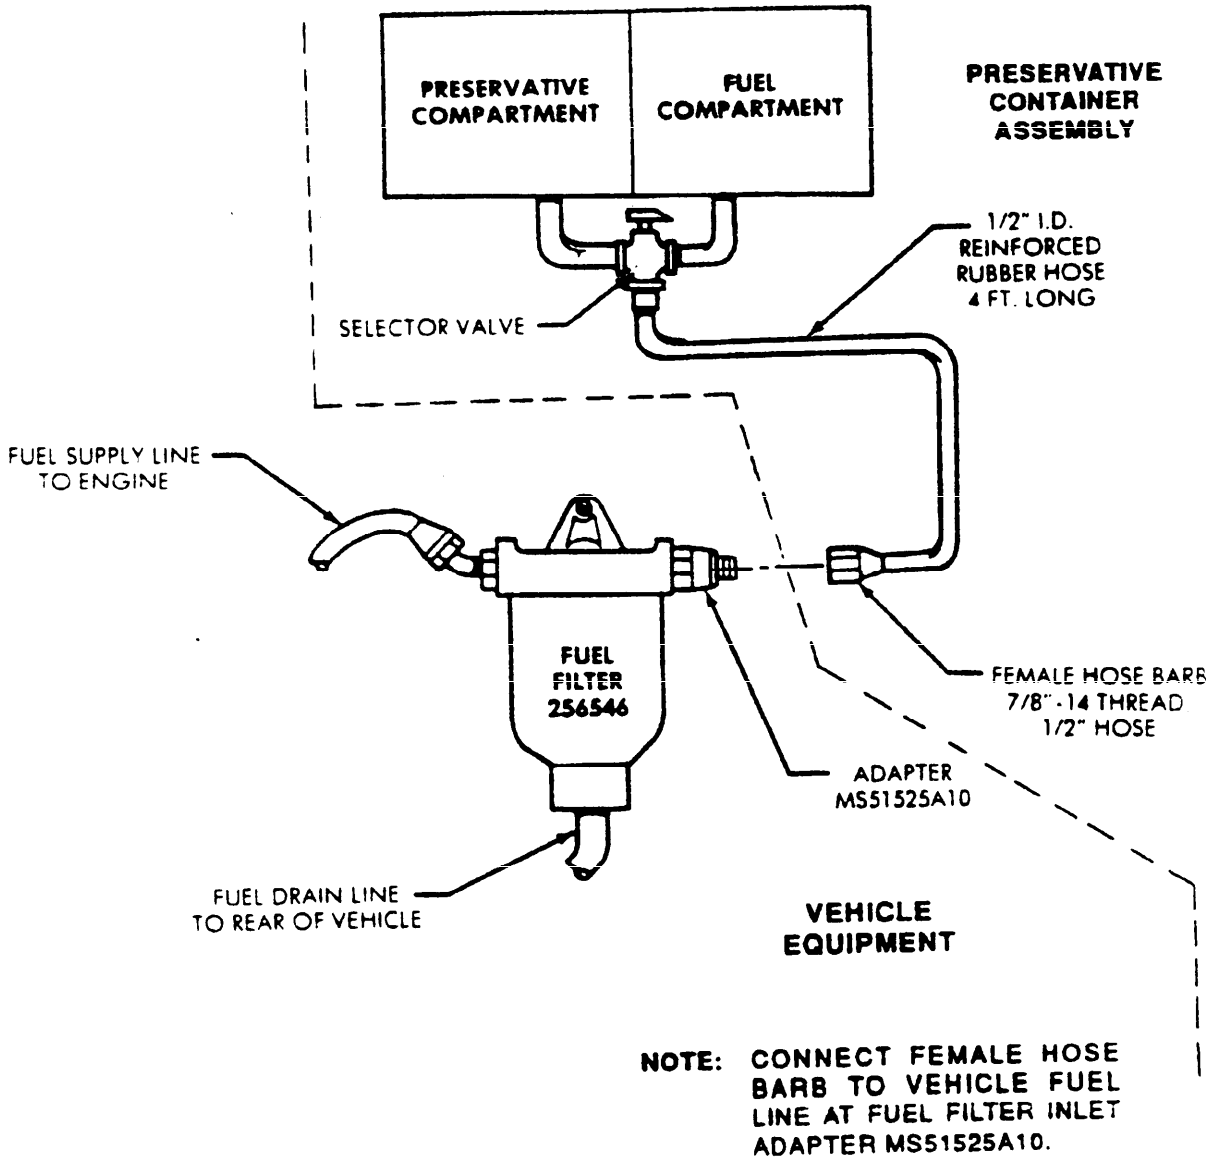


FIGURE 1. Preservative Container Assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

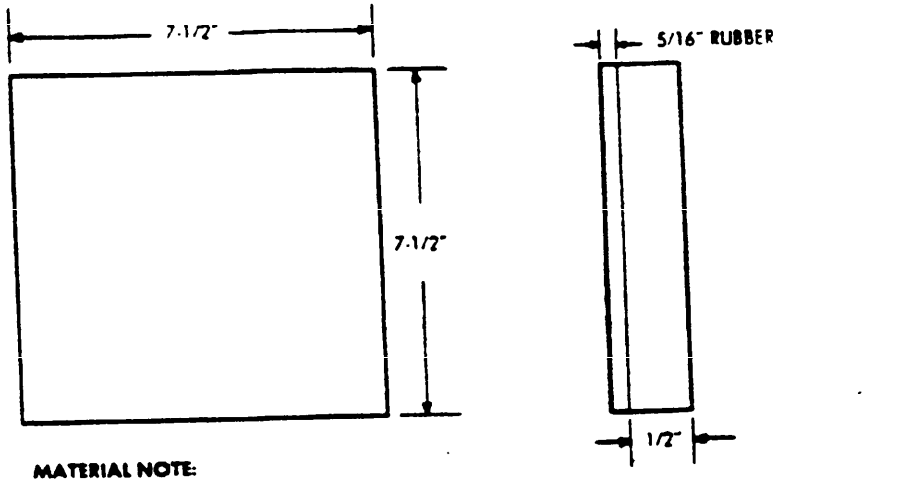

AIR RESTRICTOR PLATE



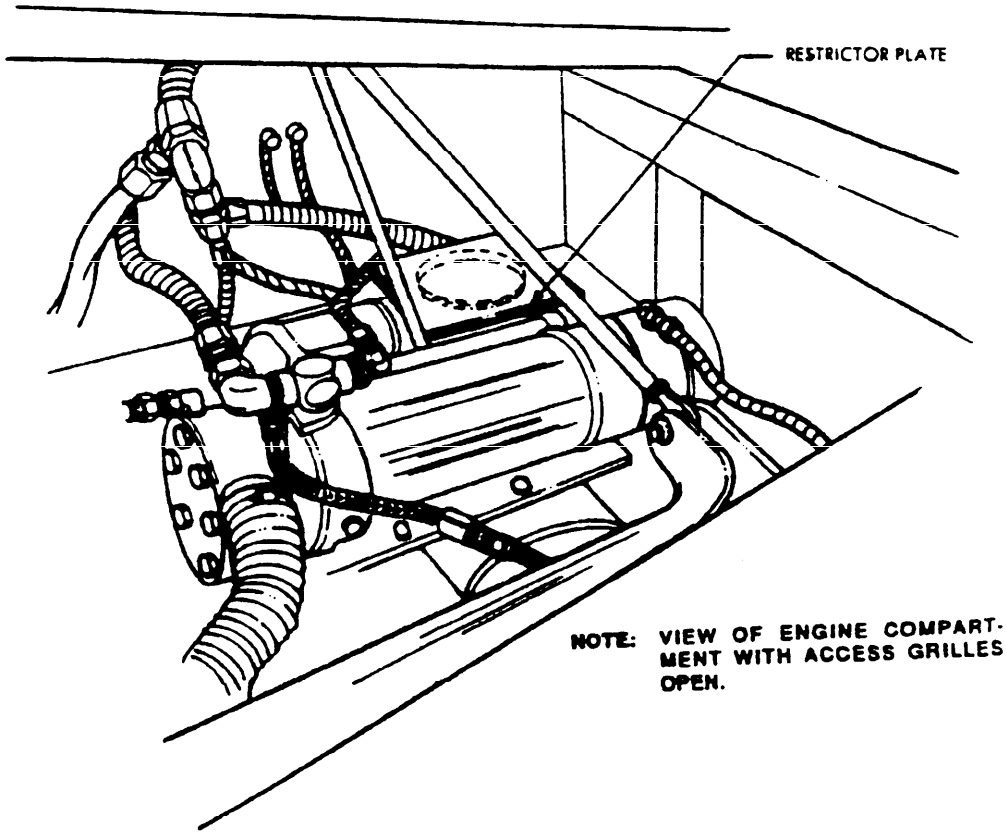


FIGURE 2. View of Engine/Restrictor Plate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

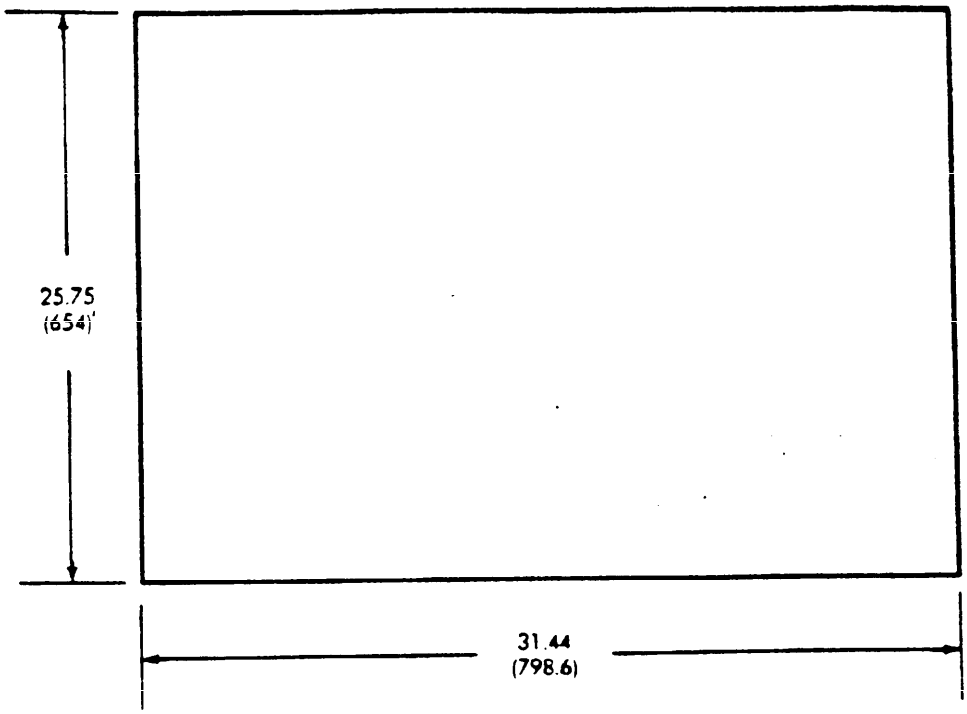


REPLACES PLATE — 12352551
DIMENSIONS IN INCHES (AND MILLIMETERS)

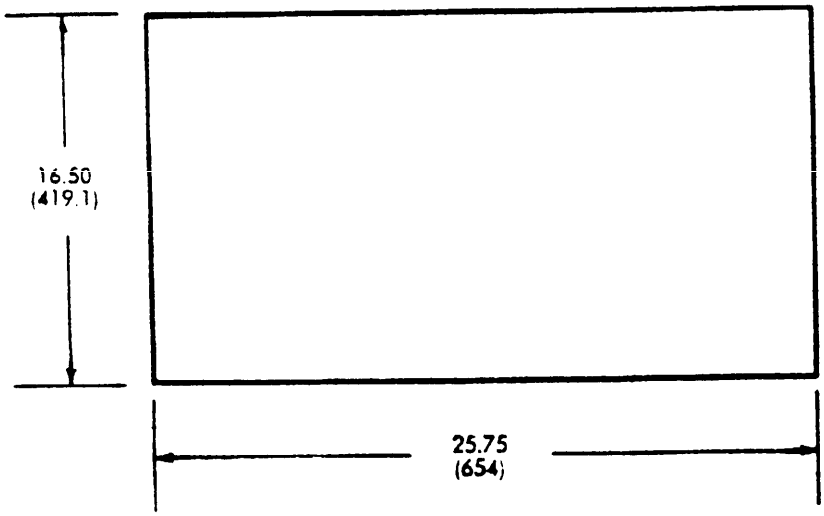


REPLACES PLATE — 12352549
DIMENSIONS IN INCHES (AND MILLIMETERS)

FIGURE 3. Screen, Wire.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

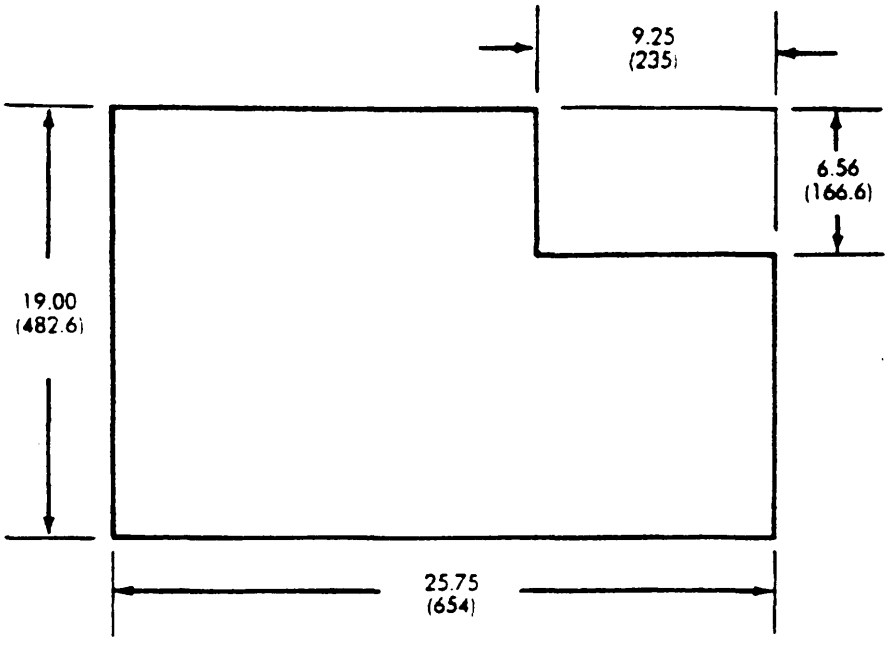

REPLACES PLATE — 12352550
DIMENSIONS IN INCHES (AND MILLIMETERS)

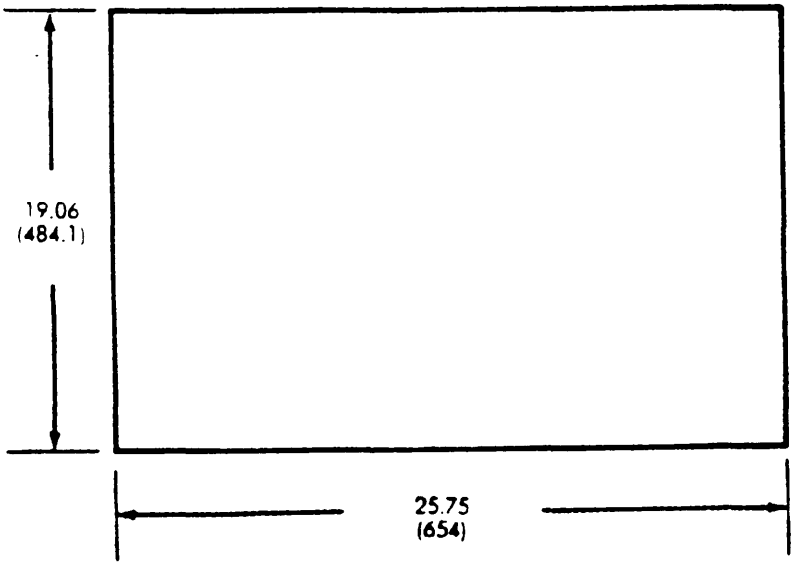

REPLACES PLATE — 12352552
DIMENSIONS IN INCHES (AND MILLIMETERS)

FIGURE 4. Screen, Wire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.



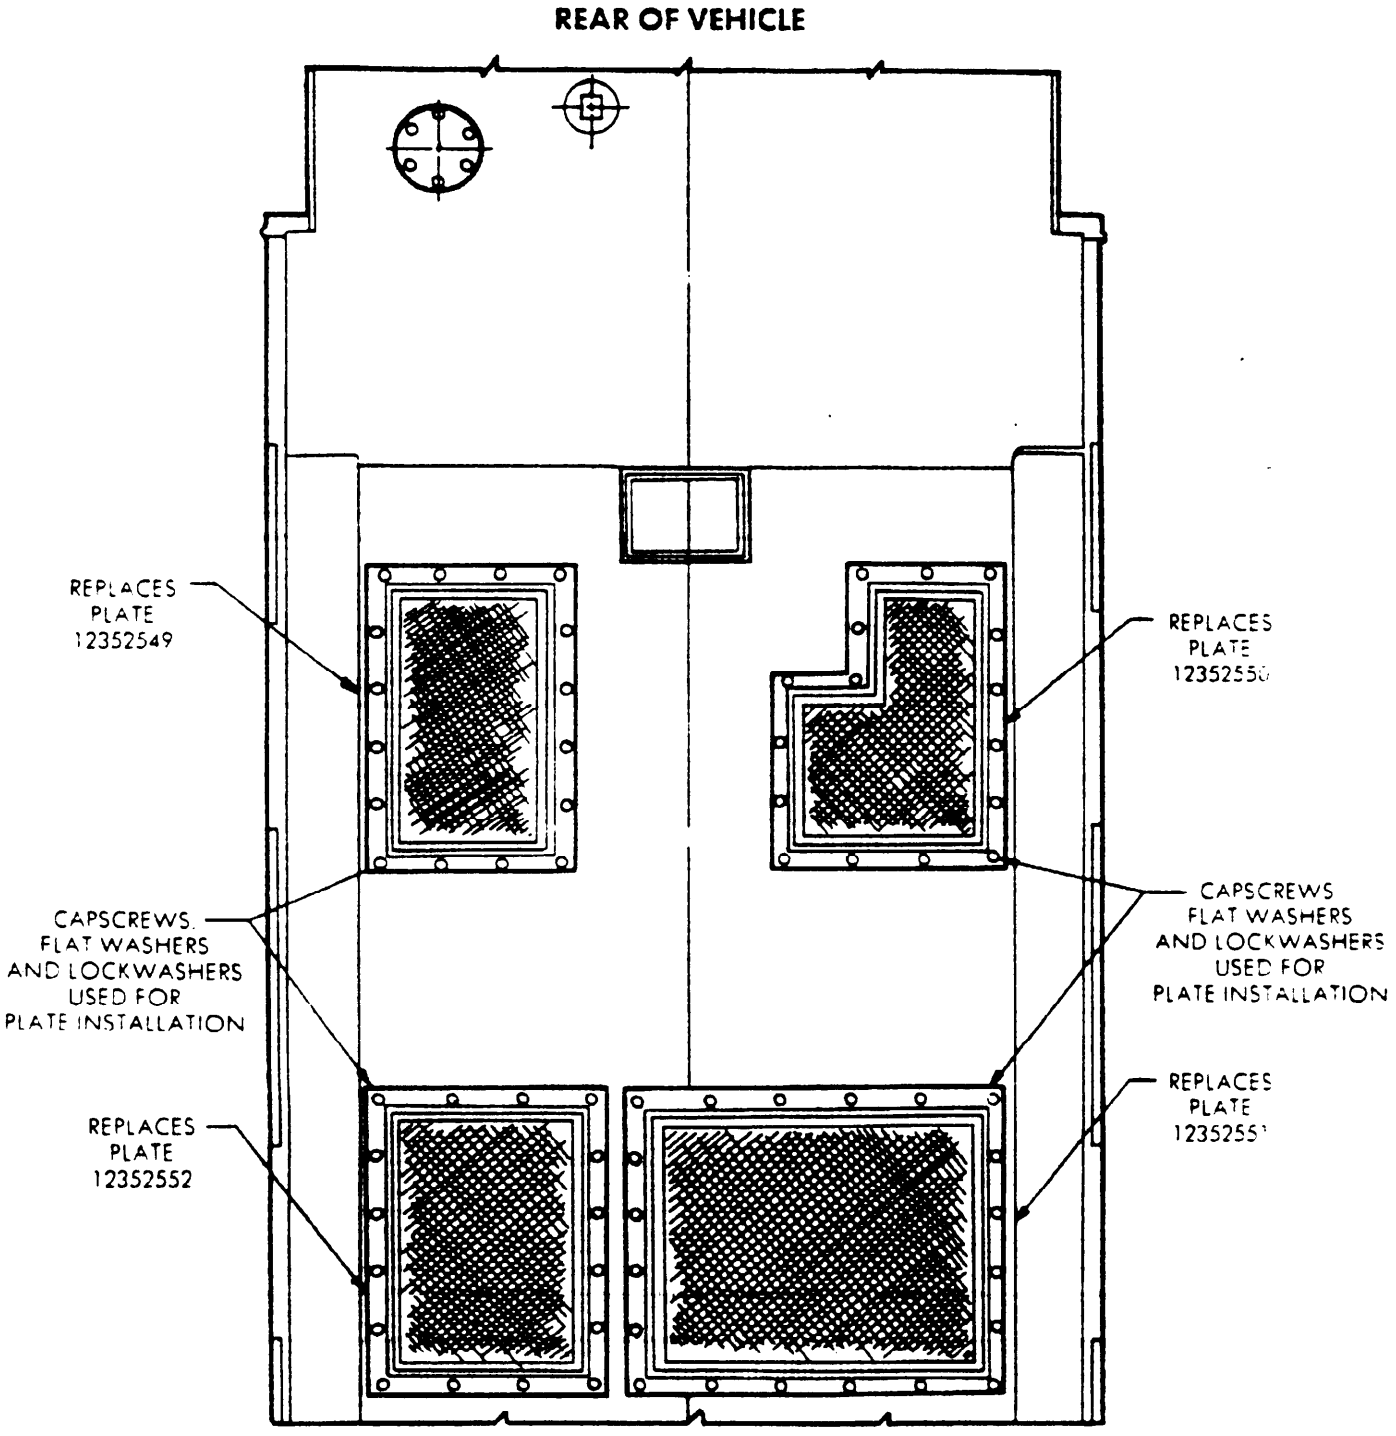


FIGURE 5. View of Vehicle Underside Ventilation Screens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

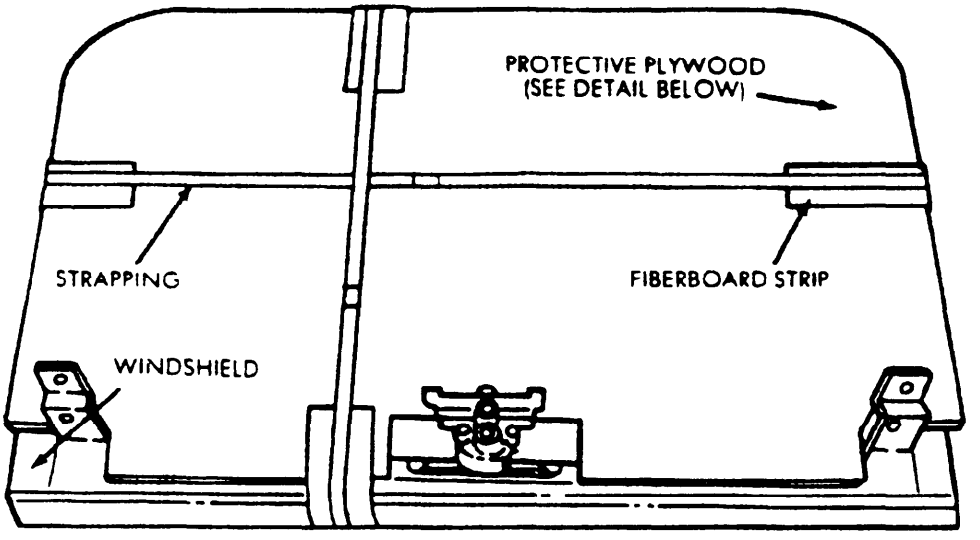

INSTALLATION

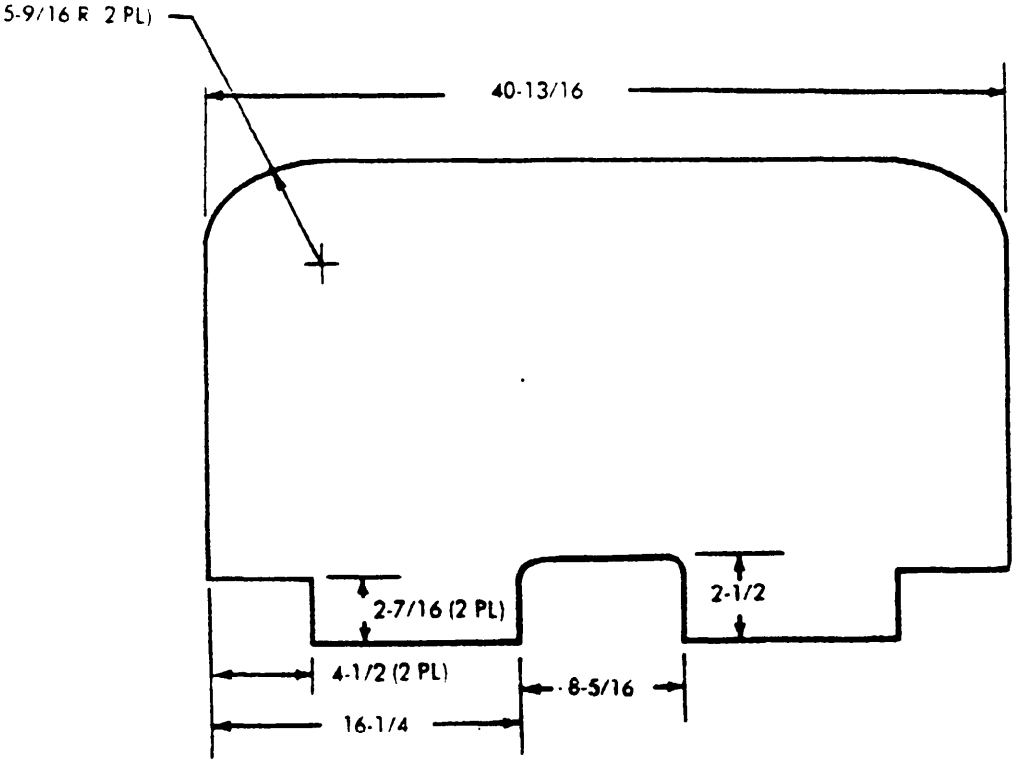

DIMENSIONS IN INCHES

TOL. ± 1/16

FIGURE 6. Protective plywood detail.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.


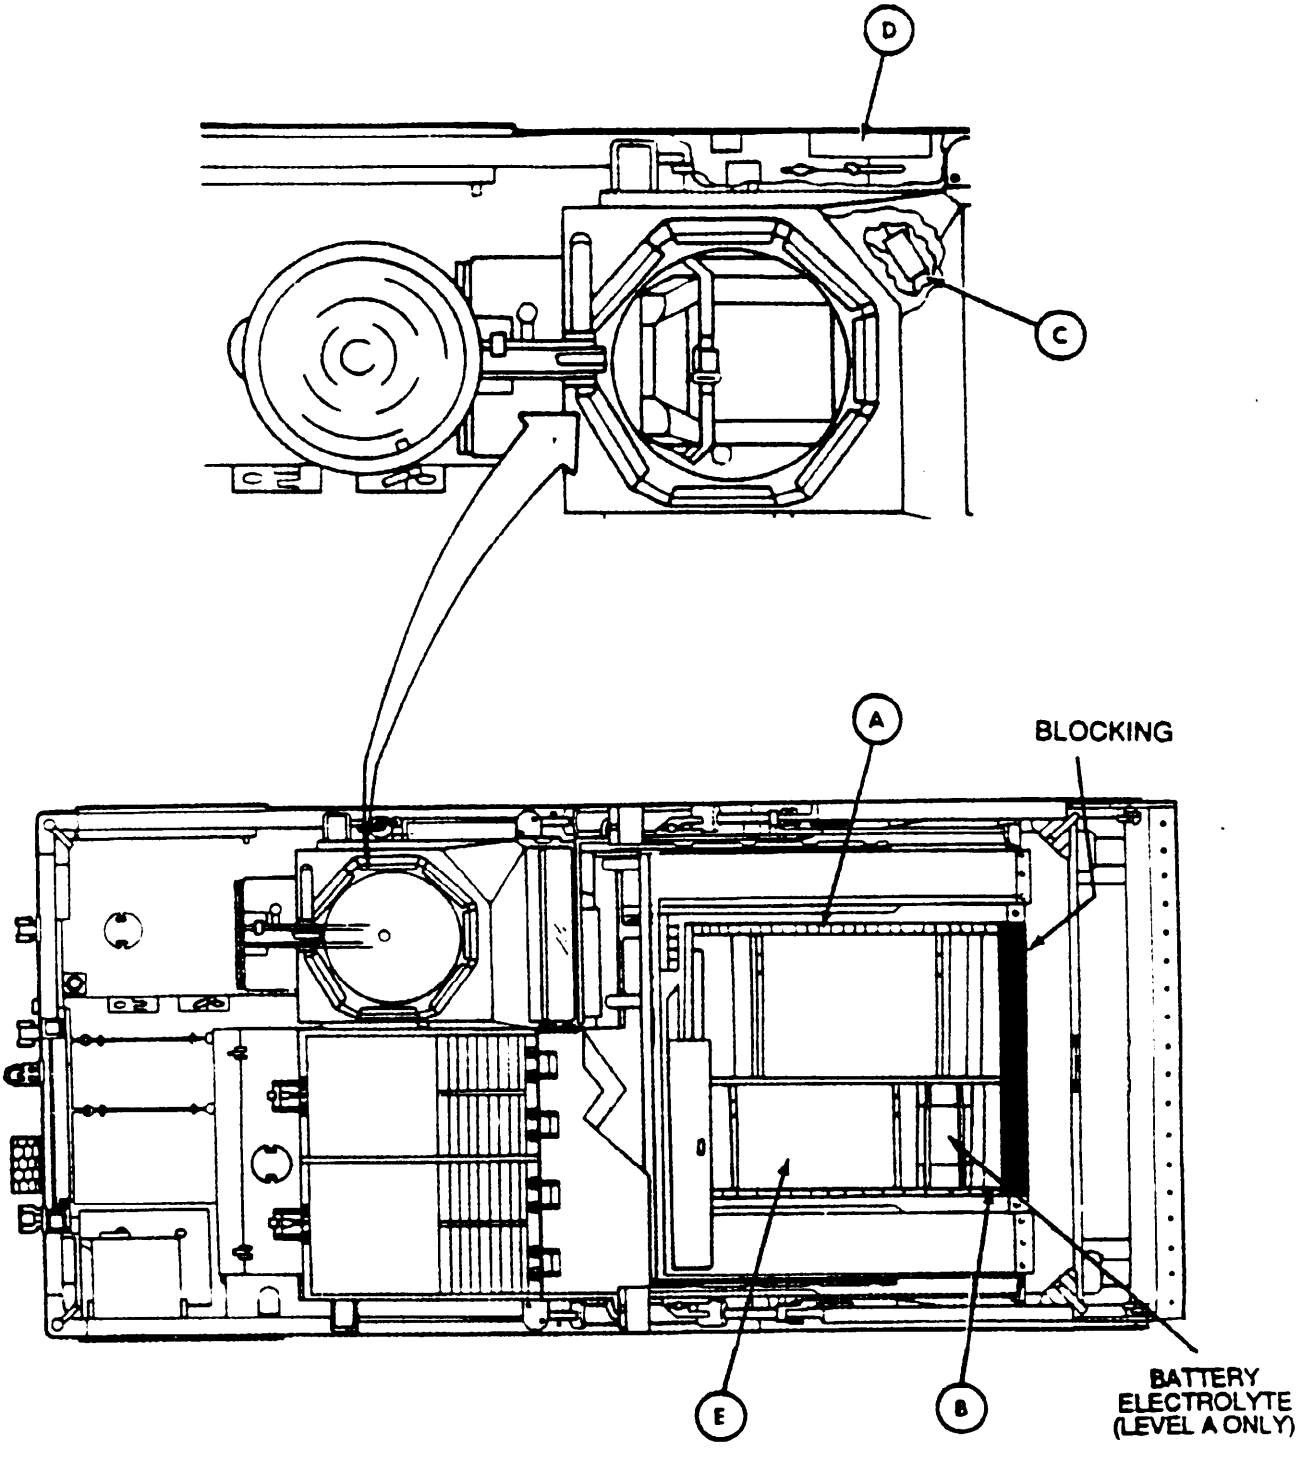


FIGURE 7. Stowage locations.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

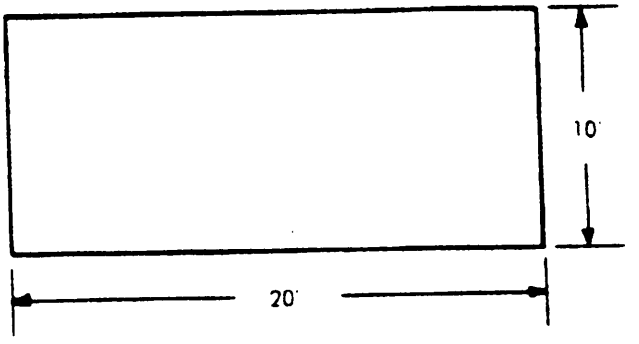

BAG



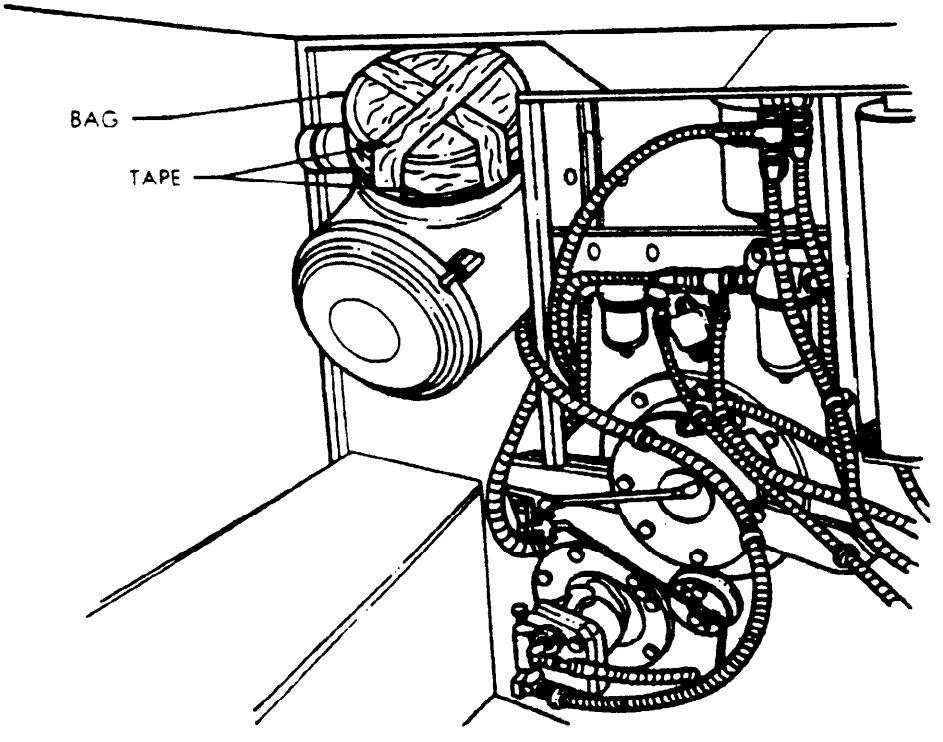


FIGURE 8. Air cleaner assembly with protective bag.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

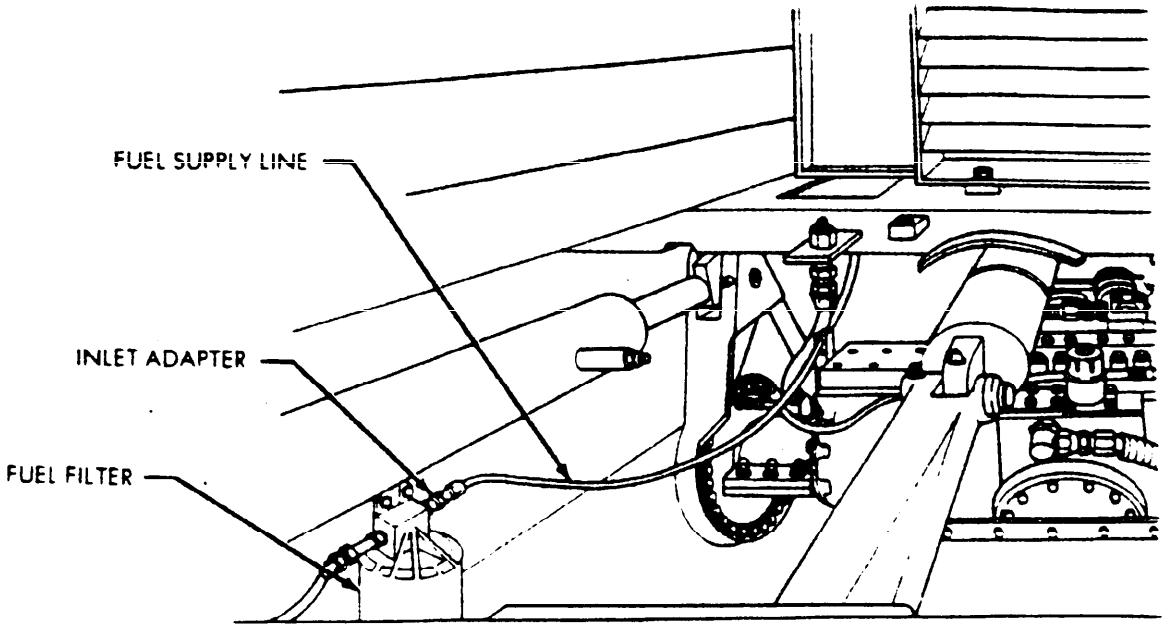


VIEW OF VEHICLE FUEL FILTER WITH REAR FLOOR PLATES REMOVED

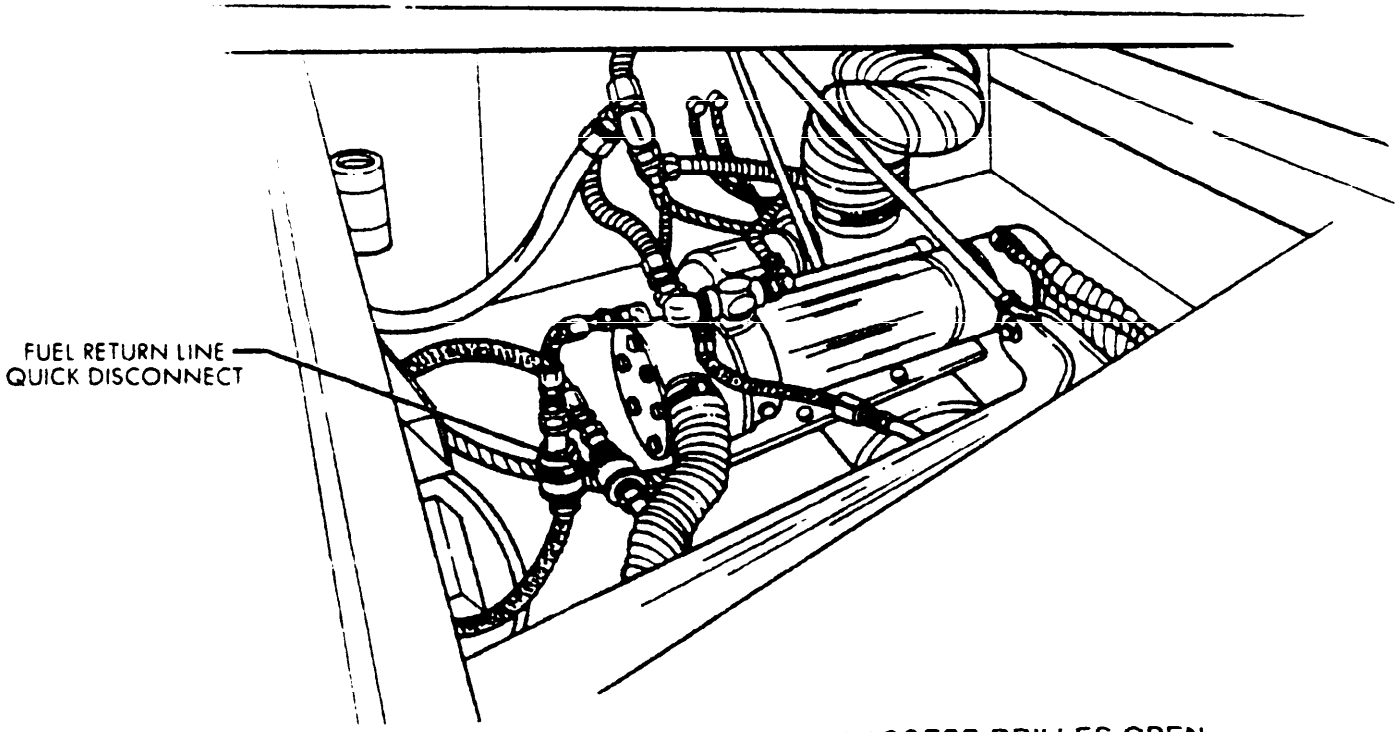

VIEW OF ENGINE COMPARTMENT WITH ACCESS GRILLES OPEN

FIGURE 9. Engine compartment and Fuel filter location.


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

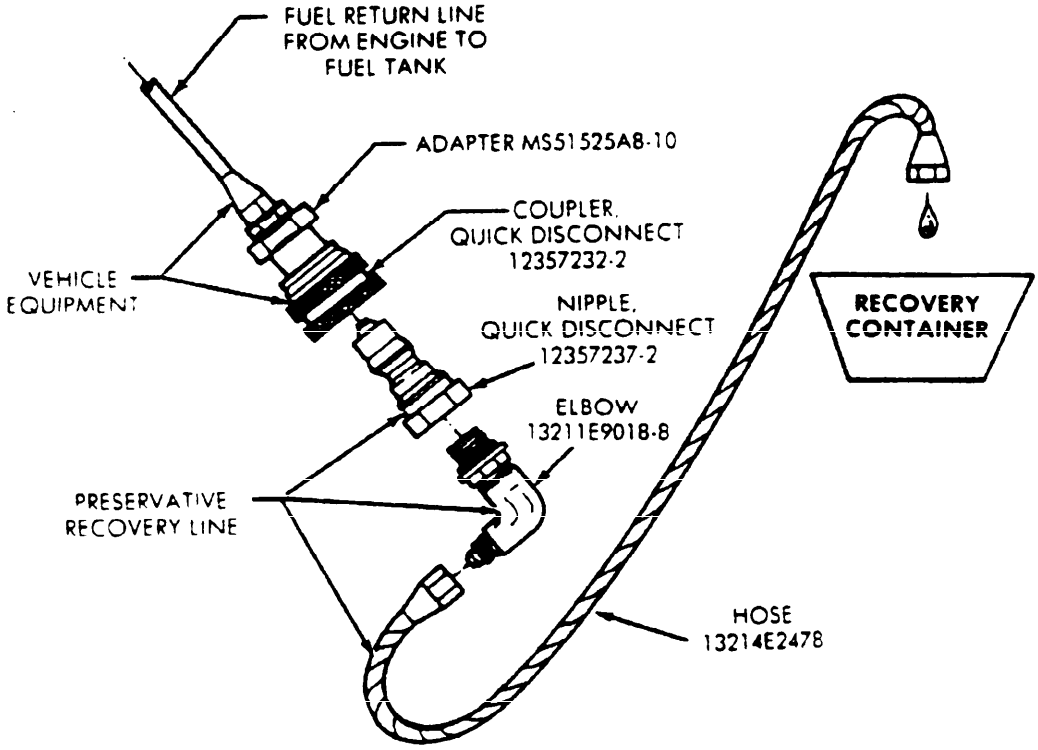

NOTE: RECOVERY CONTAINER CAN BE PLACED ON WINDSHIELD PROTECTIVE COVER DURING FUEL SYSTEM PRESERVATION.

FIGURE 10. Preservative recovery line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

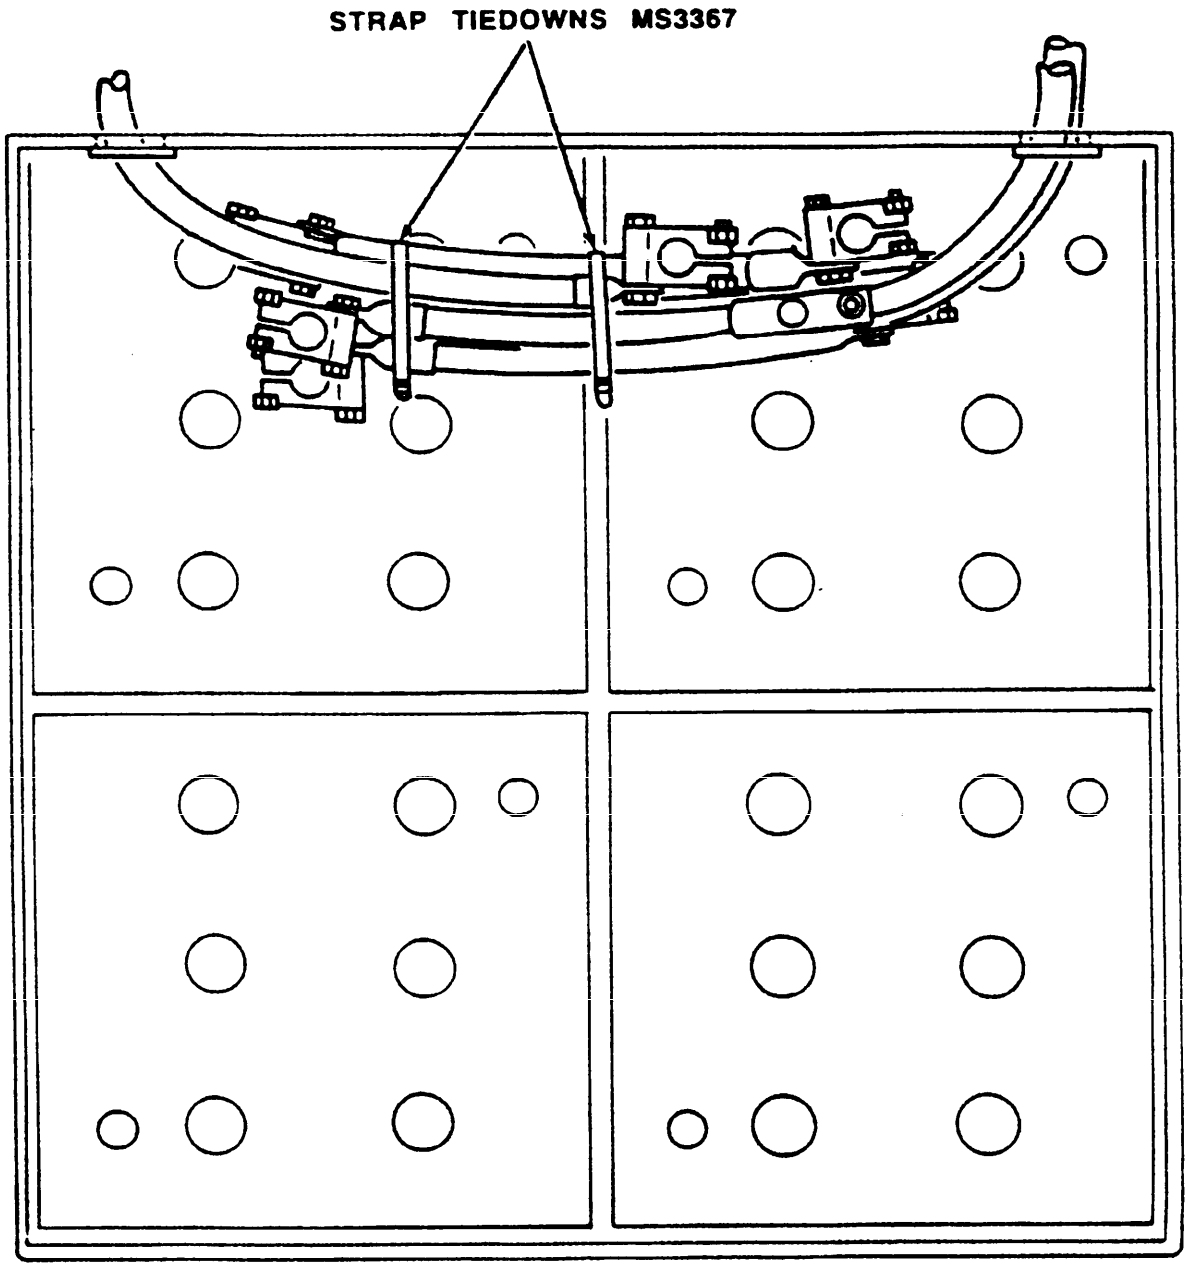

TOP VIEW OF VEHICLE BATTERY BOX.

FIGURE 11. Battery terminal restraint.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AT

Preparing activity:
Army - AT
(Project PACK-A359)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. AREA PACK

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-E-62484C(AT); Earthmover, Armored Combat, M9 Processing for Shipment and Storage of

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

FOLD

U.S. ARMY TANK - AUTOMOTIVE COMMAND
ATTN: AMSTA-GDS
WARREN, MICHIGAN 48397-5000

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



Commander
U.S. Army Tank-Automotive
Command
ATTN: AMSTA-GDS
Warren, MI 48397-5000

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.