INCH-POUND

MIL-H-62550(AT)
22 September 1989
SUPERSEDING
(see 6.5)

MILITARY SPECIFICATION

HEATER ASSEMBLY, COMBUSTION VEHICULAR COMPARTMENT, 30,000 AND 60,000 BTU/HR, GENERAL SPECIFICATION FOR

This specification is approved for use within the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a forced air inlet personnel heater assembly, referred to herein as "heater" (see 6.1).

1.2 Classification. Heaters shall be of the following types and classes, as specified:

Type I	- Heaters that must take their combustion and ventilating air from the same source ("Single Air").
Class I	- Heaters that have a nominal rating of 30,000 British Thermal Units per Hour (Btu/hr), but are also capable of operating at a nominal heating rate of 15,000 Btu/hr.
Class II	- Heaters that have a nominal maximum rating of 60,000 Btu/hr, but are also capable of operating at a nominal heating rate of 30,000 Btu/hr.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A FSC 2540

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

Type II - Heaters that can take their combustion and ventilating air from separate sources ("Dual Air").

Class II - Heaters that have a nominal maximum rating of 60,000 Btu/hr, but are also capable of operating at a nominal heating rate of 30,000 Btu/hr.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

QQ-P-416	- Plating, Cadmium (Electrodeposited).
GG-P-455	- Plates and Foils, Photographic (Photosensitive Anodized Aluminum).
TT-C-490	- Cleaning Methods for Ferrous Surfaces and Pretreatments for Organic Coatings.
VV-F-800	- Fuel Oil, Diesel.

MILITARY

MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-C-5541	- Chemical Conversion Coatings on Aluminum and Aluminum Alloys.
MIL-T-5624	- Turbine Fuel, Aviation, Grades JP-4 and JP-5.
MIL-W-8611	- Welding, Metal Arc and Gas, Steels, and Corrosion and Heat Resistant Alloys; Process for.
MIL-T-13513	- Terminal, Lug; Splice, Conductor (Electrical, Solderless for Automotive use).
MIL-P-14105	- Paint, Heat Resisting (for Steel Surfaces).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

MIL-S-22473	- Sealing, Locking, and Retaining Compounds: (Single Component).
MIL-C-22750	- Coating, Epoxy-Polyamide.
MIL-B-43436	- Band, Marker Blank.
MIL-F-45356	- Filter, Fluid, Pressure, and Filter Element, Fluid, Pressure: for Gasoline, Internal Combustion Engines, with Carburetor.
MIL-S-46163	- Sealing, Lubricating and Wicking Compounds: Thread-Locking, Anaerobic, Single-Component.
MIL-C-46168	- Coating, Aliphatic Polyurethane, Chemical Agent Resistant.
MIL-P-52192	- Primer Coating, Epoxy.
MIL-P-53022	- Primer, Epoxy Coating, Corrosion Inhibiting, Lead and Chromate Free.
MIL-P-53030	- Primer Coating, Epoxy, Water Reducible, Lead and Chromate Free.
MIL-C-53039	- Coating, Aliphatic Polyurethane, Single Component, Chemical Agent Resistant.
MIL-H-62550/1	- Heater Assembly, Combustion, Vehicular Compartment, 60,000 BTU/HR, Single Air Type
MIL-H-62550/2	- Heater Assembly, Combustion, Vehicular Compartment, 60,000 BTU/HR, Dual Air Type
MIL-H-62550/3	- Heater Assembly, Combustion, Vehicular Compartment, 30,000 BTU/HR, Single Air Type
MIL-C-81562	- Coatings, Cadmium, Tin-Cadmium and Zinc (Mechanically Deposited).
MIL-M-81594	- Marking Foil, Hot Stamp Printing of Electrical Insulating Materials.
MIL-T-83133	- Turbine Fuel, Aviation, Kerosene Type, Grade JP-8.

STANDARDS

FEDERAL

FED-STD-595	- Colors.

MILITARY

MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-202	- Test Methods for Electronic and Electrical Component Parts.
MIL-STD-454	- Standard General Requirements for Electronic Equipment.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

MIL-STD-461	- Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.
MIL-STD-462	- Electromagnetic Interference Characteristics, Measurement of.
MIL-STD-810	- Environmental Test Methods and Engineering Guidelines.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1184	- Electrical Components for Automotive Vehicles; Waterproofness Tests.
MIL-STD-1275	- Characteristics of 28 Volt DC Electrical Systems in Military Vehicles.
MIL-STD-45662	- Calibration System Requirements.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

ARMY

11669705	- Box Assembly Control.

(Copies of specifications, standards, drawings, and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity).

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Performance Test Code (PTC) 19.5	- Application Part II of Fluid Meters Sixth Edition 1971 (Interim Supplement 19.5 on Instruments and Apparatus).

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 E. 47th Street, New York, NY 10017).

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D2156	- Smoke Density in Flue Gases from Burning Distillate Fuels, Test for.
ASTM B633	- Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

AIR MOVEMENT AND CONTROL ASSOCIATION (AMCA)

210-74	- Laboratory Methods of Testing Fans for Rating.

(Application for copies should be addressed to the Air Movement and Control Association, 30 W. University Drive, Arlington Heights, IL 60004).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), the contractor shall furnish heaters which shall be subjected to first article inspection (see 4.4 and 6.3). First article inspection samples, properly marked with identifying information shall be representative of the unit to be furnished to the Government. All subsequent heaters delivered to the Government shall conform to these samples in all of their pertinent physical and performance attributes.

3.2 Materials. Materials shall be as specified herein, in applicable specifications, or drawings and shall be asbestos free. Materials not specifically designated shall be suitable for use in heaters operating as specified herein without any change in properties that would result in operation of the units falling outside of the specified limits (see 6.4). The heater shall be fabricated of suitable corrosion resistant materials or treated to prevent corrosion. The heater combustion chamber, or heat exchanger, shall be made of stainless steel which is consistent with the life, corrosion and temperature resistance, and other design considerations of the assembly (see 4.8.1).

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:24Z
Check the source to verify that this is the current version before use.

3.2.1 Recycled, virgin and reclaimed materials. There are no requirements for the exclusive use of virgin materials. The use of recycled or reclaimed (recovered) materials is acceptable provided that all other requirements of this specification are met (see 6.4) and that the material is new and unused.

3.2.2 Dissimilar metals. Except where necessary to complete an electrical circuit, the compatibility of dissimilar metals shall be in accordance with MIL-STD-889 (see 4.8.1).

3.2.3 Steel components. Nonpainted steel components, other than stainless steel, shall be cadmium plated in accordance with QQ-P-416, type II, class 2 or MIL-C-81562, type II, class 2, or zinc plated according to ASTM B633, type II, class FE/Zn 13 or MIL-C-81562, type II, class 5. Heat radiating surfaces may be aluminized steel (see 4.8.1).

3.2.4 Aluminum components. Aluminum components shall be coated in accordance with MIL-C-5541, class 1A (see 4.8.1).

3.2.5 Identification plates. Nameplates shall be furnished in the configuration as specified below (see 4.8.1):

a. Material and construction shall conform to MIL-P-514, type III, composition A, class 2, or composition C. Composition C material shall conform to GG-P-455, type II, grade A, class 1. Nameplates shall be permanently attached with metal fasteners.

3.3 Design and construction. Heaters shall be constructed to the form and dimensions depicted on the applicable drawing specified by the contracting authority (see 4.8.1, 4.8.2 and 6.2). Heaters conforming to Type I, Class II or MIL-H-62550/1 should not be ordered. In their lieu heaters conforming to Type II, Class II or MIL-H-62550/2 should be ordered. The latter heaters are field convertible (see 3.3.3 and 3.4.15) to the former. Other than as specified herein, the heaters shall have no provisions for adjustments of their control circuits. Any provisions for adjustment that the manufacturer deems necessary, shall be, on the completed heater, permanently sealed.

3.3.1 Weight. Class I heaters shall not weigh more than 21 pounds (lbs). Class II heaters shall not weigh more than 38 lbs (see 4.8.3).

3.3.2 Electrical components and wiring. The heater electrical components and wiring shall operate and meet all environmental requirements. The wire and insulation shall be flexible to -70 degrees F (°F) and be sized in accordance with the required rating. Crimped terminals shall be crimped according to MIL-T-13513. Soldering shall conform to MIL-STD-454, requirement 5 (see 4.8.1).

3.3.3 Interchangeability. The assembly shall be so designed and fabricated that all component assemblies and parts are functionally and dimensionally interchangeable with like component assemblies and parts

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

previously furnished by the same manufacturer. Construction shall be such that any part, except those furnished in matched sets or for which a selective fit is specified, may be installed, replaced or adjusted without requiring modification. Heaters conforming to Type II, Class II or MIL-H-62550/2 shall be converted to MIL-H-62550/1 by the removal of adapters external to the 7.87 to 7.93 cylindrical surface only through the use of screw drivers, hex keys, or sockets. Dimensional conformance to MIL-H-62550/1 shall be verified (see 4.8.1).

3.3.4 Safety. Hot spots that could create contact burn to personnel shall be well insulated, guarded, or fall within the areas designated on applicable drawings. The heater shall be equipped with an automatic fuel shut off device to shut down the heater and enter its purge cycle in the event of overheating, loss of flame, or failure to ignite. The heater shall be so designed that, with proper installation, the heater exhaust gases cannot enter the vehicle personnel compartment (see 3.4.10 and 4.8.1).

3.3.5 Sealant. All sealing threaded fittings in the heater's fuel circuit or threads utilizing a locking compound shall be sealed or locked, as applicable, with compound conforming to MIL-S-22473 or MIL-S-46163. Compound's grade shall be selected so that its strength shall not result in part damage upon disassembly for repair.

3.3.6 Air bleed. Heaters shall be equipped with an air bleed valve for purging air from the (vehicle) heater fuel line. The valve shall be operated by hand or with a 1/4 inch wrench.

3.3.7 Control circuits.

3.3.7.1 Start cycle. Upon initiating the start cycle with the heater control box (Drawing 11669705), the heater control circuits shall control the heater start cycle and, upon starting, automatically switch to run mode. If the heater fails to start in the allotted time (see 3.4.8), the heater shall automatically exit the start mode and exhaust any excess fuel vapors (see 3.4.9 and 3.4.8.1).

3.3.7.2 Heat output. The heat output of heaters shall be manually setable (with control box 11669705) or automatically reduce when excessive ventilating air temperatures occur (see 3.4.6).

3.3.8 Accessibility. The air bleed valve (see 3.3.6) and fuel inlet shall be accessible without special tools and without disassembling the heater.

3.3.9 Welding. All heater parts that are exposed to combustion gases during normal operation shall be welded, as applicable, according to MIL-W-8611.

3.3.10 Gaskets. Unless otherwise specified herein (see 3.3.5) no formed in place gaskets shall be used with disassemble heater parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.11 Brush inspection. Electric motor, as applicable shall have provision for brush inspection or indication of brush wear without disassembly of motor.

3.3.12 Designated spare part. If the contractor so wishes, he may designate the igniter as a spare part. If he does so, he shall include a spare igniter within the heater. If automatic switching to the spare igniter from the original igniter is not a feature of the heater design, the spare igniter shall be visible and accessible with no more than removing of controls cover.

3.3.13 Filters. No filters or screens with ratings less than 140 micron shall be used in the heater's fuel circuit.

3.3.14 Wire identification. Each wire end or connector for each heater component shall be uniquely marked by the contractor according to MIL-B-43436 or MIL-M-81594. Igniter lead marking optional if they are otherwise readily identifiable.

3.3.15 Fuel compatibility. The heater shall be capable of operating on JP-5 per MIL-T-5624.

3.4 Performance. The heater shall meet the performance requirements specified herein when mounted in any position from horizontal to vertical with the air inlet level with, or higher than, the air outlet; and, except as otherwise specified, when operating in the high, and low heat modes. The heater shall perform as specified using fuel conforming to VV-F-800 as follows (whenever DF-A is specified herein, the contractor may substitute JP-8 according to MIL-T-83133):

Above plus 20°F	type DF-2
Plus 20 to minus 25°F	type DF-1
Below minus 25°F	type DF-A

3.4.1 Fuel.

3.4.1.1 Fuel consumption. With any fuel pressure between 3 and 15 pounds per square inch gage (psig) at the fuel valve inlet, fuel consumption shall not exceed the amounts shown by table I (see 4.8.4.1).

TABLE I. Maximum fuel flow (pounds per minute, lbs/min).

Control box heat level setting	Class I	Class II
High heat	0.049	0.092
Low heat	0.031	0.052

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

3.4.1.2 Fuel leakage. There shall be no visible leakage from the heater fuel components with the heater operating and 15 psig fuel pressure applied to the inlet (see 4.8.4.2).

3.4.2 Voltage. Except where otherwise specified, the heater shall start and meet performance requirements with applied voltages of 23 to 30 volts (V) direct current (dc). At ambient temperatures below minus 25°F the heater shall start and run with an applied voltage of 19 V dc (see 4.8.5).

3.4.2.1 Transient voltage. The heater shall not be damaged when exposed to electrical spikes and surges described by MIL-STD-1275 for both fault free and single fault operation of vehicle electrical system (see 4.8.5.1).

3.4.3 Current. At 24 V dc, the current draw from the power source shall not exceed that specified by table II (see 4.8.6).

TABLE II. Maximum current draw.

Ambient Temperature (°F)	Class I		Class II	
	Start (A) 1/	Run (A)	Start (A)	Run (A)
Above 45	12.0	8.0	16.0	15.0
Below 45	17.0	13.0	21.0	20.0

1/ A = Amperes.

3.4.4 Heat output. The heat output of the heater shall be as shown by table III (see 4.8.7).

TABLE III. Heater heat output.

Control box heat level setting	Class I (Btu/hr)	Class II (Btu/hr)
High heat	30,000 + 3,000 - 3,000	60,000 + 12,000 - 6,000
Low heat	15,000 + 3,000 - 3,000	30,000 + 6,000 - 3,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.5 Air discharge rate. With 24 V dc applied, the ventilating air discharge rate, based on a standard air density of 0.075 pounds per cubic foot (lb/cu ft) at 29.92 in of Mercury (Hg), 70°F, into the specified restriction shall be as follows (see 4.8.8):

TABLE IV. Ventilating and exhaust air circuits minimum restrictions.

Minimum ventilating air flow rate (standard cubic feet per minute, scfm)	Air circuits minimum restrictions (in-water)			
	Class I		Class II	
	Ventilation	Combustion	Ventilation	Combustion
115	0.00	0.00	N/A	N/A
80	0.75	0.75	N/A	N/A
200	N/A	N/A	0.00	0.00
180	N/A	N/A	1.40	0.95

3.4.6 Temperature limit. When the heater's ventilating air circuit is restricted, the heater shall limit the discharge air temperature so that it falls between 275 and 350°F. When the air restriction is removed the heater shall continue burning without requiring a return to the start cycle. Upon further restriction of air flow to not greater than 45 scfm (class I) or 90 scfm (class II) the ventilating air temperature shall not raise above 475°F and the heater shall shut off its fuel flow, then enter its purge cycle and subsequently shut itself off (see 4.8.9).

3.4.7 Smoke density. After the heater has been operating for not longer than 7 minutes, its exhaust gases shall not exceed a smoke spot number of three (five at high heat and 73 ± 18°F) as defined in ASTM D2156, operation at 19 V dc optional (see 4.8.10).

3.4.8 Starting time. The starting time, measured from the time the control box run/start switch is put in the "start" position until the igniter circuit is de-energized shall not exceed 2.5 minutes at temperatures above 20°F. At lower temperatures, starting time shall not exceed 3.5 minutes. Upon starting, the control box run lamp will light (see 4.8.11).

3.4.9 Purging time. The purging time, measured from the time the heater switch is turned off until the blowers automatically shut off at which time the exhaust temperature shall not be greater than 350°F, shall not exceed 4.0 minutes (see 4.8.12).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

3.4.10 Toxic fumes. The heater shall be designed so that the combustion products do not contaminate the ventilating air during operation of the heater. Heat exchangers shall meet the leak requirements of MIL-STD-1184 for type II, class II components, except substitute procedure 5 for procedure 1. Subsequent to the completion of first article and control tests, the heater shall meet the following leakage requirements according to the specified type (see 4.8.13).

3.4.10.1 Type I heaters. Leakage shall not exceed 0.5 scfm.

3.4.10.2 Type II heaters. Leakage shall not exceed one scfm.

3.4.11 Endurance. The heater shall meet the requirements of 3.4.1.1 and 3.4.2 through 3.4.7 and 3.4.10 after 1200 hours of operation; and 3.4.1.2 and 3.4.8 and 3.4.9 during 1200 hours of operation; including at least 2400 start cycles (see 4.8.14).

3.4.12 Environmental conditions. The heater shall meet the requirements of 3.4.1 through 3.4.10 after being subjected to the environmental conditions specified in 3.4.12.1 through 3.4.12.6.

3.4.12.1 High temperature. The heater shall meet the requirements after storage at 160°F (see 4.8.15.1).

3.4.12.2 Low temperature. The heater shall meet the requirements after storage at a temperature of -65°F and during operation at -55°F and 30°F (see 4.8.15.2).

3.4.12.3 Humidity. The heater shall meet the requirements after exposure to relative humidity up to 100% (see 4.8.15.3).

3.4.12.4 Salt fog. The heater shall meet the requirements after exposure to salt fog for 96 hours (see 4.8.15.4).

3.4.12.5 Shock. The heater shall meet the requirements after being subjected to 40 gravity units (g) shock loading (see 4.8.15.5).

3.4.12.6 Vibration. The heater shall meet the requirements during and after sinusoidal vibration in accordance with figure 1, including up to four resonance dwells (see 4.8.15.6)

3.4.12.7 Electromagnetic interference (EMI). The heater shall meet the requirements of MIL-STD-461A, notice 4 (CE-04 and RE-02) (narrow and broad band), and operate as specified (see 3.4.4 and 3.4.8) when exposed to electrical interference specified by CS-01, RS-03 and RS-03.1) for all operating modes including the start cycle. The single switching actions that initiates and ends the heater start cycle, do not have to meet CE-04 and RE-02 EMI requirements (see 4.8.15.7).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.13 Combustion air inlet strength. Type II only. The heater's combustion air inlet shall be capable of sustaining at least 110 lbs load without permanent bending, cracking, interference between moving parts, or any damage that would effect heater performance or durability (see 4.8.16).

3.4.14 Starting with fault. The heater shall not sustain damage when subject to starting procedures a, b, and c. After conducting this test, the heater will operate properly when the igniter is properly installed. Failure of the heater to start shall cause the control lamp to flash. The flash rate shall be between 60 and 120 times per minute. The duty cycle shall be between 30 and 60 percent (see 4.8.17).

a. Heater control box start switch in the "start" position for more than 30 minutes.
b. Open igniter circuit.
c. Shorted igniter circuit.

3.4.15 Field conversion. Type II, Class II or MIL-H-62550/2 heaters shall have their dual air adapters removed (see 3.3.3) and meet the requirements of 3.4.4 through 3.4.10 (see 4.8.18).

3.5 Protective coating. All steel parts, except stainless steel, that are in part or totally subject to temperatures exceeding 400°F, shall be coated color Forest Green or Olive Drab, per MIL-P-14105, 1.5 - 3.5 mils dry film thickness. Surfaces shall be free of oil, grease, rust and mill scale before treatment. All other painted steel parts shall be coated as follows: Clean and treat per type I or type III of TT-C-490, prime per MIL-P-52192, MIL-P-53030, or MIL-P-53022; dry film thickness 0.8 mils minimum. The top paint color shall be camouflage green 383, chip number 34094 of FED-STD-595, conforming to MIL-C-22750, MIL-C-46168 or MIL-C-53039. Total dry film thickness of both coats shall be between 2.6 and 4.5 mils.

3.6 Identification and marking. The heaters shall be marked in accordance with MIL-STD-130 with the following information (see 4.8.1 and 4.8.2):

a. Design activity CAGE and Part or Identifying Number (PIN).
b. Manufacturer's name, CAGE, and model number.
c. Contract number.
d. Nomenclature: Heater, Vehicle Compartment, Fuel-Fired, 60,000 Btu/hr or 30,000 Btu/hr, as applicable.
e. National stock number.
f. Serial number.
g. Type II (only) heaters. Combustion air inlet adapter shall be marked as follows with letters no less than 0.5 in high by black paint conforming to MIL-C-46168 or MIL-C-53039: "DO NOT REMOVE".

3.7 Workmanship. The heater shall be free of defects such as burrs, scratches, chips, sharp edges, corrosion, scale and dirt. Workmanship shall also be in accordance with requirement 9 of MIL-STD-454 (see 4.8.1 and 4.8.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order (see 6.2), the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material. Unless otherwise specified in the contract (see 6.2), the supplier is responsible for the provision and maintenance of all inspection equipment necessary to assure that supplies and services conform to contract requirements. Inspection equipment must be capable of repetitive measurements to an accuracy of 10% of the parameter's tolerance. Calibration of inspection equipment shall be in accordance with MIL-STD-45662.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspections (see 4.5).
c. Control tests (see 4.6).
d. Inspection of packaging (see 4.7).

4.3 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be conducted under the following conditions:

a. Air temperature: 73 ± 18°F.
b. Barometric pressure: 28.5 ± 2 in Hg.
c. Relative humidity: 50 ± 40 percent.

4.4 First article inspection. The first article test plan shall be approved by the procuring activity prior to beginning of first article testing. Unless otherwise specified (see 6.2), the Government shall randomly select three of the first ten additional heaters produced under the production contract for first article inspection. First article samples shall be numbered and inspected as specified in 4.4.1 and in table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of inspections.

Title	Requirement	Inspection	First article Samples			Quality conformance Acceptance	Control
			1	2	3	100%	
			Hor	Vert	Hor	Horizontal	
Materials and construction	3.2 thru 3.2.4 and 3.3.2 thru 3.3.15	4.8.1	X	X	X		X
Defects (see table VII)	3.3, 3.5, 3.6 & 3.7	4.8.2	X	X	X		X
Weight	3.3.1	4.8.3	X	X	X		X
Fuel Consumption	3.4.1.1	4.8.4.1	X	X	X	X	X
Fuel leakage	3.4.1.2	4.8.4.1	X	X	X	X	X
Voltage	3.4.2	4.8.5	X	X	X	X	X
Voltage transient	3.4.2.1	4.8.5.1	X	X	X		X
Current	3.4.3	4.8.6	X	X	X	X	
Heat output	3.4.4	4.8.7	X	X	X		X
Air discharge rate	3.4.5	4.6.8	X	X	X		X
High and over temperature operation	3.4.6	4.8.9	X	X	X		X
Smoke density	3.4.7	4.8.10	X	X	X	X	X
Starting time	3.4.8	4.8.11	X	X	X	X	X
Purging time	3.4.9	4.8.12	X	X	X	X	X
Toxic fumes	3.4.10	4.8.13	X	X	X		X
Endurance	3.4.11	4.8.14	X	X			
Endurance (reduced)	3.4.11	4.8.14.1					X
High temperature	3.4.12.1	4.8.15.1	X	X	X		
Low temperature	3.4.12.2	4.8.15.2	X	X	X		X
Humidity	3.4.12.3	4.8.15.3		X			
Salt fog	3.4.12.4	4.8.15.4			X		
Shock	3.4.12.5	4.8.15.5	X		X		X
Vibration	3.4.12.6	4.8.15.6		X	X		X
Electromagnetic interference (EMI)	3.4.12.7	4.8.15.7			X		
Combustion air inlet strength test	3.4.13	4.8.16	X	X	X		X
Starting with fault	3.4.14	4.8.17	X	X	X		X
Field conversion	3.4.15	4.8.18	X				

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

Approval of the first article sample shall not relieve the contractor of his obligation to supply heaters that are fully representative of those inspected as a first article sample. Any changes or deviation of the production units from the first article sample shall be subject to the approval of the contracting officer. Unless otherwise specified, the listing in table V does not imply any particular test sequence. Failure of the first article to meet any of the requirements specified herein will be cause for the Government to refuse to perform surveillance on additional testing until the fault(s) have been identified and corrected to the Government's satisfaction.

4.4.1 In-process inspections. During fabrication of the first sample production heater, an in-process inspection shall be conducted by the contractor under the surveillance of the Government inspector. Inspection shall be made at the contractor's facility prior to application of primer and paint. Processing and welding procedures, quality system, and inspection records shall be reviewed and evaluated during this inspection.

4.4.2 Production sample. After completion of inspection, the first sample production heater shall remain at the manufacturing facility, as a production sample, and be the last heater shipped on the contract, unless otherwise specified herein. The heater may be released sooner at the discretion of the contracting officer. The contractor shall service and maintain the heaters during this period. The heater subject to endurance testing shall not be used to fulfill production quantities of the contract.

4.4.3 First article inspection failure. The procuring agency shall determine whether a particular first article failure shall be treated as major or minor.

a. A major failure is a non-compliance with requirements specified herein by a functioning component, heat exchanger, or when corrective action requires a design change. As a minimum, the endurance or environmental test during which the deficiency surfaced shall be repeated. A complete first article test repeat of any or all units may be necessary at the discretion of the procuring agency.

b. A minor failure, in general, involves a non-compliance caused by a non-functioning component, a minor workmanship deficiency, or when design change is unnecessary. At most, a repeat of the endurance or environmental test which caused the failure shall be required.

c. The Government shall not accept delivery of any production units until all first article requirements have been satisfied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspections (QCI). QCI shall consist of the examinations of 4.5.2 and the acceptance tests of 4.5.3. Nonconformance with any of the specified requirements in sections 3 and 5 shall be cause for rejection.

4.5.1 Lot formation. An inspection lot shall consist of all the heaters of one type and part number, from an identifiable production period, from one manufacturer, submitted at one time for acceptance.

4.5.1.1 Sample size. Unless otherwise specified (see 6.2), sample size for quality conformance examination and acceptance tests shall be determined in accordance with sampling inspection table VI.

TABLE VI. Sampling inspection.

Sampling lot size	Sample size for Majors	Sample size for Minors
2 to 8	*	3
9 to 25	13	3
26 to 50	13	5
51 to 90	13	6
91 to 150	13	7
151 to 280	20	10
281 to 500	29	11
501 to 1200	34	15
1201 to 3200	42	18
3,201 to 10,000	50	22
10,001 to 35,000	60	29
35,001 to 150,000	74	29
150,001 to 500,000	90	29
500,001 and over	102	29

* Indicates entire lot must be inspected.
NOTE: The acceptance number in all cases is zero.

4.5.2 Examination. Sample units shall be examined for the defects specified in table VII.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

TABLE VII. Classification of defects.

Category	Defect	Method of examination
Major		
101	Assembly, incomplete (see 3.3).	Visual
102	Dimensions affecting interchangeability, out of tolerance (see 3.3).	SIE 1/
103	Faulty workmanship affecting performance (see 3.7).	Visual
Minor		
201	Dimensions not affecting interchangeability, out of tolerance (see 3.3).	SIE
202	Protective coating, improper (see 3.5).	Visual
203	Faulty workmanship affecting appearance (see 3.7).	Visual
204	Identification marking, improper (see 3.6).	Visual

1/ SIE = Standard Inspection Equipment.

4.5.3 Acceptance test (100%). Subsequent to the examination of 4.5.2, each heater shall be subjected to the acceptance test specified in table V.

4.5.4 Failure disposition. Any examination defect or acceptance test failure shall be cause for the Government to refuse acceptance of the production quantity represented by the lot size. Any deficiency found during, or as a result of QCI shall be evidence that all items represented by the lot size are similarly deficient unless contrary evidence satisfactory to the Government is furnished by the contractor. Such deficiencies on all items shall be corrected by the contractor.

4.6 Control tests. Control tests shall be conducted on one heater from each lot of 600 units consecutively produced, except that not more than one test shall be performed in a three month period, nor less than one test in a six month period. Control test specimens shall be representative of the production lot being offered for acceptance. The heaters shall be subjected to the control tests specified in table V.

4.6.1 Failure. Failure of any heater to pass any of the specified tests shall be cause for the Government to refuse acceptance of the production quantity represented until action taken by the contractor to correct defects and prevent recurrence has been approved by the procurement agency.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

4.7 Inspection of packaging. The preservation, packaging, packing, and marking shall be inspected to determine conformance to 5.1.

4.8 Methods of inspection. Except as otherwise specified herein, performance tests shall be conducted with the heater mounted in the positions specified in table V, at the specified heat outputs, high and low heat, (see 3.4.4), and at input voltages (measured at the power input to the control box) of 23.0 ± 0.5 V dc and 30.0 ± 0.5 V dc. Acceptance testing shall be conducted at 23.0 ± 1.0 V dc only and high heat, control box optional. The fuel and ambient temperature shall be as specified in 3.4 and the fuel pressure shall be 8 ± 1 psig. Prior to each start, the heater shall be cooled for at least 10 minutes. The ventilation air outlet temperature shall be measured in a duct, within 10% of its center and 42 ± 1 in from the heater. Temperature sensor shall be shielded from radiant heating by the heater. All tests shall be conducted with heater control box part number 11669705 with a nonshielded copper wire cable assembly 10 to 12 ft long connecting the control box with the heater. Wire gage shall be equal or greater to that used in the control box for the same circuit. If the test set up requires a longer cable, the gage of the wire and cable length shall be changed so as to provide equal resistance to that of the specified cable. If the igniter is a designated spare part (see 3.3.12), the igniter may be replaced only once during first article testing. Otherwise the igniter shall not be replaced and no other repairs or adjustments may be performed upon the heater during the testing specified herein.

4.8.1 Materials, design, and construction. Conformance to 3.2 through 3.2.4, and 3.3.2 through 3.3.14, shall be determined by inspection of contractor records providing proof or certification that design, construction, processing, and materials conform to requirements. Applicable records shall include drawings, control standards, vendor catalogs and certifications, industry standards, test reports, and rating data.

4.8.2 Defects. Conformance to 3.3, 3.5, 3.6 and 3.7, shall be determined by examination for the defects listed in table VII.

4.8.3 Weight. To determine conformance to 3.3.1, the heaters shall be weighed.

4.8.4 Fuel.

4.8.4.1 Fuel consumption. To determine conformance to 3.4.1.1, the fuel flow shall be measured and a fuel pressure of 15 (+0, -1) psig applied to the fuel valve inlet. Repeat procedure except substitute 3 (+1, -0) psig for 15 psig.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

4.8.4.2 Fuel leakage. To determine conformance to 3.4.1.2, the heater shall be operated for at least 5 minutes at a fuel pressure of 14.0 ± 1 psig. Subsequently, the heater's control box cover shall be removed and the fuel circuit examined for fuel leakage.

4.8.5 Voltage. To determine conformance to 3.4.2, applied voltage shall be measured throughout performance testing.

4.8.5.1 Transient voltage. To determine conformance to 3.4.2.1, the heater shall be subjected to spike and surge voltages described by MIL-STD-1275 as being generated during fault free and single fault operation of the vehicle electrical system. The specified voltages shall be applied at least 100 times asynchronously with the switching of any electronic device that is directly subject (i.e., without active regulation of its voltage supply) to the spike and surge voltages of the vehicle electrical system.

4.8.6 Current. To determine conformance to 3.4.3, heater current draw shall be measured during performance testing. Running current shall be measured after the igniter or start circuit has de-energized.

4.8.7 Heat output. To determine conformance to 3.4.4, set ventilating and exhaust back pressures as specified (see 4.8.8), with temperature sensors measuring input and output air temperatures in the duct specified by 4.8.8, and measuring ventilating air flow (see 4.8.8), the heater shall be operated until the ventilating air outlet temperature has stabilized. When testing is performed at ambient temperatures above 55°F, and the heater's controls limit the ventilating air outlet temperature, the control may be locked out. Locking out is only allowed when the outlet temperature reaches between 275 and 350°F. Heat output shall be calculated using the following equation:

$H = V \times d \times Cp \times T$

H = Heat output in Btu/hr.
V = Ventilating air flow rate in cubic feet per hour (cu ft/hr).
d = Density of ventilating air in pounds per cubic foot (lb/cu ft).
Cp = Average specific heat of the ventilating air (from temperature rise across heater) in Btu per lb per degree F, including moisture content
T = Ventilating air temperature rise across heater (outlet temperature, in degrees F, minus inlet temperature, in degrees F).

4.8.8 Air discharge rate. To determine conformance to 3.4.5, establish a test setup by operating the heater as necessary and set the ventilating air circuit restriction as specified by table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE VIII. Air circuit restrictions.

Class	Ventilating Air		Combustion Gas
	Minimum Pressure Loss (in water)	Flow (scfm)	Minimum Pressure Loss (in water)
I	0.75	94+5	0.75
II	1.30	174+5	0.95

Measure the air flow and pressure drops according to AMCA 210-74 or ASME PTC 19.5. With the heater operating as necessary at high heat, set the combustion gas circuit restriction as specified (see table VIII) and measure the ventilating air flow rate and back pressures of the exhaust and ventilating air as specified. During subsequent testing no changes shall be made in these restrictions. The thermal conductivity of the ventilating air duct's wall shall be less than 0.20 Btu/hr per square foot per degree F. Subsequently the heater shall be operated as specified herein (see 4.8) and ventilating air flow measured as specified to determine conformance with table IV.

4.8.9 Temperature limit. To determine conformance to 3.4.6, expose the heater to a temperature between 55 and 91°F and measure the temperature of the ventilating air in the duct and heater fuel flow. Operate the heater into the duct used in 4.8.8, restricting the ventilating air flow as necessary until the heater limits the air's temperature to between 275 and 350°F. Continue to operate the heater for at least an additional 30 minutes. Within a period of not less than five minutes, continuously reduce the air flow to not more than 45 scfm (class I) or 90 scfm (class II). Air temperature shall remain within specified limits. Again, continue to operate the heater for at least an additional 30 minutes. Subsequently, the air flow shall be further restricted and the heater shall shut off its fuel flow and enter its purge cycle (see 4.8.12) without the ventilating air temperature exceeding 475°F.

4.8.10 Smoke density. To determine conformance to 3.4.7, the heater shall be operated for not more than 7 minutes. Subsequently, without changing the heater operating condition, the smoke density of the exhaust gases shall be measured according to ASTM D2156.

4.8.11 Starting time. To determine conformance to 3.4.8, put the control box start/run switch in the "start" position for 2 ± 1 seconds. Return the switch to its "run" position. Monitor the control box lamp. Repeat this test except keep the start switch in the "start" position until the lamp lights and then switch it to the "run" position. The heater shall start and operate after both procedures.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

4.8.12 Purging time. To determine conformance to 3.4.9, the ventilating air temperature shall be stabilized at high heat and the control box starting switch shall be switched to the "off" position. Measure the combustion gas temperature 24 ± 1 in away from the heater's exhaust tube and the time from the starting switch being turned off until the blowers shut off. The elapsed time shall not exceed 4.0 minutes.

4.8.13 Toxic fumes. To determine conformance to 3.4.10, prior to heater assembly, all heat exchangers shall be tested according to MIL-STD-1184, procedure 5, except in lieu of applying a vacuum to exterior of heat exchanger, apply pressure internally. Subsequent to completion of first article and control test, pressurize the exhaust tube with air at no less than 3 inches water pressure, block the combustion air inlet, and measure the air flow rate.

4.8.14 Endurance. To determine conformance to 3.4.11, the heater shall be operated with the specified restrictions (see 4.8.7 and 4.8.8) for a total of 1200 hours "ON" time (ignite and run, see 4.8.14.1). Operation shall be in 40 minute cycles consisting of 30 minutes "ON" time and 10 minutes "OFF" time (purge and cool). The total of 1200 hours of operation shall consist of only "ON" time. "OFF" time shall not be included in compilation of operating time. Install a filter conforming to MIL-F-45356, type I or II, class I in the heater's fuel line. Fuel pressure shall be as specified (see 4.8) at the filter's inlet. Fuel pressure may also be measured down stream of the filter. Add fine contaminate to DF-2 fuel (as specified by MIL-F-45356) up stream of the filter at a rate not less than 0.5 grams per hour for a total of not less than 100 grams. When the filter loads up, it shall be changed. During each cycle (start and run portions) the applied voltage shall drop to less than 19.0 V dc for 2.5 ± 0.5 seconds. During endurance testing the heater shall be tested as specified by 4.8.11 and 4.8.12. After each phase of endurance testing, and still at the phase's specified temperature, the heater shall be tested as specified in 4.8.4 through 4.8.12. Fuel shall be at the same temperature as the ambient (test) temperature. Testing shall consist of the following phases:

PHASE I - Using DF-2 fuel at ambient temperature of 73 ± 18°F

a. Set heater control box at low heat and operate the heater for 25 cycles with 23.0 ± 0.5 V dc applied.
b. Repeat step A using an input voltage of 28.0 ± 0.5 V dc.
c. Reset temperature control to high heat and repeat steps "a" and "b".
d. Repeat steps "a" through "c" until 600 forty minute cycles are completed (300 "ON" hours).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

PHASE II - Using DF-1 fuel and at minus 25 ± 5°F repeat steps "a" through "d", except 300 forty minute cycles (150 "ON" hours) shall be completed and in step "b" substitute 30.0 ± 0.5 V dc in lieu of 28.0 ± 0.5 V dc.

PHASE III - Using DF-A fuel and at minus 55 ± 5°F repeat steps "a" through "d", except 300 forty minute cycles (150 "ON" hours) shall be completed, and in step "a" and "b" substitute less than 19 V dc and 30 ± 0.5 V dc, respectively, for the specified voltages. At the 19 V dc condition of this phase there is no requirement to drop the voltage as specified by the basic paragraph.

PHASE IV - Repeat Phases I through III for an additional 1200 cycles.

4.8.14.1 Reduced endurance testing. For control test only, endurance testing (see 4.6.14) shall be reduced to 300 cycles. The test shall consist of 100 cycles each of phases I, II and III.

4.8.15 Environmental. Before testing the heater shall be operated for not less than 10 minutes. Environmental testing as applicable shall be performed before endurance testing. After the completion of environmental testing as specified in 4.8.15.1 through 4.8.15.6, the heater shall be subjected to the tests specified in 4.8.4 through 4.8.13.

4.8.15.1 High temperature. To determine conformance to 3.4.12.1, the heater shall be tested as specified by MIL-STD-202, method 108, condition B at no less than 160°F. The heater shall be positioned as specified in table V. After storage, the heater temperature shall be allowed to reach a temperature of 73 ± 18°F, and the heater shall be tested as specified in 4.8.4 through 4.8.12 using DF-2 fuel.

4.8.15.2 Low temperature. To determine conformance to 3.4.12.2, the heater shall be tested in accordance with MIL-STD-810, method 502, procedure I. The heater shall be preconditioned by operating with DF-A fuel. The heater, positioned as specified in table V, shall be stored at no more than minus 65°F for 12 hours. After storage, the heater temperature shall be allowed to reach a temperature of minus 55 ± 5°F and the heater shall be tested as specified in 4.8.4 through 4.8.12 using DF-A fuel. Subsequently, repeat the test but use DF-2 fuel in lieu of DF-A fuel and use 25 ± 5°F in lieu of minus 55 ± 5°F.

4.8.15.3 Humidity. To determine conformance to 3.4.12.3, the heater shall be tested as specified in MIL-STD-202, method 106.

4.8.15.4 Salt fog. To determine conformance to 3.4.12.4, the heater shall be tested in accordance with MIL-STD-202, method 101, condition A.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

4.8.15.5 Shock. To determine conformance to 3.4.12.5, the heater, with no fuel applied, shall be tested as specified by MIL-STD-202, method 213, condition A, except the pulse shall have an amplitude of 40 g's and a duration of 18 milliseconds. It shall be mounted at the locations shown by the applicable drawing.

4.8.15.6 Vibration. To determine conformance to 3.4.12.6, the heater shall be rigidly mounted at the locations specified by the applicable drawing and subjected to vibration as specified by MIL-STD-202, method 204, condition A, using the curve shown by figure 1, in lieu of specified vibration level. During testing, heater shall be started, purged, operated and monitored for intermittent operation. A resonant frequency search shall be conducted along each axis over a range of 5 to 500 Hertz (Hz). The test schedule shall include 13-1/3 minutes dwell time at each resonance (up to a maximum of four). If more than four resonances are present, the most severe shall be used. The total cycling time per axis shall be 80 minutes including the resonance dwell time. Total cycle time shall be equally divided between operation at low and high heat.

4.8.15.7 Electromagnetic interference. To determine conformance to 3.4.12.7, the heater shall be subject to the tests specified by MIL-STD-462, notice 3. While it is exposed to the specified interference, it shall be operated as specified by 4.8.7 and 4.8.11. Starting and operating the heater may be simulated by eliminating fuel combustion. If this simulation is used, the contractor's test plan shall describe completely how he intends to simulate the heater's operation and demonstrate that his simulation is adequate to ensure representative heater operation during the specified testing.

4.8.16 Combustion air inlet strength. Type II only. Hang the heater from the combustion air inlet by attaching a suitable strap to the heater's 1.50 in diameter. Measure the torque necessary to rotate the adapter through its specified range. Suitably attach sufficient weight to the heater's ventilating air outlet to make 110 lbs the total weight supported by the combustion air inlet. Remove the heater from the test set up. Inspect the heater and rotate the combustion air inlet. The inlet shall rotate freely with no binding, and the torque required to rotate it shall not change by more than 20 percent. Operate the heater. There shall be no evidence of interfering parts, such as vibration, slow motor speeds, or sounds of rubbing parts.

4.8.17 Starting with fault. To determine conformance to 3.4.14, prior to endurance or vibration and shock testing, as applicable, the control box lamp shall be monitored and the heater shall be subject to the following tests:

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

a. Move the control box's start/run switch to the start position and hold it there for at least 30 minutes. The heater shall start and operate.

b. Substitute an air supply for the fuel supply.

i. Move the control box's start/run switch to the start position and hold it there for at least 30 minutes.
ii. Remove igniter from heater and leave heater's igniter circuit open. Repeat step i.
iii. Remove igniter from heater and short out the heater's igniter terminals with a copper wire of at least 10 gage and not longer than one foot. Repeat step i.

c. Subsequently, the heater shall start and run.

4.8.18 Field conversion. To determine conformance to 3.4.15, Type II, Class II or MIL-H-62550/2 heaters shall have their dual air adapters removed only with the specified tools (see 3.3.3) and tests specified by 4.8.7 through 4.8.13 shall be performed.

5. PACKAGING

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking for the desired level shall be in accordance with the applicable packaging requirements specified by the contracting authority (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Application information. The heater furnished under this specification is intended to supply warm air to the crew compartment of military vehicles. In order to obtain heater durability in these vehicles that heaters meeting this specification have demonstrated, the following installation guidelines must be followed. Otherwise, their durability will be unsatisfactory.

6.1.1 Restriction. The restriction of the heater air circuits should not exceed those specified by this specification (see 3.4.5).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

6.1.2 Fuel. Heater fuel must not contain solid contaminates larger than 30 micron. Filters conforming to MIL-F-45356, Type I or II, Class I provide adequate protection and capacity. Filters that require frequent cleaning are not effective. The best source of heater fuel is downstream of the engine fuel filter(s).

6.1.3 Ventilator. The heater should not be used solely as a ventilating device or fan. The heater's (fan motor) life is consumed performing a task that can be much more cheaply performed by a dedicated fan.

6.1.4 Fuel pressure. Fuel pressure should be between 3 and 15 psig.

6.1.5 Combustion air. Combustion air should be free of dust, sand, and/or water. Otherwise the burner will become clogged with debris and the heater will fail to start. In most vehicles, the air taken from the crew compartment is adequate for combustion purposes. During military operations, crew compartments are free of liquid water, and dust concentrations of 0.009 g/cubic ft of AC fine dust equivalent have been measured there.

6.1.6 Fuel line. The internal diameter of the fuel lines for these heaters should be at least one half inch. This size, while not needed for fuel temperatures above minimum specified (see 3.4), helps fuel flow when the temperature is below the cloud point of the fuel in the heater's fuel line.

6.1.7 Heater power. Electric power for the heater should be taken from the "hot" side of the vehicle's master power switch. Severe damage happens to heaters when they lose power before the completion of their purge cycle.

6.1.8 Differential restriction. The vehicle's external inlet and outlet for the heater's combustion air circuit should be located so that between the openings there is no actual or potential for differential pressures greater than 2 in water.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Title, number, and date of applicable drawing (see 3.3). Heaters conforming to Type I, Class II or MIL-H-62550/1 should not be ordered. In their lieu, heaters conforming to Type II, Class II or MIL-H-62550/2 should be ordered. The latter heaters are field convertible (see 3.3.3 and 3.4.15) to the former.
c. If first article is required (see 3.1).
d. If responsibility for inspection and the place of inspection is other than the contractors (see 4.1).
e. Arrangements for first article inspection, approval of test results, and disposition of first article (see 4.4).
f. Government's rights and conditions for waiving first article inspection (see 6.3).
g. Selection of applicable level and packaging requirements (see 5.1).
h. Sampling table, if other than as specified (see 4.5.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

6.3 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerers whether the first article samples should be first article sample, preproduction sample, initial production sample, first production item, or standard production item from the contractor's current inventory. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Recovered materials. "Recovered materials" means materials that have been collected or recovered from solid waste (see 6.4.1).

6.4.1 Solid waste. "Solid waste" means (a) any garbage, refuse, or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material resulting from industrial, commercial, mining, and agricultural operations, and from community activities. It does not include solid or dissolved material in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under section 402 of the Clean Water Act, (33 U.S.C. 1342 et seq.), or source, special nuclear, or by product material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.) (Source: Federal Acquisition Regulations, section 23.402).

6.5 Supersession data.

Superseded Part	New Part (MIL-H-62550)
M46792/2	Type I, Class I
7748716	Type I, Class II
11601809	Type I, Class II
11669489	Type II, Class II
11669489-1	Type II, Class II
11669490	Type II, Class II
11669490-1	Type II, Class II
11669496	Type I, Class II

6.6 Critically. This is a critical item.

6.7 AMC policy on AQLs/LTPDs. This specification is certified to be in compliance with current Army Military Command (AMC) policy for the elimination of AQLs/LTPDs (Acceptable Quality Levels/Lot Tolerance Percent Defectives) from military specifications.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

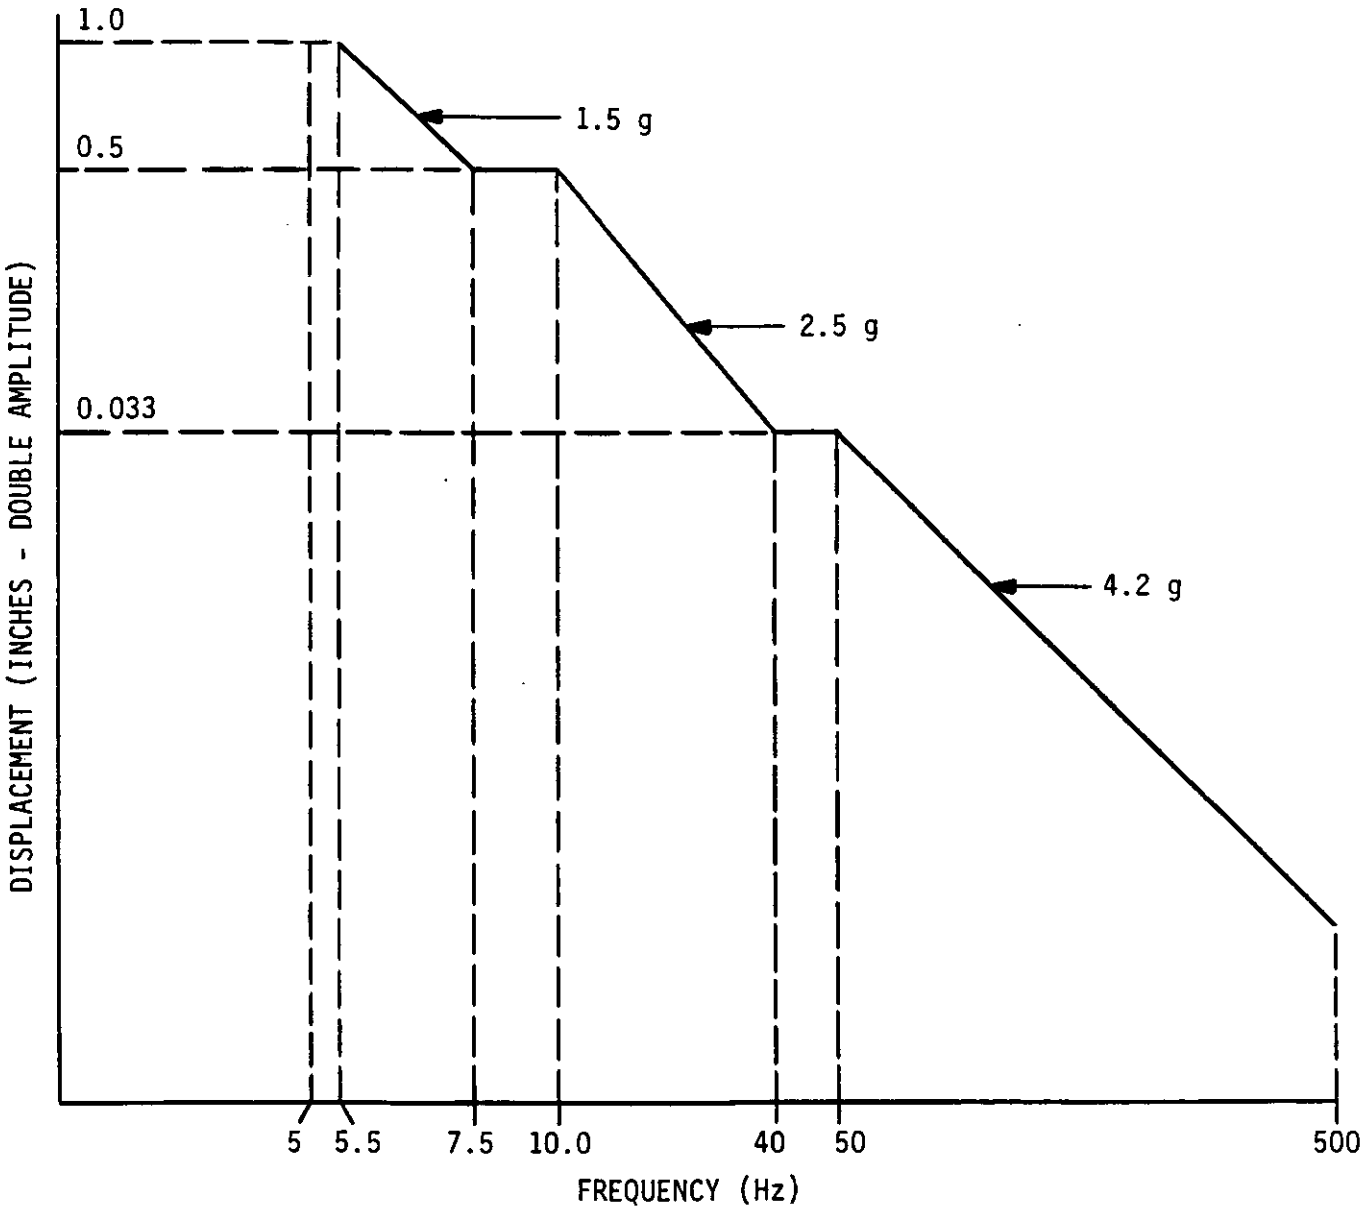


FIGURE 1. Vibration curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AT

Preparing activity:
Army - AT

(Project 2540-A106)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
US Army Tank-Automotive Command
ATTN: AMSTA-GDS
Warren, MI 48397-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.