MIL-P-60905A-(MU)
20 September 1973
SUPERSEDING
MIL-P-60905(MU)
19 February 1968
(See 6.4)

MILITARY SPECIFICATION
PARTS AND SUBASSEMBLIES FOR TEST VEHICLE: PXR6007

*1. SCOPE

*1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of test vehicle PXR6007 used for new materials test and stockpile reliability test program for the M454 project.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

*SPECIFICATIONS

FEDERAL

QQ-W-343 - Wire, Electrical, Uninsulated AWG #20 Drawn and Annealed.
QQ-S-571 - Solder, Tin Alloy; Lead Tin Alloy; and Lead Alloy.

*MILITARY

MIL-I-23053 - Insulation Tubing, Electrical, Heat Shrinkable, Class 1 or 3, Any Color.
MIL-S-60902 - Soldering Electrical Connections for Nuclear Weapons Systems, Procedure For.
MIL-T-46038 - Titanium Alloy, Wrought, Rods and Billets.

STANDARDS

*MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-1169 - Packaging, Packing and Marking for Shipment of Inert Ammunition Components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

MS-3102A24-7P - Connector.
MS-3106E24-75(C) - Connector.
MS-9021-29 - Packing, Preformed.
MS-9390-08 - Pin, Headless.
MS-16555-65 - Pin, Straight, Headless.
*MS-16995-3 - Screw, Cap Socket Head.
MS-16997-102 - Screw.
MS-28775-430 - Packing, Preformed.
MS-29513-240 - Packing, Preformed.
MS-35206-211 - Screw, Machine, Pan. Head.
MS-35206-245 - Screw, Machine.
MS-35337-21 - Washer, Lock, Split.
MS-35337-24 - Washer, Lock.
MS-35456-11 - Screw, Cap, Socket Head.
*MS-51963-110 - Set Screw, Hex Socket.
*MS-51975-9,17 - Screw Shoulder.

DRAWINGS

PICATINNY ARSENAL

8857439 - Clutch, Half, Positive.
8857479 - Clutch, Half, Positive.
8857484 - Packing, Preformed.
8857491 - Window, Observation.
8857492 - Plate Retaining, Window.
8857545 - Pin, Straight, Headless
9203276 - Pin, Straight, Headless.
9204353 - Compound, Potting.
9212230 - Switch Block Subassembly.
9212231 - Switch Block Assembly, Aft.
9212232 - Block, Switch, Aft.
9212233 - Block, Switch, Forward.
9212234 - Adapter and Cable Assembly.
9212235 - Modified Connector Assembly.
9212236 - Connector, Modified.
9212237 - Lug, Terminal.
9212239 - Cable, Ribbon.
9212240 - Body, Alternative.
9212241 - Base, Alternative.
9212242 - Adapter.
9212244 - Washer, Friction.
9212246 - Body.
9212247 - Seat Assembly.
9212248 - Seat.
9212249 - Screw, Knurled Head.
9212250 - Nut, Jam.
9212251 - Ring, Retainer.
9212252 - Block, Mounting, Connector.
9212253 - Plate, Connector.
9212254 - Plate, Support.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

9212569 - Tubing, Insulation.
9214726 - (Sheet 2) - PXR-6007 Shipping Assembly.
9214728 - Plug, Shorting.
9214729 - Ogive and Window Assembly.
9214730 - Ogive.
9214731 - Support Rod Assembly.
9214732 - Rod, Support.
9214733 - Ring, Clamping.
9214734 - Plug.
9214735 - Cover, Adapter, M.T.
9215750 - Screw, Cap, Flat Head.
9216353 - Screw, Set, Hex, Socket, Oval Point.
9216409 - Blank, Rotating Band.
9220310 - Screw, Connector.
9220313 - Insulator, Top.
9220314 - Body, Connector.
9220315 - Seal, Lower.
9220322 - Adhesive Sealant.
9220324 - Screw, Guide.
9220325 - Pin, Connector.
9221104 - Connector, Electrical.
10520044 - Gromet Assembly.
10520045 - Housing, Liner.
10520046 - Liner.
10520062 - Tie.
10520063 - Staple.
*10999804 - Gasket, Metal.
*10999805 - Nut.

PUBLICATIONS

*ASTM-E-8-66 - Methods of Tension Testing of Metallic Materials.
*ASTM-E-23-66 - Methods for Notched Bar Impact Testing of Metallic Materials.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.2 Assembly. The assemblies shall comply with all requirements specified on the drawing (dwg) 9212230, 9212234, 9212247, 9214726, 9214728, 9214729, and 9214731, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

*3.3 Serialization. The contractor shall assign serial numbers as required by drawings.

*3.3.1 Unclassified items. The contractor may select any number which complies with the drawing requirement. These numbers shall not be duplicated.

*3.3.2 Classified items. Production quantities shall not be revealed. Random serial numbers shall be selected by the contractor in a manner which has been approved by the procuring agency. These numbers shall not be duplicated.

*3.4 Tool manufacturing control (T.M.C.). When T.M.C. is specified herein, five consecutive parts which comply with drawing dimensions will constitute proper initial tool control acceptance. During normal production, five parts shall be selected at the start and at the end of each day's production (for a minimum of 10 parts) and examined as specified in the applicable paragraph in 4.3.2.1. In addition, five consecutive parts shall be examined as specified in the applicable paragraph in 4.3.2.1 whenever the manufacturing tool requires maintenance. Failure of any part to comply with any of the examinations specified in 4.3.2.1 shall reject the lot of production under consideration.

*3.5 Preformed packing (see dwg 8857484).

*3.5.1 Axial thickness (see dwg 8857484). Axial thickness (dim. B) shall be the average of three measurements taken at points distributed around the circumference of the packing when measured as specified in 4.4.1.1 and comply with the requirements of the applicable details on dwg 8857484.

*3.5.2 Inside diameter (see dwg 8857484). The inside diameter shall be measured as specified in 4.4.1.2 employing no stress in excess of that necessary to overcome the ellipticity of the packing and comply with the requirements of the applicable details on dwg 8857484.

*3.6 Circuit resistance (see dwg 9214728). The circuit resistance between any pin and any other pin in the shorting plug shall not exceed 0.1 ohm when tested as specified in 4.4.2.

*3.7 Rotating band (see 9212246 and 9212241).

3.7.1 Physical properties. After removal from the base, a two inch gage test coupon shall show the following physical properties: Tensile strength of 30,000 pounds per square inch and a minimum elongation of 25 percent when tested as specified in 4.4.3.1.

3.7.2 Seating. After seating of the band before machining, the diametrical clearance between the band and the seat shall not exceed, 0.005 inch at any point of measurement on the band when computed as specified in 4.4.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

3.7.3 Damaged rotating band. Each rotating band on each projectile assembly shall be inspected for the following defects.

a. Cracks.
b. Any dent, nick, scratch or gouge which exceeds the allowable depth (see Fig. 1).

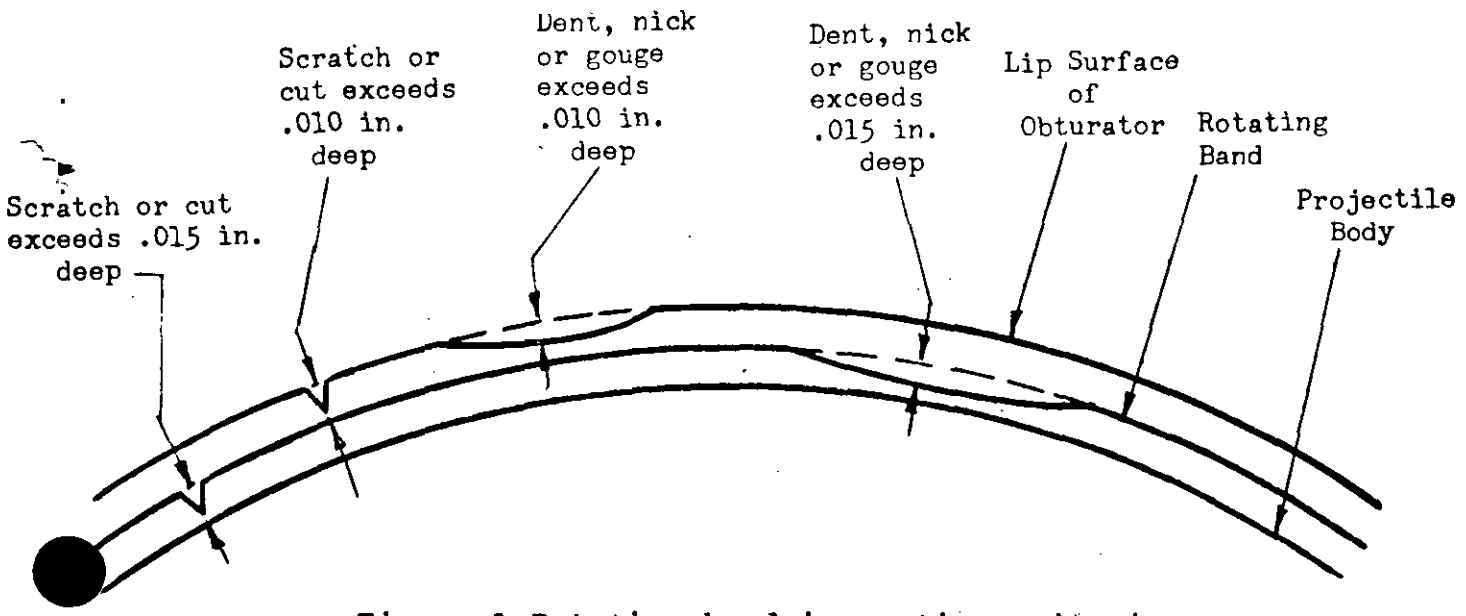


Figure 1. Rotating band inspection criteria

c. Foreign matter embedded in rotating band material. Any rotating band which any of the defects listed in a, b, and c shall be rejected and removed from the lot when inspected as specified in 4.4.3.

*3.8 Metal to metal contact (see dwg 9214726(sheet 2). When base (see dwg 9212241) and body (see dwg 9212240) are used in the assembly, metal to metal contact will be considered established when the gap in the joint is calculated in accordance with the drawing. The gap shall not exceed 0.001 inch or show a variation of more than 0.005 inch, when measured as specified in 4.4.4.

*3.9 Pin seated on bottom of hole (see dwg 9214726(sheet 2). The pin shall be considered seated on the bottom of the hole when the actual measurement of the assembled pin below flush shall equal the calculated measurement plus or minus 0.001 inch when measured as specified in 4.4.5.

*3.10 Workmanship.

*3.10.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*3.10.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

*3.10.3 Burrs. Parts shall be free from burrs.

*3.10.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

*3.10.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

*3.10.6 Electrical. Cable assemblies and wires shall be dressed in such a manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from burrs, sharp edges, or points. All parts shall be free from flux, chips, dirt, grease, rust or foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.2 First article inspection. Not applicable.

*4.3 Quality conformance inspection.

*4.3.1 Inspection lot formation. All items in each inspection lot shall be from one production line, one shift, one batch of products, one manufacturer of raw material or components, one production method or manufacturing operation. The entire lot shall be submitted as a unit for inspection.

*4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (see Table I and Table II), and inspected for all characteristics in the applicable classification. Any characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Major Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-72	all	140-141	124	256-259	177	541-549	230
73	72	142	125	260-262	178	550-559	231
74	73	143-144	126	263-265	179	560-569	232
75	74	145	127	266-268	180	570-579	233
76	75	146-147	128	269-271	181	580-590	234
77	76	148-149	129	272-275	182	591-601	235
78	77	150	130	276-278	183	602-613	236
79	78	151-152	131	279-282	184	614-625	237
80	79	153-154	132	283-285	185	626-637	238
81-82	80	155-156	133	286-289	186	638-649	239
83	81	157	134	290-293	187	650-662	240
84	82	158-159	135	294-296	188	663-676	241
85	83	160-161	136	297-300	189	677-690	242
86	84	162-163	137	301-304	180	691-704	243
87	85	164-165	138	305-308	191	705-719	244
88-89	86	166-167	139	309-312	192	720-735	245
90	87	168	140	313-316	193	736-751	246
91	88	169-170	141	317-320	194	752-768	247
92	89	171-172	142	321-324	195	769-785	248
93	90	173-174	143	325-329	196	786-804	249
94-95	91	175-176	144	330-333	197	805-823	250
96	92	177-178	145	334-338	198	824-842	251
97	93	179-180	146	339-342	199	843-863	252
98	94	181-182	147	343-347	200	864-884	253
99-100	95	183-184	148	348-352	201	885-907	254
101	96	185-187	149	353-356	202	908-930	255
102	97	188-189	150	357-361	203	931-955	256
103	98	190-191	151	362-366	204	956-981	257
104-105	99	192-193	152	367-372	205	982-1008	258
106	100	194-195	153	373-377	206	1009-1036	259
107	101	196-197	154	378-382	207	1037-1066	260
108-109	102	198-200	155	383-388	208	1067-1098	261
110	103	201-202	156	389-393	209	1099-1131	262
111	104	203-204	157	394-399	210	1132-1166	263
112-113	105	205-207	158	400-405	211	1167-1204	264
114	106	208-209	159	406-411	212	1205-1243	265
115	107	210-212	160	412-417	213	1244-1285	266
116-117	108	213-214	161	418-424	214	1286-1330	267
118	109	215-217	162	425-430	215	1331-1378	268
119	110	218-219	163	431-437	216	1379-1429	269
120-121	111	220-222	164	438-443	217	1430-1483	270
122	112	223-224	165	444-450	218	1484-1542	271
123-124	113	225-227	166	451-457	219	1543-1605	272
125	114	228-230	167	458-465	220	1606-1673	273
126-127	115	231-232	168	466-472	221	1674-1747	274
128	116	233-235	169	473-480	222	1748-1827	275
129-130	117	236-238	170	481-488	223	1828-1914	276
131	118	239-241	171	489-496	224	1915-2010	277
132-133	119	242-243	172	497-504	225	2011-2115	278
134	120	244-246	173	505-513	226	2116-2232	279
135-136	121	247-249	174	514-521	227	2233-2361	280
137	122	250-252	175	522-530	228	over 2361	298
138-139	123	253-255	176	531-540	229		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Table II
Minor Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131			

4.3.2.1 Classification of characteristics (see 3.2). Critical, major and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Pin, headless (see dwg MS9390-08 covering a detail of dwg 9212231 and 9212247).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Objective evidence (see 6.2) available for part in accordance with MS9390-08	Visual
Minor:		
201.	Workmanship (see 3.10)	Visual/Manual

4.3.2.1.2 Block switch, aft (see dwg 9212232 covering a detail of dwg 9212231).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
*101.	Depth of thread in 3 threaded holes left face, min (.88)	Gage
102.	Pitch diameter of 3 threaded holes left face, max	Gage

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

103.	Minor diameter of 3 threaded holes left face, max	Gage
104.	Location of 2 pin holes in left inside hub	Gage
*105.	Left inside diameter in hub in left cavity (.878)	Gage
106.	Location of 2 slots in hub in left cavity	Gage
*107.	Width of slots in hub in left cavity (.24)	Gage
*108.	Depth of 2 holes in hub in left cavity (.12)	Gage
*109.	Diameter of 2 holes in hub in left cavity (.0930)	Gage
*110.	Depth of left cavity (1.15)	Gage
*111.	Distance from left face to top of hub in left cavity (.90)	Gage
*112.	Diameter of thread clearance center hole, min (.94)	Gage
*113.	Concentricity of left inside diameter of hub	Gage
*114.	Left inside diameter of hub in left cavity (1.127)	Gage
*115.	Diameter of hub in left cavity (1.26)	Gage
*116.	Left inside diameter (2.97)	Gage
*117.	Distance from left face to bottom of counterbore in hub in left inside cavity (.982)	Gage
118.	Left face perpendicular to inside diameter	Gage
*119.	Total length (2.143)	Gage
*120.	Distance between right face and bottom of thread clearance (.73)	Gage
*121.	Distance between right face and top of thread clearance, min (.69)	Gage
*122.	Length of right inside diameter, max (.22)	Gage
*123.	Length from right face to right outside shoulder (.20)	Gage
*124.	Taper of left cavity (20°)	Gage
*125.	Right inside diameter, min (.97)	Gage
*126.	Diameter of intersection of taper and bottom of left cavity (2.27)	Gage
*127.	Right outside diameter (4.60)	Gage
*128.	Outside diameter (5.30)	Gage
*129.	Concentricity of outside diameter	Gage
130.	Pitch diameter of thread center hole	Gage
131.	Minor diameter of thread center hole, max	Gage

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

132.	Pitch diameter 3 threaded holes in right face	Gage
133.	Minor diameter 3 threaded holes in right face, max	Gage
*134.	Depth of 3 threaded holes in right face, min (.69)	Gage
*135.	Diameter of counterbores on 3 threaded holes right face (.38)	Gage
*136.	Depth of counterbores on 3 threaded holes right face (.10)	Gage
137.	Location of 3 threaded holes right face	Gage
138.	Material (see 3.1)	Visual

Minor:

201.	Chamfer or radius present	Visual
202.	Stamping	Visual/Manual
*203.	Serialization (see 3.3.1)	Visual
*204.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.3 Screw (see dwg MS16997-102 covering a detail of dwg 9212230).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Objective evidence (see 6.2) available for part in accordance with MS16997-102	Visual

Minor:

*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.4 Block, switch, forward (see 9212233 covering a detail of dwg 9212230).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Outside diameter (5.30)	Gage
*102.	Concentricity of outside diameter	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*103.	Outside diameter of left groove in left face (4.57)	Gage
*104.	Inside diameter of left groove in left face (3.41)	Gage
*105.	Diameter of 3 counterbored holes, max (.406)	Gage
*106.	Diameter of 3 counterbores, max (.593)	Gage
*107.	Depth of 3 counterbores, max (.396)	Gage
*108.	Distance between bottoms of slots, max (4.400)	Gage
*109.	Distance from bottom of slot to center (2.200)	Gage
*110.	Width of 2 slots, min (2.002)	Gage
111.	Location of 2 slots	Gage
112.	Pitch diameter of 2 tapped holes	Gage
113.	Minor diameter of 2 tapped holes,max	Gage
*114.	Depth of thread in 2 tapped holes, min (.64)	Gage
115.	Location of 2 tapped holes	Gage
*116.	Diameter of counterbore on 2 tapped holes (.312)	Gage
*117.	Depth of counterbore on 2 tapped holes (.17)	Gage
118.	Pitch diameter of thread center hole	Gage
119.	Minor diameter of thread center hole, max	Gage
*120.	Depth of thread center hole, min (.35)	Gage
*121.	Depth of thread clearance center hole, max (.39)	Gage
*122.	Depth of right large cavity (.675)	Gage
*123.	Diameter of right large cavity (2.97)	Gage
*124.	Diameter of thread clearance center hole, min (1.38)	Gage
*125.	Diameter center hole (1.252)	Gage
126.	Right face perpendicular to center hole	Gage
*127.	Total length (1.672)	Gage
*128.	Depth of groove in left face (.22)	Gage
129.	No sharp corners or edges on or in slots	Visual/Manual
130.	Material (see 3.1)	Visual
131.	Radius or chamfer present	Visual

Minor:

201.	Stamping	Visual/Manual
*202.	Serialization (see 3.3.1)	Visual
*203.	Workmanship (see 3.10)	Visual/Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*4.3.2.1.5 Switch block sub-assembly (see dwg 9212230).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
*101.	Distance from bottom of thru slot to center line, max (2.46)	Gage
*102.	Angle of bottom of thru slot (22° 30')	Gage
*103.	Depth of small left slot, min (.79)	Gage
*104.	Depth of small right slot, min (.79)	Gage
105.	Location of slanted hole	Gage
*106.	Angle of slanted hole (20°)	Gage
*107.	Width of vertical hole in thru slot, min (1.56)	Gage
108.	Location of vertical hole in thru slot	Gage
*109.	Length of vertical hole in thru slot, min (.095)	Gage
110.	Location of small right slot	Gage
*111.	Width of small right slot, min (.25)	Gage
112.	Location of thru slot	Gage
*113.	Width of thru slot, min (.70)	Gage
*114.	Diameter of slanted hole, min (.500)	Gage
115.	Location of small left slot	Gage
*116.	Width of small left slot, min (.065)	Gage
117.	Radius present	Visual
118.	Parts of assembly tight	Manual
119.	Screws flush or below flush	Visual/Manual
*120.	No sharp edges or projections in or on slots or holes	Visual/Manual
*121.	Objective evidence (see 6.2) for protective finish in accordance with dwg 9212230	Visual
*122.	Pins tight	Manual
Minor:		
*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.6 Pin, connector (see dwg 9220325 covering a detail of dwg 9221104).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Major:

101.	Objective evidence (see 6.2) available for proper part in accordance with dwg 9220325	Visual
102.	Objective evidence (see 6.2) available for gold plate in accordance with dwg 9220325	Visual

Minor:

*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.7 Screw, guide (see dwg 9220324 covering a detail of dwg 9221104).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Diameter of pin (.090)	Gage
*102.	Total length (1.327)	Gage
*103.	Length from left shoulder to right face (.797)	Gage
*104.	Length from right shoulder of largest diameter to right face (.630)	Gage
*105.	Length of diameter right of largest diameter (.326)	Gage
*106.	Inside diameter (.092)	Gage
*107.	Depth of inside diameter (.613)	Gage
108.	Material (see 3.1)	Visual

Minor:

201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.8 Screw connector (see dwg 9220310 covering a detail of dwg 9221104).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Distance from left face to left shoulder (.177)	Gage
102.	Total length	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*103. Length of head (.117).....Gage
104. Material (see 3.1).....Visual

Minor:

*201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.9 Body, connector (see dwg 9220314 covering a detail of dwg 9221104).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101. Height of bosses (.120).....Gage
*102. Total thickness (.321).....Gage
*103. Diameter of small holes, max (.091)....Gage
104. Mold flash removed.....Visual
105. No crack split or tear.....Visual
106. Material (see 3.1).....Visual

Minor:

201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.10 Insulator, top (see dwg 9220313 covering a detail of dwg 9221104).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101. Thickness (.207).....Gage
*102. Diameter of 10 small holes, max (.080).Gage
103. No tear split or crack.....Visual
104. Flash removed.....Visual
105. Material (see 3.1).....Visual

Minor:

*201. Workmanship (see 3.10).....Visual/Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*4.3.2.1.11 Seal, lower (see dwg 9220315 covering a detail of dwg 9221104).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
*101.	Thickness (.145)	Gage
*102.	Diameter of small holes, max (.080)	Gage
103.	No tear split or crack	Visual
104.	Flash removed	Visual
105.	Material (see 3.1)	Visual
Minor:		
*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.12 Adhesive sealant (see dwg 9220322 covering a detail of dwg 9221104).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
101.	Objective evidence (see 6.2) available for proper compound in accordance with dwg 9220322	Visual
Minor:		
*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.13 Connector, electrical (see dwg 9221104 covering a detail of dwg 9212234).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
101.	All parts present and properly assembled	Visual
*102.	Distance from top of pins to connector body (.455)	Gage

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:22Z
Check the source to verify that this is the currentversion before use.

103. Concentricity of holes in connector body.....Gage
104. Seal, lower bonded.....Manual

Minor:

*201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.14 Lug, terminal (see dwg 9212237 covering a detail of dwg 9212235).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101. Objective evidence (see 6.2) available for proper part in accordance with dwg 9212237.....Visual

Minor:

*201. Workmanship (see 3.10).....Visual

*4.3.2.1.15 Tubing, insulation (see dwg 9212569 covering a detail of dwg 9212235).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101. Objective evidence (see 6.2) available for proper part in accordance with dwg 9212569.....Visual

Minor:

*201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.16 Connector, modified (see dwg 9212236 covering a detail of dwg 9212235).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

Major:

101.	Objective evidence (6.2) available for proper connector in accordance with MS3102A-24-TP	Visual
102.	Rubber insert present	Visual
103.	Pin arrangement	Visual
104.	No sharp corners present	Visual
*105.	Diameter of 4 holes (.17)	Gage

Minor:

*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.17 Modified connector assembly (see dwg 9212235 covering a detail of dwg 9212234).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Length of twisted wires (5.00)	**Measure
*102.	Length of stripped twisted wires (.50)	**Measure
*103.	Length of tubing (6.95)	**Measure
104.	Length from connector to end of tubing (6.85)	**Measure
*105.	Length of 3 wires in tubing (8.875)	**Measure
*106.	Tubing insulation present on lugs	Visual
*107.	Width of tubing, max (.107)	**Measure
*108.	Thickness of tubing, max (.08)	**Measure
109.	Soldering in accordance with MIL-S-60902 (MU)	Visual/Manual
110.	Objective evidence (see 6.2) available for proper wire in accordance with applicable specification	Visual

**Measure with suitable scale.

Minor:

201.	Marking	Visual
202.	Stamping	Visual
*203.	Workmanship (see 3.10)	Visual/Manual

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:22Z
Check the source to verify that this is the current version before use.

*4.3.2.1.18 Cable, ribbon (see dwg 9212239 covering a detail of dwg 9212234).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
101.	Objective evidence (see 6.2) available proper part in accordance with dwg 9212239	Visual
Minor:		
*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.19 Adapter (see dwg 9212242 covering a detail of dwg 9212234).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
101.	Location of 2 center tapped holes for connector	Gage
102.	Location of 4 end tapped holes for connector	Gage
*103.	Depth of large slot, min (.08)	Gage
104.	Location of large slot	Gage
*105.	Width of large slot, min (.90)	Gage
*106.	Large outside diameter (4.89)	Gage
*107.	Concentricity of large outside diameter	Gage
108.	Large inside diameter (3.58)	Gage
*109.	Concentricity of large inside diameter	Gage
*110.	Depth of small slot in flange, min (.105)	Gage
*111.	Small inside diameter (1.80)	Gage
*112.	Small outside diameter (3.789)	Gage
*113.	Length of small outside diameter (.250)	Gage
114.	Length from right shoulder to bottom of large inside diameter (.070)	Gage
*115.	Total thickness (.509)	Gage
*116.	Width of small slot, min (.65)	Gage
117.	Location of small slot	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*118.	Pitch diameter of 3 tapped holes, max	Gage
119.	Minor diameter of 3 tapped holes, max	Gage
120.	Location of 3 tapped holes	Gage
*121.	No sharp edges of burrs in or on both slots, radius present on top edges and bottom of slot	Visual/Manual
122.	Material (see 3.1)	Visual
123.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212242	Visual

Minor:

201.	Stamping	Visual
*202.	Serialization (see 3.3.1)	Visual
*203.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.20 Potting compound (see dwg 9204353 covering a detail of dwg 9212234).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Objective evidence (see 6.2) available for compound in accordance with dwg 9204353	Visual

Minor: None defined.

*4.3.2.1.21 Adapter and cable assembly (see dwg 9212234) before potting.

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Objective evidence (see 6.2) available for insulation tubing in accordance with MIL-I-23053	Visual
102.	Insulation tubing on pins (see note 2)	Visual
103.	Soldering in accordance with MIL-S-60902 (MU) and QQ-S-571	Visual/Manual
104.	All parts present and properly assembled	Visual

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

105. Ribbon cable connected in accordance with Table III.....Visual
106. Distance between connector and adapter (13.85).....**Measure

**Measure with suitable scale.

Minor:

201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.22 Adapter and cable assembly (see dwg 9212234).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101. Height of potting on modified connector (.78).....**Measure
*102. Location of cables and wires (view B-B).....Gage
*103. Height of potting on adapter (.50)...**Measure
*104. Components not damaged, missing or loose.....Visual/Manual

**Measure with suitable scale.

Minor:

*201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.23 Seat (see dwg 9212248 covering a detail of dwg 9212247).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101. Outside diameter (1.250).....Gage
*102. Concentricity of outside diameter.....Gage
103. Pitch diameter of thread, max.....Gage
104. Minor diameter of thread, max.....Gage
*105. Depth of thread, min (.40).....Gage
*106. Depth of thread clearance, max (.44)...Gage
*107. Diameter of thread clearance, min (.94).....Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*108.	Small right inside diameter (.878)	Gage
*109.	Length of right inside diameter (.072)	Gage
*110.	Total length (.96)	Gage
*111.	Width of left slot (.25)	Gage
*112.	Length of left slot (.495)	Gage
113.	Location of 2 holes right face	Gage
114.	Location of 2 slots	Gage
*115.	Width of 2 slots (.24)	Gage
*116.	Diameter 2 holes right face (.0930)	Gage
*117.	Depth of 2 holes right face (.12)	Gage
*118.	Large right inside diameter (1.127)	Gage
*119.	Concentricity of right inside diameter	Gage
*120.	Finish	Visual
121.	Taper left end	Visual
122.	Material (see 3.1)	Visual
123.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212248	Visual

Minor:

*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.24 Seat assembly (see dwg 9212247).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Pins tight	Manual

Minor:

201.	Workmanship (see 3.10)	Visual/Manual

4.3.2.1.25 Ogive (see dwg 9214730 covering a detail of dwg 9214729).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Thread clearance on left thread (.01)	Visual
*102.	Pitch diameter of left thread, min	Gage
103.	Major diameter of left thread, min	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*104.	Concentricity of left thread	Gage
105.	Location of 2 left threaded lugs	Gage
*106.	Width of 2 left threaded lugs (2.000)	Gage
107.	Location of intermediate size slot in cavity	Gage
*108.	Width of intermediate size slot in cavity, min (.74)	Gage
*109.	Depth of intermediate size slot in cavity, min (.08)	Gage
110.	Location of large slot in cavity	Gage
*111.	Width of large slot in cavity, min (1.00)	Gage
*112.	Large diameter of left cavity (4.920)	Gage
*113.	Concentricity of large diameter of left cavity	Gage
114.	Perpendicularity of large diameter of left cavity with right shoulder	Gage
*115.	Depth of large slot in cavity, min (.215)	Gage
*116.	Depth of small slot in lug and cavity (.03)	Gage
117.	Location of small slot in lug and cavity	Gage
*118.	Width of small slot in lug and cavity (.24)	Gage
119.	Location of curved slot in cavity	Gage
*120.	Radius of curved slot in cavity (2.70)	Gage
*121.	Diameter of hole ogive (.360)	Gage
122.	Location of hole in ogive	Gage
123.	Chamfer on hole in ogive	Visual
*124.	Diameter of spot face on hole in ogive, min (.74)	Gage
125.	Perpendicularity of right shoulder with 3 section thread	Gage
*126.	Total length (8.35)	Gage
*127.	Length from left face to right shoulder and slots in 3 section thread (7.33)	Gage
*128.	Length of curved slot in cavity not including taper, min (2.530)	Gage
*129.	Concentricity of right outside diameter	Gage
*130.	Left outside diameter (6.070)	Gage
*131.	Concentricity of left outside diameter	Gage
*132.	Length of large slot in cavity, min (2.530)	Gage
*133.	Length from left shoulder to left of window opening (2.940)	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*134.	Length of intermediate sized slot in cavity, min (4.38)	Gage
135.	Perpendicularity of left face with 3 section thread	Gage
*136.	Length of left cavity (5.274)	Gage
*137.	Length from bottom of cavity to right shoulder (.582)	Gage
*138.	Depth of chamfer on window opening (.095)	Gage
*139.	Depth of contour of recess, max (.17)	Gage
*140.	Outside diameter of right shoulder (5.086)	Gage
*141.	Small inside diameter of right end (3.800)	Gage
*142.	Concentricity of small inside diameter of right end and perpendicularity with right shoulder	Gage
*143.	Length of small slot in lug and cavity, min (3.10)	Gage
144.	No steps present in right shoulder as noted on dwg	Visual
145.	Location of small slot in 3 section thread	Gage
*146.	Width of small slot in 3 section thread (.92)	Gage
*147.	Diameter of 3 holes in right face (.257)	Gage
*148.	Diameter of countersink in 3 holes in right face, min (.53)	Gage
149.	Location of 3 holes in right face	Gage
*150.	Width of large slot in 3 section thread (1.31)	Gage
151.	Location of large slot in 3 section thread	Gage
*152.	Inside diameter of 3 section thread (4.12)	Gage
*153.	Width of intermediate slot in 3 section thread (1.128)	Gage
154.	Location of intermediate slot in 3 section thread	Gage
*155.	Pitch diameter of 3 section thread, min	Gage
156.	Major diameter of 3 section thread, min	Gage
*157.	Length of 3 section thread clearance, max (.08)	Gage
*158.	Length of outside diameter adjacent to 3 section thread clearance (.36)	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*159.	Outside diameter adjacent to 3 section thread clearance (4.55)	Gage
*160.	Depth of slot, min (section B-B) (.13)	Gage
*161.	Length of slot (section B-B), min (.30)	Gage
*162.	Width of contour recess window slot, min	Gage
163.	Symmetry of contour of recess with window slot	Gage
*164.	Length of contour recess window slot, min (1.740)	Gage
*165.	Length of window slot, max (1.175)	Gage
166.	Location of window slot in relation to intermediate slot in 3 section thread and large diameter of left cavity	Gage
*167.	Width of window slot, max (.255)	Gage
168.	Location of tapped holes in recessed contour	Gage
169.	Pitch diameter of tapped holes in recessed contour, max	Gage
170.	Minor diameter of tapped holes in recessed contour, max	Gage
171.	Material (see 3.1, 4.3.3.4.1 and 4.3.3.5.1) or antigalling compound in accordance with applicable note and drawing	Visual
172.	Radii, chamfer or spot face present	Visual
173.	Antigalling coating present on threads	Visual
174.	Marking made with electrolytic process	Visual

Minor:

201.	Blunt start on 3 section thread	Visual
202.	Finish	Visual
203.	Marking	Visual
*204.	Serialization (3.3.1)	Visual
*205.	Workmanship (see 3.10)	Visual/Manual

4.3.2.1.26 Screw, cap socket head (see dwg MS16995-3) and packing, preformed (see dwg MS 9021-29) covering details of dwg 9214729).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:22Z
Check the source to verify that this is the current version before use.

Major:

*101. Objective evidence (see 6.2) available for proper part in accordance with MS 16995-3 or MS 9021-29 as applicable.....Visual

Minor:

*201. Workmanship (see 3.10).....Visual/Manual

4.3.2.1.27 Plate, retaining, window (see dwg 8857492 covering a detail of dwg 9214729).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Symmetry of outside contour with slot	Gage
102.	Location of holes with slot	Gage
*103.	Width of slot, max (.265)	Gage
*104.	Length of slot, max (1.170)	Gage
105.	Diameter of holes, max (.0995)	Gage
*106.	Thickness, max (.10)	Gage
107.	Straightness	Gage
*108.	Diameter of C Bore, max (.155)	Gage
*109.	Depth of C Bore, max (.03)	Gage
110.	Chamfer around slot, max	Gage
111.	Material (see 3.1)	Visual
112.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 8857492	Visual

Minor:

201.	Surface finish	Gage
*202.	Workmanship (see 3.10)	Visual/Manual

4.3.2.1.28 Window, observation (see dwg 8857491 covering a detail of dwg 9214729).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Major:

101.	Symmetry of outside contour with window	Gage
102.	Location of holes with window	Gage
*103.	Length of window, min (1.150)	Gage
*104.	Width of window, min	Gage
105.	Height of painted surface above flange, min (.16)	Gage
106.	Thickness of flange (.11)	Gage
107.	Transparency not impaired by imperfections	Visual
108.	No cracks in flange and around holes	Visual
*109.	Total length, min (1.72)	Gage
110.	Total width, min (.85)	Gage
111.	Material (see 3.1)	Visual

Minor:

201.	Protective finish present	Visual
202.	Chamfer present	Visual
*203.	Workmanship (see 3.10)	Visual/Manual

4.3.2.1.29 Ogive & window assembly (see dwg 9214729).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Torque on socket head cap screw	Gage
102.	Window assembled correctly	Visual
103.	Components all present and in proper location	Visual
104.	Polished window contour	Manual

Minor:

201.	Workmanship (see 3.10)	Visual/Manual

4.3.2.1.30 Clutch half, positive (see dwg 8857479 covering a detail of dwg 8857439).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Major:

*101.	Right outside diameter (.66)	Gage
*102.	Width of groove (.094)	Gage
*103.	Diameter of groove (.250)	Gage
*104.	Concentricity of groove diameter	Gage
*105.	Depth of hex hole, min (.25)	Gage
*106.	Total length (.405)	Gage
107.	Perpendicularity of left shoulder with right diameter	Gage
108.	Left face parallel with left shoulder	Gage
109.	Location of hole in left flange	Gage
*110.	Diameter of hole in left flange (.0938)	Gage
*111.	Width across flats of hex socket (.125)	Gage
*112.	Length of left outside diameter (.19)	Gage
*113.	Width of right flange (.04)	Gage
114.	Material (see 3.1)	Visual
*115.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 8857479	Visual

Minor:

*201.	Left outside diameter, min (.344)	Gage
202.	Finish	Gage
203.	Marking	Visual
204.	Radius present	Visual
*205.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.31 Pin, straight, headless (see dwg 8857545 covering a detail of dwg 8857439).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Diameter (.0958)	Gage
102.	Finish on diameter	Gage
103.	Rockwell hardness	Gage
104.	Material (see 3.1)	Visual
105.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 8857545	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Minor:

201. Total length.....Gage
202. Radius of chamfer present.....Visual
*203. Workmanship (see 3.10).....Visual/Manual

4.3.2.1.32 Clutch half positive (see dwg 8857439).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
101.	Length of projection of pin.....	Gage
102.	Pin tight.....	Manual
Minor:		
201.	Dots present and identifiable.....	Visual
202.	Marking.....	Visual
*203.	Workmanship (see 3.10).....	Visual/Manual

*4.3.2.1.33 Pin, straight, headless (see dwg MS 16555-65) covering a detail of dwg 9214731).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
101.	Objective evidence (see 6.2) available for proper part in accordance with MS 16555-65.....	Visual
Minor:		
*201.	Workmanship (see 3.10).....	Visual/Manual

4.3.2.1.34 Rod, support (see dwg 9214732 covering a detail of dwg 9214731).

Categories	Characteristics	Method of Inspection
Critical: None defined.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Major:

*101.	Outside diameter (2.505)	Gage
*102.	Diameter of side hole, max (.371)	Gage
103.	Pitch diameter of thread	Gage
104.	Minor diameter of thread, max	Gage
*105.	Length of right outside diameter (.24)	Gage
*106.	Diameter of cavity at left of thread, min (1.25)	Gage
*107.	Diameter of hole right of thread, min (1.380)	Gage
*108.	Right outside diameter (2.00)	Gage
*109.	Depth of chamfer right end, min (.125)	Gage
*110.	Depth from right end of thread to right face (.375)	Gage
*111.	Depth from left end of effective thread to right face, min (.80)	Gage
*112.	Depth of right cavity, min (1.25)	Gage
*113.	Total length (13.29)	Gage
114.	Material (see 3.1)	Visual
115.	Left cavity will provide access to rod	Visual
116.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9214732	Visual

Minor:

*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.35 Support rod assembly (see dwg 9214731).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Pin below flush	Visual/Manual

Minor:

201.	Marking	Visual
*202.	Workmanship (see 3.10)	Visual/Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*4.3.2.1.36 Blank, rotating band (see dwg 9216409 covering a detail of dwg 9212246 or 9212241).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
*101.	Total length, min (1.995)	Gage
*102.	Inside diameter, max (6.18)	Gage
*103.	Outside diameter, min (7.218)	Gage
104.	Material (see 3.1)	Visual
Minor:		
*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.37 Body (see dwg 9212246) and Base, alternative (see dwg 9212241) after rough machining and finish machining of rotating band groove.

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
*101.	Width of rotating band groove (1.98)	Gage
*102.	Small diameter of rotating band groove (5.80)	Gage
103.	Projections present undamaged, correct number on bottom of rotating band groove	Visual
104.	Notches in projections on bottom of rotating band groove present and correctly spaced	Visual
105.	Radius present	Visual
106.	Material (see 3.1, 4.3.3.4.2 and 4.3.3.5.2)	Visual
Minor:		
201.	Workmanship (see 3.10)	Visual/Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*4.3.2.1.38 Body (see dwg 9212246 covering a detailof dwg 9214726). See 4.3.2.1.37 for inspection of rotating band groove. Delete this paragraph when dwgs 9212241, 9212240 and 9203276 are used.

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Large outside diameters (6.092)	Gage
*102.	Diameter of thread clearance, min (3.02)	Gage
*103.	Inside diameter right of thread clearance (2.932)	Gage
*104.	Small left inside diameter (2.508)	Gage
*105.	Concentricity of small left inside diameter	Gage
106.	Pitch diameter of left thread	Gage
107.	Minor diameter of left thread, max	Gage
*108.	Concentricity of left thread	Gage
*109.	Length of left thread clearance, max (.20)	Gage
*110.	Depth to bottom left thread clearance (.625)	Gage
*111.	Distance from left face to small inside diameter (.740)	Gage
*112.	Distance from left face to rotating band groove (1.18)	Gage
*113.	Length of left outside diameter (5.50)	Gage
*114.	Small outside diameter (6.07)	Gage
115.	Shoulder of right cavity perpendicular to left outside diameter	Gage
*116.	Depth of large forward cavity (4.696)	Gage
117.	Perpendicularity of right face with left outside diameter	Gage
*118.	Length of right usable thread (1.52)	Gage
*119.	Left cavity diameter, max (4.50)	Gage
*120.	Right cavity diameter (5.325)	Gage
*121.	Concentricity of right cavity diameter	Gage
*122.	Concentricity of right outside diameter	Gage
*123.	Pitch diameter of right thread, max	Gage
124.	Minor diameter of right thread, max	Gage
*125.	Concentricity of right thread	Gage
*126.	Depth of taper right end (.30)	Gage
*127.	Length of right outside diameter (2.50)	Gage
128.	Location of 4 tapped holes	Gage
*129.	Depth of small cavity (18.65)	Gage
*130.	Total length (20.02)	Gage
131.	Pitch diameter 4 right tapped holes	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

132.	Minor diameter 4 right tapped holes, max	Gage
133.	Pitch diameter 3 left tapped holes	Gage
134.	Minor diameter 3 left tapped holes, max	Gage
135.	Location of 3 left tapped holes	Gage
*136.	Length of rotating band (2.02)	Gage
*137.	Diameter of small grooves in rotating band (6.04)	Gage
*138.	Diameter of large groove in rotating band (6.05)	Gage
*139.	Largest diameter of rotating band (6.320)	Gage
140.	Contour of rotating band	Visual
141.	Rotating band (see 3.7.3)	Visual
142.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212246	Visual

Minor:

201.	Radius or chamfer present	Visual
202.	Finish	Visual
203.	Stamping	Visual/Manual
*204.	Serialization (see 3.3.1)	Visual
*205.	Workmanship (see 3.10)	Visual/Manual

4.3.2.1.39 Base, alternative (see dwg 9212241 covering a detail of dwg 9214726). See 4.3.2.1.37 for inspection of rotating band groove. Delete this paragraph when dwg 9212246 is used.

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Large outside diameters (6.092)	Gage
*102.	Diameter of left outside thread clearance, max (5.82)	Gage
*103.	Diameter of inside left thread clearance, min (3.02)	Gage
*104.	Inside diameter right of thread clearance (2.932)	Gage
*105.	Small left inside diameter (2.508)	Gage
*106.	Concentricity of small left inside diameter	Gage
107.	Pitch diameter of left inside thread	Gage
108.	Minor diameter of left inside thread, max	Gage
*109.	Concentricity of rear inside thread	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

110.	Pitch diameter of left outside thread	Gage
111.	Major diameter of left outside thread,min	Gage
*112.	Distance from left face to left of inside thread clearance (.625)	Gage
*113.	Distance from left face to small inside diameter (.740)	Gage
*114.	Length of inside thread clearance, max (.20)	Gage
*115.	Depth of left cavity (5.26)	Gage
116.	Perpendicularity of right inside shoulder with right inside diameter	Gage
*117.	Depth of right cavity, max (1.6245)	Gage
*118.	Diameter of left cavity, max (4.50)	Gage
*119.	Inside right diameter, max (5.630)	Gage
*120.	Concentricity of right inside diameter	Gage
*121.	Right outside diameter (6.070)	Gage
*122.	Length of right outside diameter (1.36)	Gage
*123.	Total length (6.62)	Gage
*124.	Distance from left face to rotating band groove (1.18)	Gage
*125.	Distance from left face to left outside shoulder (.50)	Gage
*126.	Outside thread clearance, max (.13)	Gage
*127.	Length of rotating band (2.02)	Gage
*128.	Diameter of small grooves in rotating band (6.04)	Gage
*129.	Diameter of large groove in rotating band (6.05)	Gage
*130.	Largest diameter of rotating band (6.320)	Gage
131.	Contour of rotating band	Visual
132.	Rotating band (see 3.8.3)	Visual
133.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212241	Visual

Minor:

201.	Radius or chamfer present	Visual
202.	Surface finish	Visual
203.	Stamping	Visual/Manual
*204.	Serialization (see 3.3.1)	Visual
*205.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.40 Pin, straight, headless (see dwg 9203276 covering a detail of dwg 9214726). Delete this paragraph when Body 9212246 is used.

Categories	Characteristics	Method of Inspection
Critical:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Major:

*101.	Depth of chamfer left end (.016)	Gage
*102.	Total length (.468)	Gage
*103.	Diameter (.3762)	Gage
104.	Rockwell hardness	Gage
105.	Tool makers ink present right end	Visual
106.	Material (see 3.1 and 4.3.3.6)	Visual
107.	Surface finish	Visual

Minor:

201.	Right chamfer present	Visual
*202.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.3.41 Body, alternative (see dwg 9212240 covering a detail of dwg 9214726). This paragraph is not used when Body 9212246 is used.

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Left outside diameter, min (5.6296)	Gage
*102.	Outside diameter right of left outside diameter (6.070)	Gage
103.	Perpendicularity of right inside shoulder with left outside diameter	Gage
*104.	Depth of right cavity (4.696)	Gage
105.	Perpendicularity of right face with left outside diameter	Gage
*106.	Depth of usable thread, min (1.52)	Gage
*107.	Left inside diameter, max (4.50)	Gage
*108.	Inside diameter of right cavity (5.325)	Gage
*109.	Concentricity of inside diameter of right cavity	Gage
*110.	Diameter of sharp corners right end (6.045)	Gage
*111.	Right outside diameter (6.0902)	Gage
*112.	Concentricity of right outside diameter	Gage
113.	Pitch diameter of thread	Gage
114.	Minor diameter of thread, max	Gage
*115.	Concentricity of thread	Gage
*116.	Length of right outside diameter (2.45)	Gage
117.	Location of 4 tapped holes	Gage
*118.	Total length (15.00)	Gage
119.	Pitch diameter of 4 tapped holes	Gage
120.	Minor diameter of 4 tapped holes	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

121.	Pitch diameter of 3 tapped holes	Gage
122.	Minor diameter of 3 tapped holes	Gage
123.	Location of 3 tapped holes	Gage
*124.	Length of left outside diameter, min (1.6250)	Gage
125.	Left face parallel with right face and perpendicular to left outside diameter	Gage
126.	Material (see 3.1, 4.3.3.4.2 and 4.3.3.5.2)	Visual
127.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212240	Visual

Minor:

201.	Radius of chamfer present	Visual
202.	Finish	Visual
203.	Stamping	Visual/Manual
*204.	Serialization (see 3.3.1)	Visual
*205.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.42 PXR-6007 Shipping assembly (see dwg 9214726, sheet 2). This paragraph is not used when Body 9212246 is used.

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Diameter of 10 holes, max (.3750)	Gage
102.	Location of 10 holes	Gage
103.	Depth of 10 holes (.506)	Gage
104.	Metal to metal contact (see 3.9)	Gage
105.	Pin seated on botton of hole (see 3.10)	Gage
106.	Interference fit of pins within drawing limits	Gage
107.	Tool makers ink visable on pins	Visual

Minor:

201.	Workmanship (see 3.10)	Visual/Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*4.3.2.1.43 Set screw, hex. socket (see dwg MS 51963-110), packing, preformed (see dwg MS 29513-240), washer, lock (see dwg MS 35337-24), Screw, Cap, Socket head (see dwg MS 35456-11), packing, preformed (see dwg MS 28775-430), Screw, machine (see dwg MS 35206-245), Screw, shoulder (see dwg MS 51975-17), Screw, shoulder (see dwg MS 51975-9), Washer, lock, split (see dwg MS 35337-21) Screw, machine, pan head (see dwg MS 35206-211).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
101.	Objective evidence (see 6.2) available for part in accordance with applicable standard	Visual
Minor:		
*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.44 Screw, cap, flat head (see dwg 9215750) and Screw, set, hex. socket, oval point (see dwg 9216353).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
101.	Objective evidence (see 6.2) available for part in accordance with dwg 9215750	Visual
Minor:		
*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.45 Clamping ring (see dwg 9214733).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
101.	Location of 4 holes	Gage
*102.	Diameter of 4 holes (.203)	Gage
*103.	Thickness of flange (.12)	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*104.	Total length (.42)	Gage
*105.	Left outside diameter (3.46)	Gage
*106.	Inside diameter (2.30)	Gage
107.	Material (see 3.1)	Visual
108.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9214733	Visual

Minor:

*201.	Right outside diameter, max (4.88)	Gage
202.	Stamping	Visual
*203.	Serialization (see 3.3.1)	Visual
*204.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.46 Cover, adapter, MT (see dwg 9214735) before painting.

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Inside diameter left and right of right groove (5.80)	Gage
*102.	Inside diameter left to thread (4.60)	Gage
103.	Profile of tapered cavity	Gage
*104.	Inside diameter of left groove (5.650)	Gage
105.	Pitch diameter of thread	Gage
106.	Minor diameter of thread, max	Gage
*107.	Length to left groove (.13)	Gage
*108.	Width of left groove (.37)	Gage
*109.	Length from left face to bottom tapered cavity (.65)	Gage
*110.	Length from left face to left of thread (1.00)	Gage
*111.	Length from left face to shoulder right of thread (1.68)	Gage
*112.	Length from left face to left of right groove (1.78)	Gage
*113.	Length from left face to left of right inside diameter (2.10)	Gage
*114.	Width of outside groove, min (.20)	Gage
*115.	Total length (2.25)	Gage
*116.	Distance across flats (4.63)	Gage
117.	Location of 4 tapped holes	Gage
*118.	Depth of thread of 4 tapped holes, min (.38)	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

119.	Pitch diameter of 4 tapped holes	Gage
120.	Minor diameter of 4 tapped holes, max	Gage
*121.	Width of right inside groove (.187)	Gage
*122.	Diameter of right inside groove (4.036)	Gage
123.	Material (see 3.1)	Visual
124.	Blunt start on thread	Visual
125.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9214735	Visual

Minor:

201.	Finish	Visual
202.	Marking	Visual
*203.	Workmanship (see 3.10)	Visual

*4.3.2.1.47 Cover, adapter, MT (see dwg 9214735).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major: None defined.

Minor:

201.	Paint no bare spots	Visual
202.	Serialization (see 3.3.1)	Visual
203.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.48 Packing preformed (see dwg 8857484-1, covering a detail of dwg 9214726).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Axial thickness (see 3.5.1)	Gage
102.	Inside diameter (see 3.5.2)	Gage
103.	No split, cracks; properly formed	Visual
104.	Surface has no defects, blemishes or irregularities	Visual
105.	Material (see 3.1)	Visual

Minor:

201.	Workmanship (see 3.10)	Visual/Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*4.3.2.1.49 Plate, connector (see dwg 9212253).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
*101.	Large outside diameter (5.320)	Gage
102.	Location of 3 counterbored holes	Gage
*103.	Depth of 3 counterbores (.26)	Gage
*104.	Diameter of 3 counterbores, min (.58)	Gage
*105.	Diameter of 3 counterbored holes (.375)	Gage
*106.	Left outside diameter (3.50)	Gage
*107.	Left inside diameter (2.51)	Gage
*108.	Concentricity of left inside diameter	Gage
109.	Pitch diameter of threaded hole	Gage
110.	Minor diameter of threaded hole, max	Gage
111.	Location of threaded hole	Gage
*112.	Right inside diameter (2.990)	Gage
*113.	Concentricity of right inside diameter	Gage
*114.	Depth of inside right chamfer, min (.18)	Gage
*115.	Length of outside diameter (.40)	Gage
*116.	Thickness of flange (.750)	Gage
*117.	Depth of right cavity (1.105)	Gage
*118.	Total length (2.40)	Gage
119.	Chamfer or radius present	Visual
120.	Material (see 3.1)	Visual
121.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212253	Visual
Minor:		
201.	Stamping	Visual
*202.	Serialization (see 3.3.1)	Visual
*203.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.50 Block, mounting, connector (see dwg 9212252).

Categories	Characteristics	Method of Inspection
Critical: None defined.		
Major:		
101.	Pitch diameter of 4 threaded holes in left face	Gage
102.	Minor diameter of 4 threaded holes in left face, max	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

103.	Location of 4 threaded holes in left face	Gage
*104.	Diameter of cavity at left end, min (1.60)	Gage
*105.	Small outside diameter (2.980)	Gage
*106.	Diameter of flange, max (4.600)	Gage
107.	Location of 3 holes in flange	Gage
*108.	Diameter of 3 holes in flange (.375)	Gage
*109.	Depth of slot, min (1.71)	Gage
110.	Location of slot	Gage
*111.	Width of slot, min (.65)	Gage
*112.	Depth of left cavity, min (1.05)	Gage
113.	Location of slanted hole	Gage
*114.	Thickness of flange (.104)	Gage
*115.	Total length (1.200)	Gage
*116.	Diameter of slanted hole, min (.4375)	Gage
117.	No burrs or sharp edges in or around slanted hole or slot	Visual/Manual
118.	Material (see 3.1)	Visual
*119.	Radii present	Visual
120.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212252	Visual

Minor:

201.	Stamping	Visual/Manual
*202.	Serialization (see 3.3.1)	Visual
*203.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.51 Plate, support (see dwg 9212254).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Radius of extended section (2.69)	Gage
102.	Outside diameter of body (4.910)	Gage
103.	Location of slot	Gage
*104.	Width of slot, min (.104)	Gage
*105.	Total length (2.52)	Gage
*106.	Width of tapered section of slot, min (.50)	Gage
107.	Location of slot in curved extended section	Gage
*108.	Width of slot in cirved extended section, min (.76)	Gage
*109.	Depth of slot in curved extended section, min (.67)	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*110.	Thickness of basic section (.700)	Gage
111.	Perpendicularity of right surface with outside diameter	Gage
112.	Left surface parallel with right surface	Gage
*113.	Length of slot, min (1.59)	Gage
114.	Location of extended curved section	Gage
115.	Pitch diameter of 2 threaded holes	Gage
116.	Minor diameter of 2 threaded holes, max	Gage
*117.	Diameter of counterbores on 2 threaded holes (.250)	Gage
*118.	Depth of counterbores on 2 threaded holes (.14)	Gage
119.	Location of 2 threaded holes	Gage
*120.	Diameter of 2 holes (.3125)	Gage
121.	Location of 2 holes	Gage
*122.	Diameter of counterbores on 2 holes, min (.46)	Gage
*123.	Depth of counterbores on 2 holes (.22)	Gage
*124.	No sharp edges in or on tapered slot	Visual/Manual
125.	Material (see 3.1, 4.3.3.4.1 and 4.3.3.5.1)	Visual
126.	Marking made with electrolytic process	Visual

Minor:

*201.	No radius missing	Visual
202.	Marking	Visual
*203.	Serialization (see 3.3.1)	Visual
*204.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.52 Screw, knurled head (see dwg 9212249).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Knurl present	Visual
*102.	Diameter of thread clearance, max (.42)	Gage
103.	Pitch diameter of thread	Gage
104.	Major diameter of thread, min	Gage
*105.	Pilot diameter (.375)	Gage
*106.	Length of thread clearance, max (.125)	Gage
*107.	Distance from head to right end of thread (.46)	Gage
*108.	Distance from head to end of screw (.64)	Gage
*109.	Total length (.96)	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

110. Material (see 3.1).....Visual
111. Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212249.....Visual

Minor:

201. Chamfer present.....Visual
*202. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.53 Washer, friction (see dwg 9212244).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101. Distance from center to end of tab (.562).....Gage
*102. Inside diameter (.48).....Gage
*103. Outside diameter (.875).....Gage
*104. Width of tab (.240).....Gage
*105. Thickness (.060).....Gage
106. Material (see 3.1).....Visual
107. Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212244.....Visual

Minor:

*201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.54 Nut, jam (see dwg 9212250-1 or 2).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101. Width across flats of hex. opening (.49)...Gage
102. Pitch diameter of thread.....Gage
103. Major diameter of thread, min.....Gage
*104. Thickness (.17).....Gage
105. Material (see 3.1).....Visual
106. Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212250-1 or 2.....Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Minor:

*201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.55 Ring, retainer (see dwg 9212251).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Pitch diameter of thread.....	Gage
102.	Major diameter of thread, min.....	Gage
*103.	Width of slot (.05).....	Gage
*104.	Inside diameter, max (.99).....	Gage
*105.	Depth of slot, min (.05).....	Gage
*106.	Thickness, min (.26).....	Gage
107.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9212251.....	Visual

Minor:

*201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.56 Plug, shorting (see dwg 9214728 before potting.

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Objective evidence (see 6.2) available for part in accordance with MS 3106E24-7S(C).....	Visual
102.	Objective evidence (see 6.2) available for wire in accordance with QQ-W-343.....	Visual
103.	Soldering in accordance with MIL-S-60902(MU).....	Visual/Manual

Minor:

*201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.57 Plug, shorting (see dwg 9214728).

Categories	Characteristics	Method of Inspection

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:22Z
Check the source to verify that this is the current version before use.

Critical: None defined.

Major:

101.	Potting	Visual
102.	No potting on threads	Visual

Minor:

201.	Marking	Visual
*202.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.58 Plug (see dwg 9214734).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Diameter of 2 holes (.281)	Gage
*102.	Depth of 2 holes, min (.23)	Gage
103.	Location of 2 holes	Gage
104.	Pitch diameter of thread	Gage
105.	Major diameter of thread, min	Gage
*106.	Right diameter (2.83)	Gage
*107.	Length of right diameter (.16)	Gage
*108.	Total length (.65)	Gage
109.	Material (see 3.1)	Visual
110.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 9214734	Visual

Minor:

201.	Stamping	Visual
*202.	Serialization (see 3.3.1)	Visual
*203.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.59 Housing, liner (see dwg 10520045 covering a detail of dwg 10520044) before painting.

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Gap in circumference (1/4)	**Measure
102.	Location of slots on edges	**Measure
*103.	Diameter at centerline (6 21/32)	**Measure

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*104.	Diameter at edges (6 1/16)	**Measure
*105.	Radius of outside contour (5 1/32)	**Measure
*106.	Thickness (.025)	Gage
*107.	Total length (3 1/16)	**Measure
*108.	Distance from centerline to outside of vertical portion of slots (1 3/16)	**Measure
*109.	Width of horizontal portion of slots (1/8)	**Measure
*110.	Length of vertical portion of slots (5/16)	**Measure
*111.	Width of vertical portion of slots	**Measure
*112.	Distance from edge to left side of vertical slot (5/16)	**Measure
*113.	Diameter of wire grooves (.09)	**Measure
114.	Section C-C- present	Visual
115.	Material (see 3.1)	Visual
116.	Radius missing	Visual
117.	Objective evidence (see 6.2) available for protective finish in accordance with dwg 10520045	Visual

**Measure with suitable scale.

Minor:

201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.60 Housing, liner (see dwg 10520045 covering a detail of dwg 10520044).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major: None defined.

Minor:

201.	Paint present no bare spot	Visual
*202.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.61 Liner (see dwg 10520046 covering a detail of dwg 10520044).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Major:

*101.	Width of gap in circumference, max (1/8)	T.M.C. (see 3.5)
*102.	Length of edge slots, max (4 1/8)	T.M.C. (see 3.5)
*103.	Width of edge slots, max (3/16)	T.M.C. (see 3.5)
*104.	Total length, min (2 3/4)	T.M.C. (see 3.5)
*105.	Thickness, min (1/8)	T.M.C. (see 3.5)
*106.	Inside diameter at edges, max (6.07)	T.M.C. (see 3.5)
*107.	Inside diameter at centerline, max (6 3/8)	T.M.C. (see 3.5)
*108.	Radius of inside curvature (4 7/8)	T.M.C. (see 3.5)
109.	Material (see 3.1)	Visual

Minor:

*201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.62 Tie (see dwg 10520062 covering a detail of dwg 10520044).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Length (8)	**Measure
*102.	Diameter (.062)	Gage
*103.	Inside diameter of ring end (Alt. A) (1/8)	**Measure
*104.	Diameter of knob end (Alt. B) (1/8)	**Measure
105.	Material (see 3.1)	Visual

**Measure with suitable scale.

Minor:

201.	Workmanship (see 3.10)	Visual/Manual

*4.3.2.1.63 Staple (see dwg 10520063 covering a detail of dwg 10520044).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

*101.	Width (7/16)	**Measure
102.	Length (3/8)	**Measure

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

103. Diameter of wire (.051).....Gage
104. Material (see 3.1).....Visual

**Measure with suitable scale.

Minor:

201. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.64 Grommet assembly for 155mm, 8 in., and 240mm (see dwg 10520044).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101. Staples flat against liner.....Visual
102. Liner does not overlap housing.....Visual
103. All parts present and properly assembled...Visual

Minor:

*201. Paint present no bare spot.....Visual
*202. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.65 Nut (see dwg 10999805).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101. Inside diameter (2.000).....Gage
102. Location of 2 holes.....Gage
103. Diameter of 2 holes (.265).....Gage
104. Flatness of both faces.....Gage
105. Perpendicularity of both faces.....Gage
106. Chamfer present both sides.....Gage
107. Pitch diameter of thread.....Gage
108. Major diameter of thread.....Gage
109. Proper 63 finish.....Visual
110. Rockwell hardness.....Gage
111. Material (see 3.1).....Visual
112. Objective evidence (see 6.2) for protective finish in accordance with 10999805.....Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

Minor:

201. Surface finish except as noted.....Visual
202. Workmanship (see 3.10).....Visual/Manual

*4.3.2.1.66 Gasket, metal (see dwg 10999804).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Thickness (.032)	Gage
102.	Outside diameter (2.900)	Gage
103.	Inside diameter (2.510)	Gage
104.	Concentricity of outside diameter	Gage
105.	Flatness	Gage
106.	Material (see 3.1)	Visual
Minor:		
201.	Workmanship (see 3.10)	Visual/Manual

4.3.3 Testing. - The contractor shall perform all the tests specified in this paragraph. Tests do not have to be performed in the order specified.

Test	Test Classification
a. Circuit resistance	Major
b. Rotating band	Major
c. Insulation resistance	Major
d. Charpy	Major
e. Tensile	Major
f. Shear	Major

Of these tests (b) is considered destructive when sample parts are used and samples so tested shall not be returned to the lot. The destructive samples are over and above the deliverable quantity of the items required by the contract.

4.3.3.1 Circuit resistance.

*4.3.3.1.1 Circuit resistance (see 3.6). - Each applicable part shall be subjected to this test (see 4.4.2). If any applicable part fails to comply with requirement, (see 3.6), it shall be classified defective and removed from the lot.

4.3.3.1.2 Circuit resistance (see dwg 9212234). - Each assembly shall be tested as specified in 4.4.2 and Table I, drawing 9212234. If any assembly fails to comply with drawing requirements the assembly shall be rejected and removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

*4.3.3.2 Rotating band (see 3.7).

*4.3.3.2.1 Band seating and physical properties (see 3.8.1 and 3.8.2). - Prior to finish machining rotating bands, a sample shall be selected and tested in accordance with 4.4.3.1. If the sample fails to comply with the requirements 3.7.1 and 3.7.2, the lot shall be rejected.

*4.3.3.2.2 Damage (see 3.7.3). - Each rotating band shall be inspected in accordance with 4.4.3.2. If any rotating band fails to comply with requirement 3.7.3, the assembly shall be rejected and removed from the lot.

4.3.3.3 Insulation resistance (see dwg 9212234,. - Each assembly shall be tested as specified in 4.4.6 and Table II, drawing 9212234. If any assembly fails to comply with drawing requirements, the assembly shall be rejected and removed from the lot.

4.3.3.4 Charpy.

4.3.3.4.1 Charpy (see dwg 9214730 and 9212254). - A sample shall be prepared and tested in accordance with MIL-T-46038, Impact tests. If the sample fails to comply with drawing requirements the heat treated lot shall be rejected.

4.3.3.4.2 Charpy (see dwgs 9212246, 9212241 and 9212240). A sample shall be prepared and tested in accordance with 4.4.7.1. If any sample fails to comply with drawing requirements the heat treated lot shall be rejected.

4.3.3.4.3 Charpy (see dwg 9203276). - A sample shall be tested in accordance with 4.4.7.2. If the sample fails to comply with drawing requirements the heat treated lot shall be rejected.

4.3.3.5 Tensile.

4.3.3.5.1 Tensile (see dwgs 9214730 and 9212254). - A sample shall be prepared and tested in accordance with MIL-T-45038. If the sample fails to comply with drawing requirements, the heat treated lot shall be rejected.

4.3.3.5.2 Tensile (see dwgs 9212246, 9212241, and 9212240). A sample shall be prepared and tested in accordance with 4.4.8. If any sample fails to comply with drawing requirements the heat treated lot shall be rejected.

4.3.3.6 Shear (see 9203276). - Test specimens shall be prepared and tested in accordance with 4.4.9. If any test specimen fails to comply with drawing requirements, the heat treated lot shall be rejected.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions and calibration instructions designed or specified by the contractor. The contractor shall obtain approval of such designs, operating instructions and calibration instructions as specified in 6.1.2 and 6.3 prior to use on the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

4.3.4.2 Minor characteristics and tests. - The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by a Government representative authorized by the procuring agency.

4.4 Test methods. - The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

*4.4.1 Preformed packing (see 3.5).

*4.4.1.1 Axial thickness (see 3.5.1). - An approved micrometer equipped with 1/4" diameter ball points shall be used to determine axial thickness (Dim B). In employing this instrument the tips are closed, the O-ring (or section thereof) allowed to rest on the tips, and the tips very carefully separated until the ring falls through of its own weight. Three measurements shall be taken at points approximately 120 degrees apart around the circumference. The average of the three readings shall comply with the requirements of the applicable detail on dwg. 8857484 and 3.5.1.

*4.4.1.2 Inside diameter (see 3.5.2). - The inside diameter shall be measured by an approved stepped cone and comply with the requirements of 3.5.2.

*4.4.2 Circuit resistance (see 3.6). - The circuit resistance shall be measured with approved equipment. Actual readings of resistance measured shall be recorded and records maintained 6 months min. after projectile has been fired.

*4.4.3 Rotating band (see 3.7).

*4.4.3.1 Rotating band seating and physical properties (see 3.7.1 and 3.7.2). - Prior to the removal the unmachined band shall be measured on three diameters, 120 degrees apart. At each of the three diameters, measurement along the width of the band shall be taken at stations 1, 2, and 3 totaling 9 measurements in all. Stations 1 and 3 are 5/16 inch from ends, and station 2 is at the center. The location of points of measurement shall be marked on the band along with the orientation of the band with the base. The band shall be removed in a manner that will keep deformation to a minimum. After removal the thickness of the band shall be measured at each of the marked points (a total of 18 measurements) and the diameter of the band seat at these points shall also be measured. To each of the band seat diameters add the sum of the corresponding 2 band thicknesses and subtract from the corresponding diameter previously determined. The result will indicate twice the diametrical clearance between the band and its seat as indicated in 3.7.2. If the band is well seated, a negative clearance of interference may be indicated. When irregular band profiles interfere with measurement, the manufacturer is authorized to machine the outside of the band

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

in order to obtain an adequate cylindrical surface. The diameter of the machined band shall exceed the bourrelet diameter. Since a piece must be destroyed to test clearances, a dummy component of similar material will be used for the test providing the dimensions of the band seat is within drawing 9212246 or 9212241, each time a band is tested. The machine settings used in banding the test specimen shall be the same as the lot banded. One speciment shall be tested for every 50 pieces or less produced or when a new lot of band blanks is used. A maximum of 6 cuts in the rotating band are permissible across the band seat in the test piece. The removed band shall be carefully flattened without hammering and test coupons shall be machined in accordance with ASTM-E-8-66 except the overall length specified for the specimen shall be determined by the contractor. Tensile shall be tested on approved equipment.

*4.4.3.2 Damaged rotating band (see 3.7.3). - An impression with "cast stone" (or grey stone) shall be taken of each nick, scratch, dent or gouge to determine the depth of the imperfection by a comparator type device or any other accurate measureing device approved by Picatinny Arsenal, Dover, New Jersey, ATTENTION: SARPA-QA-N-I. Any other method devised by the contractor to measure the depth of the imperfections shall be approved by Picatinny Arsenal, SARPA-QA-N-I. For the allowable depth of the imperfection see Figure 1. In addition, the rotating band shall be visually inspected for any crack or foreign matter embedded in the rotating band.

*4.4.4 Metal to metal contact (see 3.8). - The gap shall be measured as specified on drawing 9214726 to insure metal to metal contact. The procedure and equipment used in measuring the gap shall be approved by Picatinny Arsenal, Dover, New Jersey, ATTENTION: SARPA-QA-N-I.

*4.4.5 Pin seated on bottom of hole (see 3.9). - Measure the depth of hole to the nearest .001 inch and record. Measure length of pin to be used to the nearest .001 inch and record. Subtract the measured pin length from the measured depth of the hole and record. After pin assembly measure depth of pin below flush to the nearest .001 inch. The measured depth of pin below flush shall comply with requirements of 3.9.

4.4.6 Insulation resistance (see 4.3.3.3). - The insulation resistance shall be measured with approved equipment at a potential of 500 + 50 volts direct current, with the current limited to 5 milliamperes. Actual resistance measured shall be recorded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

4.4.7 Charpy.

*4.4.7.1 Charpy (see 4.3.3.4.2). - The heat treated lot shall not exceed 25 pieces from the same manufacturer and the same mill run of stock. A sample piece, minimum length one inch, shall be selected from the stock at random when preparing the pieces (see applicable drawing) for heat treatment from stock. This sample may also be used for tensile specimens. The sample shall be included in the heat treated lot and receive the same treatment and process as the heat treated parts. After heat treatment two transverse specimens shall be selected from the sample 180 degrees apart, with the notch on one specimen facing the outside of the sample and the notch on the other specimen facing the inside of the sample. These specimens shall be prepared and tested on approved equipment in accordance with ASTM-E-23-66. The average of the test results from the two specimens shall comply with drawing requirements.

*4.4.7.2 Charpy (see 4.3.3.4.3). - Two test specimens shall be selected at random from stock for each heat treated lot of parts. These specimens shall be included in the heat treated lot and receive the same treatment and process. After heat treatment the test specimens shall be prepared and tested on approved test equipment in accordance with ASTM-E-23-66 and comply with the drawing requirements.

*4.4.8 Tensile (see 4.3.3.5.2). - The heat treated lot shall not exceed 25 pieces, from the same manufacturer and the same mill run of stock. A sample piece, minimum length one inch, shall be selected from the stock at random when preparing the pieces (see applicable drawing) for heat treatment from stock. This sample may also be used for charpy specimen. The sample shall be included in the heat treated lot and receive the same treatment and process as the heat treated parts. After heat treatment two transverse specimens shall be selected 180 degrees apart. These specimens shall be prepared and tested on approved equipment in accordance with ASTM-E-8-66. The average of the test results from the two specimens shall comply with drawing requirements.

4.4.9 Shear (see 4.3.3.6). - Two suitable test specimens shall be prepared and tested for each heat treated lot on approved test equipment and comply with drawing requirements.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. - Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. - The parts and subassemblies shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169(MU).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. - The parts and subassemblies shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169(MU).

5.2 Packing.

5.2.1 Levels A and C. - The parts and subassemblies shall be packed in accordance with the applicable instructions contained in MIL-STD-1169(MU).

5.3 Marking. - Marking shall be in accordance with MIL-STD-1169(MU).

6. NOTES

*6.1 Ordering data. Procurement documents should specify the following:

*6.1.1 Procurement requirements.

a. Title, number, and date of this specification.
b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

*6.1.2 Contract data requirements (see 4.3.4.1). Data specified in 4.3.4.1 will be delivered as identified on a numbered DD Form 1664 when specified on a DD Form 1423 incorporated in the contract.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

*6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commanding Officer, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SARPA-QA-N-I.

*6.4 Identification of changes. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - MU

Preparing activity:
Army - MU

Project No. 1190-A059

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-P-60905A(MU) - Parts and Assemblies for Test Vehicle PXR6007

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:22Z
Check the source to verify that this is the current version before use.