MIL-P-63224A (AR)
14 MAY 1986
SUPERSEDING
MIL-P-63224 (AR)
31 August 1979

MILITARY SPECIFICATION

PROJECTILE, GUIDED, 155MM, M712
GUIDANCE SECTION FOR

This Specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for the manufacture and acceptance of the Guidance Section for the M712, 155MM Guided Projectile, critical item.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-601	-	Box, Wood, Cleated, Plywood
PPP-B-621	-	Box, Wood, Nailed and Lock Corner
PPP-C-843	-	Cushioning Material, Cellulosic
PPP-C-1120	-	Cushioning Material, Uncompressed Bound Fiber for Packaging
PPP-T-76	-	Tape, Packaging, Paper (For Carton Sealing)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn: AMSMC-QA, Dover, New Jersey 07801-5001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A
FSC 1320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	-	Preservation-packaging, Methods of
MIL-B-117	-	Bag, Sleeve and Tubing-Interior Packaging
MIL-D-3464	-	Desiccants, Activated, Bagged, Packaged Use and Static Dehumidification
MIL-I-6866	-	Inspection, Penetrant Method of
MIL-P-17667	-	Paper, Wrapping, Chemically Neutral (Non-Corrosive)
MIL-P-63225	-	Projectile, Guided, 155MM, M712, Control Section for
MIL-P-63226	-	Projectile, Guided, 155MM, M712, Warhead for
MIL-P-63227	-	Projectile, Guided, 155mm, M712, Packaging for

STANDARDS

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-810	-	Environmental Test Methods

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

US Army Armament Research and Development Center (ARDC)

9301900 - Guidance Section

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Item definition. The Projectile, Guided, 155MM, M712 Guidance Section, hereinafter referred to as the guidance section, is the forward assembly for the M712 Cannon Launched Guided Projectile and interfaces with the forward end of the warhead section. It consists of two separate assemblies: seeker assembly and electronic assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

(a) Seeker assembly. The seeker assembly employs folded, body fixed optics, a spin-stabilized gimballed mirror (seeker gyro), a four quadrant detector and preamplifiers to detect and acquire coded laser signals, when these signals enter the seeker field of view. To prevent gyro damage during storage transportation and cannon launch, the seeker gyro rotor is mechanically restrained by a "gotcha" assembly. Electrically excited coils, external to the gyro, are used to torque and sustain the speed of a permanent magnet gyro rotor. The gyro rotor is initially spun up by a mechanical spring starter after the gotcha disengages. The seeker assembly also contains direct impact and shockwave sensors which are part of the fuzing system and are used to sense impact of the projectile with a target.

(b) Electronic assembly. The electronic assembly consists of eight annular printed circuit (PC) cards: spin torquer, video amplifier, sample and hold, pulse logic, spot jump inhibitor, decoder, autopilot, and sequencer. The PC cards are mounted between a forward bulkhead, which contains spin and torquer drive electronic elements, and an electronic roll-rate sensor, and an aft bulkhead which contains the system voltage regulators and time code switches. Electrical interconnections are made with a flexible printed circuit assembly called a motherboard. The PC card assembly is contained within an outer housing which includes the forward bourrelet, shockwave sensors, and external switches for laser coding and trajectory sequence selection.

3.2 Design and construction.

3.2.1 Production drawings. The guidance section shall be fabricated in accordance with drawings, parts lists, and other documents listed on drawing 9301900.

3.3 Characteristics. The characteristics of the guidance section shall be as specified herein.

3.3.1 Performance. The performance parameters specified in 3.3.1.1 through 3.3.1.15 are specified with the seeker gyro gotcha engaged.

3.3.1.1 Squib circuit resistance. The direct current resistance of the seeker gyro gotcha and seeker gyro spring squib circuits shall be 2.2±0.5 ohm each. CAUTION: For test purposes, source current shall not exceed 1.0 milliamp (ma) at a maximum of 5.0 volts direct current (VDC).

3.3.1.2 Load connections. The guidance section load connections shall be as follows:

(a) 220K ohms ±5% between pitch command and signal ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

(b) 110K ohms ±5% between yaw command and signal ground.

(c) 220K ohms ± 5% between roll command and signal ground.

(d) 10K ohms ±5% between charge detonator capacitor 1 and fuze ground 1.

(e) 10K ohms ± 5% between charge detonator capacitor 2 and fuze ground 2.

(f) 1K ohms ± 5% between explosive actuator 1 squib drive and fuze ground 1.

(g) 1K ohms ± 5% between explosive actuator 2 squib drive and fuze ground 2.

(h) 1K ohms ± 5% between ± 30 VDC battery squib drive and signal ground.

(i) 1K ohms ± 5% between gas squib drive and squib ground.

(j) 1K ohms ± 5% between wing extend squib drive and squib ground.

(k) 1K ohms ± 5% between wing unlock squib drive and squib ground.

(l) 1K ohms ± 5% between seeker gyro gotcha squib drive and squib ground.

(m) 1K ohms ± 5% between seeker gyro spring squib drive and squib ground.

3.3.1.3 Electrical power requirements. The electrical power required to functionally operate the guidance section shall be as follows:

(a) +12.5 ±0.5 VDC @ 1.5 amperes (amps) maximum (Note 1)

(b) +20 ±1.0 VDC @ 1.5 amps maximum (Note 2)

(c) -20 ±1.0 VDC @ 1.5 amps maximum (Note 2)

(d) +30 ±0.5 VDC @ 4.5 amps maximum (Note 3)

(e) -30 ±.5 VDC @ 4.5 amps maximum (Note 3)

TEST NOTES:

1 the +12.5 VDC shall be applied in such a manner that the rate of rise of the applied voltage to the unit under test (UUT) shall not exceed 5 volts/5 milliseconds (ms) until the +12.5 VDC supply reaches 8 VDC minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

2 The application of the +20 VDC shall be delayed by at least 100 ms after application of the +12.5 VDC.

3 Current indicated at +30 VDC is required for first article testing. For testing other than first article, current requirements are +30 VDC at 0.5 amps; -30 VDC is not required.

3.3.1.4 Regulated voltages. The guidance section voltage regulator outputs shall be as follows:

(a) +15 volts regulator: +15 ± 0.75 VDC
(b) -15 volts regulator: -15 ± 0.75 VDC
(c) +5 volts regulator: +5 ± 0.4 VDC

3.3.1.5 Squib drive outputs. The amplitude and timing sequence of the squib drive signals shall be as shown in Table 1.

3.3.1.6 Target acquisition. At target acquisition, the target acquisition signal shall change from a logic level zero to a logic level one. At 2 ±0.40 seconds after the change of the target acquisition signal to a logic level one, the charge detonator capacitor No. 1 and 2 signals shall change from 0 to 29 +7 VDC and the guidance enable signal shall change from a logic level one to a logic level zero.

3.3.1.7 Video pulse present signal. Using the following conditions, the number of video pulse presence gated pulses shall equal the input code:

(a) The guidance section optical window shall be illuminated at a nominal power density of 16 microwatts per square centimeter (uW/cm^2).

(b) The guidance section shall be oriented so that the pitch and yaw line-of-sight (LOS) signals read 0± 0.5 VDC relative to signal ground.

(c) Guidance section positioned in the roll axis so that angular displacement in the pitch plane shall produce a yaw LOS signal that is not greater than 10 percent of the pitch LOS signal.

3.3.1.8 On axis threshold. When the guidance section is oriented as described in 3.3.1.7 (b) and (c) and is illuminated at the minimum power density, as specified in drawing 9300800, the guidance section shall maintain target acquisition, and the target acquisition function shall maintain a logic level one.

3.3.1.9 Operational code correlation/decorrelation response.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.3.1.9.1 Before guidance enable. Illuminate guidance section optical window at a nominal power density of .80 ± .20 microwatt per square centimeter (UW/CM^2). With the guidance section illuminated at this level and the guidance enable signal at logic level one, the target acquisition signal shall indicate a logic level one. The target acquisition signal shall change to a logic level zero after the illumination signal is interrupted for a period of time equal to the number of pulses specified in drawing 9300800. The target acquisition signal shall indicate a logic level one after the number of pulses specified in drawing 9300800 are again permitted to illuminate the guidance optical window. The results of this test can be adversely affected by the statistical occurrence of noise within the decoder gates. As such, both portions of the above test can be repeated up to three times each to demonstrate compliance with this test requirement.

3.3.1.9.2 After guidance enable. With the target acquisition signal at logic level one, and the guidance enable signal at logic level zero, interruption of the illumination signal as described in 3.3.1.9.1 shall cause the target acquisition signal to change to a logic level zero, but the guidance enable signal shall remain at, logic level zero. When reilluminated as described in 3.3.1.9.1, the target acquisition signal shall change to a logic level one and the guidance enable signal shall remain at logic level zero. The timing requirements demonstrated in 3.3.1.9.1 need not be redemonstrated in this subtest.

3.3.1.10 Dynamic range/boresight shift. When the guidance section is oriented as described in 3.3.1.7 (b) and (c), and the illumination level is varied over a range of 48 decibels (dB), beginning at a nominal 0.4 uw/cm^2, performance shall be as follows:

(a) The maximum variation of the LOS signal over the input illumination range shall not exceed 3 volts.

(b) Over any 8 dB illumination increment within the last 30 dB of the 48 dB illumination range, the change in pitch and yaw LOS shall not exceed 0.53 volts.

(c) Over the 48 dB illumination range, the automatic gain control (AGC) shall fit within the bounds defined in Figure 1 where:

$$\text{Input power above threshold} = (10) \log \frac{\text{Power In}}{\text{Threshold Power}}$$

and threshold power is as described in drawing 9300800.

(d) Beginning with the system not in acquisition it shall acquire in a manner as stated in 3.3.1.9.1 and the AGC shall fall within the bounds of Figure 1 with laser energy 30 ± 1dB above the threshold value described in drawing 9300800.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

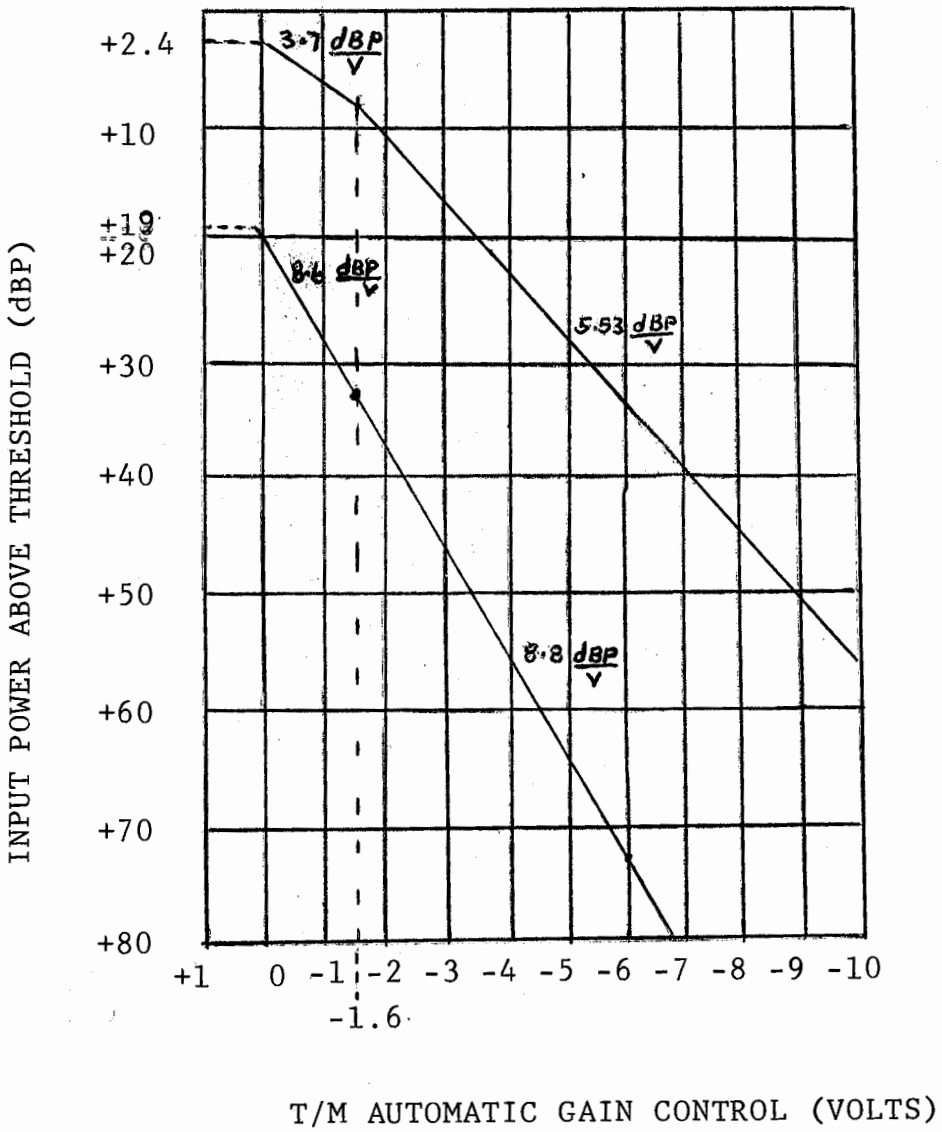


FIGURE 1 Automatic gain control bounds

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.3.1.11 Proportional zone.

3.3.1.11.1 Pitch axis (nominal signal power). Under the following conditions, the pitch LOS signal versus displacement shall meet the requirements of 3.3.1.11.2:

(a) Guidance enabled.

(b) Guidance section oriented as described by 3.3.1.7 (b) and (c).

(c) An angular offset from 0 to ± 2.5 degrees, at an angular rate not to exceed 2.0 degrees per second, between the guidance section longitudinal axis and the incident illumination in the pitch axis while monitoring the pitch LOS signal.

(d) Guidance section optical window illuminated at a power density of 20 ± 5 uw/cm^2.

3.3.1.11.2 Pitch axis LOS proportional zone. Under the conditions specified in 3.3.1.11.1, the pitch axis LOS signal, as a function of offset angle, shall meet the following requirements:

(a) The LOS signal shall be represented by straight line segments between the 0.0V point and the ± 1.25v points, between the +1.25v and +2.50v points, and between the -1.25v and -2.50v points.

(b) The slope of the straight line segments shall be 8.5 ± 4.5 v/degree,

(c) The LOS signal shall not deviate from each of the straight line segments by more than 0.5v,

(d) The magnitude of the LOS signal shall be $\geq$ 2.50v outside the ±2.50v zone (0.25 to 0.83 degrees offset) and shall be $\geq$ 4.00v outside the ±2.0 degree offset points,

(e) Monitor the LOS line while outside the plus or minus 2 degree offset point for a maximum of 40 seconds. During this interval ensure that a continuous 7 second interval can be found that no more than one LOS noise pulse exists within that interval. There is no limit to the number of times the 7 second interval can be restarted within the 40 second interval. An LOS noise pulse is defined as a pulse to pulse variation in which the absolute value of the LOS voltage drops to less than 3.0 volts.

3.3.1.11.3 Yaw axis LOS proportional zone. The yaw LOS signal shall meet the same requirements as defined for the pitch axis in 3.3.1.11.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.3.1.12 Noise count. The guidance section shall not be illuminated with laser energy. However, during the test the optical window shall be illuminated with white light from a tungsten filament lamp or equivalent such that the illuminance at the seeker dome is between 150 ft - candles and 1500 ft - candles. The desired level is 550 ft - candles as measured with a calibrated light meter or equivalent. With the above conditions, pulses shall occur on the pulse presence line at a frequency of 232 + 25 pulses per second averaged over a minimum 10 second period. The pulses will be positive going pulses from logic level zero to logic level one, 1 to 50 microseconds in duration, and shall have a source impedance of 10K ohms. Under the noise conditions stated above, target acquisition shall not occur more than one time in a given 10 minute period due to noise.

3.3.1.13 Autopilot pitch and yaw channels, ballistic mode. With the code switches at 211 and timer switches at 11 under the load conditions of 3.3.1.2 and power requirements of 3.3.1.3, and with a plus or minus voltage applied to the seeker gimbal angle pitch test line as required to achieve +1.00 + 0.05 VDC at the pitch gimbal angle, the gravity bias pitch voltage with respect to signal ground shall be -7.0 + 0.7 VDC at 4 + 1 seconds after the SEQUENCER RESET/INHIBIT line has been open circuited. At 4 + 1 seconds after target acquisition the pitch command voltage shall be -3.5 + 0.6 VDC. With the pitch channel conditions specified above applied to the yaw channel, the yaw gravity bias voltage and yaw fin command shall meet the same requirements as specified for the pitch channel.

3.3.1.14 Autopilot pitch and yaw channel, FUFO mode. With the code switch set at 211 and the time delay switch set at 32, under the load conditions of 3.3.1.2 and power requirements of 3.3.1.3 and with a plus or minus voltage applied to seeker gimbal angle pitch test line as required to achieve -0.5 + 0.01 VDC at the pitch gimbal angle output line, the following requirements shall be met:

(a) Four (4) + 1 seconds after the SEQUENCER RESET/INHIBIT line has been open circuited, the gravity bias pitch voltage with respect to signal ground shall increase to 3.5 + 0.6 VDC. At wing extend (WEX) (Free Gyro) occurrence, there shall be a positive increasing ramp of 0.5 + 0.15 volts per second until target acquisition which shall be simulated at approximately two seconds (not a test parameter) after WEX. The voltage level present at target acquisition shall be maintained within a drift rate of ± 0.055 VDC per second.

(b) The pitch command signal shall be 0.0 + 0.2 volts until WEX occurrence and then exhibit a positive step of 0.25 + 0.05 VDC. One ± 0.5 second after WEX occurrence the pitch command

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

shall exhibit a positive increasing voltage until simulated target acquisition. At simulated target acquisition a negative step of 0.25 ± 0.05 VDC shall occur after which the drift rate of the voltage level shall be maintained within ±0.028 VDC per second.

(c) With the pitch channel conditions specified above applied to the yaw channel, yaw gravity bias and yaw fin command shall meet the same requirements as specified for the pitch channel.

3.3.1.15 Autopilot roll channel. With the guidance section mounted with the flight axis in the vertical position and with the roll rate sensor enabled, within 2 seconds after roll rate sensor unlatch the autopilot roll command output signal shall be -1.36 ± 0.35 VDC with respect to signal ground, and shall not have changed by less than +0.07 volts DC or more than +0.97 volts DC at a time no less than 10 seconds. With the roll rate sensor in the latched mode, the roll command output signal shall be -9.1 ± 1.8 VDC, 3 ± 0.2 seconds after the roll rate sensor is enabled.

3.3.1.16 Live sequence. With the guidance section electrically assembled into an all-up-round (AUR) configuration, using the control section internal battery as the electrical power source, code switches set to 211, SGG, and SGS squibs connected to their respective drive circuits, and the optical window illuminated at a power density sufficient to operate the optical system, the sequence of events shall be as described in 3.3.1.5 and 3.3.1.6. Event 4 of Table I shall release the seeker gyro gotcha. Event 6 shall release the spring starter which shall spin up the gyro to 119.0 + 2/-5 revolutions per second (rps) within 2.0 seconds after start of event 6. With the gyro spinning, electrically caged, and bore sighted as defined in 3.3.1.7 (b) and (c), the peak-to-peak pitch and yaw LOS signal variation shall not exceed 1.0 volt over a period of 10 ± 1 seconds. In an uncaged mode, the pitch and yaw gimbal angle signals shall be not greater than 0.1 volt peak-to-peak over a period of 10 ± 1 seconds. In the caged mode with the illumination source offset in pitch and yaw from boresight, the pitch command shall indicate a negative voltage when the illumination source is moved up from boresight and positive when the illumination source is moved down. The yaw command signals shall indicate a negative voltage when the illumination source is moved to the left of boresight; when facing the forward end of the projectile and positive when the illumination source is displaced to the right; when facing the forward end of the projectile. The above specified LOS, gimbal, and fin command signals shall also be met with the code switches set at 788.

3.3.1.17 Fin command polarity. With the guidance section in the mode described in 3.3.1.11 (a) and (b), illuminated at a power density sufficient to operate the optical system and in the caged mode, with the illumination source offset in pitch and yaw from

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

boresight, the pitch command signal shall indicate a positive voltage when the illumination source is moved up from boresight and negative when the illumination source is moved down. The yaw command signal shall indicate a positive voltage when the illumination source is moved to the right boresight, when facing the forward end of the projectile and negative when the illumination source is displaced to the left of oresight, when facing the forward end of the projectile.

3.3.1.18 Instantaneous field of view (IFOV). Under the conditions specified in 3.3.1.11.1 (a) and (b), the pitch and yaw IFOV shall meet the requirements of drawing 9300800.

3.3.1.19 Fuze shockwave sensors. When the guidance section is impacted on the metal housin adjacent to and in line with each of the shockwave sensors, with an impulse not exceeding that which would result from a metal rod, having a maximum weight of 0.5 pound, striking at a velocity of not more than 30.0 feet per second, a voltage output shall be detected on the appropriate fire detonator line. The voltage generated shall be a minimum of 1.0 VDC at the corresponding fire detonator line. Voltages generated by the adjacent sensors not being impacted, shall be less than the voltage detected at the detonator line corresponding to the sensor being impacted.

3.3.1.20 Optical filter. The optical filter shall have no chips or cracks after the guidance section has been exposed to the environmental conditions of 3.3.2.

3.3.2 Enironmental conditions. The guidance section shall meet the performance requirements of 3.3.1 when subjected to the following environments, as specified. The requirements of 3.3.2.1, 3.3.2.2, and 3.3.2.3, apply only with the guidance section assembled into an AUR configuration (either tactical or simulated) and installed in a tactical container (MIL-P-63227). After exposure to these environmental conditions, the guidance section shall show no evidence of physical damage which would render it unsuitable for its intended use.

3.3.2.1 Temperature shock. The guidance section assembled into a test item, shall meet the requirements of 3.3.1 after exposure of the test item to temperature shocks in either direction between -50°F (-45.6°C) and 160°F (71°C).

3.3.2.2 Transportation vibration. The guidance section assembled into a test item, shall meet the requirements of 3.3.1 after exposure of the test item to the transportation vibration requirements of MIL-STD-810, Method 514.2, Procedure X.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.3.2.3 Fragility shock. The guidance section assembled into a test item, shall meet the requirements of 3.3.1 after exposure of the test item in all three axes, to half sine wave mechanical shock pulses having nominal durations of 10 ms, with nominal peak accelerations of 200g.

3.3.2.4 Launch shock. The guidance section shall meet the requirements of 3.3.1 after exposure to a forward longitudinal acceleration of a maximum of 9000g +300g at temperatures ranging from 70°F (21°C) to 145 °F (63°C) and 8000g +400g at -25°F (-31.6°C), linearly increasing to 9000 +300g at 70°F (21°C). This requirement shall apply following exposure to the temperature shock of 3.3.2.1; transportation vibration of 3.3.2.2, and fragility shock of 3.3.2.3.

3.3.2.5 High temperature. The guidance section shall meet the requirements of 3.3.1 during ambient temperatures up to and including 145°F (63°C).

3.3.2.6 Low temperature. The guidance section shall meet the requirements of 3.3.1 during ambient temperatures down to and including -25°F (-31.6°C).

3.4 First article inspection. This specification makes provision for first article inspection. First article samples shall meet all the requirements of this specification. Requirements for submission of the first article samples by the contractor shall be as specified in the contract.

3.5 Workmanship. All parts shall be fabricated and finished in a thoroughly workmanlike manner. Except as otherwise specified, the parts shall be free of cracks, scratches, burrs, dents, gouges, surface defects or any surface discontinuities. The items shall be free from dirt, chips, grease, corrosion and other foreign material. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat and legible. Exterior surface coatings shall be continuous. Scratches not exposing base metal are permitted.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchases order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the procuring activity. The procuring activity reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The following types of inspection shall be conducted on this item:

(a) First article inspection (4.3)

(b) Quality conformance inspection (4.4)

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of 10 Guidance Section assemblies and the parts and assemblies listed below. All assemblies and components shall have been produced by the contractor or furnished by a supplier and shall have been manufactured using the same production processes, procedures and equipment which will be used in fulfilling the contract. All parts and materials shall be obtained from the same source of supply as will be used in regular production. Prior to submission, the contractor shall inspect the sample to the degree necessary to ensure that it conforms to the requirements of the contract and submit a record of this inspection with the sample, including statements of findings for materials, processes and tests. A sample containing known defects will not be submitted unless specifically authorized by the procuring activity.

Part Description	Drawings	Quantity
Frame, Rotor-Machining	9306017	5
Coil, Assembly	9306020	5
Magnet, Ring	9306041	5
Drive Nut	9306061	5
Detector Housing	9306085	5
Filter Optical	9306089	5
Cover, Detector Housing-Machining	9306148	5
Pin, Trunnion - Yaw	9306187	5
Pin, Trunnion - Pitch	9306188	5
Base, Gyro	9306406	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

Part Description	Drawings	Quantity
Lock, Gotcha	9306407	5
Ring, Gimbal-Machining	9306409	5
Inner Gimbal-Machining	9306410	5
Rotor Assembly	9306045	5
Gyro Support Assembly	9306424	5
Drive Support	9306427	5
Housing, Electronics	9306520	5
Circuit Card Assy, Autopilot	9301770	5
Circuit Card Assy, Fwd Bulkhead	9301920	5
Motherboard, Multilayer, Rigi-Flex	9301903	5
Motherboard Assembly	9301905	5
Plug, Threaded-Fwd bulkhead	9306606	5
Retaining Ring, Electronics	9306607	5
Aft Bulkhead - Machining	9306608	5
Circuit Card Assy, Video Amp	9301795	5
Circuit Card Assy, Sample and Hold - LSI	9301755	5
Circuit Card Assy, Pulse Logic-LSI	9301760	5
Circuit Card Assy, Decoder-LSI	9301785 or 9395671	5
Circuit Card Assy, Spin Torque-LSI	9306630	5
Circuit Card Assy, Sequencer-LSI	9306635	5
Circuit Card Assy, Aft Bulkhead	9306660	5
Circuit Card Assy, Spot Jump Inhibitor	9301765	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

Part Description	Drawings	Quantity
Preamplifier Assy - LSI	9306680	5
Plate, Fwd Bulkhead - Casting	9306731	5
Spacer, Outer Circuit Card	9306732	5
Plate, Fwd Bulkhead-Machining	9306745	5

4.3.2 Inspections to be performed. The first article test samples shall be subjected by the procuring activity to the examinations and tests in accordance with Table I. Also the first article test samples may be subjected by the procuring activity to any or all of the examinations and tests specified in this specification and to any or all requirements of the applicable drawings. Environmental tests shall be conducted in the sequence indicated. The testing shall be considered destructive and the tested assemblies shall not be returned to a lot for delivery.

4.3.3 Rejection. If any assembly, component, or test specimen fails to comply with any of the applicable requirements, the first article samples shall be rejected. The procuring activity reserves the right to terminate its inspection upon any failure of any assembly, component, or test specimen in the sample to comply with any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
	Guidance Section		9301900
			NEXT HIGHER ASSEMBLY 9305300

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Squib resistance	10	100%	3.3.1.1	4.5.3.2
102	Load connections	10	100%	3.3.1.2	4.5.3.1
103	Electrical power requirements	10	100%	3.3.1.3	4.5.3.3
104	Regulated voltages	10	100%	3.3.1.4	4.5.3.4
105	Squib drive outputs	10	100%	3.3.1.5	4.5.3.5
106	Target acquisition	10	100%	3.3.1.6	4.5.3.7
107	Video pulse present signal	10	100%	3.3.1.7	4.5.3.8
108	On axis threshold	10	100%	3.3.1.8	4.5.3.9
109	Operational code correlation/decorrelation response	10	100%	3.3.1.9	4.5.3.10
110	Dynamic range/boresight shift	10	100%	3.3.1.10	4.5.3.11
111	Proportional zone	10	100%	3.3.1.11	4.5.3.12
112	Noise count	10	100%	3.3.1.12	4.5.3.13
113	Autopilot pitch and yaw channels ballistic code	10	100%	3.3.1.13	4.5.3.14
114	Autopilot pitch and yaw channels FUFO mode	10	100%	3.3.1.14	4.5.3.15
115	Autopilot roll channel	10	100%	3.3.1.15	4.5.3.16
116	Fuze shockwave sensors	10	100%	3.3.1.19	4.5.3.6
117	Instantaneous field of view (IFOV)	Note1	100%	3.3.1.18	4.5.3.18
118	Temperature shock	10	100%	3.3.2.1	4.5.4.1
119	Transportation vibration	10	100%	3.3.2.2	4.5.4.2

NOTES:

1. Two units from the first article sample shall be selected for this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-P-63224A (AR)

PARAGRAPH	TITLE: Guidance Section		SHEET 2 OF 2		DRAWING NUMBER: 9301900
					NEXT HIGHER ASSEMBLY: 9305300
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
120	Fragility shock	10	100%	3.3.2.3	4.5.4.3
121	Launch shock, high temperature (See Note 2)	5	100%	3.3.2.4	4.5.4.4
122	High temperature operation (See Note 2)	5	100%	3.3.2.5	4.5.4.6
	Live sequence		-	-	4.5.3.17
	Guid. code 211 (1 assy)		-	3.3.1.16	4.5.3.17.1
	Guid. code 788 (1 assy)		-	3.3.1.16	4.5.3.17.2
	Fin comm. polarity (2 assys)		-	3.3.1.17	4.5.3.17.3
	Duty cycle (1 assy)		-	3.3.1.16	4.5.3.17.4
123	Launch shock, low temperature (See Note 2)	5	100%	3.3.2.4	4.5.4.5
124	Low temperature operation (See Note 2)	5	100%	3.3.2.6	4.5.4.7
	Live sequence		-	-	4.5.3.17
	Guid. code 211 (1 assy)		-	3.3.1.16	4.5.3.17.1
	Guid. code 788 (1 assy)		-	3.3.1.16	4.5.3.17.2
	Fin comm. polarity (2 assy)		-	3.3.1.17	4.5.3.17.3
	Duty cycle (1 assy)		-	3.3.1.16	4.5.3.17.4

NOTES:
2. Ten assemblies shall be tested in the sequence shown for major items 101 through 120. The first article sample shall then be divided into 2 groups of 5 units each. One group shall be tested per major items 121 & 122, the second group shall be tested per major items 123 & 124.

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot. Unless otherwise specified herein or by the procuring activity, inspection lot size, lot formation, and presentation of lots shall be in accordance with the inspection and sampling procedures herein and the "submission of product" provisions of MIL-STD-105. Lot size shall be no greater than 1 month's production. The electronic packages and seeker assemblies in each lot shall be from not more than one interfix number, from one manufacturer.

4.4.2 Inspections.

4.4.2 Sampling plans. Each lot of guidance sections shall be inspected per paragraphs 4.4.2.1 through 4.4.2.37. Unless otherwise specified, sampling shall be to Level II of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 9306017
4.4.2.1	Frame, Rotor-Machining				NEXT HIGHER ASSEMBLY 9306045
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Cracks		Dwg.	Dwg.	MIL-I-6866
102	Inspection for burrs		100%	3.3.2	Visual (20 power magnification minimum)
Minor					
201	Magnet mounting surface O.D.		0.65%	Dwg.	Gage
202	Positional tolerance of magnet mounting surface O.D. with respect to centerline of shaft hole		0.65%	Dwg.	Gage
203	Positional tolerance of counterbore with respect to centerline of shaft hole		0.65%	Dwg.	Gage
204	Runout of forward surface with respect to aft rotor surface		0.65%	Dwg.	Gage
205	Parallelism of flange forward surface to aft rotor surface		0.65%	Dwg.	Gage
206	Parallelism of flange aft surface to aft rotor surface		0.65%	Dwg.	Gage
207	Perpendicularity of boss surface to centerline of shaft hole		0.65%	Dwg.	Gage
208	Shaft hole diameter		0.65%	Dwg.	Gage
209	Dimensional code marking		0.65%	Dwg.	Visual
210	Shaft hole diameter roundness		0.65%	Dwg.	Gage

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9306017
4.4.2.1	Frame, Rotor-Machining				NEXT HIGHER ASSEMBLY 9306020
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
211	Inside diameter of rotor housing		0.65%	Dwg.	Gage
212	Positional tolerance of housing I.D. with respect to centerline of shaft hole		0.65%	Dwg.	Gage
213	Outside diameter of housing between flange and teeth		0.65%	Dwg.	Gage
214	Positional tolerance of housing O.D. between flange and teeth with respect to outside diameter of teeth		0.65%	Dwg.	Gage
215	Outside diameter of teeth		0.65%	Dwg.	Gage
216	Positional tolerance of teeth O.D. and center line of shaft hole		0.65%	Dwg.	Gage
217	Positional tolerance of keyway with respect to centerline of shaft hole		0.65%	Dwg.	Gage
218	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9306020
4.4.2.2	Coil Assembly				NEXT HIGHER ASSEMBLY 9306000
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Installation of filter, lens and retainer		0.65%	Dwg.	Gage/Visual
202	Wire installation on fore and aft sides of gyro support		0.65%	Dwg.	Visual
203	Installation of polyester tape on direct impact sensor		0.65%	Dwg.	Visual
204	Runout of detector housing with respect to lens element number 1		0.65%	Dwg.	Visual
205	Installation of seeker harness		0.65%	Dwg.	Visual
206	Gap between insulating tubing and gyro support on aft side		0.65%	Dwg.	Visual
207	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Magnet, Ring				9306041
					NEXT HIGHER ASSEMBLY 9306045
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Cracks		Dwg.	Dwg.	MIL-I-6866
Minor					
201	Marking		0.65%	Dwg.	Visual
202	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Drive Nut				9306061
					NEXT HIGHER ASSEMBLY 9306400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Diameter of counterbore		0.65%	Dwg.	Gage
202	Width of slot		0.65%	Dwg.	Gage
203	Positional tolerance of slot with reference to hole location		0.65%	Dwg.	Gage
204	Positional tolerance of inside thread with respect to hole location		0.65%	Dwg.	Gage
205	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Detector Housing				9306085
					NEXT HIGHER ASSEMBLY 9306020
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Positional tolerance of knurled end I.D. with respect to housing I.D.		0.65%	Dwg.	Gage
202	Runout of inside surface at knurled end with respect to housing I.D.		0.65%	Dwg.	Gage
203	Positional tolerance of tube assembly holes with respect to forward end		0.65%	Dwg.	Gage
204	Positional tolerance of tube assembly mounting hole with respect to tube assembly holes		0.65%	Dwg.	Gage
205	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.6	Filter, Optical		9306089
			NEXT HIGHER ASSEMBLY 9306020

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Runout of outside diameter with respect to inside diameter		0.40%	Dwg.	Gage
102	Parallelism of one face with respect to other face		0.40%	Dwg.	Gage
103	Surface quality prior to coat		0.40%	Dwg.	Gage
104	Dimensions of clear aperture		0.40%	Dwg.	Gage
105	Transmittance values		100%	Dwg.	Gage
106	Transmittance outside the filter band pass region of filter		100%	Dwg.	Gage
Minor	None defined				

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9306148
4.4.2.7	Cover, Detection Housing-Machining				NEXT HIGHER ASSEMBLY 9306020
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Positional tolerance of thread major diameter with respect to angle of chamfer		0.65%	Dwg.	Gage
202	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.8	Pin, Trunnion - Yaw				9306187
					NEXT HIGHER ASSEMBLY
					9306400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Trunnion diameter		0.65%	Dwg.	Gage
202	Perpendicularity of shaft side of head with respect to shaft		0.65%	Dwg.	Gage
203	Thread characteristics		0.65%	Dwg.	Gage
204	Finish		0.65%	Dwg.	Gage
205	Code marking		0.65%	Dwg.	Visual
206	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.9	Pin, Trunnion - Pitch				9306188
					NEXT HIGHER ASSEMBLY
					9306400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Trunnion diameter		0.65%	Dwg.	Gage
202	Perpendicularity of shaft side of head with respect to O.D.		0.65%	Dwg.	Gage
203	Thread characteristics		0.65%	Dwg.	Gage
204	Finish		0.65%	Dwg.	Gage
205	Code marking		0.65%	Dwg.	Visual
206	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER 9306406
4.4.2.10	Base, Gyro				NEXT HIGHER ASSEMBLY 9306415
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Intersection of trunnion holes centerline with respect to vertical centerline through diameter of forward face of base flange.		0.65%	Dwg.	Gage
202	Positional tolerance between the two trunnion holes		0.65%	Dwg.	Gage
203	Roundness of trunnion holes		0.65%	Dwg.	Gage
204	Positional tolerance of trunnion hole with respect to locating notch		0.65%	Dwg.	Gage
205	Parallelism between centerline of trunnion holes and forward face of base flange		0.65%	Dwg.	Gage
206	Diameter of trunnion holes		0.65%	Dwg.	Gage
207	Runout of gyro support interface surface with respect to inside tooth diameter and forward face of base flange		0.65%	Dwg.	Gage
208	True position of outside tooth diameter with respect to diameter of undercut tooth diameter and top surface of teeth		0.65%	Dwg.	Gage
209	Perpendicularity between outside of trunnion surfaces to trunnion holes		0.65%	Dwg.	Gage

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER
4.4.2.10	Base, Gyro				9306406
					NEXT HIGHER ASSEMBLY
					9306415
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
210	True position of distance between outside trunnion surfaces with respect to diameter of forward surface of base flange and forward surface of base flange		0.65%	Dwg.	Gage
211	True position of distance between inside trunnion surfaces with respect to diameter of forward surface of base flange		0.65%	Dwg.	Gage
212	Positional tolerance of forward end of gyro O.D. with respect to diameter of forward face of base flange		0.65%	Dwg.	Gage
213	Positional tolerance of locating notch with respect to diameter of forward face of base flange		0.65%	Dwg.	Gage
214	Parallelism of lower surface of teeth to top surface of teeth		0.65%	Dwg.	Gage
215	Flatness of top surface of teeth		0.65%	Dwg.	Gage
216	Parallelism of top surface of teeth to top surface of base flange		0.65%	Dwg.	Gage
217	Parallelism of bottom surface of base flange to top surface of base flange		0.65%	Dwg.	Gage
218	Positional tolerance of throat I.D. with respect to diameter of forward face of base flange and top surface of teeth		0.65%	Dwg.	Gage

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER 9306406
4.4.2.10	Base, Gyro				NEXT HIGHER ASSEMBLY 9306415
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
219	Positional tolerance of the undercut teeth diameter with respect to diameter of forward face of base flange (Datum B) and top surface of teeth		0.65%	Dwg.	Gage
220	Positional tolerance of tooth position with respect to I.D. of teeth and diameter of forward face of base flange (Datum B)		0.65%	Dwg.	Gage
221	Positional tolerance of O.D. of throat with respect to diameter of forward face of base flange		0.65%	Dwg.	Gage
222	Positional tolerance of variable resistor mounting screw holes with respect to trunnion hole diameter		0.65%	Dwg.	Gage
223	Positional tolerance of holes in web with respect to diameter of forward surface of base flange		0.65%	Dwg.	Gage
224	Code marking		0.65%	Dwg.	Visual
225	Workmanship		0.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.11	Lock, Gotcha				9306407
					NEXT HIGHER ASSEMBLY
					9306415
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Positional tolerance of space between teeth with respect to minor diameter of top teeth		0.65%	Dwg.	Gage
202	Concentricity of diameter of undercut and gotcha I.D. with respect to minor diameter of lower teeth		0.65%	Dwg.	Gage
203	Concentricity of minor diameter at top of inner teeth with respect to minor diameter of lower teeth		0.65%	Dwg.	Gage
204	Concentricity of minor diameter of lower teeth with respect to minor diameter of upper teeth		0.65%	Dwg.	Gage
205	Concentricity of gotcha O.D. with respect to minor diameter of lower teeth		0.65%	Dwg.	Gage
206	Concentricity of minor diameter at bottom of inner teeth with respect to minor diameter of lower teeth		0.65%	Dwg.	Gage
207	Perpendicularity of top surface with respect to minor diameter of lower teeth		0.65%	Dwg.	Gage

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.11	Lock, Gotcha				9306407
					NEXT HIGHER ASSEMBLY
					9306415
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
208	Perpendicularity of bottom surface of inner teeth with respect to minor diameter of lower teeth		0.65%	Dwg.	Gage
209	Flatness of bottom surface of inner teeth		0.65%	Dwg.	Gage
210	Flatness of top surface of lower teeth		0.65%	Dwg.	Gage
211	Parallelism of top surface of lower teeth with respect to bottom surface of inner teeth		0.65%	Dwg.	Gage
212	Positional tolerance of spring retainer mounting holes with respect to bottom surface of gotcha and outside diameter of gotcha		0.65%	Dwg.	Gage
213	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER 9306409
4.4.2.12	Ring, Gimbal - Machining				NEXT HIGHER ASSEMBLY 9306400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Trunnion pin holes diameter		0.65%	Dwg.	Gage
202	Bearing holes diameter		0.65%	Dwg.	Gage
203	Positional tolerance of trunnion hole diameter with respect to depth of ring at trunnion hole centerline, width of ring between outer surfaces at bearing holes, and centerline between bearing holes		0.65%	Dwg.	Gage
204	Positional tolerance of trunnion hole diameter with respect to depth of ring at trunnion holes, width of ring between outer surfaces at bearing holes, centerline between bearing holes and opposite side trunnion pin hole diameter		0.65%	Dwg.	Gage
205	Positional tolerance of left hand bearing hole diameter with respect to thickness of ring at trunnion holes, and width of ring between outer surfaces at trunnion rings		0.65%	Dwg.	Gage

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER 9306409
4.4.2.12	Ring, Gimbal - Machining				NEXT HIGHER ASSEMBLY 9306400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
206	Positional tolerance of right hand bearing hole diameter with respect to opposite side bearing hole		0.65%	Dwg.	Gage
207	Perpendicularity of left hand trunnion pin boss with respect to corresponding trunnion hole diameter		0.65%	Dwg.	Gage
208	Perpendicularity of left hand inside surface to diameter of corresponding trunnion pin hole		0.65%	Dwg.	Gage
209	Perpendicularity of right hand trunnion pin boss to corresponding trunnion pin hole diameter		0.65%	Dwg.	Gage
210	Perpendicularity of right hand inside surface to diameter of corresponding trunnion pin hole		0.65%	Dwg.	Gage
211	Perpendicularity of right hand outer bearing surface to centerline between bearing holes		0.65%	Dwg.	Gage
212	Perpendicularity of left hand outer bearing surface to centerline between bearing holes		0.65%	Dwg.	Gage
213	Positional tolerance of centerline of bearing holes with respect to center-line of trunnion holes		0.65%	Dwg.	Gage
214	Positional tolerance of variable resistor mounting holes with respect to diameter of corresponding bearing hole		0.65%	Dwg.	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER
4.4.2.12	Ring, Gimbal - Machining				9306409
					NEXT HIGHER ASSEMBLY
					9306400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
215	Workmanship		0.65%	3.5	Visual
216	Code identification of bearing and trunnion hole diameters		0.65%	Dwg.	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 9306410
4.4.2.13	Inner Gimbal - Machining				NEXT HIGHER ASSEMBLY 9306400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Spin bearing hole I.D.		0.65%	Dwg.	Gage
202	Position tolerance of gimbal width		0.65%	Dwg.	Gage
203	Positional tolerance of slot width with respect to its corresponding trunnion pin hole diameter		0.65%	Dwg.	Gage
204	Left hand trunnion pin hole diameter		0.65%	Dwg.	Gage
205	Right hand trunnion pin hole diameter		0.65%	Dwg.	Gage
206	Positional tolerance of left hand trunnion pin hole with respect to top surface and spin bearing hole I.D.		0.65%	Dwg.	Gage
207	Positional tolerance of right hand trunnion pin hole with respect to top surface, spin bearing hole I.D. and opposite trunnion pin hole diameter		0.65%	Dwg.	Gage
208	Positional tolerance of overall length with respect to I.D. of spin bearing hole		0.65%	Dwg.	Gage
209	Positional tolerance of length between undercuts with respect to I.D. of spin bearing hole		0.65%	Dwg.	Gage

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.13	Inner Gimbal - Machining				9306410
					NEXT HIGHER ASSEMBLY 9306400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
210	Perpendicularity of slot surface to corresponding trunnion hole pin diameter		0.65%	Dwg.	Gage
211	Positional tolerance of the distance between slot ends with respect to spin bearing hole I.D.		100%	Dwg.	Gage
212	Positional tolerance of the LED pickoff interface hole with respect to spin bearing hole I.D.		100%	Dwg.	Gage
213	Positional tolerance of the pickoff assembly holes with respect to the spin bearing hole I.D.		0.65%	Dwg.	Gage
214	Code identification		0.65%	Dwg.	Visual
215	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.14	Rotor Assembly				9306045
					NEXT HIGHER ASSEMBLY 9306400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Flatness		0.65%	Dwg.	
202	Reflectivity		Dwg.	Dwg.	
203	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.15	Gyro Support Assembly				9306424
					NEXT HIGHER ASSEMBLY 9306020
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Positional tolerance of coil form insertion diameter with respect to Datum H		0.65%	Dwg.	Gage
202	Positional tolerance of gyro support I.D. (Datum H) with respect to splice face diameter (Datum E) and splice butt face (Datum D)		0.65%	Dwg.	Gage
203	Major diameter of window mating threads		0.65%	Dwg.	Gage
204	Positional tolerance of window mating threads major diameter with respect to the axis established by Datum A and B		0.65%	Dwg.	Gage
205	Parallelism of gyro support face (Datum K) with splice butt face		0.65%	Dwg.	Gage
206	Positional tolerance of gyro locating pin hole with respect to gyro support I.D. (Datum H), gyro support face (Datum K), and splice locating pin		0.65%	Dwg.	Gage
207	SWS spot face flatness		0.65%	Dwg.	Gage
208	Positional tolerance of SWS mounting hole with respect to gyro support I.D. and splice locating pin		0.65%	Dwg.	Gage

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.15	Gyro Support Assembly				9306424
					NEXT HIGHER ASSEMBLY 9306020
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
209	Perpendicularity of SWS mounting holes to spot face surface		0.65%	Dwg.	Gage
210	Positional tolerance of splice surface diameter with respect to the axis established by Datums A and B		0.65%	Dwg.	Gage
211	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.16	Drive Support				9306427
					NEXT HIGHER ASSEMBLY 9306000
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Inside thread minor diameter		0.65%	Dwg.	Gage
202	Outside thread major diameter		0.65%	Dwg.	Gage
203	Positional tolerance of outside thread major diameter with respect to inside thread minor diameter		0.65%	Dwg.	Gage
204	Positional tolerance of raised boss with respect to inside thread minor diameter		0.65%	Dwg.	Gage
205	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 9306520
4.4.2.17	Housing, Electronics				NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Bourrelet diameter		0.40%	Dwg.	Gage
Minor					
201	Runout between forward I.D. and bourrelet O.D.		0.65%	Dwg.	Gage
202	Positional tolerance of aft end O.D. with respect to inside diameter of housing		0.65%	Dwg.	Gage
203	Positional tolerance of aft end I.D. with respect to inside diameter of housing		0.65%	Dwg.	Gage
204	Inside diameter of housing		0.65%	Dwg.	Gage
205	Positional tolerance of fwd end I.D. with respect to inside diameter of housing		0.65%	Dwg.	Gage
206	Runout between forward housing I.D. and aft end splice O.D.		0.65%	Dwg.	Gage
207	Runout between forward threads and housing I.D.		0.65%	Dwg.	Gage
208	Positional tolerance of fwd splice holes with reference to fwd I.D., fwd edge of locating slot		0.65%	Dwg.	Gage

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.17	Housing, Electronics				9306520
					NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
209	Positional tolerance of aft splice holes with reference to aft splice O.D. and aft splice shoulder		0.65%	Dwg.	Gage
210	Parallelism of aft vertical splice surface with respect to forward end		0.65%	Dwg.	Gage
211	Dye penetrant inspection		100%	Dwg.	MIL-I-6866
212	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.18	Circuit Card Assembly, Autopilot				9301770
					NEXT HIGHER ASSEMBLY
					9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit card operation		100%	Dwg.	Gage
102	Conformal coating		100%	Dwg.	Dwg.
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.19	Circuit Card Assembly, Fwd Bulkhead				9301920
					NEXT HIGHER ASSEMBLY 9301782
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit card operation		100%	Dwg.	Gage
102	Conformal coating		100%	Dwg.	Dwg.
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 9301903
4.4.2.20	Motherboard, Multilayer, Rigi-Flex				NEXT HIGHER ASSEMBLY 9301905
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Outside diameter or distribution board		0.65%	Dwg.	Gage
202	True position of distribution board O.D. with respect to datum A		0.65%	Dwg.	Gage
203	Width of each hardback and true position with respect to datums A and B and ref. hole		0.65%(1)	Dwg.	Gage
204	Inside diameter of distribution board (Datum A)		0.65%(1)	Dwg.	Gage
205	Width of distribution board between slots and true position to datum A and datum B		0.65%(1)	Dwg.	Gage
206	Length of hardbacks and true position with respect to datum A and datum B		0.65%(1)	Dwg.	Gage
207	True position of tab "A" with respect to datum A and datum B		0.65%(1)	Dwg.	Gage
208	True position of distribution board alignment holes to datum A and datum B		0.65%	Dwg.	Gage

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9301903
4.4.2.20	Motherhood, Multilayer, Rigi-Flex				NEXT HIGHER ASSEMBLY 9301905
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
209	True position of 9 hardback PCB location holes (18 places)		0.65% (1)	Dwg.	Gage
210	Workmanship		0.65%	3.5	Visual

NOTES: 1. Where certified and approved positional controlled fabrication machines are used to produce the specified detail patterns, a single rigid sample specimen in each fabrication lot may be used for examination of true positions in lieu of examination of hardware items to the stated AQL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.21	Motherboard Assy				9301905
					NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Continuity test		100%	Dwg.	Gage
102	Insulation resistance		100%	Dwg.	Gage
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.22	Plug, Threaded - Forward Bulkhead				9306606
					NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Perpendicularity of major diameter of threads with respect to bottom surface		0.65%	Dwg.	Gage
202	I.D. of plug		0.65%	Dwg.	Gage
203	Positional tolerance of plug I.D. with respect to thread major diameter		0.65%	Dwg.	Gage
204	Positional tolerance of plug base O.D. with respect to thread major diameter		0.65%	Dwg.	Gage
205	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9306607
4.4.2.23	Retaining Ring, Electronics				NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Major diameter		0.65%	Dwg.	Gage
202	Positional tolerance of I.D. with respect to major diameter		0.65%	Dwg.	Gage
203	Perpendicularity of face with respect to major diameter		0.65%	Dwg.	Gage
204	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.24	Aft Bulkhead - Machining				9306608
					NEXT HIGHER ASSEMBLY
					9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	O.D. of fwd flange		0.40%	Dwg.	Gage
102	Positional tolerance of fwd flange O.D. with respect to inside diameter of aft flange and aft face		0.40%	Dwg.	Gage
103	O.D. of aft flange		0.40%	Dwg.	Gage
104	Positional tolerance of aft flange O.D. with respect to fwd flange O.D. and aft face		0.40%	Dwg.	Gage
105	Positional tolerance of coded B #2 - 56UNC threaded holes with respect to fwd flange O.D.		0.40%	Dwg.	Gage
106	Positional tolerance of 0.073 in. diameter holes with respect to fwd flange O.D. and Datum C		0.40%	Dwg.	Gage
107	Positional tolerance of 0.166 inch diameter holes with respect to fwd flange O.D. and Datum C		0.40%	Dwg.	Gage
108	Positional tolerance of coded "A" #4-40UNC threaded holes		0.40%	Dwg.	Gage
109	Runout of flange with respect to fwd face		0.40%	Dwg.	Gage
110	Width of locating slot		0.40%	Dwg.	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.24	Aft Bulkhead - Machining				9306608
					NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
111	Positional tolerance of locating slot with respect to fwd flange O.D. and Datum C		0.40%	Dwg.	Gage
Minor 201	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.25	Circuit Card Assembly, Video Amp - LSI				9301795
					NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit card operation		100%	Dwg.	Gage
102	Conformal coating		100%	Dwg.	Dwg.
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET OF		DRAWING NUMBER
4.4.2.26	Circuit Card Assembly, Sample and Hold - LSI		1 1		9301755
					NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit card operation		100%	Dwg.	Gage
102	Conformal coating		100%	Dwg.	Dwg.
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9301760
4.4.2.27	Circuit Card Assembly, Pulse Logic - LSI				NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit card operation		100%	Dwg.	Gage
102	Conformal coating		100%	Dwg.	Dwg.
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.28	Circuit Card Assembly, Decoder - LSI				9301785 or 9395671
					NEXT HIGHER ASSEMBLY
					9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit card operation		100%	Dwg.	Gage
102	Conformal coating		100%	Dwg.	Dwg.
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.29	Circuit Card Assembly, Spin Torquer - LSI				9306630
					NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit card operation		100%	Dwg.	Gage
102	Conformal coating		100%	Dwg.	Dwg.
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.30	Circuit Card Assembly, Sequencer - LSI				9306635
					NEXT HIGHER ASSEMBLY
					9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit card operation		100%	Dwg.	Gage
102	Conformal coating		100%	Dwg.	Dwg.
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.31	Circuit Card Assembly, Aft Bulkhead				9306660
					NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit card operation		100%	Dwg.	Gage
102	Conformal coating		100%	Dwg.	Dwg.
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET OF		DRAWING NUMBER
4.4.2.32	Circuit Card Assembly, Spot Jump Inhibitor		1 1		9301765
					NEXT HIGHER ASSEMBLY 9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit card operation		100%	Dwg.	Gage
102	Conformal coating		100%	Dwg.	Dwg.
Minor					
201	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-QA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9306680
4.4.2.33	Preamplifier Assembly, LSI				NEXT HIGHER ASSEMBLY 9306020
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Limited environmental tests		100%	Dwg.	Gage
102	Channel output tests		100%	Dwg.	Gage
103	Oscillation test		100%	Dwg.	Gage
Minor					
201	Marking		0.65%	Dwg.	Visual
202	Workmanship		0.65%	3.5	Visual

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.34	Plate, FWD Bulkhead - Casting	1 OF 1	9306731
			NEXT HIGHER ASSEMBLY: 9306745

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
Major 101	Minimum acceptable compression loads		Dwg.	Dwg.	Gage
Minor 201	Workmanship		0.65%	3.5	Visual

NOTES:

DPSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.35	Spacer, Outer Circuit Card				9306732
					NEXT HIGHER ASSEMBLY
					9301790
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Minimum acceptable compression loads		Dwg.	Dwg.	Gage
Minor					
201	Positional tolerance of unthreaded holes with respect to face, outside diameter and bottom surface		0.65%	Dwg.	Gage
202	Positional tolerance of threaded holes with respect to face, outside diameter and bottom surface		0.65%	Dwg.	Gage
203	Workmanship		0.65%	3.5	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be us

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.36	Plate, Forward Bulkhead - Machining	1 OF 1	9306745
			NEXT HIGHER ASSEMBLY 9301782

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Positional tolerance of tapped holes with respect to aft surface of web and O.D. of bulkhead		0.65%	Dwg.	Gage
202	Positional tolerance of tapped holes in bottom with respect to aft surface of web, O.D. of bulkhead, and base of bulkhead		0.65%	Dwg.	Gage
203	Positional tolerance of minor diameter of bulkhead center threads with respect to aft surface of web and O.D. of bulkhead		0.65%	Dwg.	Gage
204	Workmanship		0.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.37	Guidance Section	1 OF 2	9301900
			NEXT HIGHER ASSEMBLY 9305300

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Squib circuit resistance		100%	3.3.1.1	4.5.3.2
102	Load connections		100%	3.3.1.2	4.5.3.1
103	Electrical power requirements		100%	3.3.1.3	4.5.3.3
104	Regulator voltages		100%	3.3.1.4	4.5.3.4
105	Squib drive outputs		100%	3.3.1.5	4.5.3.5
106	Target acquisition		100%	3.3.1.6	4.5.3.7
107	Video pulse present signal		100%	3.3.1.7	4.5.3.8
108	On axis threshold		100%	3.3.1.8	4.5.3.9
109	Operational code correlation/ decorrelation response		100%	3.3.1.9	4.5.3.10
110	Dynamic range/boresight shift		100%	3.3.1.10	4.5.3.11
111	Proportional zone		100%	3.3.1.11	4.5.3.12
112	Noise count		100%	3.3.1.12	4.5.3.13
113	Autopilot pitch and yaw channels - ballistic mode		100%	3.3.1.13	4.5.3.14
114	Autopilot pitch and yaw channels - FUFO mode		100%	3.3.1.14	4.5.3.15
115	Autopilot roll channel		100%	3.3.1.15	4.5.3.16
116	Fuze shockwave sensors		100%	3.3.1.19	4.5.3.6
117	Electronic assembly		100%	Dwg.	QAP 9301790
118	Gyro assembly		100%	Dwg.	QAP 9306400
119	Seeker assembly		100%	Dwg.	QAP 9306000
120	Thermal bonding (seeker to electronics assembly)		0.40%	Dwg.	Visual per 9300940

NOTES:

DRSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-63224A (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9301900
4.4.2.37	Guidance Section				NEXT HIGHER ASSEMBLY 9305300
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
121	Optical filter		100%	3.3.1.20	4.5
122	Spring starter		100%	Dwg.	TR9306030
Minor					
201	Workmanship		0.65%	3.5	Visual
202	Marking		0.65%	Dwg.	Visual

NOTES:

DPSMC-OA (D) Form 160, 1 Aug 83 replaces edition of 1 Jul 77 which may be used until exhausted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.4.3 Testing.

4.4.3.1 Sampling inspection rejection. Lots failing to meet the requirements of 4.4.2 shall be dispositioned in accordance with the applicable requirements of MIL-STD-105.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein are described in the "Paragraph Reference/Inspection Method" column in the inspection tables included herein. The contractor shall submit for approval all inspection equipment designs in accordance with the terms of the contract (See 6.4).

4.5 Methods of inspection.

4.5.1 Test conditions.

4.5.1.1 Environmental conditions. Unless otherwise specified for the purpose of test, testing shall be conducted at the following conditions:

(a)	Temperature	72° ±18°F (22.2° ± 10°C)
(b)	Relative humidity:	90 percent maximum
(c)	Barometric pressure	28 to 32 inches of mercury

4.5.1.2 Test tolerancecs. All tolerances specified herein are absolute with no allowance made for measuring equipment inaccuracy. Measurements shall ensure that the values measured are within the tolerances or limits specified.

4.5.1.3 AUR configuration. Where the test methods require testing of the guidance section in an AUR configuration. It is intended that the AUR consist of a tactical guidance section (MIL-P-63224), a tactical control section (MIL-P-63225), and an inert warhead section. The inert warhead shall be identical to the tactical warhead (MIL-P-63226), with the exception that the explosive cavity shall be filled with inert material having the same specific gravity as the explosive composition and the fuze shall be an inert test fuze fabricated to the requirements of MIL-P-63226. Live sequence testing may be conducted with the sections only electrically connected as an AUR. Mechanical assembly of the sections into an AUR is not required.

4.5.2 Physical and dimensional characteristics. The physical and dimensional characteristics shall be inspected to the applicable requirements of 3.2.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.5.3 Performance test. The tests of 4.5.3.17 shall be conducted with the guidance section electrically assembled into an AUR configuration.

4.5.3.1 Initial conditions. The following conditions are considered to exist at the beginning of each performance test. However, during the testing sequence, it is not necessary to return to initial conditions unless specifically required by the individual test conditions.

(a) Power ground connected to power ground.

(b) Squib ground connected to power ground.

(c) 0.00 +0.40 -0.00 VDC between SEQUENCER RESET/INHIBIT and signal ground.

(d) 0.00 +0.40 -0.00 VDC between SES Logic 1 and SES Logic 1/2 return.

(e) 0.00 +0.40 -0.00 VDC between SES Logic 2 and SES Logic 1/2 return.

(f) 0.00 +0.40 -0.00 VDC between manual cage and signal ground.

(g) Electrical loads of 3.3.1.2 connected to appropriate circuits.

(h) Code switch set at 211.

(i) Timer switch set at 11.

(j) A window, painted in accordance with drawing 9305300, shall be used.

(k) Unless otherwise noted for the purpose of testing, the following power shall be applied to the unit under test (UUT):

(1) +20 $\pm$1.0 VDC between +30V Reg and PWR GRD

(2) -20 $\pm$1.0 VDC between -30V Reg and PWR GRD

(3) +12.5 $\pm$0.5 VDC between +11V Reg and PWR GRD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

(4) 0.0, +0.4 VDC between +30V S/T and PWR GRD
-0.0 VDC

(5) 0.0, +0.4 VDC between -30V S/T and PWR GRD
-0.0 VDC

(6) +30 ±0.5 VDC between +30V SQ PWR and SQ GRD

(7) +12.5 ±0.5 VDC between +11V SQ PWR and SQ GRD

4.5.3.2 Squib current impendance test. The dc resistance characteristics of the guidance section squib circuits measured in the power off condition shall be 2.2 ± 0.5 ohms each for the seeker gyro gotcha (SGG), and the seeker gyro starter (SGS) squibs when measurements are taken between the wires corresponding to the two functions. The meter used to measure squib resistance shall provide no more than 1.0 ma at a maximum of 5.0 volts direct current. Squib leads shall be shortened to squib ground except during the above test and during test firings.

4.5.3.3 Electrical power requirements test. The guidance section shall be capable of operation with the electrical power requirements of 3.3.1.3 attached to appropriate pins. Unless otherwise stated hereafter, the electrical power to be used for test and evaluation shall be in accordance with 4.5.3.1.

4.5.3.4 Regulater power test. With the +12.5 VDC and ± 20 VDC of 3.3.1.3 applied to the appropriate pins, the regulated voltages shall meet the requirements of 3.3.1.4.

4.5.3.5 Squib drive output test. Apply 4.5 ± 0.5 VDC from a 10K ohm ± 5% source resistance to SES logic 1 and 2 with respect to SES logic 1 and 2 return. Open circuit the SEQUENCER RESET/INHIBIT line. Observe the signals of Table II. Open circuit SES Logic 1 and SES logic 2 and apply 0.000 +0.40 VDC to -0.00 the SEQUENCER RESET/INHIBIT line with respect to signal ground. Open circuit the SEQUENCER RESET/INHIBIT line. Observe that events number 1 and 2 of Table II do not occur.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE II

Squib drive response

Event No.	Description of Signal	Signal Amplitude with Respect to Squib Ground (in volts)	Signal Timing (in seconds)
1	Explosive Actuator (EA) 1 Squib Drive	>10.4	0.0 to 0.4 after start of sequencer
2	EA Squib Drive	>10.4	0.0 to 0.4 after start of sequencer
3	+30V Battery Squib Drive	>11.0	0.0 to 0.4 after Event No. 2 (at zero time delay)
4	Seeker Gyro Gotcha Squib Drive (SGG)	>25.8	1.0 ± 0.4 after start of Event No. 3
5	Gas Squib Drive	>25.9	1.0 ± 0.4 after start of Event No. 4
6	Seeker Gyro Spring Squib Drive (SGS)	>25.8	1.0 ± 0.4 after start of Event No. 5
7	Wing Unlock Squib Drive	>25.9	1.9 ± 0.4 after start of Event No. 6
8	Wing Extend Squib Drive	>25.9	2.0 ± 0.4 after start of Event No. 6 but always after WUN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.5.3.6. Fuze shockwave sensor test.

The housing adjacent to each of the shock wave sensors shall be impacted per the requirements of 3.3.1.19.

Impact Location	Signal Output
SWS-1	Fire Det-1
SWS-2	Fire Det-1
SWS-3	Fire Det-2

4.5.3.7 Target acquisition test. Apply 4.5 + 0.5 VDC from a 10 k ohm +5% source resistance to SES Logic 1 and $\overline{2}$ with respect to SES logic 1 and 2 return. Illuminate the guidance section optical window at a nominal power density of 7.5 uw/cm^2. Open circuit the SEQUENCER RESET/INHIBIT line. The target acquisition line signal shall change from a logic level zero to a logic level one (> 2.4 VDC) at 1.2 +0.4 seconds after WEX. At 2 +0.40 seconds after the change of the target acquisition signal to a logic level one, the charge detonator capacitor Number 1 and 2 signals shall change from 0 to a value of 28 + 8 VDC. The guidance enable signal shall change from a logic level one to a logic level zero (< 0.8 VDC).

4.5.3.8 Video pulses present test. Position and illuminate the guidance section to meet the requirements of 3.3.1.7. The pulse repetition frequency (PRF) of the energy source shall equal that of the 211 code setting of the guidance section under test. Pulse width, PRF, stability, and frequency of the energy source shall be as specified on drawing 9300800. Monitor the video pulse presence gated signal line. The number of pulses shall be equal to the number of pulses of the input code.

4.5.3.9 On axis threshold test. Mount the guidance section to allow pitch/yaw and roll motion. Open circuit the SEQUENCER RESET/INHIBIT line, then illuminate in accordance with 3.3.1.7 (a). Position the guidance section to achieve the requirements of 3.3.1.7 (b) and (c). Monitor target acquisition for a logic level one. Reduce the illumination level to the minimum power density, as specified in 9300800. The target acquisition signal shall maintain a logic level one. Increase the illumination to the original level.

4.5.3.10 Operational code correlation/decorrelation response test. Position and illuminate the guidance section in accordance with 3.3.1.7 and 3.3.1.9.1 respectively. Open circuit the SEQUENCER RESET/INHIBIT line. The target acquisition and guidance enable line signals shall both indicate a logic level one.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

Interrupt the illumination signal for a period of time equal to the number of pulses specified by drawing 9300800 (this must be accomplished during the normal time interval between target acquisition and guidance enable). The target acquisition signal shall change to a logic level zero but the guidance enable signal shall remain at a logic level one. Reilluminate the guidance section optical window. The target acquisition signal shall indicate a logic level one after the number of pulses specified by drawing 9300800 are allowed to illuminate the optical window. The results of this test can be adversely affected by the statistical occurrence of noise in the decoder gate. As such, both parts of the above test can be repeated up to three times to demonstrate compliance with this subtest. Wait at least two time intervals equal to the number of pulses specified by drawing 9300800 required for acquisition if any of the three retests described above are required. After occurrence of guidance enable, the target aquisition signal shall be a logic level one and the guidance enable signal shall be a logic level zero. Interruption of the illumination signal as described above shall cause the target acquisition signal to change to a logic level zero, and the guidance enable signal shall remain at a logic level zero. Reilluminate the guidance section optical window as specified above. The target acquisition signal shall return to a logic level one and guidance enable shall remain at logic level zero. The timing requirements demonstrated above need not be redemonstrated in this portion of the subtest.

4.5.3.11 Dynamic range/boresight shift test. Position and illuminate the guidance section to achieve the requirements of 3.3.1.7 (b) and (c). Open circuit the SEQUENCER RESET/INHIBIT line and monitor the target acquisition line for a logic level one signal. Vary the illumination level over the range specified in .2.1.10. The resulting variations in the LOS signal voltage shall meet the requirements of 3.3.1.10 (a). Vary the illumination as required by 3.3.1.10 (b). The resulting variations in LOS signal shall meet the requirements of 3.3.1.10 (b). The Automatic Gain Control (AGC) voltage during the variation in illumination levels shall meet the parameters of 3.3.1.10 (c). Beginning prior to sequence open circuit the SEQUENCER RESET/INHIBIT line with the guidance section positioned to achieve the requirements of 3.3.1.7 (b) and illuminated with properly coded laser energy 30 $\pm$ 1dB above the threshold value described in drawing 9300800. Monitor the acquisition line for a logic level one in the time stated in 3.3.1.9.1. Monitor the AGC line and verify that the AGC voltage falls within the bounds of Figure 1 at one second after acquisition.

4.5.3.12 Line of sight (LOS) proportional zone test. Position and illuminate the guidance section optical window in accordance with the requirements of 3.3.1.11.1. Open circuit the SEQUENCER RESET/INHIBIT line. Monitor the pitch LOS signal, after guidance enable, as the guidance section is rotated in the pitch axis from 0 to 2.5 degrees in both directions from the line of incident illumination. The pitch LOS signal shall meet the parameters of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

3.3.1.11.2. Repeat the above procedure in the yaw axis, monitoring the yaw LOS signal. The yaw LOS signal shall meet the requirements of 3.3.1.11.3.

4.5.3.13 Noise count test. The systems detection of noise is a statistical event. As such the requirements stated in 3.3.1.12 can be demonstrated if in a 30 min time frame, a continuous 10 min interval can be found that the requirements in 3.3.1.12 are satisfied. A test interval will be terminated on the second noise detection and the start of the next test interval will begin immediately. There is no limit to the number of resets within the 30 min test. Test will be satisfactorily completed when a 10 min continuous interval is completed during which the requirements in 3.3.1.12 are met. Open circuit the SEQUENCE RESET/INHIBIT line. Starting at 2± 0.04 seconds after Wing Extend (WEX) signal, monitor the target acquisition line for the occurrence of a change from logic level zero to logic level one. Monitor the pulses on the pulse presence line for the pulses of 3.3.1.12. The requirements of 3.3.1.12 shall be met under the conditions stated below. During the test do not illuminate the optical window with laser energy. However, during the test the optical window shall be illuminated with white light from a tungsten filament lamp or equivalent such that the illuminance at the seeker dome is between 150 ft- candles and 1500 ft- candles. The desired level is 550 ft- candles as measured with a calibrated light meter or equivalent.

4.5.3.14 Autopilot, pitch and yaw, ballistic mode test. Under the initial conditions of 4.5.3.1, monitor pitch and yaw gimbal angle output lines with respect to signal ground. Apply a plus or minus voltage to seeker gimbal angle pitch test and seeker gimbal angle yaw test lines with respect to signal ground, to achieve +1.00 ± 0.05 VDC at both the pitch gimbal angle and yaw gimbal angle output lines. Open circuit the SEQUENCER RESET/INHIBIT line. At 4 ± 1 seconds later, the voltages at Gravity Bias Pitch (GBP) and Gravity Bias Yaw (GBY) output lines with respect to signal ground shall be -7.0 ± 0.7 VDC. Apply +4.5 ± 0.5 VDC from a 10K ohms source resistance to the target acquisition line. At 4 ± 1 seconds after target acquisition the voltage at pitch command and yaw command shall be -3.5 ± 0.6 VDC with respect to signal ground.

4.5.3.15 Autopilot, pitch and yaw, FUFO mode test. Under the initial conditions of 4.5.3.1, set the time delay switches on the guidance section to 32, monitor pitch and yaw gimbal angle output lines with respect to signal ground. Apply a plus or minus voltage with respect to signal ground to seeker gimbal angle pitch test and seeker gimbal angle yaw test lines to achieve -0.5 ± 0.01 VDC at pitch gimbal angle and yaw gimbal angle output lines. Monitor GBP, GBY, pitch command and yaw command signals with respect to signal ground as a function of time. Open circuit the SEQUENCER RESET/INHIBIT line and 2 seconds (not a test parameter)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

after the occurrence of WEX function apply +4.5 ± 0.5 VDC from a 10K ohms source resistance to the target acquisition line. The GBP, GBY, pitch command and yaw command signals shall meet the requirements of 3.3.1.14 (a), (b), and (c).

4.5.3.16 Autopilot roll channel test. Position the guidance section with the flight axis in the vertical plane. Apply the 12.5 VDC amd the ± 20 VDC in the sequence described by test notes 1 and 2 of 3.3.1.3. Monitor the roll command relative to signal ground Open circuit the SEQUENCER RESET/INHIBIT line. After the occurrence of the WEX function, the voltage at the roll command output line shall meet the requirements of 3.3.1.15 for the Roll Rate Sensor in the latched mode. Connect the latch inhibit line to -15.0 ± 0.75 VDC. The roll command voltage shall meet the requirements of 3.3.1.15 for the Roll Rate Sensor in the unlatched mode.

4.5.3.17 Live sequence test. The following tests shall be conducted with the guidance section electrically assembled into an AUR configuration (4.5.1.5).

4.5.3.17.1 Guidance code setting 211 test. The projectile shall be configured in a live sequence mode as follows:

(a) Initial conditions per 4.5.3.1 (c), (f), (h), (i), and (j)

(b) +12.5 ± 0.05 VDC supplied from an external source (see MIL-P-63225)

(c) ± 30 VDC supplied from control section battery

(d) 4.5 ± 0.5 VDC, from a 10K ohm source resistance, to SES Logic 1 and SES Logic 2, with respect to SES Logic 1/2 return

(e) Remove the guidance section load resistors of 3.3.1.2 prior to assembly

(f) Position and illuminate in accordance with 3.3.1.16

(g) Connect Roll Rate Sensor latch inhibit line to -15.0 ± 0.75 VDC

Open circuit the SEQUENCER TEST/INHIBIT line. The sequence of events shall be in accordance with 3.3.1.16. The gyro gotcha shall release and the spring starter shall spin up the gyro. Gyro spinup speed shall meet the requirements of 3.3.1.16. The pitch and yaw LOS signals shall meet the requirements of 3.3.1.16. Open circuit the manual cage line. When monitored, as required by 3.3.1.16, the pitch and yaw gimbal angle voltages with respect to signal ground shall meet the requirements of 3.3.1.16. Return the manual cage circuit to initial conditions. Offset the illumination source from

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

boresight in the pitch plane in both directions (up and down). The pitch command signals shall meet the requirements of 3.3.1.16. Repeat this test for motion in the yaw plane. The yaw command signals shall meet the requirements of 3.3.1.16. This test shall be conducted in conjuction with the control section functional test (Ref. MIL-P-63225).

4.5.3.17.2 Guidance code setting 788 test. The test of 4.5.3.17.1 shall be conducted with the guidance code set at 788. The pitch and yaw functions shall meet the same requirements as stated in 4.5.3.17.1. This test shall be conducted in conjunction with the control section functional test (Ref. MIL-P-63225).

4.5.3.17.3 Fin command polarity test. With the guidance section in the same configuration and mode as the completion of the tests of 4.5.3.17.2, offset the illumination source from boresight in both pitch and yaw (up, down, left, and right). The pitch and yaw command signals shall meet the requirements of 3.3.1.17. This test shall be conducted in conjunction with the control section fin and command test (Ref. MIL-P-63225).

4.5.3.17.4 Duty cycle operation test. The projectile shall be configured into a live sequence mode in accordance with 4.5.3.17.1. Open circuit the SEQUENCER RESET/INHIBIT line. The sequence of events shall be in accordance with 3.3.1.16. Remove the illumination after "guidance enabled" signal has changed to a logic level zero. This condition shall be continued for a minimum of 70 seconds after event 5 of Table II. This test shall be conducted in conjunction with the control section shaft unlock/duration and duty cycle test (Ref. MIL-P-63225).

4.5.3.18 IFOV test. The guidance section shall be tested in accordance with drawing 9300800 to verify the requirements of 3.3.1.18.

4.5.3.19 Optical filter. The optical filter shall be visually inspected, after exposed to the environments of 3.3.2, to insure that it is free of chips or cracks.

4.5.4 Environmental tests. The guidance section, assembled and packaged in accordancec with 3.3.2, shall meet the performance requirements specified in each of the test methods as a part of the test.

4.5.4.1 Temperature shock test. The unit under test (UUT) shall be subjected to the temperature shock tests of MIL-STD-810, Method 503.1, Procedure I, with the exception that the low temperature of step 2 shall be -50°F + 2.5°F (-45.6°C + 1.4°C) and step 9 shall be omitted. Before exposure to this environment, the guidance section shall meet the performance requirements of 3.3.1.1 through 3.3.1.15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

4.5.4.2 Transportation vibration test. The UUT shall be subjected to the vibration tests of MIL-STD-810, Method 514.2, Procedure X using the criteria of Table 514.2-VII and Figure 514.2-7 curve AX (except that search and dwell tests shall be omitted).

4.5.4.3 Fragility shock test. The UUT shall be subjected to the shock test of MIL-STD-810, Method 516.2, Procedure I, using the shock pulse of Figure 516.2-2 with the exception that peak acceleration "A" shall be 200g and nominal duration "D" shall be 10 ms. After exposure, the guidance section shall be examined and show no evidence of physical damage and shall meet the performance requirements of 3.3.1.1 through 3.3.1.15.

4.5.4.4 Launch shock, high temperature test. The guidance section shall be installed in an appropriate canister and the assembly shall be exposed to the launch shock of 3.3.2.4 from, an 8 inch gun, M115 or equivalent (GFE), at +145°F ±2.5°F, (63°C ±1.4°C) in the forward direction. The launch canister with the guidance section installed shall be subjected to the gun launch within 5 minutes after removal from temperature conditioning. After exposure, the guidance section shall be examined and shall show no evidence of physical damage and shall meet the performance requirements of 3.3.1.1 through 3.3.1.15.

4.5.4.5 Launch shock, low temperature test. The guidance section shall be installed in an appropriate canister and the assembly exposed to the launch shock of 3.3.2.4 from an 8 inch gun M115 or equivalent (GFE), at -25°F ±2.5°F (-32°C ±1.4°C), in the forward direction. The launch canister with the guidance section installed, shall be subjected to the gun launch within 5 minutes after removal from temperature conditioning, After exposure, the guidance section shall be examined and shall show no evidence of physical damage and shall meet the performance requirements of 3.3.1.1 through 3.3.1.15.

4.5.4.6 High temperature, operating tests. The guidance section while stabilized at a temperature of 145°F ± 2.5°F (63°C ±1.4°C) shall meet the performance requirements of 4.5.3.12, 4.5.3.14 and 4.5.3.15. When electrically assembled per 4.5.1.5, shall meet the performance requirements of 4.5.3.17 while stabilized at a temperature of 145°F ± 2.5°F (63°C ± 1.4°C). After exposure and completion of the performance tests, the guidance section shall be examined and shall show no evidence of physical damage. NOTE: Continuous operating time (application of ±30 VDC) shall not exceed 70 seconds at this temperature.

4.5.4.7 Low temperature, operating tests. The guidance section while stabilized at a temperature of -25°F ± 2.5°F (-31.6°C ± 1.4°C) shall meet the performance requirements of 4.5.3.12, 4.5.3.14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

and 4.5.3.15. When electrically assembled per 4.5.1.5 shall meet the performance requirements of 4.5.3.17 while stabilized at a temperature of -25°F ± 2.5°F (-31.6°C ± 1.4°C). After exposure and completion of the performance tests, the guidance section shall be examined and shall show no evidence of physical damage.

5 PACKAGING.

5.1 General. Packaging and packing shall be level A, B, or commercial, as specified (See 6.2(e)).

5.1.1 Level A.

5.1.1.1 Cleaning. Cleaning shall be accomplished by wiping the exterior surfaces of the guidance section with a dry lint-free cloth. The internal portions of the assembly may be cleaned with prepared compressed air.

5.1.1.2 Packaging. The guidance section shall be packaged in accordance with Method IIc of MIL-P-116. Sharp edges and protrusions shall be covered with PPP-C-843 cushioning material. The assembly shall then be wrapped with TYPE II, MIL-P-17667, barrier material. Desiccant conforming to MIL-D-3464 shall be spaced uniformly through the assembly and secured with PPP-T-76 tape. The assembly shall then be heat sealed within a class F, MIL-B-117 bag.

5.1.1.3 Packing. The packaged guidance section shall be cushioned within an exterior container with PPP-C-1120 lining the container. The exterior container shall conform to PPP-B-601 or PPP-B-621, overseas requirements.

5.1.2 Level B.

5.1.2.1 Cleaning. See 5.1.1.1.

5.1.2.2 Packaging. The guidance section shall be packaged in accordance with Method IA-8 of MIL-P-116. Sharp edges and protrusions shall be cushioned with PPP-C-843. The assembly shall then be heat sealed within a class F, MIL-B-117 bag.

5.1.2.3 Packing. Packing shall be accomplished as defined in 5.1.1.3 with the exception that the exterior container shall be a domestic type.

5.1.3 Commercial.

5.1.3.1 Cleaning. See 5.1.1.1.

5.1.3.2 Packaging. The guidance section shall be packaged in a manner that prevents contamination of the item from the supply source to the first receiving activity for immediate use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

5.1.3.3 Packing. The guidance section either single unit, or multiples thereof, shall be properly secured in a strong wooden or metal box. The gross weight of a box containing one or more guidance sections shall not exceed the weight restraint for the container used.

5.2 Marking. Unit and exterior markings shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The guidance section is intended for use in the Projectile, 155MM, CLGP, M712.

6.2 Ordering data. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

(a) Title, number and date of this specification.

(b) Quantity required and delivery schedules.

(c) Serialization requirements, if applicable.

(d) Quality Conformance Inspection, if other than specified in Section 4 of this specification.

(e) First Article sample requirements, if other than specified in Section 4 of this specification.

(f) Packaging requirements, if other than specified in Section 5 of this specification.

(g) Certificates of conformance for each lot or shipment of product.

(h) Requirements for lot control.

6.2.2 Contract data requirements.

(a) Contract data requirements for inspection equipment designs conforming to Data Item Description DI-R-10054.

(b) Data Cards When required by incorporation of DD Form 1423 into the contract, data cards shall be prepared for each lot in accordance with Data Item Description DI-L-1410, except that for propellant or explosive lots, Acceptance and Description Sheets will be prepared in accordance with MIL-STD-1171.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

6.3 Definitions.

6.3.1 Contractor. Unless otherwise specified, the word contractor used throughout this specification shall mean any supplier or producer of items or material to the Government. This shall include commercial contractors, sub-contractors, Government Owned, Contractor Operated (GOCO) plants.

6.3.2 Technical data package (TDP). A technical description of an item adequate for use in procurement. The description defines the required design configuration and assures adequacy of item performance. It consists of all applicable technical data such as plans, drawings, and associated lists of specifications, standards, models, performance requirements, quality assurance provisions, and packaging data. Clarification of Quality Assurance terms and definations are available in MIL-STD-109.

6.4 Inspection equipment designs. Inspection equipment designs are of two types - Government Special Inspection Equipment IE) designs and contractor designs. SIE designs are designated by drawing numbers under the "Method of Inspection" heading in Section 4, or on the equipment lists referenced on the equipment tabulation, whichever is specified in the item detail specification. Design responsibility for all other inspection equipment is assigned to the contractor. The contractor need not furnish any design when a complete Government SIE design is provided. Unless otherwise specified, however, the contractor may submit alternate or modified contractor designs of SIE in accordance with 6.4.2 and 6.4.3 should he elect to do so.

6.4.1 SIE designs. SIE designs may consist of any of the following:

(a) Detailed drawings which completely depict all information necessary for the fabrication and use of the item of inspection equipment.

(b) A source control drawing or a specification control drawing as defined in MIL-STD-100.

(c) An envelope drawing, as defined in MIL-STD-100, which establishes the criteria which a detailed design shall meet. When envelope drawings are specified, the contractor shall prepare designs which comply with the criteria therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

6.4.2 Contractor designs. Contractor designs are required for all inspection equipment for which SIE designs are not specified and may include commercial equipment which the contractor proposes to use. (Commercial equipment is defined as unmodified equipment which is cataloged and available for purchase by the general public). Contractor designs shall include appropriate operation instructions, calibration procedures and maintenance procedures. Commercial equipment shall be fully described by cataloge listings or other means which provide sufficient information to permit identification and evaluation by the Government and may include illustrations and engineering data. Designs shall be prepared for any special fixture(s) required to be used with commercial equipment, or with SIE designs if not otherwise covered.

6.4.3 Submission of designs for approval. Contractor designs shall be approved by the Government prior to fabricating or procuring the equipment. Designs shall be submitted for approval in accordance with the stipulations, time frame and distribution specified in the Contract Data Requirements Lists (DD Form 1423). Partial submission of inspection equipment designs is permissible and encouraged. However, the completion date for design review will be based on the date of the final submission of designs and the required delivery schedule as stipulated in the contract. All submissions shall be addressed to: ARDC, ATT: AMSMC-QAR-I (D), Dover, NJ 07801-5001.

6.5 Drawings. Drawings listed in Section 2 of this specification under the heading US Armament Research and Development Center (ARDC) may also include drawings prepared by, and identified as, US Army Armament Research and Development Command (ARRADCOM) or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARDC.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1320-A826)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.