MIL-T-62297A(AT)
28 September 1984
SUPERSEDING
MIL-T-62297(AT)
16 January 1979

MILITARY SPECIFICATION

TRUCK, VAN: FORWARD CONTROL, HIGH VOLUME, CRIME SCENE LABORATORY, GASOLINE ENGINE DRIVEN, 10,000 POUNDS GVW, 4x2, COMMERCIAL

This specification is approved for use by US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a gasoline engine driven, four-wheel, two-rear wheel drive, forward control, high volume van commercial truck having a minimum gross vehicle weight (GVW) of 10,000 pounds. The vehicle is equipped to carry crime scene laboratory equipment. Vehicles procured under this specification are commercial items which shall be warranted by the manufacturer as specified in procurement documents.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: DRSTA-GBS.1, Warren, MI 48090, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

*	O-E-915	- Extinguishers, Fire, Dry-Chemical (Portable).
	W-B-131	- Battery, Storage: Vehicular, Ignition, Lighting and Starting.
*	ZZ-T-381	- Tires, Pneumatic, Vehicular (Highway).

MILITARY

	MIL-B-46176	- Brake Fluid, Silicone, Automotive All Weather, Operational and Preservative.

STANDARDS

MILITARY

*	MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
	MIL-STD-1223	- Nontactical Wheeled Vehicles Treatment, Painting, Rustproofing, Identification Marking and Data Plate Standards.

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DEPARTMENT OF TRANSPORTATION (DoT)
Federal Motor Carrier Safety Regulations.
Federal Motor Vehicle Safety Standards.

(Application for copies should be addressed to the Department of Transportation, Federal Highway Administration, Washington, D.C. 20591.)

ENVIRONMENTAL PROTECTION AGENCY (EPA)
Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines.
Noise Emission Standards for Transportation Equipment - Medium and Heavy Trucks.

(Application for copies should reference the Code of Federal Regulations, 40 CFR, and the Federal Register and should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)
National Electrical Code - 70

(Application for copies should be addressed to National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.)

SAE, INC.
SAE Standards and Recommended Practices

	J245	- Engine Rating Code - Spark Ignition.
	J537	- Storage Batteries (DoD adopted).
*	J551	- Performance Levels and Methods of Measurement of Electromagnetic Radiation from Motor Vehicles and Devices (20-1,000 MHz).
	J588	- Turn Signal Lamps.
	J589	- Turn Signal Switch.
*	J1349	- Engine Power Test Code - Spark Ignition and Diesel.

(Application for copies should be addressed to SAE, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

THE TIRE AND RIM ASSOCIATION, INC.
Yearbook.

(Application for copies should be addressed to The Tire and Rim Association, Inc., 3200 W. Market Street, Akron, OH 44313.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

* 3.1 Standard vehicle and accessories. Except as specified in 3.1.1 through 3.1.1.5, the vehicle, components, assemblies, and

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the current version before use.

accessories to be delivered under the contract shall be standard or optional items, which meet or exceed the requirements of this specification. All chassis items shall be as represented in the chassis manufacturer's technical data, and special bodies or mounted equipment shall be as represented in the body and equipment manufacturer's technical data. Technical data shall be limited to specifications and technical material identical to that furnished to the authorized company representatives for selection of vehicle models and components, and shall be on file in the engineering offices of the procuring activity, prior to delivery of the items. The chassis model furnished shall be not older than the chassis manufacturer's current model on the date of invitation for bids.

3.1.1 Special requirements. In addition to the standard vehicle and components specified in 3.1, the vehicle shall be furnished with special equipment as specified herein.

* 3.1.1.1 Painting and marking. Treatment, painting, identification marking, and data plates shall be in accordance with MIL-STD-1223. The exterior color and the identification markings shall be in accordance with MIL-STD-1223 for the military service identified by the procuring activity (see 6.2).

* 3.1.1.2 Rustproofing. When specified (see 6.2), the vehicle shall be rustproofed in accordance with MIL-STD-1223. When specified (see 6.2), tropical rustproofing in accordance with MIL-STD-1223 shall be furnished.

* 3.1.1.3 Silicone brake fluid. When specified (see 6.2), and if available as the manufacturer's standard or optional brake fluid, brake fluid conforming to MIL-B-46176 shall be provided in the hydraulic brake system. A tag shall be placed near the master cylinder stating "CAUTION: USE SILICONE BRAKE FLUID ONLY, MIL-B-46176."

3.1.1.4 Coolant level indicator. A coolant level indicator consisting of an unbreakable translucent reservoir shall be provided in a position readily visible for checking coolant level. The translucent reservoir shall be part of the coolant recovery system.

3.1.1.5 Heavy duty cooling system. When specified (see 6.2), a heavy duty cooling system shall be furnished that will maintain coolant at a temperature below the boiling point, with vehicle loaded to rated GVW and operated at 10,000 feet above sea level or in an ambient air temperature of not less than 125 degrees Fahrenheit (°F).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the current version before use.

3.2 General design.

3.2.1 Federal Motor Vehicle Safety Standards. The vehicle and furnished accessories shall comply with all Federal Motor Vehicle Safety Standards in effect on the date of manufacture.

3.2.2 Air pollution control. The vehicle shall comply with EPA Regulations governing Control of Air Pollution from New Motor Vehicles and New Motor Vehicle Engines in effect on the date of manufacture. In addition, vehicles destined for California shall comply with State of California regulations governing air pollution control in effect on the date of manufacture.

3.2.3 Sound level. The interior sound level shall conform to Federal Motor Carrier Safety Regulation 393.94.

3.2.4 Curb weight. The curb weight shall include the weight of the chassis and cab, with all attachments, accessories, and equipment, the body, and a full complement of fuel, lubricants, and coolant.

3.2.5 Gross vehicle weight. Gross vehicle weight (GVW) shall consist of curb weight, operator (weight computed at 175 pounds), and a payload evenly distributed over the vehicle load area to provide not less than the specified GVW. Minimum GVW shall be 10,000 pounds.

3.2.6 Ratings. Vehicle and component ratings shall be the manufacturer's published ratings. Vehicle and component ratings shall not be raised to meet the requirements of this specification. When ratings are not published, the verification of equipment manufacturer's rating shall be made available to the engineering office of the procuring activity.

3.2.7 Wheelbase. The wheelbase shall be not less than 145 inches.

3.3 Performance.

* 3.3.1 Speeds and gradeability. The vehicle shall maintain a high speed of not less than 58 miles per hour (mph) on smooth, approximately level, hard surfaced roads. The vehicle shall be capable of ascending grades of at least 20 percent in low-speed range. Speed and gradeability shall be with vehicle loaded to specified GVW.

* 3.3.2 Service brakes. The service brakes shall control and hold the vehicle, when loaded to specified GVW, on a 30 percent grade. The service brakes shall stop the vehicle, within the stopping distance requirements of Federal Motor Carrier Safety Regulation 392.52 under all conditions of loading up to specified GVW.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the current version before use.

3.3.3 Parking brakes. A hand or foot actuated parking brake shall be furnished in addition to the service brakes. When a foot actuated parking brake is furnished, a hand lever shall be furnished to release the parking brake. The vehicle parking brake shall be capable of holding the vehicle loaded to specified GVW on a 30 percent slope.

3.4 Chassis components.

* 3.4.1 Engine. The engine shall be a liquid cooled, internal combustion, four-stroke cycle gasoline engine with not less than eight cylinders. The engine furnished shall provide the required vehicle performance when operated on unleaded fuel with a research octane rating of 91, at engine speed not more than the manufacturer's recommended operating speed. The engine shall be capable of continuous, warranted operation on unleaded fuel. The engine shall develop not less than 140 net brake horsepower at manufacturer's recommended governed speed and shall have a rated net torque output of not less than 245 pound feet. Engine net torque and net horsepower ratings shall be in accordance with SAE J245 or SAE J1349.

3.4.1.1 Oil filter. A full flow oil filter shall be furnished.

3.4.1.2 Power plant heaters. When specified (see 6.2), a coolant heater and an engine oil heater shall be provided. Unless otherwise specified (see 6.2), a battery heater shall be provided when power plant heaters are specified. Heaters shall operate on 110-volt alternating current (ac), and shall be wired through a junction block to a single three-pronged (male), weatherproof, slave receptacle for receiving external power and grounding vehicle. A three-wire connecting cable, 25 feet long and of adequate line capacity to supply power for all heater units simultaneously, shall be furnished. Connecting cable shall include a matching female connector at the vehicle end and a standard, three-pronged (two power plus one ground) male connector at the other end. Electrical apparatus shall conform to Federal Motor Carrier Safety Regulation 393.77(c)(7). Electrical insulation of connecting cable shall withstand normal operating stresses in low ambient air temperatures (down to minus 60°F) without cracking or loss of dielectric capacity. All heater lead wires shall be installed without interfering with vehicle component operation, and without loose excess wire. A carrier for the connecting cable shall be mounted within the cab or engine compartment and shall provide positive cable retention during vehicle operation. Heaters shall be furnished as follows:

(a) Coolant heater, 1500-watt minimum rating, shall be installed in the engine block or lower coolant inlet hose. Engine

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

thermostat with an operating range of 170°F to 195°F shall be installed.

(b) Immersion type engine oil heater, 300-watt minimum rating, with 170°F to 195°F thermostat, shall be installed in the oil pan through any convenient opening.

(c) Battery heater shall have a capacity adequate to maintain the battery electrolyte at a temperature of not less than 10°F during vehicle exposure in ambient air temperatures as low as minus 60°F, and shall embody a thermostat to limit the temperature of the electrolyte to not more than 80°F.

3.4.2 Electrical system. The electrical system shall be in accordance with Federal Motor Carrier Safety Regulations 393.27 through 393.31 and 393.33.

* 3.4.2.1 Ignition system. The ignition system of 12-volt direct current (dc) potential shall be furnished. An alternator of not less than 60-ampere dc rated capacity which provides not less than 16 ampere dc output at normal engine idle speed shall be furnished.

* 3.4.2.2 Battery. The battery shall be of 12-volt potential. The battery shall have a reserve capacity rating of not less than 100 minutes and a cold cranking rating at 0°F of not less than 450 amperes. Cold cranking and reserve capacity ratings shall be in accordance with SAE J537. The battery shall be of the maintenance-free type having maintenance-free characteristics listed in W-B-131.

3.4.2.3 Lighting. All vehicle lights and reflectors shall be as specified herein and shall conform to Federal Motor Carrier Safety Regulation 393.11, 393.19, 393.20 and 393.22 through 393.26(d).

3.4.2.3.1 Turn signals. Turn signals shall be furnished. Turn signal lights may be combined with stoplights at rear and with parking lights at front. Taillights and stoplights may be incorporated into same housing. Control for turn signals shall be self-cancelling type, with visible and audible flash indicator. Turn signal lamps shall conform to SAE J588 and turn signal operating unit shall conform to SAE J589, class A.

* 3.4.2.4 Radio interference suppression. The vehicle shall be suppressed to limit electromagnetic radiation in accordance with SAE J551. Any body equipment emitting radio interference shall be suppressed to the same level as the vehicle chassis.

* 3.4.3 Fuel system. The fuel system shall conform to Federal Motor Carrier Safety Regulations 393.65 and 393.67 (except compliance with 393.67(c), subparagraphs (1), (4)(ii), (7)(ii), (8), (9), (11),

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

393.67(d) and 393.67(f) is not required). The capacity of the fuel tank shall be not less than 40 gallons.

3.4.3.1 Air cleaner. An air cleaner shall be furnished. When equipped with an oil-bath type, oil capacity shall be not less than 1 pint.

* 3.4.4 Exhaust system. The exhaust system shall conform to Federal Motor Carrier Safety Regulation 393.83. The exhaust shall discharge to the atmosphere to the rear of the vehicle or to the side behind the rear wheels and shall be so located as to minimize the possibility of exhaust fumes entering the body.

3.4.5 Transmission. The contractor's current standard automatic transmission shall be furnished. Input torque capacity of the transmission shall be at least equal to the maximum torque delivered by the engine.

3.4.6 Drive line components. Drive line components shall be adequate to transmit the maximum delivered torque of the engine, as developed through the maximum gear train reduction.

3.4.7 Suspension. The vehicle shall be equipped with suspension system with components having a rated capacity at least equal to the load imposed on each member, measured at the ground, with vehicle loaded to specified GVW. When suspension is rated at the spring pads, unsprung weight shall be deducted. The vehicle shall be equipped with hydraulic, double-acting shock absorbers at each wheel.

* 3.4.8 Frame. Chassis frame shall be the manufacturer's standard for the vehicle furnished.

* 3.4.9 Axles. Axle ratings shall be at least equal to the load imposed on each axle, measured at the ground, with vehicle loaded to specified GVW. A single reduction rear axle shall be furnished.

3.4.9.1 Traction control. When specified (see 6.2), traction control shall be furnished. Traction control shall be of the positive traction, limited slip or automatic locking differential type.

* 3.4.10 Wheels, rims, tires and tubes. The vehicle shall be equipped with single front and dual rear wheels. Rim size, tire size and ply rating shall be the same for all wheels on the vehicle. Rim and tire ratings shall conform to Tire and Rim Association recommendations for the type and size of tires furnished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

* 3.4.10.1 Tires. Tires shall be tube or tubeless truck type with highway tread. Tires shall be of the steel belted radial ply type. Tires shall have a rated capacity at least equal to the load imposed on each tire, measured at each wheel, at the ground, with the vehicle loaded to specified GVW. Tires shall conform to Tire and Rim Association recommendations or to ZZ-T-381, with a size designation system the same as the Tire and Rim Association.

* 3.4.10.2 Inner tubes. When tube type tires are furnished, inner tubes shall be of the heavy duty type and shall be of proper size for tires furnished. When mounted on other than drop center rims, tire flaps shall be furnished.

3.4.10.3 Spare wheel assembly. Unless otherwise specified (see 6.2), a spare wheel or rim shall be stowed for shipment in a readily accessible location in the vehicle.

3.4.10.3.1 Spare tire. Unless otherwise specified (see 6.2), an inflated spare tire mounted on spare wheel or rim shall be furnished. The spare tire shall be of the same size, tread design and ply rating as the tires in use on the vehicle.

* 3.4.11 Brakes. Manufacturer's standard power brakes shall be furnished. Brakes shall conform to Federal Motor Carrier Safety Regulations 393.40 through 393.42 and 393.45 through 393.52.

3.4.12 Steering. Power steering shall be furnished.

3.4.13 Windshield wipers and washers. The vehicle shall be equipped with dual windshield wipers and windshield washers. Windshield wipers shall be multi-speed type and operated by electric motor(s).

* 3.4.14 Bumpers. Front and rear bumpers shall be provided on the vehicle and shall conform to Federal Motor Carrier Safety Regulation 393.86.

* 3.4.15 Tools. Unless otherwise specified (see 6.2), the vehicle shall be furnished with tools required for exchanging mounted tire assembly with the spare assembly and shall include at least a jack, jack handle, and wheel-nut wrench. The jack shall be of such closed height as to permit its location under axle, or other satisfactory lift point, at any wheel with a flat tire. The jack, without blocking, shall be capable of raising any wheel of the loaded vehicle to a height adequate to permit removal and replacement of the wheel and tire assembly. Stowage space of sufficient size to accommodate vehicle jack, hand tools, anti-skid chains and emergency triangles shall be furnished for

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the currentversion before use.

retaining equipment during vehicle operation. Tools shall be stowed in an easily accessible location.

3.4.16 Heating, defrosting and ventilating system. Heating system, with fresh air intakes, having discharge outlets to the floor and to windshield defroster louvers, complete with blower and controls, shall be furnished.

* 3.4.17 Driver's compartment air conditioning system. When specified (see 6.2), the manufacturer's standard air conditioning system shall be furnished. When air conditioning is specified, tinted safety glass shall be furnished for the windshield and the passenger and driver's side door windows. The driver's compartment shall be insulated when air conditioning system is specified.

3.4.18 Controls and operating mechanisms. Controls and operating mechanisms shall be located for left-hand drive. Controls shall be complete and conveniently operable by the driver. Lever controls shall be designed and located to permit easy entrance and exit of operator to and from driver's compartment. Instruments and controls shall be identified as to their function and installed in a manner to facilitate removal and servicing. Instruments shall be panel mounted.

* 3.4.19 Accessories and equipment. Chassis equipment shall be complete with all accessories furnished as standard equipment by the manufacturer. The following minimum equipment shall be furnished:

(a) Key-operated ignition switch
(b) Ammeter, charging indicator or voltmeter
(c) Fuel gage
(d) Oil pressure gage or indicator
(e) Engine temperature gage or indicator
(f) Speedometer with recording odometer
(g) Cigarette lighter.
(h) Ash receptacle, permanently attached
(i) Two padded sunvisors
(j) Front door mounted armrest on driver's and passenger's side
(k) Driver's compartment ventilator, other than window
(l) Domelight switch operable from driver's seat
(m) Glove box
(n) Door operated domelight switch for both doors.

3.4.20 Rearview mirrors. An inside rearview mirror shall be furnished. An outside rearview mirror shall be provided on both sides. The outside rearview mirrors shall be of the Junior West Coast or low mount type incorporating a wide angle viewing system. The upper mirror

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

shall have a flat reflective area of not less than 35 square inches. The lower mirror shall have a convex reflective area of not less than 20 square inches. The mirror assembly heads shall be adjustable and mounted to minimize obstruction of forward lines of vision.

3.4.21 Horn. Manufacturer's standard electric horn shall be furnished.

* 3.4.22 Emergency equipment. A dry chemical type fire extinguisher shall be furnished with mounting bracket mounted convenient to the driver. The fire extinguisher shall have an Underwriter's Laboratory rating of 10B:C or more, shall include a metal safety pin and wire and shall conform to type I or type II, class 2, size 5 of O-E-915. The fire extinguisher shall permit visual determination as to whether it is fully charged. A first aid kit shall be furnished with mounting bracket. First aid kit size shall be 9-7/16 inch long, 5-7/16 inch wide, and 2-7/8 inch thick.

3.5 Vehicle type. The vehicle shall be a forward control model with a high volume type body.

* 3.5.1 Cab. The cab shall include street and curbside sedan type doors. All doors shall be capable of being opened from inside and shall include, in addition to the door operating handles, a grab handle on the inside of each door. Doors shall incorporate the manufacturer's standard key locking arrangement. The doors shall be equipped with crank-regulated, safety glass windows. Drip rails shall be installed above the doors. An adjustable upholstered driver's seat, with back, shall be furnished. A similar seat shall be furnished on the passenger side. Seat belts shall be furnished for each seat. A full headliner shall be provided. The color of the upholstery and the interior finish shall be compatible with the exterior color (see 3.1.1.1). White upholstery shall not be furnished.

* 3.5.2 Body. The body shall be of the minimum dimensions specified in table I. Body subframe, rear corner posts, rear header, rear crossmember, and rear bumper shall be constructed of steel. Body side posts, front posts, side and front wall panels, roof assembly and rub rail shall be constructed of steel. Steel used shall be of the minimum gages specified for carbon steel. The van body shall be accessible from the cab.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

TABLE I. Body interior dimensions - minimum.

Dimension	Minimum (inches)
Width, exclusive of wheelwells	90
Length	144
Height	74

* 3.5.2.1 Body subframing. Body subframing shall be of welded, bolted or riveted construction. There shall be not less than eight outriggers full channel or equivalent section, steel construction, attached to chassis frame by rivets or welds. Welded outriggers shall be joined by weld for not less than 50 percent of the length of the contact edge(s). Spacing of crossmembers shall be equal to framing between chassis frame rails. Crossmembers shall be used between chassis frame rails when chassis framing is not adequate to support floor. Crossmembers and outriggers shall be not less than 12 gage (0.1046 inch) steel. Design of subframe shall permit low floor height, and shall permit vehicle operation at speeds up to 55 mph over improved roads, when loaded with an evenly distributed payload to the rated GVW, without evidence of permanent deformation.

3.5.2.2 Body framing. Side and front post construction shall be of formed steel and shall be not less than 1 inch in depth and 18 gage (0.0478 inches) steel when side and front wall posts are spaced on maximum 24 inch centers. Front corner post construction shall be of formed steel and shall be not less than 1 inch in depth and 18 gage (0.0478 inches) steel. Rear corner posts shall be not less than 14 gage (0.0748 inch) steel.

3.5.2.3 Body exterior. Roof assembly shall be standard for the vehicle, and shall be constructed to insure drainage. Roof support bow construction shall be of formed steel. When roof support bows are spaced on 24 inch maximum centers, the roof bow shall be not less than 0.0875 inches in depth and 18 gage (0.0478 inches) steel. Body side panels shall be not less than 19 gage (0.0418 inches) steel. All roof and body seams and joints shall be weatherproof. Body roof rails shall have a maximum radius of 5 inches. Rub rails shall be permanently attached to or become a part of the exterior of the body at the floor line.

* 3.5.2.4 Rear doors. Two full height, side hinged rear doors shall be provided. Nominal full width rear doors shall be provided. The doors shall be provided with bracing to prevent sagging and shall be equipped with three cast steel or equivalent hinges per door. Two fixed windows of clear glass shall be provided, one in the upper section of each door. Window size shall be not less than a nominal 18 inches by 18 inches. At least the right (curbside) door shall have door operating

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

handles inside and outside. A key locking arrangement for the right (curbside) door shall be provided. The left (streetside) door shall have readily accessible door release(s) and shall be capable of being locked closed when the right (curbside) door is closed and locked. In addition to the door operating handles, grab handles to assist in closing the doors shall be provided on the inside of the doors. The doors and the body shall be provided with mating door catches to hold the doors in full open position. Drip rails shall be installed above the doors.

3.5.2.5 Bulkhead. A bulkhead constructed of not less than 16 gage (0.0598 inch) steel with a rigid center section door and solid side panels shall be provided between the cab and body. The door shall have openings in the upper and lower halves separated by a solid area. The openings shall be open mesh or perforated type with diamond or round shape contained within the open area. The openings shall have an outside perimeter of not less than 17 inches high by 15 inches wide with the solid separation between openings not less than 6 inches. The upper edge of the upper opening shall be approximately 3 inches from the top of the bulkhead. The diamond or round shaped openings shall provide not less than 60 percent of open area. The center door shall have a two-way handle, lockable from the cab and shall be hinged to swing into the body area.

3.5.2.6 Exterior generator access door. An exterior generator access door shall be located on the right curb side of the body to provide access to the generator (see 3.5.3.11). The door shall be approximately 13 inches high by 29 inches wide, shall be louvered, and shall be provided with a disc tumbler cam lock which is keyed identical to the cabinet doors in the interior.

3.5.2.7 Flooring. The flooring in the body shall be 3/4-inch exterior grade plywood and shall be covered with vinyl asbestos tile, a nominal 12 by 12 by 3/32 inches in size. Flooring shall cover the complete steel body floor except for the fender wells. The color of the tile shall be harmonious with the interior.

3.5.2.8 Insulation. Insulation shall be provided in the exterior doors, walls, and ceiling of the body and shall provide resistance to transfer of heat equivalent to the protection afforded by a 1-inch thick batt having a thermal conductivity of 0.24, in normal ambient air temperatures. Insulation shall be either flexible or batt type, fibrous or cellular material, having a moisture absorption capacity of less than 2 percent by weight. Insulation shall be made of asbestos free material. Materials shall be odorless and fire retardent. Insulation shall not breed nor promote the growth of fungus and shall not cause nor accelerate corrosion of steel, copper or aluminum. Insulation shall be

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the current version before use.

cemented to inner side of external walls and provided with means to retain insulation under all operating conditions. Cement shall be waterproof and resulting bond shall provide shear strength sufficient to prevent sag of the insulation when assembled vehicle is operated at speeds up to 55 mph over improved roads. All insulation, to maximum practicable extent, shall be installed prior to the closing of spaces in body sides, front and rear panels, ends, doors, upright body members, roof, roof bows, and other parts.

3.5.2.9 Headliner. The headliner shall cover the complete ceiling and shall be not less than 1/8-inch thick vinyl-clad bending board, white embossed, vinyl T laminate finish with waterproof vapor barrier backing.

3.5.2.10 Wall panels. Front, rear and side walls shall be not less than 0.030-gage steel paneling. Panels shall be primed with zinc chromate and spray painted with white enamel finish.

3.5.2.11 Rear bumper. A safety tread, steel plate step bumper shall be provided at the rear.

3.5.3 Interior furnishings. The interior of the body shall be arranged as shown in figures 1 and 2, and shall include the following:

(a) One kit storage cabinet - driver's side
(b) Two combination storage cabinets - driver's side
(c) One evidence table desk with stool - driver's side
(d) One evidence examination table counter top - driver's side
(e) One lighting equipment and generator cabinet - passenger's side
(f) Three combination storage cabinets - passenger's side
(g) One evidence table desk with stool - passenger's side
(h) At the manufacturer's option, side hinged doors split horizontally may be furnished in lieu of vertically split doors as shown in figures 1 and 2.

3.5.3.1 Cabinet construction. All cabinet shall be of not less than 0.064-gage aluminum and shall be of modular construction. All cabinets shall be zinc chromate primed and finished with light blue baked enamel finish. All cabinet compartment shelves shall be adjustable, shall have a 1/2-inch lip at the front and shall be lined with skid-proof vinyl matting to absorb shock. All cabinet doors shall be provided with handles and each cabinet shall include a spring type holding device to hold the doors closed while unlocked and with the vehicle in motion. Magnetic lock holders are not acceptable. All door locks shall be disc tumbler cam type and shall be keyed alike. Cabinets

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

located at wheel well locations shall nest with the wheel wells. The cabinet size and shelf spacing in the driver's side kit storage cabinet, the two driver's side combination storage cabinets, and the three passenger's side combination storage cabinets shall accommodate the equipment listed in table II. The cabinets shall be secured to the body interior with easily removable corrosion resistant fasteners.

TABLE II. Cabinet equipment.

Item	Quantity	Dimensions (inches)
Camera kit, KS 134	1	22-1/2 x 16-1/2 x 6
Casting kit	1	18 x 13 x 6
Fingerprint kit, burglary	1	16 x 10-1/2 x 5-3/4
Fingerprint kit, post mortem	1	13-1/2 x 10-1/2 x 5
Rape evidence kit	2	11-1/2 x 8-3/4 x 1
Trace metal detection kit	1	8 x 6 x 4
Gunshot residue kit	2	4 x 5 x 3/4
Identi-kit	1	10 x 7-1/4 x 4-3/4
Drug field test kit	1	11-1/4 x 5-1/4 x 4
Crime scene posters	15	11 x 14 x 1/16
Footprint lifter packages	2	6 x 15 x 1/2
Sketch kit	1	17 x 12 x 5
Bolt cutters	1	36 x 8 x 1-1/2
Raid jackets	4	24 x 12 x 6 folded
Videotape recorder	1	14 x 15-1/2 x 7
Videotape camera kit	1	19 x 30-1/2 x 10-1/4
Coveralls	4	8 x 7 x 2-1/4 folded
Odor masks	4	8 x 8 x 8
Marking kit	TBD	8-1/2 x 11 x 12 shelf space
Reference manauls	TBD	8-1/2 x 11 x 12 shelf space

3.5.3.2 Kit storage cabinet - driver's side. One kit storage cabinet for the driver's side shall be furnished and shall be not less than 45 inches high by 48 inches wide by 14 inches deep with compartments for ready access. The cabinet shall have two side-hinged, lockable formica doors. The doors shall be not less than 5/8-inch flakeboard with the front and all edges covered with 1/16-inch plastic laminate. The door backs shall be covered with 0.020-inch backing sheet laminate. The color shall be light blue.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the current version before use.

3.5.3.3 Combination storage cabinets - driver's side. Two combination storage cabinets for the driver's side shall be furnished. The dimensions of each cabinet shall be not less than 45 inches high by 22-5/16 inches wide by 14 inches deep. Each cabinet shall contain not less than three shelves and two side-hinged, lockable formica doors. The doors shall be not less than 5/8-inch flakeboard with front and all edges covered with a 1/16-inch plastic laminate. The door backs shall be covered with 0.020-inch backing sheet laminate. The color shall be light blue.

3.5.3.4 Combination storage cabinets - passenger's side. Three combination storage cabinets for the passenger's side shall be furnished. THe dimensions of each cabinet shall be not less than 45 inches high by 22-5/16 inches wide by 14 inches deep. Each cabinet shall contain not less than three adjustable shelves and two formica doors. The doors shall be not less than 5/8-inch flakeboard with front and all edges covered with 1/16-inch plastic laminate. The door backs shall be covered with 0.020-inch backing laminate. The color shall be light blue.

3.5.3.5 Lighting equipment and generator cabinet. One lighting equipment and generator cabinet shall be furnished and shall be located on the passenger's side. Overall dimension shall be not less than 45 inches high by 48 inches wide by 19 inches deep. The lower compartment shall house the generator (see 3.5.3.11). The generator compartment shall be fully lined with not less than 5/8-inch thick flame-resistant acoustical tile. The door to the generator compartment shall be side hinged. The upper storage compartment shall include adjustable shelving and shall provide storage for three 500-watt, portable floodlights with bulb guards (see 3.5.10). Doors for the upper storage compartment shall be two side-hinged, lockable doors. All doors shall be not less than 5/8-inch flakeboard with front and all edges covered with a 1/16-inch plastic laminate. The storage compartment door shall be backed with 0.020-inch backing sheet laminate and the generator compartment door shall be backed with not less than 5/8-inch flame-resistant acoustical tile. Color shall be light blue except for the acoustical tile in the generator compartment.

3.5.3.6 Evidence table desks. Two evidence table desks shall be furnished, one on the driver's side and one on the passenger's side, at the location shown in figures 1 and 2. Both evidence table desks shall be covered with not less than 1/16-inch plastic laminate with wood grain finish on all exposed surfaces. The dimensions of the passenger's side evidence table desk shall be not less than 28 inches wide by 19 inches deep and shall include a center drawer not less than 18 inches deep by

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

20 inches wide by 2-1/2 inches high. The dimensions of the driver's side evidence table desk shall be not less than 50-3/8 inches wide by 19 inches deep. The top of both evidence table desks shall be 32 inches ± 1 inch above the floor.

3.5.3.7 Evidence examination table countertop. An evidence examination table countertop with not less than a 3-inch backsplash shall be furnished. The evidence examination table countertop shall be located above the kit storage cabinet and the two combination storage cabinets on the driver's side as shown in figure 1. The countertop shall be 46 inches ± 1 inch above the floor. The countertop, 3-inch backsplash and all exposed edges shall be covered with 1/16-inch plastic grain finish. The dimensions of the evidence examination table countertop shall be not less than 91-3/4 inches wide by 15 inches deep.

3.5.3.8 Stools. Two padded steel stools shall be furnished. Each stool shall include a swivel seat, adjustable height feature, and spring-loaded, hold-down locking device for securing while in transit.

3.5.3.9 Van body air conditioner. A roof mounted, 120 volt alternating current (ac) air conditioner with not less than 11,000 British thermal units (Btu) rating shall be furnished. The air conditioner shall provide four-way, directional air-flow, fresh air circulation and shall require a depth of not more than 2 inches below the ceiling.

3.5.3.10 Space heater. A 120-volt ac, 1250-watt space heater shall be furnished and shall provide not less than 4269 Btu output. The heater shall include a fan and an automatic thermal safety switch, shall be of the circulated heat steam type and shall incorporate a cast aluminum safety heating grid. The heater shall be located at the rear of the body area below the evidence table desk on the driver's side and shall be approximately 16 inches high by 13 inches wide by 3-3/4 inches deep. The heater and installation shall conform to Federal Motor Carrier Safety Regulation 393.77.

* 3.5.3.11 Generator. A gasoline engine driven generator shall be furnished in the location shown in figure 1. The generator shall have a power rating of 120 volts ac, 60 hertz (Hz), single phase and shall provide not less than 4000 watts (Onan Model 4 OBF gasoline engine with Vacu-Flo cooling, or equivalent). The generator shall include independent 12-volt dc battery system, battery trickle charging circuit, cooling for compartment, mounting, mechanical fuel pump, and positive fuel shut off. The generator engine shall be connected to the vehicle fuel tank. The generator shall include circuit breaker(s) to protect the generator from overload. The generator output shall be wired

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the currentversion before use.

through the DOCKSIDE/OFF/GENERATOR mode switch (see 3.5.4). A remote electric start switch for the generator engine shall be furnished and mounted in the driver's light control console (see 3.5.7).

3.5.3.11.1 Generator engine exhaust system. No part of the exhaust system shall be located so as to result in burning, charring, or damaging the electrical wiring, the fuel supply, or any combustible part of the vehicle and shall be in accordance with Federal Motor Carrier Safety Regulation 393.83(a).

* 3.5.4 Alternating current system. A 120-volt ac system for the interior electrical devices and the two outside receptacles (see 3.5.5) shall be furnished. The system shall be supplied by either external 120-volts ac through a waterproof, male, power-input plug, located on the left front fender (driver's side), or from the internal generator (see 3.5.3.11). An extension cord, not less than 20 feet in length and with a plug that matches the external power-input plug, shall be furnished. The extension cord shall be rated to handle not less than 100 amperes. Selection of the external or internal (generator) 120-volts ac shall be controlled by a "DOCKSIDE/OFF/GENERATOR POWER" mode switch, located on the driver's light-control console (see 3.5.7). The ac system shall be complete and shall include a panel enclosure, not less than six individual 15 ampere circuit breakers, necessary junction boxes, and other equipment specified herein. Wiring shall be arranged such that air conditioner and space heater will operate from external ac only and not from the internal generator. Each of the three outlets, fluorescent lights, space heater, and air conditioner shall include a ground fault interrupter and shall be on separate 15 ampere circuit breakers. Each circuit breaker shall be appropriately labeled or identified. Electrical components and installation shall conform to NFPA No. 70 Electrical Code.

* 3.5.5 Outside ac outlet. Two weatherproof, duplex outlet, 120-volts ac receptacles with waterproof cover plates, shall be located outside the rear of the vehicle, one on each side. Receptacles shall be positioned so that they are not obscured by rear doors when fully open.

3.5.6 Inside ac outlets. One duplex outlet, 120-volts ac receptacle shall be furnished at the driver's side evidence table desk and one at the passenger's side evidence table desk.

3.5.7 Driver's light control console. A dashboard-mounted console with toggle switches and indicator lights for switching of the three emergency dome lights (see 3.5.8.2), the left and right side exterior alley lights (see 3.5.9.1), and a switch for remote starting of the generator engine shall be furnished. The driver's light control console

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

shall also house the "DOCKSIDE/OFF/GENERATOR POWER" mode switch (see 3.5.4).

3.5.8 Interior lighting. Interior lighting shall be provided by three 12-volt dc dome lights, two 120-volt ac fluorescent light fixtures, and four high-intensity lab lights as specified in 3.5.8.1 through 3.5.8.3.

3.5.8.1 Dome lights. Three 12-volt dc reserve lighting dome lights shall be furnished. Lights shall be ceiling mounted and shall be controlled by a switch on the driver's light control console (see 3.5.7) and a switch at the curbside door.

3.5.8.2 Fluorescent lights. Two overhead, 4-foot, twin-tube fluorescent light fixtures shall be furnished in the body ceiling. Each fixture shall include a plastic diffuser and independent wall switch.

3.5.8.3 Evidence table lights. Four high-intensity, 12-volt dc, wall mounted lights with self-contained switches shall be furnished, two for each evidence table desk location.

3.5.9 Special exterior lighting. Special 12-volt dc exterior lighting shall be furnished and shall consist of four exterior alley lamps, a spotlight and a cab-mounted warning light assembly. All special exterior lighting shall be weatherproof and shall operate on 12-volts dc.

* 3.5.9.1 Exterior alley lamps. The four side mounted quartz-halogen alley lamps shall be mounted on each top corner of the exterior of the vehicle body. The lights shall be controlled by a switch on the driver's light control console (see 3.5.7). Lights shall be easily demountable and provided with weather-proof connectors which can be easily disengaged. A ten foot extension cord for use with the alley lamps shall be provided. Four brackets, suitable for mounting the lights, shall be installed on the exterior of the vehicle (two on each side). The brackets shall be positioned midway up each side and spaced six feet apart. Additional brackets shall be installed midway up and centered on the interior and exterior of each rear door. The exterior side brackets shall conform to state requirements for protruding objects.

3.5.9.2 Spotlight. A spotlight, located at the front center of the cab roof, shall be provided. The spotlight shall have not less than a 5-inch lens and shall be capable of 360-degree rotation. The inside controls shall be convenient to the driver.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

3.5.9.3 Warning lights. Two rotating warning light shall be provided and shall be mounted on the forward position of the vehicle roof on the streetside and curbside. Each light shall have a dome and shall have two high-intensity sealed-beam lamps. Unless otherwise specified (see 6.2), the color of the warning lights shall be blue. The two warning lights shall be fully synchronized by a chain driven mechanism housed in an extruded aluminum alloy bar covered with polished stainless steel. The complete assembly shall be mounted on cab gutters. The two warning lights shall be operated by means of one separate heavy duty switch. The switch shall be located on the instrument panel, so positioned as to be readily accessible to the driver, and shall be marked to indicate the function of the switch. An indicating light shall be provided. At the option of the manufacturer, or when specified (see 6.2), the lights shall be removed for shipment. When removed, the lights shall be stowed in the vehicle.

* 3.5.10 Portable floodlights. Three 500-watt portable quartz-halogen floodlights and three tripods, capable of elevating lights not more than eight feet high, shall be furnished. The floodlights shall have protective wire bulb guards and shall include 10-foot electric cables. The floodlights shall be of a size that is storable in the floodlight storage area (see 3.5.3.5).

3.6 Servicing and adjusting. Prior to acceptance of the vehicle by the Government inspector, the contractor shall service and adjust each vehicle and its mounted equipment for operational use including at least the following: alining of lights; adjustment of the engine, electrical and brake systems; filling and charging of the battery; alinement of front wheels; inflation of all tires; complete lubrication of chassis, engine, and running gear with grades of lubricants recommended for the ambient air temperature at the delivery point; servicing of cooling system with a solution of ethylene glycol type antifreeze and water in equal parts by volume; and servicing of windshield washer reservoir with water and appropriate additives.

* 3.7 Workmanship. Defective components or parts and assemblies which have been repaired or modified to overcome deficiencies shall not be furnished. All parts shall exhibit no evidence of damage, mutilation or poor workmanship of construction. Damaged components or parts that have been subjected to major rebuilding or repairs shall not be used as replacement parts or components. All mounting devices such as bolts, nuts, and rivets shall be complete.

* 3.7.1 Metal fabrication. Metal used in the fabrication of equipment shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the currentversion before use.

metal. Shearing and chipping shall be done neatly and accurately. All bends of a major character shall be made with controlled means in order to insure uniformity of size and shape.

* 3.7.2 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

* 3.7.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of an approved shape and of uniform size for the same diameter of rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes, and shall be in full contact with the surface of the member.

* 3.7.4 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loadings.

* 3.7.5 Panel installation. All interior and exterior panels shall be installed in a neat and uniform manner free of misalinement, open seams, gaps, uneven surfaces, damaged or missing fasteners (rivets, etc.). Exterior overlapped surfaces shall be sealed with sealing compound. Interior panels shall be firmly secured and free of misalined joiners, edgings and moldings. All paneling shall be free of dents, nicks, scratches, sharp edges, buckling, waviness, and other defects.

* 3.7.6 Door and window installation. All exterior doors and windows shall be installed with proper alinement, fitted and sealed to prevent entrance of air, dust, or water. Doors and windows with associated hardware shall be free of binding or interference during opening, closing and locking.

* 3.7.7 Insulation. The insulation shall be installed without excessive voids, open spaces, rips, tears or other types of damage. The insulation shall be properly fitted and secured.

* 3.7.8 Floor covering and floor installation. The floor covering shall be installed and secured to the floor service and shall fit uniformly. The covering shall be free of gaps, open seams, bulges,

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:23Z
Check the source to verify that this is the currentversion before use.

bumps, or waviness. The underside of the floor panels exposed to the road shall be sprayed with sound deadening material.

* 3.7.9 Electrical system installation. The vehicle electrical system shall be installed providing proper routing for electrical wiring with clearances between wiring and applicable parts. All wiring shall be properly secured at points of bending and shall be protected against chafing and damage. All circuits shall be properly grounded. Electrical wiring covering shall be free of cracks, cuts, kinks, frays, and other defects. All wiring shall be free of loose or faulty connections. Wall outlets and electrical fixtures shall be installed in a neat straight position. All electrical appliances shall be secure and properly fitted without any evidence of damage.

* 3.7.10 Air conditioning and heating installation. The air conditioning unit shall be securely shock mounted. Diffusers shall be capable of adjustment without binding or interference. The fan blower heaters shall be securely mounted free of gaps, exposed electrical wiring, or insulation. The fan blowers shall be capable of operating without vibration and undue noise.

* 3.7.11 Cabinets, desks and countertops. Cabinets, desks and countertops shall be installed and securely fitted, level with floor, without delamination, scratches, mars, color fade, bulges, uneven surfaces and rough edges or corners. All drawers and cabinet doors shall be fitted to provide ease of operation without binding, interference or excessive play during opening, closing and key locking operations.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Government verification. Quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of observation of the operations to determine that practices, methods, and procedures of the contractor's inspection are being properly applied. Failure of the

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:23Z
Check the source to verify that this is the current version before use.

contractor to promptly correct product deficiencies discovered shall be cause for suspension of acceptance until correction has been made or until conformance of product to specification criteria has been demonstrated.

* 4.3 In-process water spray test. Each vehicle produced under the contract shall be subjected to a water spray test. The water spray test shall be performed prior to installation of interior paneling and insulation. The vehicle shall be exposed to a 100 percent water spray for not less than 15 minutes. The spray shall be delivered by nozzles operating at not less than 25 pounds per square inch (psi) water pressure, sufficient in number, placed approximately 4 feet from the body, to afford full coverage of sides, roof, front, rear and undercarriage of the vehicle body. The spray shall be applied simultaneously, or section by section. All doors and windows shall be closed as in normal travel position. During the water spray test, all doors, windows and paneling shall be examined and observed from the interior of the van body for leakage. Any evidence of leakage (water or moisture) shall be cause for rejection.

4.4 First production vehicle inspection. The first vehicle produced under the contract shall be inspected by the contractor at his plant under the direction and in the presence of Government representatives. The purpose of the inspection shall be to determine vehicle conformance to the contract. Acceptance of the first production vehicle shall not constitute a waiver by the Government of its rights under the provisions of the contract.

* 4.4.1 Vehicle weight. The first production vehicle shall be weighed to determine curb weight and the distribution of curb weight on the front and rear axles. The imposed loading on front and rear axles will be computed using the curb weight and the payload, uniformly distributed over the vehicle load areas to provide the specified GVW. The calculated imposed loads on front and rear axles will be utilized to ascertain that the suspension, axles, and tires furnished are of adequate capacity to meet contractual requirements.

* 4.4.2 Road test. To determine conformance to 3.3 and 3.3.1, the first production vehicle with rated payload shall be road tested prior to the water spray test (see 4.3). The vehicle shall be road tested for a distance of not less than 50 miles. The vehicle shall attain speeds up to at least 55 mph. At least 20 percent of the road test distance shall be over dry, unimproved or gravel roads at speeds up to 20 mph. The vehicle shall be subjected to not less than three sudden stops from speeds of not less than 20 mph on a substantially level, dry, smooth surface free of loose material. The vehicle shall be observed for the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

specified stopping distance. During the road test, the lights and the auxiliary electric heater shall be operated. The lights and electrical equipment shall be observed to verify that the auxiliary generator provides sufficient electrical power for satisfactory operation during transit. Upon completion of the road test, the vehicle, components and accessories shall be examined for damage and leakage (lubricant or air). All equipment permanently installed or secured for transit shall be examined for damage.

* 4.3.3 Radio frequency suppression verification. The vehicle manufacturer shall indicate on the military questionnaire (commercial vehicle engineering data) if the vehicle is suppressed to limit electromagnetic radiation in accordance with SAE J551.

* 4.4.5 Functional tests. After completion of the road test the following functional tests shall be performed.

* 4.4.5.1 Electrical system test. To determine conformance to 3.5.4 through 3.5.10, the electrical system shall be subjected to a functional test. The satisfactory performance of the electrical system shall be verified. All lighting shall be turned on and the lighting shall be observed during the phase-in operation of the air conditioning compressor, to verify that the lighting does not fade. The air conditioning unit shall be observed for satisfactory operation. The power and electrical circuits shall be verified to assure that the power load is in accordance with the specified requirements and actual loads imposed.

* 4.4.5.2 Air conditioning test. To determine conformance to 3.5.3.9, the air conditioning unit shall be subjected to a functional test. The air conditioning unit shall be tested under actual or simulated conditions at least as stringent as the specified requirements. Simulated conditions acceptable to the Government may be used. Performance of the air conditioning unit shall be verified to determine that the unit has sufficient capacity to maintain the inside of the van body area at an evenly circulated cooling temperature of 72°F maximum in 95°F ambient air temperature. Inside temperature may be calculated either with the number of occupants required or the use of simulated heat for sensible cooling.

* 4.4.5.3 Heating test. To determine conformance to 3.5.3.10, the vehicle heating system shall be subjected to a functional test. The electric fan blower heaters shall be tested under actual or simulated conditions at least as stringent as the specified requirements. Simulated conditions must be acceptable to the Government. Performance of the heating system shall be verified to determine that the system is

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

capable of maintaining the inside of the vehicle at a minimum of 70°F midway between the floor and ceiling in ambient outside air temperature of 0°F with no occupants inside.

* 4.4.5.4 Air conditioning and heating test data. Results of the air conditioning and heating tests performed in accordance with 4.4.3.2 and 4.4.3.3 shall be recorded. Test data, including a description of all applicable pertinent test conditions, shall be furnished to the Government representative. If the vehicle manufacturer has previously tested an identical model vehicle with the same components within a 1-month period, a certification and the specified test data verifying conformance to this specification may be provided in lieu of the first production vehicle air conditioning or heating test. Certification and previous test results, if furnished, shall be forwarded to the engineering office of the procuring activity with the commercial vehicle engineering data (questionnaire).

* 4.4.6 Production sample. Upon acceptance of the first production vehicle, it shall remain at the manufacturing facility as a production sample, and be the last vehicle shipped on the contract. The contractor shall maintain the vehicle in a serviceable condition for the duration of the contract.

* 4.4.7 Failure. Failure of the first production vehicle to meet the requirements of the contract shall be cause for rejection of the vehicle. Further, the Government shall continue to refuse acceptance of all vehicles under the contract, until the contractor has taken corrective action to eliminate the cause(s) of the failure.

* 4.8 Production vehicle inspection. Each production vehicle shall be subjected to dimensional inspection and operational tests as specified in section 3. The vehicle, associated controls and equipment shall be operated to the extent necessary to verify compliance with contract requirements. The contractor's inspection system, as a minimum, shall assure that the vehicle and attached equipment conforms to the dimensional and operational requirements and the vehicle is capable of meeting the requirements herein. For each vehicle under contract, the contractor shall make available to the Government, at the point of final acceptance, records acceptable to the Government. The records shall indicate that servicing and adjusting required by 3.6 have been accomplished.

* 4.8.1 Vehicle body inspection. Vehicle bodies shall be inspected for the characteristics and defects contained in table III. Sampling for inspection shall be in accordance with MIL-STD-105. Acceptance and rejection shall be processed in accordance with acceptance and rejection

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

criteria of MIL-STD-105. Vehicle bodies shall be inspected for conformance to the Acceptable Quality Level (AQL) on the basis of percent defective as specified in table III.

TABLE II. Major defects - AQL - 25 defects per 100 units.

Defect number	Characteristic	Major defects	Method of inspection
101	Exterior paneling	Unevenness, buckling, bulges, warping, missing or damaged rivets, overlapped sheets and joints, not sealed, insufficient thickness, dents, scratches, sharp edges, other surface defects (see 3.5.2.2 and 3.7.5).	Visual
102	Doors and door hardware	Improper fit and alinement, damaged or missing seals, improper material, inoperative door locks, binding or interference, not weatherproof, missing weatherproof seal, improper assembly of hardware, inoperative (see 3.5.2.4 and 3.7.6)	Visual and functional
103	Interior panels	Unevenness, buckling, gaps, open seams, improper fit of joiners, edgings, moldings, and surface defects (see 3.5.2.10 and 3.7.5).	Visual
104	Floor	Gaps, waviness, cracks, bulges, open seams, not firmly secured, incorrect floor covering material, inadequate coverage of sound deadening material (see 3.5.2.7 and 3.7.8).	Visual
105	Electrical system, components	Code violations; sloppy or loose connections, inadequate wiring clearances, circuit breaker panel(s) not of adequate capacity or not grounded, wiring not secured, fastened or clipped, improper wire size, faulty wiring	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

TABLE II. Major defects - AQL - 25 defects per 100 units. - Continued

Defect number	Characteristic	Major defects	Method of inspection
		material, conduit, fuses or receptacles, electrical controls inoperative or damaged (see 3.5.4 through 3.5.8.3 and 3.7.9)	
106	Floodlights	Installation not weatherproof, improper grounding, improper light wattage, inoperative (see 3.5.9 through 3.5.10)	Visual and functional
107	Air conditioner, heater and controls	Improper capacity, air conditioner not securely mounted, air leaks in ceiling ducts, binding of diffusers, improper wiring and grounding, undue noise, vibration, inoperative (see 3.5.3.9, 3.5.3.10 and 3.7.10)	Visual and operational
108	Sealants and caulking	Application not uniform, incorrect amounts, improper material	Visual
109	Desks, cabinets and laminated counter tops	Delamination, scratches, mars, color fade, unevenness, bulging, rough edges, not level with floor, not alined or fitted, not secure, loose mounting, poor construction, improper counter height, interference of desks and cabinet drawers (see 3.5.3.1 through 3.5.3.7)	Visual and functional

5. PACKAGING

5.1 Vehicle processing. The vehicle shall be processed for shipment, from manufacturer's plant to initial receiving activity, in accordance with the manufacturer's standard commercial practice.

6. NOTES

6.1 Intended use. The vehicle covered by this specification is intended for general nontactical use by the Government in transporting personnel or cargo.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Identification of appropriate service for painting and marking (see 3.1.1.1).
(c) Rustproofing, if required (see 3.1.1.2).
(d) Tropical rustproofing, if required (see 3.1.1.2).
(e) Silicone brake fluid, if required (see 3.1.1.3).
(f) Heavy duty cooling system, if required (see 3.1.1.5).
(g) Power plant heaters, if required (see 3.4.1.2).
(h) If a battery heater is not required (see 3.4.1.2).
(i) Traction control, if required (see 3.4.9.1).
(j) If a spare wheel or rim is not required (see 3.4.10.3).
(k) If a spare tire is not required (see 3.4.10.3.1).
(l) If tools are not required (see 3.4.15).
(m) Air conditioning system, if required (see 3.4.17).
(n) Color of warning lights, if not blue (see 3.5.9.3).
(o) Removal of warning lights for shipment, if required (see 3.5.9.3).

* 6.3 Identification of changes. The margins of this specification are marked with asterisks (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - AT

Preparing activity:
Army - AT

Project No. 2320-AC39

☆U.S. GOVERNMENT PRINTING OFFICE: 1984—505-038/A4867

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

DRAWING NOT TO SCALE

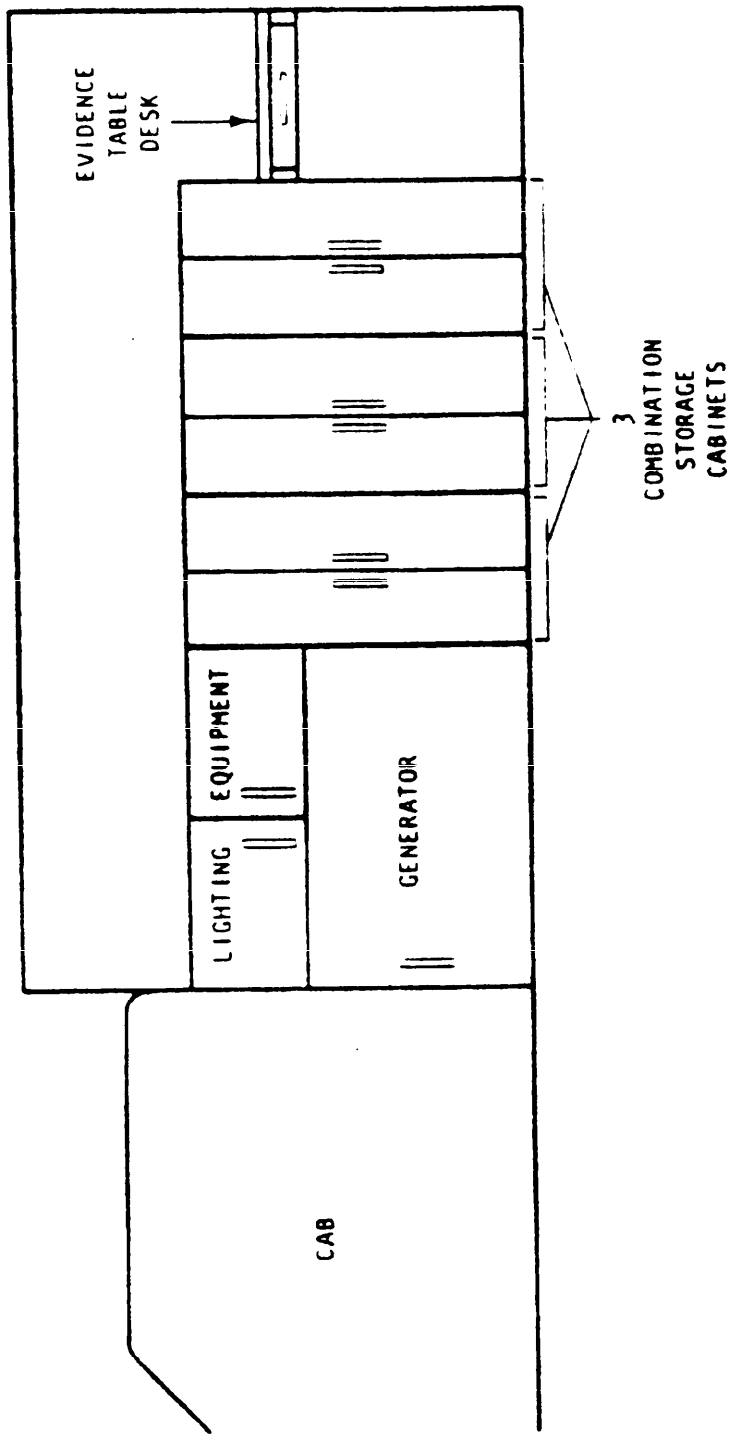


FIGURE 1. Evidence collection van layout passenger's side.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

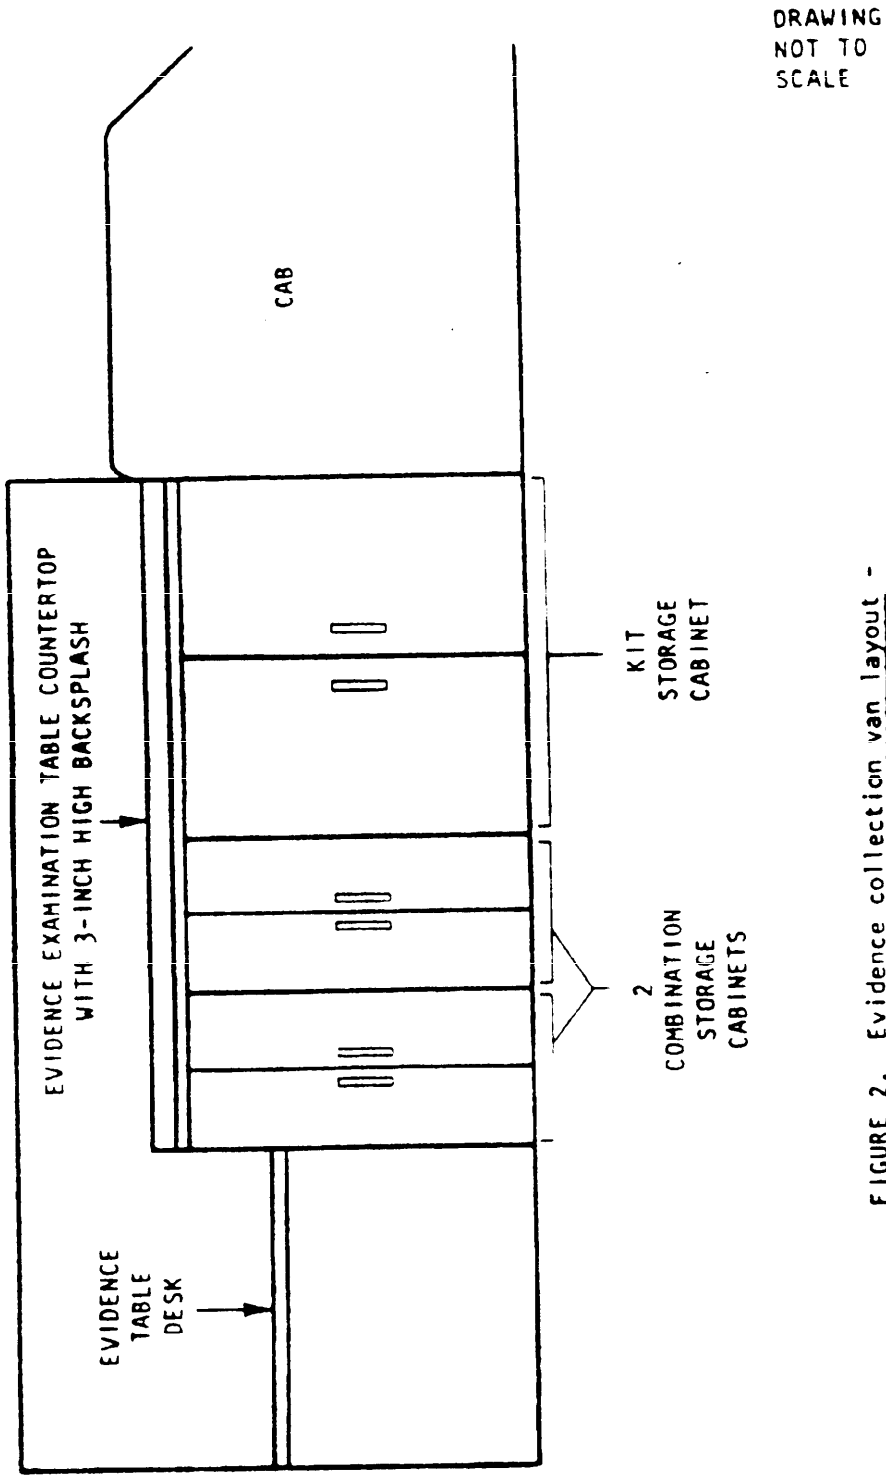


FIGURE 2. Evidence collection van layout - driver's side.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army-Automotive Command
Attn: DRSTA-GBS.1
Warren, MI 48090

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:23Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:23Z
Check the source to verify that this is the current version before use.