MILITARY SPECIFICATION

TANK, COMBAT, FULL-TRACKED, M1, SERIES; PROCESSING FOR SHIPMENT AND STORAGE OF

This specification is approved for use within the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers processing of the M1 series Combat Tank, Full Tracked, for storage outside of buildings, for immediate use shipment, and for domestic or oversea shipment, including carloading meeting the requirements of levels A and B preservation (see 1.2). The M1 Series includes M1, IPM1, and M1A1 tanks.

1.2 Classification. Processing shall be of the following levels as specified (see 6.1).

Level A	- Processing for domestic or overseas shipments and any storage outside of buildings in excess of 90 days from date of processing (periodic care and preservation during storage required).
Level B	- Limited processing for immediate use shipment and for domestic or overseas shipments (excluding open deck loading), and any storage not to exceed 90 days from date of processing.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: AMSTA-GDS, Warren, MI 48397-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A AREA PACK

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS
FEDERAL

O-C-1901	- Cleaning Compound, Windshield (Solvent and Antifreeze Concentrated).
O-E-760	- Alcohol Properietary Solvent and Special Industrial Solvents.
O-S-576	- Sodium Bicarbonate, Technical
O-S-801	- Sulfuric Acid, Electrolyte; for Storage Batteries
P-D-220	- Detergent, General Purpose.
P-D-680	- Dry Cleaning Solvent.
T-R-650	- Rope, Yarn and Twine, Bast Fiber.
V-F-106	- Fastener, Slide, Interlocking.
V-T-295	- Thread, Nylon.
FF-N-105	- Nails, Brads, Staples and Spikes, Wire, Cut and Wrought.
FF-T-276	- Thimbles, Rope.
NN-P-530	- Plywood, Flat Panel.
QQ-A-200	- Aluminum Alloy, Bar, Rod, Shapes, Structural Shapes, Tube and Wire, Extruded; General Specification For.
QQ-A-250	- Aluminum and Aluminum Alloy Plate and Sheet; General Specification For.
QQ-A-1876	- Aluminum Foil.
QQ-B-650	- Brazing Alloy, Copper, Copper-Zinc and Copper-Phosphorus.
QQ-P-416	- Plating, Cadmium, (Electrodeposited).
QQ-S-698	- Steel Sheet and Strip, Low-Carbon.
QQ-W-461	- Wire, Steel, Carbon, (Round, Bare and Coated).
RR-W-360	- Wire Fabric, Industrial.
RR-W-410	- Wire Rope and Strand.
TT-C-490	- Cleaning Methods for Ferrous Surfaces and for Organic Coatings.
TT-E-527	- Enamel, Alkyd, Lusterless.
TT-E-529	- Enamel, Alkyd, Semigloss.
TT-P-636	- Primer Coating, Alkyd Wood and Ferrous Metal.
TT-P-1757	- Primer Coating, Zinc Chromate, Low Moisture-Sensitivity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TT-V-121	- Varnish, Spar, Water-Resisting.
UU-C-282	- Chipboard.
UU-P-268	- Paper, Kraft, Wrapping.
UU-T-81	- Tags, Shipping and Stock.
VV-L-800	- Lubricating Oil, General Purpose, Preservative (Water-Displacing, Low Temperature).
WW-T-700	- Tube, Aluminum and Aluminum Alloy, Drawn, Seamless, General Specification for.
ZZ-T-351	- Tip, Cane and Crutch, Rubber.
MMM-A-178	- Adhesive, Paper Label, Water-Resistant.
MMM-A-1617	- Adhesive, Rubber Base, General Purpose.
NNN-P-40	- Paper, Tissue, Lens Cleaning.
PPP-B-601	- Boxes, Wood, Cleated Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Locked Corner.
PPP-B-636	- Box, Fiberboard.
PPP-C-795	- Cushioning Materials, Flexible, Cellular, Plastic Film for Packaging Applications.
PPP-C-1752	- Cushioning Material, Polyethylene Foam.
PPP-C-1797	- Cushioning Material, Resilient, Low Density, Unicellular, Polypropylene Foam.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.
PPP-T-97	- Tape; Pressure-Sensitive Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-117	- Bags, Sleeves and Tubing-Interior Packaging.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-B-131	- Barrier Materials, Watervaporproof, Flexible, Heat-Sealable.
MIL-C-450	- Coating Compound, Bituminous Solvent Type, Black (for Ammunition).
MIL-W-530	- Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-R-3065	- Rubber, Fabricated Products.
MIL-P-3420	- Packaging Materials, Volatile Corrosion Inhibitor, Treated, Opaque.
MIL-D-3464	- Dessicants, Activated, Bagged, Packaging Use and Static Dehumidification.
MIL-W-3912	- Wood Parts and Wood Substitutes, Fabricated: For Transport Vehicle Bodies and Similar Applications.
MIL-C-5501	- Caps and Plugs, Protective, Dust and Moisture Seal.
MIL-C-5541	- Chemical Conversion Coatings on Aluminum and Aluminum Alloys.
MIL-L-6081	- Lubrication Oil, Jet Engine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

MIL-B-7883	- Brazing of Steels, Copper, Copper Alloys, Nickel Alloys, Aluminum and Aluminum Alloys.
MIL-C-8188	- Corrosion Preventive Oil, Gas Turbine Engine, Aircraft Synthetic Base.
MIL-I-8574	- Inhibitors, Corrosion, Volatile, Utilization of.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-A-12560	- Armor Plate, Steel, Wrought, Homogeneous.
MIL-P-12841	- Basic Issue Items for Military Vehicles, Carriages and Equipment; Preparation for.
MIL-P-13983	- Paint, Temporary, Lusterless, Gasoline Removable.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold-Application.
MIL-C-16555	- Coating, Compound, Strippable, Sprayable,
MIL-D-16791	- Detergents, General Purpose (Liquid Non-ionic).
MIL-P-17667	- Paper, Wrapping, Chemically Neutral.
MIL-M-20693	- Molding Plastic, Polyamide (Nylon), Rigid.
MIL-C-20696	- Cloth, Coated, Nylon, Waterproof.
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative and Brake-in.
MIL-T-22085	- Tapes, Pressure Sensitive, Adhesive, Preservation and Sealing.
MIL-F-22191	- Barrier Materials, Transparent, Flexible, Heat Sealable.
MIL-E-22200	- Electrodes, Welding, Covered, General Specification for.
MIL-E-23765	- Electrodes and Rods - Welding Bare, Solid and Alloyed Cored General Specification for.
MIL-W-45205	- Welding, Gas Metal-Arc and Gas Tungsten-Arc, Aluminum Alloys Readily Weldable for Structures, Excluding Armor.
MIL-C-46168	- Coating, Aliphatic Polyurethane, Chemical Agent Resistant.
MIL-H-46170	- Hydraulic Fluid, Rust Inhibited, Fire Resistant, Synthetic Hydrocarbon Base.
MIL-T-50036	- Talc, Technical, T1 and T3.
MIL-P-53022	- Primer, Epoxy Coating, Corrosion Inhibiting, Lead and Chromate Free.
MIL-P-53030	- Primer, Coating, Epoxy, Water Reducible, Lead and Chromate Free.
MIL-C-53039	- Coating, Aliphatic Polyurethane, Single Component, Chemical Agent Resistant.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

MIL-C-81309 - Corrosion Preventive Compound, Water Displacing, Untra-Thin Film.
MIL-C-81562 - Coatings, Cadmium, and Tin-Cadmium Zinc (mechanically deposited).
MIL-W-83420 - Wire Rope, Flexible, for Aircraft Control.
MIL-C-85054 - Corrosion Preventive Compound, Water Displacing, Clear (Amiguard).

STANDARDS
FEDERAL

FED-STD-595 - Color.
FED-STD-751 - Stitches, Seams, and Stitching.

MILITARY

MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-193 - Painting Procedures and Marking for Vehicles, Construction Equipment and Material Handling Equipment.
MIL-STD-417 - Classification System and Tests for Solid Elastomeric Materials.
MIL-STD-731 - Quality of Wood Members for Container and Pallets.
MIL-STD-1261 - Welding Procedures for Constructional Steels.
MIL-STD-2073-1 - DOD Material, Procedures for Development and Application of Packaging Requirements.
MIL-STD-45662 - Calibration Systems Requirements.
MS 3367 - Strap, Tiedown, Electrical Components, Adjustable, Self-Clinching, Plastic, Type I, Class 1.
MS 16842 - Clamp, Wire Rope, Saddled, Single Grip, Steel.
MS 16992 - Screw, Lag, Hexagon Head, Gimlet Point.
MS 20003 - Indicator, Card, Humidity, Three Spot, Impregnated Areas (Cobaltous Chloride).
MS 27183 - Washers, Flat-Round, Steel, Cadmium Plated, General Purpose.
MS 35206 - Screw, Machine, Pan-Head, Cross Recessed, Carbon Steel, Cadmium Plated, UNC-2A.
MS 35335 - Screw, Machine, Square Head, Cadmium or Zinc Plated, UNC-2A.
MS 35338 - Washer, Lock-Spring, Helical, Regular (Medium) Series.
MS 35691 - Nut, Plain, Hexagon, (Jam) UNC-2B and UNF-2B.
MS 49005 - Plugs, Pipe, Headless, Aluminum, Iron or Steel.
MS 51839 - Tube to Boss, 90°, O-Ring, Flareless Type, Hydraulic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

MS 51843	- Adapter, Straight, Tube to Boss, O-Ring, Flareless Type, Hydraulic.
MS 51922	- Nut, Self-Locking, Hexagon Prevaling Torque, General PUrpose, 250°F, UNC-2B and UNC-2F.
MS 51937	- Bolt, Eye and Shoulder.
MS 51967	- Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNC-2B.
MS 51968	- Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated UNF-2B.
MS 51975	- Screw, Shoulder-Socket Head, Hexagon, Alloy Steel, Cadmium, UNC-3A.
MS 90726	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Medium Carbon Steel, Cadmium Plated, UNF-2B.
MS 90728	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Alloy Steel, Grade 8, Cadmium Plated, UNC-2B.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS
ORDNANCE

9338559	- Crosswind Sensor.
12271350	- Hose Assembly.
12273123	- Fitting, Quick Disconnect.
12273961	- Accessory Assembly-Loader Weapon.
12274063	- Accessory Assembly-Coax Weapon.
12274537	- Screw, Cap, Hexagon, Metric.
12275001	- Hook.
12282500	- Crosswind Velocity Sensor.
12282741	- Bracket.
12285860	- Desiccant.
12287034	- Pin.
12287287	- Headlamp Assembly.

OTHER PUBLICATIONS
REGULATIONS

TM 9-2350-255-30	- Direct Support Maintenance Manual.
TM 9-2350-264-34	- Direct Support and General Support Maintenance Manual.
TM 9-6140-200-14	- Lead Acid Storage Batteries.
AR 755-15	- Disposal of Unwanted Radioactive Material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by the contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A36	- Structural Steel.
ASTM A108	- Steel Bars, Carbon, Cold-Finished, Standard Quality.
ASTM A322	- Steel Bars, Standard Grades.
ASTM A331	- Steel Bars, Alloy Cold-Finished.
ASTM A366	- Steel, Sheet, Carbon, Cold Rolled, Commercial Quality.
ASTM A501	- Hot Formed Welded and Seamless Carbon Steel Structural Tubing.
ASTM A512	- Cold Drawn Buttweld Carbon Steel Mechanical Tubing.
ASTM A513	- Electric-Resistance-Welded Carbon and Alloy Steel Mechanical Tubing.
ASTM A569	- Steel, Carbon (0.15 Maximum Percent), Hot-Rolled Sheet and Strip Commercial Quality.
ASTM A575	- Carbon Steel Bars, Carbon, Merchant Quality, M-Grades.
ASTM A576	- Steel Bars, Carbon, Hot Rolled, Special Quality.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA, 19103.)

OTHER PUBLICATIONS:

AMERICAN WELDING SOCIETY

AWS A5.1	- Carbon Steel Covered Arc Welding Electrodes, Specification for.

(Application for copies should be addressed to the American Welding Society, 2501 N.W. 7th Street, Miami, FL 33125.)

DEPARTMENT OF TRANSPORTATION

Hazardous Materials Regulations

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Department of Transportation, Hazardous Materials Regulations Board, Washington, D.C. 20590.)

INTERSTATE COMMERCE COMMISION

Motor Carrier Safety Regulations

(Application for copies should be addressed to the Interstate Commerce Commision, Bureau of Motor Carriers, Washington, D.C.)

ASSOCIATION OF AMERICAN RAILROADS PUBLICATION

Section No. 1	- General Rules Governing Loading of Commodities on Open Top Cars.
Section No. 6	- Rules Governing the Loading of Department of Defense Materiel on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 1920 L Street N.W., Washington, DC 20036.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. Requirements. Except as specified herein, requirements are applicable to all models for both level A and level B processing (see 3.7 and table 1 for level B).

3.1 First article. Unless otherwise specified, one of the first 10 production processed vehicles shall be subjected to first article inspection (see 4.4 and 6.1). A separate processed vehicle shall be subjected to first article inspection for each level of protection specified. First article inspection vehicles, properly marked with identifying information, shall be representative of vehicles to be furnished to the Government. All subsequent processed vehicles delivered to the Government shall conform to the respective sample in all pertinent physical and performance attributes. The Government representative shall select the vehicle(s) to be inspected.

3.1.1 Processing records. Records of vehicle processing shall be maintained and shall be readily available for review by the Government representative.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

3.1.2 Disassembly. Projecting parts whose removal will accomplish desired cube reduction and parts susceptible to damage or pilferage shall be removed from the vehicle. Except as otherwise specified herein, removed bolts, nuts, screws, pins, and washers shall be placed in one of the mating parts and secured. Removed parts shall be preserved, packaged, and packed in accordance with the individual document for the specific item or in accordance with applicable provisions of MIL-P-116 and MIL-STD-2073-1. Packed parts shall be identified as to contents and stowed securely within the vehicle.

3.1.3 Matchmarking. Parts removed from vehicle shall be matchmarked when necessary to facilitate reassembly. Matchmarking information shall be put on cloth shipping tags conforming to type A of UU-T-81 and attached to mating parts. The marked cloth shipping tags shall be waterproofed with varnish conforming to TT-V-121 or adhesive conforming to MMM-A-178.

3.1.4 Record forms. Two copies of DD Form 1397 shall be provided. Information on forms shall include preservation accomplished and depreservation instructions. The equipment log book binder and one copy of DD Form 1397 shall be placed in a bag conforming to type I, style 2, class B of MIL-B-117; bag shall be closed by heat sealing and securely attached inside the vehicle. The other copy of DD form 1397 shall be placed in a bag conforming to type I, style 2, class B of MIL-B-117; bag shall be closed by heat sealing, stapling or taping and secured to the 50 caliber equilibrator with 2 straps conforming to MS3367-3 or equivalent.

3.1.5 Recycled, virgin and reclaimed materials. There are no requirements for the exclusive use of virgin materials. The use of recycled or reclaimed (recovered) materials is acceptable provided that all other requirements of this specification are met (see 6.6.1).

3.2 Cleaning and drying.

3.2.1 Interior of vehicle. Interior of the vehicle shall be cleaned with a solution of detergent conforming to P-D-220, or type I of MIL-D-16791, and warm water. Water or other liquid under pressure, or steam cleaning shall not be used. Care shall be taken during cleaning to assure that no liquids enter instruments, connectors, or other components susceptible to damage.

3.2.2 Battery supports and retainers. Battery supports and retainers shall be cleaned with a solution of one-half pound of sodium bicarbonate conforming to O-S-576 per gallon of water. Cleaned surfaces shall be flushed with clean water, then thoroughly dried. Dried surfaces shall then be preserved in accordance with 3.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:24Z
Check the source to verify that this is the currentversion before use.

3.2.3 Backrests, seats, headrests, and crash pads. Cushion components shall be cleaned with a solution of detergent conforming to P-D-220 or type I of MIL-D-16791, in warm water. Cushions shall be wiped with solution-soaked cloths and then rinsed with clean water to remove detergent solution. Care shall be taken not to saturate the cushions with detergent solution or water. After rinsing, cushions shall be dried, then protected in accordance with 3.4.16.

3.2.4 Exterior of vehicle. Exterior of vehicle shall be cleaned using a solution of detergent conforming to P-D-220 type I of MIL-D-16791, in water or steam. Cleaning shall remove all foreign matter. Cleaned surfaces shall be rinsed with clean water or steam and thoroughly dried. Care shall be taken to avoid entry of water or steam into engine compartment, turret ring, commander's station, personnal heater exhaust tube, air cleaner ports, or other vehicle openings.

3.2.5 Gun. When inspection indicates the need for reprocessing of gun (see 4.6.2.3), gun shall be cleaned in accordance with process C-3 of MIL-P-116 and shall be thoroughly dried in accordance with procedure D-4 of MIL-P-116.

3.2.6 Fire control, periscopes and vision blocks. Optical items shall be cleaned in accordance with 3.3.9.

3.2.7 Crosswind sensor. The crosswind sensor shall be cleaned in accordance with 3.2.7.1, 3.2.7.2 and 3.2.7.3.

3.2.7.1 Crosswind sensor (Drawing 12282500).

a. Erect crosswind sensor.
b. Using a water source such as a hose or squeeze bottle, clean the air inlets of any dirt or contamination.
c. Stow the crosswind sensor in the stowage rack and secure with strap.
d. Cover the crosswind sensor mount with barrier material conforming to MIL-B-131, class II.
e. Secure the barrier material with tape conforming to MIL-T-22085, type II.

3.2.7.2 Crosswind sensor (Drawing 9338559-1).

a. Erect crosswind sensor.
b. Using a water source such as a hose or squeeze bottle, clean the air inlets of any dirt or contamination.
c. Stow the crosswind sensor in the stowage rack and secure with strap.
d. Cover the crosswind sensor mount with barrier material conforming to MIL-B-131, class I.
e. Secure the barrier material with tape conforming to MIL-T-22085, type II.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

3.2.7.3 Crosswind sensor (Drawing 9338559-2).

a. Erect crosswind sensor.
b. Using a water source such as a hose or squeeze bottle, clean the air inlets of any dirt or contamination by spraying from the top at a downward angle of approximately 45 degrees.
c. Stow the crosswind sensor in the stowage rack and secure with strap.
d. Cover the crosswind sensor mount with barrier material conforming to MIL-B-131, Class I.
e. Secure the barrier material with tape conforming to MIL-T-22085, Type II.

3.3 Preservation.

3.3.1 Relubrication. When vehicle has been operated more then 50 miles since lubrication, or after vehicle has been cleaned in accordance with 3.2, the vehicle shall be relubricated using materials conforming to drawings, specifications, or lubrication order applicable to the vehicle. All exposed oil can points, such as, but not limited to, levers, locking, bars, strikers, hinges, hinge pins, locking pins, pintle pins, locking levers, wing nuts, latches, door locks, hand-operated locking knobs, linkage, and threaded ends of yokes and related clevis pins, shall be lubricated with oil conforming to VV-L-800. Excess lubricant shall be removed after lubrication.

3.3.2 Battery supports and retainers. Battery supports and retainers shall be preserved with compound conforming to MIL-C-450.

3.3.3 Transmission. Transmission shall contain lubricating oil conforming to MIL-L-21260, grade 10, filled to operating level. DD Form 1397 shall be annotated to indicate type and grade of lubricant applied.

3.3.4 Final drives. Final drives shall contain lubricating oil conforming to MIL-L-21260, grade 10, filled to operating level. DD Form 1397 shall be annotated to indicate type and grade of lubricant applied.

3.3.5 Engine preservation. The gas turbine engine shall be preserved in accordance with 3.3.5.1.

3.3.5.1 Engine fuel and oil system.

3.3.5.1.1 Personnel heater and fuel pump. Disconnect heater fuel line at elbow MS51839-3SS on input side or heater fuel pump. Attach drain hose to elbow and place the other end of the hose in a drain pan. Drain residual fuel from fuel pump, fuel lines and personnel heater into drain pan. Reconnect heater fuel lines. Disconnect heater fuel line at elbow MS51839-3SS on output side of heater fuel pump. Attach supply hose from preservative oil tank containing preservative oil conforming to MIL-L-21260, type I, grade 10, to elbow. Turn on preservative oil tank supply pump (5 psi) and pump approximately one quart of preservative oil through the heater fuel pump into the front fuel tank. Disconnect preservative oil tank supply hose and reconnect heater fuel line to elbow.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

WARNING: Dry Cleaning Solvent P-D-680 is toxic and flammable. To avoid injury, wear protective goggles and gloves and use in a well-ventilated area. Avoid contact with skin, eyes, and clothes, and do not breathe vapors. Do not use near open fire or excessive heat. The flash point for type I Dry Cleaning Solvent is 100°F (38°C), and for type II is 138°F (50°C). If you become dizzy while using Dry Cleaning Solvent, get fresh air immediately and get medical aid. If contact with eyes is made, wash your eyes with water and get medical aid immediately.

3.3.5.1.2 Oil system. Loosen cables and hoses on top of engine oil tank by loosening and/or removing cable tie wraps and brackets. Clean the top of the oil tank with dry cleaning solvent conforming to P-D-680. Remove the main fuel line between the quick disconnect and the in-line filter. Remove the oil level sensor from the oil tank and, using a hand driven dispensing pump inserted through the sensor opening, empty the oil tank and discard the oil.

CAUTION: Ensure that hand pump suction pipe does not damage bottom of oil tank.

Approximately 16 quarts of oil shall be removed if tank was serviced full. Fill oil tank to operational level with corrosion preventive oil conforming to MIL-C-8188 and reinstall oil level sensor and main fuel line. Run engine at low idle for 20 minutes. Low oil level light may illuminate but may be disregarded. Shut engine down. Remove main fuel line and oil level sensor from oil tank, and using the hand driven dispensing pump, empty oil tank and discard oil. Reinstall oil level sensor and main fuel line.

3.3.5.2 Oil tank. After fuel system preservation, fill oil tank to operational level with new normal seasonal operational lubricating oil as specified in lubrication order.

3.3.5.3 Fuel system.

3.3.5.3.1 Fuel pumps and fuel tanks. Each fuel tank shall be drained to the maximum extent possible. Fuel tank caps and filter screens shall be removed and coated on metallic surfaces with preservative oil conforming to type I, grade 10, of MIL-L-21260. One half of a 55 gallon drum of preservative oil conforming to type I, grade 10, of MIL-L-21260 shall be added to each front fuel tank. Tank filler screens and caps shall be reinstalled. Ensure master power is on. Set the fuel tank selector switch in driver's compartment to the right front tank. Open back flush port on fuel pump manifold to bleed air from fuel lines. Close backflush port when preservative oil appears.

NOTE: Any oil spilled from back flush port onto hull floor shall be cleaned up using dry rags and dry cleaning solvent conforming to P-D-680.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:24Z
Check the source to verify that this is the currentversion before use.

Continue pumping until right front tank is dry. Switch fuel tank selector switch to left front tank and repeat the draining procedure. When all the preservative oil has been pumped to the rear tanks, disconnect the main fuel line quick disconnect fitting and open the bleeder valves on the fuel/water separator. Disconnect smoke generator fuel line at adapter MS51843-6SS on input side of smoke generator fuel pump. Drain any residual fuel from pump and lines and reconnect fuel line. Disconnect the quick disconnect fitting on the output side of the smoke generator fuel pump and attach a drain hose to male end 12273123-2. Place the other end of the hose in a drain pan. Open drain valves on fuel/water separator and primary fuel filter housing and drain any residual fuel. Remove covers from fuel/water separator and primary fuel filter housing. Set filters aside for possible reuse. Fog and/or wipe interior of primary fuel filter housing and fuel/water separator housing with preservative oil conforming to MIL-L-21260, type I, grade 10. Replace covers on primary fuel filter and fuel/water separator. Turn on smoke generator switch and run engine through a "false start" cycle for approximately 5 seconds to introduce preservative oil into rear pumps. Close bleeder valves and drain rear tanks to the maximum extent possible. Remove covers from primary fuel filter and fuel/water separator and drain any residual preservative oil. If previously removed filters from fuel/water separator and primary fuel filter are not contaminated, reinstall them; otherwise, install new filters and, using new gaskets, replace covers on primary fuel filter and fuel/water separator. Remove drain hose from smoke generator and reconnect quick disconnect fitting.

3.3.5.3.2 Electromechanical fuel unit (EMFU). Disconnect electrical connector from EMFU. Remove engine in-line filter housing and dump fuel. Discard filter element and reinstall housing without element. Disconnect main fuel line at EMFU outlet port (to fuel nozzle). Attach hose to outlet port and place other end of hose in drain pan. Connect supply hose from preservative oil tank containing preservative oil conforming to MIL-L-6081, Grade 1010, to quick disconnect (reference 3.3.5.1.2) on main fuel supply line to in-line filter. Turn on preservative oil tank pressure supply pump (5 psi). With "starter only" switch, motor engine and observe fluid from hose attached to EMFU outlet port. Continue motoring engine until preservative oil replaces fuel from EMFU (approximately 2 quarts shall be pumped into drain pan).

CAUTION: Do not motor engine for more than 1 minute. Allow starter to cool down for 2 minutes between motoring intervals.

Remove drain hose. Remove and rinse fuel nozzle thoroughly in a container of dry-cleaning solvent conforming to P-D-680. Allow the nozzle to soak in the container for 30 minutes while agitating the nozzle every 5 minutes. Shake the nozzle dry and reinstall. Connect fuel line from EMFU to fuel nozzle. Spray inside of electrical connector with corrosion preventive compound conforming to MIL-C-81309, type III, class 2 and connect to EMFU. Spray outside of connector with corrosion preventive compound conforming to MIL-C-85054, type I. Disconnect preservative oil tank supply hose from in-line filter and reconnect main fuel supply hose at quick-disconnect.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.5.4 Batteries and circuit breakers. Disconnect batteries and open all engine related breakers.

3.3.5.5 Engine air-intake preservation. Remove precleaner and engine air filter "Vee" packs (3 each) from plenum. Using dry cleaning solvent conforming to P-D-680, clean all accessible areas of plenum. Inspect all accessible areas of plenum and reclean if required, using a cloth saturated with solvent conforming to P-D-680. Place "Vee" packs back in plenum but do not lock in place. Slide "Vee" packs toward rear of hull so that there is a gap of approximately one half inch between front edge of "Vee" packs and plenum bulkhead. Slide one sheet of barrier material conforming to MIL-B-131, class 3, approximate size 19 X 26 inches, between "Vee" packs and plenum bulkhead. Secure barrier material in place with air cleaner pack clamps. Loosely secure barrier material conforming to MIL-B-131, Class 3, approximate size 45 X 29 inches, to the bottom of the precleaner with tape conforming to type II of MIL-T-22085 and reinstall the precleaner on the plenum.

NOTE: Care should be taken during reinstallation of precleaner to avoid tearing or puncturing the barrier material.

Secure barrier material conforming to MIL-B-131, class 3 (approximately 48 by 28 inches) to the top of the precleaner with tape conforming to MIL-T-22085, type II.

3.3.5.6 Engine exhaust preservation. Open exhaust door and cut barrier paper conforming to MIL-B-131, class 3 to approximate size 30 by 38 inches, and secure over exhaust opening with tape conforming to type II of MIL-T-22085. Close and secure exhaust doors.

3.3.5.7 Engine preservation warning tag. After engine has been preserved in accordance with 3.3.5.1 through 3.3.5.6, prepare a red tag conforming to UU-T-81 imprinted with the following warning:

WARNING

ENGINE PRESERVED-BEFORE MOTORING OR OPERATING ENGINE, ALL TAPE AND BARRIER MATERIAL INSTALLED DURING PRESERVATION MUST BE REMOVED. OIL TANK IS FILLED WITH OPERATIONAL LUBRICANT, HOWEVER, FUEL SYSTEM MUST BE DEPRESERVED. IF ENGINE IS MOTORED OR OPERATED AND IS NOT BEING RETURNED TO SERVICE, PRESERVATION MUST BE REACCOMPLISHED PER 3.3.5.1 THROUGH 3.3.5.6.

Secure red tag to operators T-bar throttle grip and annotate DD Form 1397 to show date of engine preservation.

3.3.6 Turret ring bearing. Lubrication of turret ring bearing for production processed vehicles shall be in accordance with specified manufacturing requirements. for other than new production vehicles, lubricate race ring bearing in accordance with recommended semiannaul maintenance procedures.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.7 Gun tube installed in mount.

3.3.7.1 105MM gun. Immediately after cleaning (see 3.2.6), bore and chamber of the gun shall be coated with preservative oil conforming to VV-L-800. Excess preservative shall be allowed to drain from coated surfaces. A strip of VCI treated barrier material conforming to type I, class 3, style G of MIL-P-3420 shall be cut and rolled into a tube with the VCI treated surface on the outside. The barrier material shall be of a size that will provide a continuous cover for the bore and chamber surfaces. The rolled barrier material tube shall be inserted into the gun extending the entire length of bore and chamber. Tube shall not be forced or kinked in a manner that would obstruct chamber. The gun shall remain in battery with turret travel lock secured in lock position. VCI material shall be applied in accordance with MIL-I-8574.

3.3.7.1.1 Muzzle plug (105MM). A plug shall be provided for the muzzle end of the gun cannon (see figure B2). The muzzle plug shall be completely overwrapped with aluminum foil conforming to QQ-A-1876, positioned in muzzle end and secured in place with tape conforming to type II of MIL-T-22085. The joint around muzzle plug and gun shall be completely sealed with tape conforming to type II of MIL-T-22085.

3.3.7.2 120MM gun. Immediately after cleaning (see 3.2.6), bore and chamber of the gun shall be coated with preservative oil conforming to VV-L-800. Excess preservative shall be allowed to drain from coated surfaces.

CAUTION: Ensure no preservative oil comes in contact with bore evacuator.

A strip of VCI treated barrier material conforming to type I, class 3, style G of MIL-P-3420 shall be cut and rolled into a tube with the VCI treated surface on the outside. The barrier material shall be a size that will provide a continuous cover for the bore and chamber surfaces. The rolled barrier material tube shall be inserted into the gun extending the entire length of the bore and chamber. Tube shall not be forced or kinked in a manner that would obstruct chamber. The gun shall remain in the battery with turret travel lock secured in locked position. VCI material shall be applied in accordance with MIL-I-8574.

3.3.7.2.1 Muzzle plug (120MM). A plug shall be provided for the muzzle end of the gun cannon (see figure H12). The muzzle plug shall be completely over wrapped with aluminum foil conforming to QQ-A-1876, positioned in muzzle end and secured in place with tape conforming to type II of MIL-T-22085. The joint around the muzzle plug and gun shall be completely sealed with tape conforming to type II of MIL-T-22085.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.7.3 Muzzle reference collimator. Exposed optical surfaces of the muzzle reference collimator (MRC), shall be cleaned and wrapped as described in 3.3.9.3. Cushioning material approximately 12 by 24 inches conforming to PPP-C-1752 or PPP-C-1797 shall be applied over the processed collimator housing, and the cushioning material shall be completely overwrapped and secured to the gun tube with four-inch wide tape conforming to type II of MIL-T-22085.

WARNING: Internal components of the muzzle reference sight are slightly radioactive. Fragments of this material constitute a health hazard if swallowed, inhaled, or are allowed to enter the bloodstream through an open wound. If a broken sight is encountered, or if one is accidentally broken during preservation processing activities, notify responsible personnel for the disposal of broken parts in accordance with provisions of AR 755-15.

3.3.7.4 Breech mechanism.

3.3.7.4.1 105MM gun. All unpainted surfaces, including phosphated surfaces of the breech block, breech operating mechanism and firing mechanism, shall be coated with grease conforming to MIL-G-10924. A plug shall be provided for the breech (see figure B2). Plug shall be completely overwrapped with aluminum foil conforming to QQ-A-1876. Breech shall be opened and breech plug positioned in the gun chamber. Breech shall be closed.

3.3.7.4.2 120MM gun. All unpainted surfaces, including phosphated surfaces of the breech block, breech operating mechanism and firing mechanism, shall be coated with grease conforming to MIL-G-10924. A plug shall be provided for the breech (see figure H11). Plug shall be completely overwrapped with aluminum foil conforming to QQ-A-1876. Breech shall be opened and breech plug positioned in the gun chamber. Breech shall be closed.

3.3.7.5 Exercising of recoil mechanism. Unless otherwise specified (see 6.1), when the recoil mechanism has not been exercised, proof fired, overhauled, or manufactured within 6 months prior to preparaion for storage or shipment, or if the 6 month time limit should expire while the vehicle is in transit, the recoil mechanism shall be exercised a minimum of three extensions of the recoil piston. Extension shall be a minimum of 6 inches. Record of exercising shall be entered on DA Form 2408-4, "Weapons Record Data," and proof testing of the weapon shall be entered on DA Form 2408-9 "Equipment Control Record".

3.3.7.6 Recoil mechanism (after exercising). Inaccessible machined surfaces shall be fogged with preservative oil conforming to VV-L-800. Processing shall be accomplished by removing cover of the gun shield. The surface of the recoil mechanism immediately forward of the breech ring collar shall be coated with grease conforming to MIL-G-10924. Application of grease shall be made while gun cannon is out of battery during excercising and upon last extension prior to return to battery.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

WARNING: Fire resistant synthetic hydrocarbon (FRSH) hydraulic fluid may contain tricresyl phosphate in accordance with MIL-H-46170 which, if taken internally, can produce paralysis. Hydraulic fluid may be absorbed through the skin. Wear long sleeves, gloves, goggles, and faceshield. If FRSH gets in eyes, wash them immediately and get medical aid immediately. If FRSH gets on skin, thoroughly wash with soap and water. Wash hands thoroughly prior to eating or smoking. Application of these measures is considered an effective control of the hazard.

3.3.7.7 Replenisher. Replenisher shall be filled to operating level with hydraulic fluid conforming to MIL-H-46170.

3.3.7.8 Gun mount. The exposed unpainted surfaces of elevating cylinder, trunnions, trunnion caps and bearings shall be coated with grease conforming to MIL-G-10924.

3.3.7.9 Gun and turret travel locks. The gun travel lock located on the turret ceiling shall be secured to the gun breech to anchor the gun tube in zero elevation during vehicle transit. With the gun tube centered over the vehicle rear deck, the internal turret lock shall be engaged in the locked position to prevent turret rotation.

3.3.8 Gun tube removed from mount.

3.3.8.1 105MM gun. Unless otherwise specified by the contracting officer (see 6.1), the gun tube of the tank to be shipped overseas shall be removed from turret (see 6.4) and stowed on top of the vehicle turret in accordance with figures E1 through E31. Extreme care shall be exercised to prevent damage to threaded portion of gun tube during the following operations.

3.3.8.2 120MM gun. Unless otherwise specified by the contracting officer (see 6.1), the gun tube of the tank to be shipped overseas shall be removed from turret (see 6.5) and stowed on top of the vehicle turret in accordance with figures G1 through G31. Extreme care shall be exercised to prevent damage to threaded portion of gun tube during the following operations.

3.3.8.3 Gun tube.

3.3.8.3.1 105MM gun. Gun tube shall be processed in accordance with 3.2.5, 3.3.7, and as specified herein. Bare metal surfaces of breech end of tube, including threaded area, shall be wrapped with treated barrier material conforming to type I, class 1, style C of MIL-P-3420. VCI material shall be applied in accordance with MIL-I-8574. Treated side of barrier shall be applied against the bare metal surface and shall provide a continuous cover starting from 2 inches on the painted surface and extending to approximately 6 inches beyond breech end of tube. Barrier material shall overlap approximately 3 inches over entire length, and shall completely cover breech plug when folded toward tube center. Barrier material shall be secured in place with tape conforming to type II of MIL-T-22085. Tape and barrier shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

then be oversprayed with coating compound to type II, class 1,of MIL-C-16555. Coating shall be a minimum thickness of .040 inch when measured after 4 hours drying (see 4.6.2.5). Specified thickness shall be applied over the entire covered area and extend not less than 2 inches onto the painted surface of the tube. Threaded portion of the tube and area of the tube recoil surface which will contact the turret mount shall be protected by application of two layers of barrier material conforming to type I, grade C, of MIL-B-121. Barrier over the threaded portion of the tube shall be secured in place with tape conforming to type II of MIL-T-22085. Removed gun tube locking pin and set screw shall be coated with oil conforming to VV-L-800, wrapped in barrier conforming to type II, grade A, class 2, of MIL-B-121 and placed in a 4 by 8 inch bag conforming to style 2, type I, class B (4 mil), of MIL-B-117. Bag shall be identified as to contents, heat-sealed, and secured in oddment tray with tape conforming to type II of MIL-T-22085.

3.3.8.3.2 120MM gun. Gun tube shall be processed in accordance with 3.2.5, 3.3.7, and as specified herein. Bare metal surfaces of breech end of tube, including threaded area, shall be wrapped with treated barrier material conforming to type I, class 1, style C of MIL-P-3420. VCI material shall be applied in accordance with MIL-I-8574. Treated side of barrier shall be applied against bare metal surface and shall provide a continuous cover starting from 2 inches on the painted surface and extending to approximately 6 inches beyond breech end of tube. Barrier material shall overlap approximately 3 inches over entire length, and shall completely cover breech plug when folded toward tube center. Barrier material shall be secured in place with tape conforming to type II of MIL-T-22085. Tape and barrier shall then be oversprayed with coating compound conforming to type II, class 1, of MIL-C-16555. Coating shall be a minimum thickness of 0.040 inch when measured after 4 hours drying (see 4.6.2.5). Specified thickness shall be applied over the entire covered area and extend not less than 2 inches onto the painted surface of the tube. Threaded portion of the tube and area of the tube recoil surface which will contact the turret mount shall be protected by application of two layers of barrier material conforming to type I, grade C, of MIL-B-121. Barrier over the threaded portion of the tube shall be secured in place with tape conforming to type II of MIL-T-22085. Remove gun tube locking pin, locking screw and key shall be coated with oil conforming to VV-L-800, wrapped in greaseproof wrap conforming to type II, grade A, class 2, of MIL-B-121 and heat sealed in 8 by 8 inch bag conforming to style 2, type I, class B (4 mil), of MIL-B-117. Bag shall be identified as to contents, and secured in oddment tray with tape conforming to type II of MIL-T-22085.

3.3.8.4 Gun mount - after removal of gun tube.

3.3.8.4.1 105MM gun. The gun mount shall be placed in full elevation. All bare metal surfaces exposed by removal of the gun tube shall be cleaned in accordance with process C-3 and dried in accordance with process D-4 of MIL-P-116. The above surfaces shall then be coated with grease conforming to MIL-G-10924. Opening in the gun shield shall be sealed with barrier material conforming to Type I, Grade C of MIL-B-121. A plug conforming to figure E25 shall be inserted into opening of the mantlet cover and secured in position using tape conforming to MIL-T-22085 in accordance with figure E26.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.8.4.2 120MM gun. The gun mount shall be placed in full elevation. All bare metal surfaces exposed by removal of the gun tube shall be cleaned in accordance with process C-3 and dried in accordance with process D-4 of MIL-P-116. The above surfaces shall then be coated with grease conforming to MIL-G-10924. Opening in the gun shield shall be sealed with barrier material conforming to Type I, Grade C of MIL-B-121. A plug conforming to figure G25 shall be inserted into opening of the mantlet cover and secured in position using tape conforming to Type II of MIL-T-22085 in accordance with figure G26.

3.3.8.5 Breech mechanism after removal of gun tube. The breech mechanism shall be processed in accordance with 3.3.7.4.1 for the 105MM gun and 3.3.7.4.2 for the 120MM gun.

3.3.8.6 Reinstallation of gun tube in mount. Prior to reinstallation of gun tube, bare metal surfaces of gun tube and mount shall be cleaned in accordance with process C-3, and dried in accordance with process D-4 of MIL-P-116. The surfaces shall be lightly lubricated with MIL-G-10924 grease. The gun tube shall then be reinstalled (see 6.4 for 105MM gun and 6.5 for 120MM gun).

3.3.9 Fire control, periscopes and optical items. Exposed optical glass surfaces shall be cleaned by blowing air on the surfaces with a hand syringe or by brushing the surfaces with a clean camel's hair brush followed by the use of ethyl alcohol conforming to O-E-760. The surfaces to be cleaned are located as follows:

A. Interior Surfaces

1. Gunner's primary sight extension
2. Gunner's primary sight
3. Commander's weapon sight
4. Gunner's auxiliary sight
5. Commander's vision blocks
6. Gunner's vision blocks

B. Exterior Surfaces

1. Commander's vision blocks
2. Commander's weapon sight windows
3. Driver's hatch windows
4. Loader's hatch windows
5. Gunner's primary sight
6. Muzzle reference collimator

If surface contamination cannot be removed by using ethyl alcohol, cleaning shall be accomplished by use of a solution consisting of 2 ounces detergent conforming to MIL-D-16791, mixed with 1/2 gallon ethyl alcohol conforming to O-E-760, and 1 gallon of distilled water. Using a swab made of lens tissue conforming to NNN-P-40, wash the optical glass surfaces with the cleaning agent described above. Washing shall be repeated, using a clean swab each time, until the surfaces are free of dirt, grime or foreign materials.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

Cleaning shall be accomplished with a minimum of pressure and rubbing, without the use of cloth or rubbing materials, to prevent damage to lens coatings. Immediately after cleaning, the interior optics shall be covered or wrapped with lens tissue conforming to NNN-P-40, and secured with tape conforming to type II of MIL-T-22085. Headrests of the commander's weapon sight, gunner's primary sight extension, gunner's primary sight and gunner's auxiliary sight shall be completely wrapped with paper conforming to MIL-P-17667, and the paper secured with tape conforming to type II of MIL-T-22085. The exterior optics shall be covered or wrapped with lens tissue conforming to NNN-P-40, cushioned with chipboard conforming to UU-C-282 and secured with tape conforming to type II of MIL-T-22085. Surfaces to which tape is applied shall be clean and dry to assure effective tape adhesion. All exposed, unpainted, unplated, metal surfaces shall be coated with grease conforming to MIL-G-10924. Gunner's primary sight exterior ballistics doors shall be closed and locked from the inside. The coaxial maching gun and gunner's telescope openings shall be closed and plugged in accordance with figures B20 through B22 (B21 used only on M1). Plugs shall be provided for commander's weapon station in accordance with figures B20 through B22. Purging to be in accordance with 3.3.9.2 and 3.3.9.3.

WARNING: The antireflective coating on the outside right window of the gunner's thermal sight head is slightly radioactive. Fragments of this material constitute a health hazard if swallowed, inhaled, or are allowed to enter the bloodstream through an open wound. If a broken window is encountered, or if one is accidentally broken during processing activities, notify responsible personnel for disposal of broken parts in accordance with provisions of AR 755-15.

3.3.9.1 Radioactive substance warning tag. Attach to the gunner's thermal sight a red tag conforming to UU-T-81 imprinted with the following message:

WARNING

The antireflective coating on the outside right window of the gunner's thermal sight head, and the internal components of the muzzle reference sight, are slightly radioactive. Fragments of these coatings and components constitute a health hazard if swallowed, inhaled, or are allowed to enter the bloodstream through an open wound. If broken periscope windows or muzzle reference sight are encountered, or are accidently broken during vehicle deprocessing activities, notify responsible personnel for disposal of broken parts in accordance with provisions of AR 755-15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.3.9.2 Purging of the gunner's primary sight, laser range finder, image control unit, thermal receiver unit, and gunner's primary sight extension. Fire control items on hand for more than 180 days from the date of receipt at vehicle manufacturer or which disclose internal moisture at time or preparation for shipment and storage shall be purged as follows: remove dust cover from purge port. Attach dry nitrogen purge kit to purge port and allow nitrogen to flow at 5 to 6 psi through the fire control item for 20 to 30 minutes.

CAUTION: Check to ensure exhaust port is venting.

Disconnect purge kit and replace dust cover. After purging, process fire control item in accordance with 3.3.9.

3.3.9.3 Purging of muzzle reference collimator (MRC). Collimators which disclose internal moisture (desiccant turned pink) shall be purged as follows: Remove both plugs and the desiccant tube from the MRC. Reattach one plug and the purging adapter to the MRC and allow dry nitrogen to flow at 4 to 6 psi for 4 minutes. Disconnect purge inlet adapter and install new desiccant tube. Reinstall the remaining plug. After purging, process MRC in accordance with 3.3.7.3.

3.3.10 Ballistics computer. Computer Control Panel and Computer Electronic Unit (CEU) covers shall be closed. Test connector dust cap must be in place. When the main vehicle battery is removed for a period longer than 30 days, the CEU battery pack is to be removed and stored. Inspect and reform aluminum electrolytic capacitors every 4 years.

3.3.11 Radio antennae and mounts. If installed, the radio antennae shall be removed from the vehicle, packaged and packed in accordance with 3.4.3. Antenna mounts shall be covered with barrier paper conforming to MIL-B-131, class 1, and the paper secured with tape conforming to type II of MIL-T-22085.

3.3.12 Turret hydraulics. Relieve hydraulic pressure in the turret by opening and closing the turret ammo doors with the engine and auxiliary hydraulic pumps turned off.

3.3.13 Driver night viewer equipment. If installed, the driver's night vision viewer shall be removed from the vehicle. Exposed optical surfaces of the night viewer shall be cleaned in accordance with instructions specified in 3.3.9. Exposed, unpainted, unplated metal surfaces shall be cleaned and coated with grease conforming to MIL-G-10924. Preserved parts shall be packaged in accordance with 3.4.4.

3.3.14 Ventilation. The driver's and engine compartment drain valves shall be secured in open position. Unpainted metal surfaces shall be coated with preservative conforming to MIL-C-16173, grade 1. Screen conforming to figures B1 and B3 through B15 shall be constructed and installed in drain

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

valve openings and driver's center and loader's periscope openings as specified. Prepare a red tag conforming to UU-T-81 imprinted with the following: "REMOVE SCREENS AND CLOSE DRAINS BEFORE OPERATING VEHICLE." Secure the red tag in a conspicuous location in the driver's compartment.

3.3.14.1 Turret and hull ammo doors. Secure turret ammo doors open using attached pins. Block hull ammo doors open with group II or III of MIL-STD-731 wood, covered with type II, grade A, class 2 of MIL-B-121 barrier of the appropriate size.

3.3.15 Fire extinguishers. Fire extinguisher cylinders shall be charged within the requirements as stated on the caution decal affixed to the bottle.

3.3.16 Loader's maching gun mount. Loader's machine gun mount shall be removed from the vehicle. Exposed, unpainted, unplated metal surfaces shall be cleaned and coated with grease conforming to MIL-G-10924. Machine gun mount shall be packaged in accordance with 3.4.10.

3.3.17 Driver's periscope washer reservoir. Remove and empty washer reservoir. Operate foot pump until supply line is empty. Reinstall reservoir in vehicle.

3.3.18 Miscellaneous preservation. Except as otherwise specified herein, all exposed, unpainted, metal surfaces on the exterior of the vehicle, except the track, shall be coated with compound conforming to grade 1 of MIL-C-16173. all exposed, unpainted, unplated ferrous metal surfaces on the interior of the vehicle shall be coated with compound conforming to grade 4 of MIL-C-16173.

3.3.19 Hatches. Rubber seals around hatches and the four ballistic covers for the fuel filler caps shall be coated with powdered talc conforming to MIL-T-50036. During shipment, hatches shall be closed and locked from the inside, except loader's hatch. The loader's hatch shall be closed and secured from the outside with a bolt having a nut drawn up tight and tack welded to the bolt, or with nut drawn up tight and the bolt peened over or with an approved Government padlock.

3.4 Packaging.

3.4.1 Dry charged batteries and cables. Dry charged batteries shall be installed in the vehicle battery carrier. Filler cap openings shall be sealed by placing a 2 inch wide by 3-mil thick strip of film conforming to type II of MIL-F-22191 over all filler cap openings with caps removed. The film shall be of sufficient length to allow the film to be depressed into the filler cap opening to the same depth as the filler cap. Filler caps shall be screwed into the filler openings to form a complete seal without damaging plastic film. Battery cables shall be secured to battery carrier with 3/4-inch wide tape conforming to type IV of PPP-T-97.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.2 Electrolyte. Electrolyte shall be packaged, packed, and marked as specified for one gallon (or smaller as applicable) containers as specified for sulfuric acid conforming to class 2,3,or 4 of O-S-801, except that the exterior containers shall conform to PPP-B-601 or PPP-B-621. The packed electrolyte shall be stowed with the basic issue items (BII) and secured independently to permit separate removal.

3.4.3 Radio antennae. Radio antennae shall be packaged in accordance with level A requirements of MIL-STD-2073-1, identified as to content, and securely stowed within the vehicle.

3.4.4 Driver's night vision viewer. The driver;s night vision viewer shall be packaged in accordance with level A requirements of MIL-STD-2073-1, identified as to content, and securely stowed within the vehicle.

3.4.5 Fire extinguishers. Exterior fire extinguisher handle shall be completely sealed with tape conforming to type II of MIL-T-22085. A red warning tag conforming to UU-T-81 containing the following information shall be located in a conspicuous location within the driver's compartment: "EXTERIOR FIRE EXTINGUISHER HANDLE SEALED WITH TAPE - REMOVE TAPE BEFORE STARTING ENGINE OR PLACING VEHICLE IN SERVICE."

3.4.6 Tow hooks. Tow hooks and related hardware shall be removed for shipment and packaged in a type CF, class WR box conforming to PPP-B-636. Box shall be closed with tape conforming to type II of MIL-T-22085, identified as to contents, and securely stowed within the vehicle.

3.4.7 Commander's weapon cradle assembly. Secure loose chains to gun mount assembly and cover pin with tape conforming to type II of MIL-T-22085.

3.4.8 Grenade launcher cables. Secure right and left grenade launcher cables to their respective mounting brackets with tape conforming to type II of MIL-T-22085.

3.4.9 Loader's machine gun mount. Immediately after preservation (see 3.3.16) the loader's machine gun mount shall be packaged in accordance with Level A requirements of MIL-STD-2073-1, identified as to contents and securely stowed within the vehicle.

3.4.10 Accessory assemblies, M240 machine guns. Accessory assemblies 12273961 and 12274063 shall be packaged in accordance with level A requirements of MIL-STD-2073-1, identified as to contents and securely stowed within the vehicle.

3.4.11 Headlamp assemblies. The two headlamp assemblies 12287287 shall be removed for shipment and packaged in accordance with level A requirements of MIL-STD-2073-1, identified as to contents, and securely stowed within the vehicle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.4.12 Cargo straps and fender boxes. Fabric retaining straps on exterior cargo racks shall be removed, identified with the Army part numbers, packaged in a plastic bag conforming to type II, class B, style 2 of MIL-B-117 and securely stowed within the vehicle. Cargo rack and fender box covers shall be closed and the handles latched and secured with suitable gage wire conforming to QQ-W-461.

3.4.13 Basic issue items (BII). The BII shall be packaged, packed, and stowed in accordance with MIL-P-12841 or other documents designated by the responsible agency. Sensitive cargo, such as machine guns, shall be stowed and shipped as specified in 3.6. BII rails shall be assembled in accordance with figures C2 through C15. Remove one hook-12275001, one screw-MS 90728-58 and three screws-MS 90728-109 (location identified on sheet 2 of figure C1). Wrap each part number set seperately in wrapping material conforming to type II, class 1 of MIL-P-17667 and place parts in a bag conforming to style 2, type I, class B (4 mil) of MIL-B-117. Place in a box conforming to PPP-B-636 and close, identify and stow securely within the vehicle. Install BII rails as indicated on sheet 2 of figure C1 using hardware C16 through C19 identified on sheet 1 of figure C1. Tags or stencils that contain the following instructions shall be applied to all boxes containing BII. "WHEN VEHICLES ARE PLACED IN OUTSIDE STORAGE, REMOVE BII BOXES, IDENTIFY WITH VEHICLE SERIAL NUMBER, AND STORE INSIDE OF BUILDING."

3.4.14 Radio cables. Route cables out under front edge of radio mounting bracket. Coil cables and secure on top of radio mounting bracket with tape conforming to type II of MIL-T-22085. Do not route antenna cable under mounting bracket. Route antenna cable along left side of radio mounting bracket and secure with tape conforming to type II of MIL-T-22085.

3.4.15 Driver's and loader's seats. Cushioned components of the driver's and loader's seats shall be covered with paper conforming to grade B of UU-P-268 with a minimum basis weight of 60 pounds. The loader's seat back shall be folded down on the seat botton. The assembly shall then be wrapped in specified paper.

3.4.16 Gunner's primary sight ballistic doors. Ballistic doors of the gunner;s primary sight shall be sealed with tape conforming to type II of MIL-T-22085.

3.5 Vehicle closure.

3.5.1 Closure kit. Unless otherwise specified (see 6.1 and 3.7.8), each processed vehicle shall be provided with a vehicle protective closure. Details of closure kit are provided in figures D1 through D139.

3.5.2 Closure marking. The information "TO PREPARE VEHICLE FOR LOADING: OPEN ZIPPERS, REMOVE STIFFENER RODS NEAR COVER ENDS, UNFASTEN COVER FROM FRAME ENDS, AND ROLL COVER AWAY FROM FRONT AND REAR FRAME BOWS TO EXPOSE VEHICLE LIFTING EYES. AFTER LOADING, RESTORE AND SECURE COVER TO ORIGINAL CONDITION" shall be stenciled on the exterior front and rear of the closure in characters a minimum 3/4 inches high using white enamel conforming to TT-E-529.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:24Z
Check the source to verify that this is the currentversion before use.

3.5.3 Closure disposition marking. The following information shall be stenciled on the outside, front and rear of the cover: "REUSABLE CLOSURE (COVER AND FRAMEWORK) -DO NOT DESTROY - WHEN REMOVED AND NO LONGER REQUIRED FOR VEHICLE PROTECTION, DISASSEMBLE, PACKAGE, AND SHIP PER INSTRUCTIONS ON INSIDE OF COVER." The following information shall be stenciled on the inside, front and rear, of the cover:

CLOSURE PACKAGING AND SHIPPING INSTRUCTIONS:

1. DISASSEMBLE FRAMEWORK AND SECURELY BUNDLE LIKE ITEMS.
2. PACKAGE SMALL HARDWARE IN CLOTH BAGS.
3. GROUP LARGEST, HEAVIEST ITEMS ON BOTTOM OF WOOD SHIPPING BOX.
4. PLACE SMALLER PACKAGED ITEMS IN VOIDS BETWEEN LARGER ITEMS.
5. FOLD CLOSURE COVER - PLACE ON TOP OF OTHER PACKED ITEMS.
6. IMMOBOLIZE PACKED ITEMS AND SECURE BOX COVER.
7. SHIP TO (address to be furnished by contracting officer [see 6.1]).

All stenciled characters to be a minimum of 3/4 inches high using white enamel conforming to Specification TT-E-529.

3.6 Security.

3.6.1 Security of sensitive cargo. Sensitive cargo shall be stored separately under proper security or shipped by separate mode of transportation under proper security or as directed by the contracting activity.

3.6.2 Skirt security. To prevent theft of classified armor skirt during shipment of the vehicle without an armed guard escort, skirt security pins and guard assembly shall be fabricated and installed in accordance with figures F-1 through F-5. Removed skirt attaching pins shall be identified with their Army part numbers, packaged in a plastic bag conforming to type I, class B, style 2 of MIL-B-117 and stowed inside the vehicle.

3.7 Level B. Vehicles shall be processed in the same manner as specified for level A, with the following exceptions:

3.7.1 Fire control items. (see 3.2.6 and 3.3.9) All fire control items shall remain installed. Cleaning and preservation shall be in accordance with requirements of paragraph 3.3.9. All ballistic shields shall be secured in the closed position.

3.7.2 Transmission and final drives. (see 3.3.3 and 3.3.4) Transmissions and final drives shall contain normal seasonal operational lubricant as specified on lubrication order, filled to operating level. DD Form 1397 shall be annotated to indicate grade of lubricant used.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

3.7.3 Engine. (see 3.3.5) The engine shall be filled to the operating level with normal seasonal operational lubricant as specified on the lubrication order. DD Form 1397 shall be annotated to indicate grade of lubricnat used. Ensure that the inlet and exhaust covers are removed. Operate engine for 30 seconds using "STARTER ONLY" switch. Install covers on vehicle air inlet and exhaust openings.

NOTE: If covers are not available, seal intake and exhaust openings with greaseproof barrier material conforming to MIL-B-131, class I, and secure with tape conforming to type II of MIL-T-22085.

3.7.4 Fuel tanks. (see 3.3.5.3.1) Unless otherwise specified (see 6.1), vehicles shall be shipped without draining residual fuel from the fuel tanks.

3.7.5 Personnel heater and fuel pump. (see 3.3.5.1.1) Unless otherwise specified, personnel heaters and fuel pumps shall be in a ready-to-use condition.

3.7.6 Securing gun tube for shipment.

3.7.6.1 105MM gun tube. Unless otherwise specified (see 6.1), the gun tube shall be secured as follows: for domestic shipment, the gun tube shall remain installed in the turret, be processed in accordance with 3.3.7.1, and shall be secured in accordance with figure A1. For oversea shipment, the gun tube shall be removed from the turret and stowed on top of the vehicle turret in accordance with 3.3.8.1.

3.7.6.2 120MM gun tube. Unless otherwise specified (see 6.1), the gun shall be secured as follows: for domestic shipments, the gun tube shall remain installed in the turret, be processed in accordance with 3.3.7.2, and shall be secured in accordance with figure H1. For oversea shipment, the gun tube shall be removed from the turret and stowed on top of the vehicle turret in accordance with 3.3.8.2.

3.7.7 Driver's periscope washer reservoir. Reservoir shall contain .25 to .50 gallons of water and cleaning compound conforming to and mixed per O-C-1901.

3.7.8 Vehicle closure. Vehicle closures shall not be provided on vehicles processed for level B shipment and storage.

3.7.9 Miscellaneous preservation. Except as otherwise specified herein, all exposed, unpainted, metal surfaces of the exterior and interior of the vehicle, except the track, shall be coated with grease conforming to MIL-G-10924.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

3.8 Loading.

3.8.1 Loading of flat cars. Loading of vehicles on open top railcars shall be in accordance with applicable requirements of Section 1, Association of American Railroads Manual (AAR), "Loading of Commodities on Open Top Cars," and Figure Number 81 of Section 6 and the AAR rules, "Loading of Department of Defense Material on Open Top Cars." The type of railcar and the applicable transportation data shall be as authorized by the responsible Government transportation office. See 3.4.14 for processing of BII boxes.

3.8.2 Reprocessing engine after loading - level A. If engine is operated in connection with movement of vehicle during loading or unloading, engine shall be reprocessed in accordance with 3.3.5.1 through 3.3.5.6.

3.8.3 Reprocessing engine after loading - level B. If engine is operated in connection with movement of vehicle during loading or unloading, reprocess engine in accordance with 3.7.3.

3.8.4 Brakes and gearshift. Brakes shall not be set and the transmission lever shall be placed in the neutral position on vehicles with the loader's hatch sealed.

3.9 Marking. In addition to any special marking required in the contract or order, vehicle shall be marked in accordance with 3.5.2 and MIL-STD-129.

3.9.1 Lifting points. The legend "LIFT HERE" with arrow pointing to the lifting eye shall be stenciled adjacent to each lifting eye using black enamel conforming to TT-E-527, No. 37038. Stenciling to be 3/4 inches high minimum.

3.9.2 Shipping label adhesion. To assure effective adhesion when applied during cold weather, Military Shipment Labels, DD Form 1387, shall be cemented to vehicles with adhesive conforming to type I of MMM-A-1617. After mounting, labels shall be provided a protective coating in accordance with applicable provisions of MIL-STD-129.

3.9.3 Final finish. Final finish of items delineated in the figures of this specification shall be as shown thereon in accordance with MIL-STD-193.

3.10 Drive on - drive off capability. When vehicles are to be operated for loading or unloading (see 6.1), the following provisions shall apply:

3.10.1 Fuel tank. Fuel shall be provided to accomplish movement of the vehicle. The quantity of the fuel shall be at a minimum of 100 gallons and at a maximum of 200 gallons of fuel when delivered. These quantities shall be determined by interpreting the readings of the driver's instrument panel fuel gages, as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

FUEL TANK SELECTOR LEVELS

Gage Fuel Level	Left Front Gal 1/	Right Front Gal 1/	Rear Gal 1/
1/8	18	25.5	42.5
1/4	31	43.5	72.5
3/8	44	61.5	102.5
1/2	57	79.5	132.5
5/8	70	97.5	162.5
3/4	83	115.5	192.5
7/8	96	133.5	222.5
Full	109	151.5	252.5

1/ Average tolerance has been included to the Fuel Tank Selector Levels.

3.10.2 Batteries and electrolyte. Batteries shall be filled with electrolyte, conforming to O-S-801, full charged at 29 to 32 volts and with a specific gravity reading of 1.280 as required per TM 9-6140-200-14 and installed in the vehicle (see 6.9). The negative link shall be disconnected from the battery bus bar and secured to the vehicle terminal bus using tape conforming to type II of MIL-T-22085. Retighten link mounting screws and close and latch the battery access covers. A tag conforming to UU-T-81 bearing the following message shall be located in a conspicuous location in the driver's compartment:

WARNING

Vehicle preserved for drive away condition. Before starting, connect negative link to negative battery bus bar. Do not slave start or operate vehicle without connecting vehicle batteries. Disconnect negative link during any further shipment or storage of vehicle. Engine and fuel tanks not preserved.

3.10.3 Parking brake. A red tag conforming to UU-T-81 bearing the following message shall be secured in a conspicuous location in the driver's compartment:

WARNING

Vehicle preserved for drive away condition. Before starting and after connecting negative battery link to negative battery bus bar, turn on auxiliary hydraulic pump to ensure braking capability.

3.10.4 Engine. (see 3.3.5) The engine shall be filled to the operating level with normal seasonal operational lubricant as specified in the lubrication order. DD Form 1397 shall be annotated to indicate grade of lubricant used. No intake or exhaust covers shall be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform or witness any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of section 3. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Test equipment and inspection facilities. The contractor shall insure that test and inspection facilities of sufficient accuracy, quality and quanitity are established and maintained to permit performance of required inspections. Inspection equipment must be capable of repetitive measurements to an accuracy of 10 percent of the measurement tolerance. Calibration of inspection equipment shall be in accordance with MIL-STD-45662.

4.1.3 Government verification. All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of (a) surveillance of the operation to determine that practices, methods, and procedures of the written quality assurance system plan are being properly applied, and (b) Government product inspection to measure the quality of the product offered for acceptance. Deviation from the prescribed or agreed upon procedure, or instances of poor practices which might have an adverse effect upon quality of the product, will immediately be called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies shall be cause for suspension of acceptance until corrective action has been made, or until the conformance of the product to prescribed criteria has been demonstrated.

4.1.4 Qualified products. When a part or component is specified to conform to a specification having a Qualified Products List (QPL), the contractor shall make available to the Government documentation of item acquisition from such QPL. The documentation shall include the QPL date and identification of the supplier, purchase order, and quantity.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

4.1.5 Quality assurance provisions. In the conduct of inspection, the contractor shall adhere to Quality Assurance Provisions (QAP) and General Quality Assurance Provision (STA Form 458) as applicable and as required by the documents forming part of this specification.

4.1.6 Inspection records. Contractor shall maintain records of all inspection performed and such records shall be readily available for review by the Government representative.

4.2 Classification of inspection:

a. First article inspection (see 4.4).
b. Quality conformance inspections (QCI) (see 4.5).

4.3 Inspection conditions and precautions.

4.3.1 Conditions. Unless otherwise specified (see 6.2), all inspections shall be conducted under the following conditions:

a. Air temperature 73 ± 18°F
b. Barometric pressure 28.5 + 2.0 inches of mecury
- 3.0
c. Relative humidity 50 ± 30 percent

4.4 First article inspection. First article inspection shall be performed at the contractor's facilities or at other facilities acceptable to the Government on sample vehicles processed with materials, equipment, procedures, and operations normally used in production.

4.4.1 Sample. One of the first 10 production vehicles processed to each level of protection shall be subjected to first article inspection. The sample processed vehicle(s) shall have been subjected to and passed the requirements of quality conformance inspection (see 4.5).

4.4.2 Inspection routine. Sample vehicles shall be inspected in accordance with 4.6 for conformance to the requirements of table I.

4.4.3 First article inspection failure. Test item deficiencies during, or as a result of, the first article test shall be cause for rejection of the items until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiency. Any deficiency found during, or as a result, of, the first article test shall be evidence that all items already produced prior to completion of the first article test are similarly deficient unless contrary evidence satisfactory to the contracting officer is furnished by the contractor. Such deficiencies on all items shall be corrected by the contractor. The Government shall not accept products until first article testing is completed to the satisfaction of the Government.

4.5 Quality conformance inspection. Each vehicle shall be inspected in accordance with 4.6.2, 4.6.2.1, 4.6.2.2, 4.6.2.3 and 4.6.2.5 for conformance to the requirements of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.5.1 Failure. Failure of a processed vehicle to meet quality conformance inspection requirements or failure of a processed vehicle to conform to the applicable requirements of this specification shall be cause of rejection. If a processed vehicle is rejected, the contractor may rework it to correct the defects and resubmit for inspection. The former rejection or requirements for correction shall be disclosed with the resubmittal for inspection.

4.5.2 Monitoring. Equipment, materials, procedures, and operations shall be monitored for conformance.

4.5.2.1 Monitoring of equipment. Processing equipment shall be identified and inspected monthly or at the beginning of each vehicle processing to ensure proper operation.

4.5.2.2 Monitoring of material. Each material shall be identified and inspected monthly or at the beginning of each vehicle processing to ensure conformance to material specification requirements. Materials which have been Government inspected at the source and materials which have been previously certified shall require monitoring only if subject to deterioration or contamination.

4.5.2.3 Monitoring of procedures and operations. Procedures and operations shall be reviewed periodically to ensure conformance with prescribed procedures and operations. Records of personnel training for vehicle processing and records of personnel certified to prepare hazardous material shipments shall be reviewed periodically to ensure adequate current training and certification.

4.6 Methods of inspection.

4.6.1 Materials. Except for materials which have been inspected by the Government at souce, all materials to be used in processing of vehicles shall be inspected in accordance with the materials specification; or certified inspection and test reports shall be provided which show that furnished materials conform to the detailed specifications. When materials are listed on a Qualified Product List, they shall be obtained from one of the approved sources indicated.

4.6.2 Processing. Except as otherwise specified herein, vehicles shall be inspected to determine conformance to this specification. Inspection shall include all items specified in table I and 4.6.2.1 through 4.6.2.5.

4.6.2.1 Cleaning. To determine conformance to 3.2.1, interior of vehicles shall be examined for cleanliness. One vehicle each day shall be tested for cleanliness in accordance with the applicable provisions of MIL-P-116. To determine conformance to 3.2.4, exterior of vehicle shall be examined for cleanliness. Surfaces to which tape is to be applied shall be examined for cleanliness before application (see 3.3.9).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

4.6.2.2 Fuel tanks. To determine conformance to 3.3.5.3.1, the fuel tank interior shall be visually inspected to verify that specified processing has been accomplished.

4.6.2.3 Gun. Gun shall be examined to determine condition and effectiveness of processing. When reprocessing has been accomplished, it shall be examined for conformance to 3.3.7.1 and 3.3.7.1.1 or 3.3.8.1 and 3.3.8.3.1 for 105MM gun and 3.3.7.2 and 3.3.7.2.1 or 3.3.7.4.2 and 3.3.8.3.2 for 120MM gun.

4.6.2.4 Engine. The engine shall be examined to determine condition and effectiveness of processing. When reprocessing has been accomplished, the engine shall be examined for conformance to 3.3.5.

4.6.2.5 Coating compound thickness. A minimum of one vehicle per day shall be inspected for thickness of coating compound to determine conformance to 3.3.8.3.1 or 3.3.8.3.2. After 4 hours of drying, four 1-inch square specimens of barrier material shall be cut from areas (flat and contour) selected at random by the Government inspector, and measured for specified thickness.

TABLE I. Processing inspection.

(see indicated paragraphs for Level A and B requirements)

Component or Processing Activity	Cleaning	Preservation		Packaging/ Stowage
	Levels A & B	Level A	Level B	Levels A & B
Disassembly		3.1.2	3.1.2	3.1.2
Match marking				3.1.3
Record forms				3.1.4
Cleaning and drying	3.2			
Interior of vehicle	3.2.1			
Battery supports and retainers	3.2.2			
Backrests, seats, headrests and crash pads	3.2.3			3.4.1.6
Exterior of vehicle	3.2.4			
Gun	3.2.5			
Fire control, periscopes and vision blocks	3.2.6			
Crosswind sensor	3.2.7			
Crosswind sensor	3.2.7.1			
Preservation		3.3	3.3	
Relubrication		3.3.1	3.3.1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection - Continued.

(see indicated paragraphs for Level A and B requirements)

Component or Processing Activity	Cleaning	Preservation		Packaging/ Stowage
	Levels A & B	Level A	Level B	Levels A & B
Battery supports and retainers		3.3.2	3.3.2	
Transmission 1/		3.3.3	3.7.2	
Final drive 1/		3.3.4	3.7.2	
Engine preservation 1/		3.3.5	3.7.3	
Engine, fuel and oil system		3.3.5.1		
Personnel heater and fuel		3.3.5.1.1	3.7.5	
Oil system		3.3.5.1.2		
Oil tank		3.3.5.2		
Fuel system		3.3.5.3		
Fuel pumps and fuel tanks		3.3.5.3.1	3.7.4	
Electromechanical fuel unit		3.3.5.3.2		
Batteries and circuit breakers		3.3.5.4		
Engine air-intake preservation		3.3.5.5		
Engine exhaust preservation		3.3.5.6		
Engine preservation warning tag		3.3.5.7		
Turret ring bearing		3.3.6	3.3.6	
Gun tube installed in mount		3.3.7	3.7.6	3.7.7
105MM gun		3.3.7.1	3.7.6.1	3.3.7.1
Muzzle plug (105MM)		3.3.7.1.1	3.3.7.1.1	
120MM gun		3.3.7.2	3.7.6.2	3.3.7.2
Muzzle plug (120MM)		3.3.7.2.1	3.3.7.2	
Muzzle reference collimator		3.3.7.3	3.3.7.3	
Breech mechanism		3.3.7.4	3.3.7.4	
105MM gun		3.3.7.4.1	3.3.7.4.1	
120MM gun		3.3.7.4.2	3.3.7.4.2	
Exercising of recoil mechanism		3.3.7.5	3.3.7.5	
Recoil mechanism (after exercising)		3.3.7.6	3.3.7.6	
Replenisher		3.3.7.7	3.3.7.7	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection - Continued.

(see indicated paragraphs for Level A and B requirements)

Component or Processing Activity	Cleaning	Preservation		Packaging/ Stowage
	Levels A & B	Level A	Level B	Levels A & B
Gun mount		3.3.7.8	3.3.7.8	
Gun and turret travel lock		3.3.7.9	3.3.7.9	
Gun tube removed from mount		3.3.8	3.7.6	3.3.8
105MM gun		3.3.8.1	3.7.6.1	3.3.8
120MM gun		3.3.8.2	3.7.6.2	3.3.8.1
Gun tube		3.3.8.3		3.3.8.3
105MM gun		3.3.8.3.1		3.3.8.3.1
120MM gun		3.3.8.3.1.2		3.3.8.3.1
Gun mount after removal of gun tube		3.3.8.4	3.3.8.4	
105MM gun		3.3.8.4.1	3.3.8.4.1	
120MM gun		3.3.8.4.2	3.3.8.4.2	
Breech mechanism after removal of gun tube		3.3.8.5	3.3.8.5	
Reinstallation of gun tube in mount	3.3.8.6	3.3.8.6	3.3.8.6	
Fire control, periscopes and optical items	3.3.9	3.3.9	3.3.7.1	3.3.9
Radioactive substance warning tag				3.3.9.1
Purging of the GPS, LRF, ICU, TRU, and GPS extension		3.3.9.2	3.3.9.2	
Purging of muzzle reference collimator		3.3.9.3	3.3.9.3	
Ballistics computer		3.3.10	3.3.10	
Radio antenna and mounts		3.3.11	3.3.11	3.4.3
Turret hydraulics		3.3.12	3.3.12	
Driver night viewer vision equipment	3.3.10	3.3.13	3.3.13	3.4.4
Ventilation		3.3.14	3.3.14	
Turret and hull ammo doors		3.3.14.1	3.3.14.1	
Fire extinguisher		3.3.15	3.3.15	
Loader's machinegun mount		3.3.16	3.3.16	
Driver's periscope washer reservoir		3.3.17	3.7.7	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection - Continued.

(see indicated paragraphs for Level A and B requirements)

Component or Processing Activity	Cleaning	Preservation		Packaging/ Stowage
	Levels A & B	Level A	Level B	Levels A & B
Miscellaneous preservation		3.3.18	3.7.9	
Hatches		3.3.19	3.3.19	
Packaging				3.4
Dry charged batteries and cables (Level A only)				3.4.1
Electrolyte				3.4.2
Radio antenna				3.4.3
Driver night vision viewer				3.4.4
Crosswind sensor mast				3.4.5
Fire extinguisher				3.4.6
Tow hooks				3.4.7
Commander's weapon cradle				3.4.8
Grenade launcher cradle				3.4.9
Loader's machinegun mount				3.4.10
Accessory assemblies, M240 machineguns				3.4.11
Headlamp assemblies				3.4.12
Cargo straps and fender boxes				3.4.13
Basic issue items				3.4.14
Radio cables				3.4.15
Gunner's primary sight ballistic doors				3.4.17
Turret and hull ammo doors			3.4.18	
Vehicle closure		3.5	3.7.8	
Closure Kit		3.5.1		
Closure Marking		3.5.2		
Closure Disposition Marking		3.5.3		
Security				3.6
Security of sensitive cargo				3.6.1
Skirt security				3.6.2
Loading of flat cars				3.8.1
Reprocessing engine after loading - Level A				3.8.2
Reprocessing engine after loading - Level B				3.8.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection - Continued.

(see indicated paragraphs for Level A and B requirements)

Component or Processing Activity	Cleaning	Preservation		Packaging/ Stowage
	Levels A & B	Level A	Level B	Levels A & B
Brakes and gearshift				3.8.4
Marking				3.9
Lifting points				3.9.1
Shipping lavel adhesion				3.9.2
Drive on - drive off capability				3.10
Fuel tanks				3.10.1
Batteries and electrolyte				3.10.2
Parking brake				3.10.3
Engine				3.10.4

1/ Inspect DD Form 1397

5. PREPARATION FOR DELIVERY

This section is not applicable to this specification.

6. NOTES

6.1 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Applicable level of processing (see 1.2).
c. If first article inspection is not required (see 3.1).
d. If vehicle closure is not required (see 3.5).
e. Address for return of vehicle closure (see 3.5.3, Item 7)
f. If additional fuels shall be supplied (see 3.10.1).
g. If vehicle drive-on/drive off capability is required (see 3.10).
h. If gun tube is to remain installed in gun mount or removed and stowed on top of the vehicle (see 3.3.7, 3.3.8, and 3.7.6).
i. If responsibility for inspection is other than as specified (see 4.1).
j. If inspection conditions are other than as specified (see 4.3.1).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

6.2 Safety precautions. Caution should be exercised in handling fire extinguisher cylinders. Cylinders should not be dropped, be permitted to strike each other, or be handled roughly. Extreme care should be exercised during the reinstallation operation to avoid trippng fire extinguisher control system (see 3.3.15).

6.3 Forms. Copies of the "Equipment Log Book" and all required forms (see 3.1.4) will be furnished to the supplier by the Government at least 30 days before shipment of the vehicles required by the contract delivery schedule.

6.4 Installation and removal of 105MM gun tube. Installation and removal instructions for the 105MM gun tube are specified in TM 9-2350-255-30.

6.5 Installation and removal of 120MM. Installation and removal instructions for 120MM gun tubes are specified in TM 9-2350-264-34.

6.6 Definitions.

6.6.1 Recovered materials. "Recovered materials" means materials that have been collected or recovered from solid waste (see 6.6.2).

6.6.2 Solid waste. "Solid waste" means (a) any garbage, refuse, or sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility; and (b) other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, commercial, mining, and agricultural operations, and from community activities. It does not include solid or dissolved material in domestic sewage, or solid or dissolved material in irrigation return flows or industrial discharges which are point sources subject to permits under section 402 of the Clean Water Act, (33 U.S.C. 1342 et seq.), or source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.) (Source: Federal Acquisition Regulations, section 23.402).

6.7 Subject term (key word) listing.

Processing for shipment and storage of M1 series tanks.
M1 series tanks, processing for shipment and storage of.
Shipment and storage, M1 series tanks.

6.8 Supersession data. This document supercedes MIL-T-62340(AT), 19 June 1981 and General Dynamics Land Systems Division internal document SD-X10004E, 22 July 1985.

6.9 Batteries service. Charging and servicing of lead acid batteries shall be in conformance with TM 9-6140-200-14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

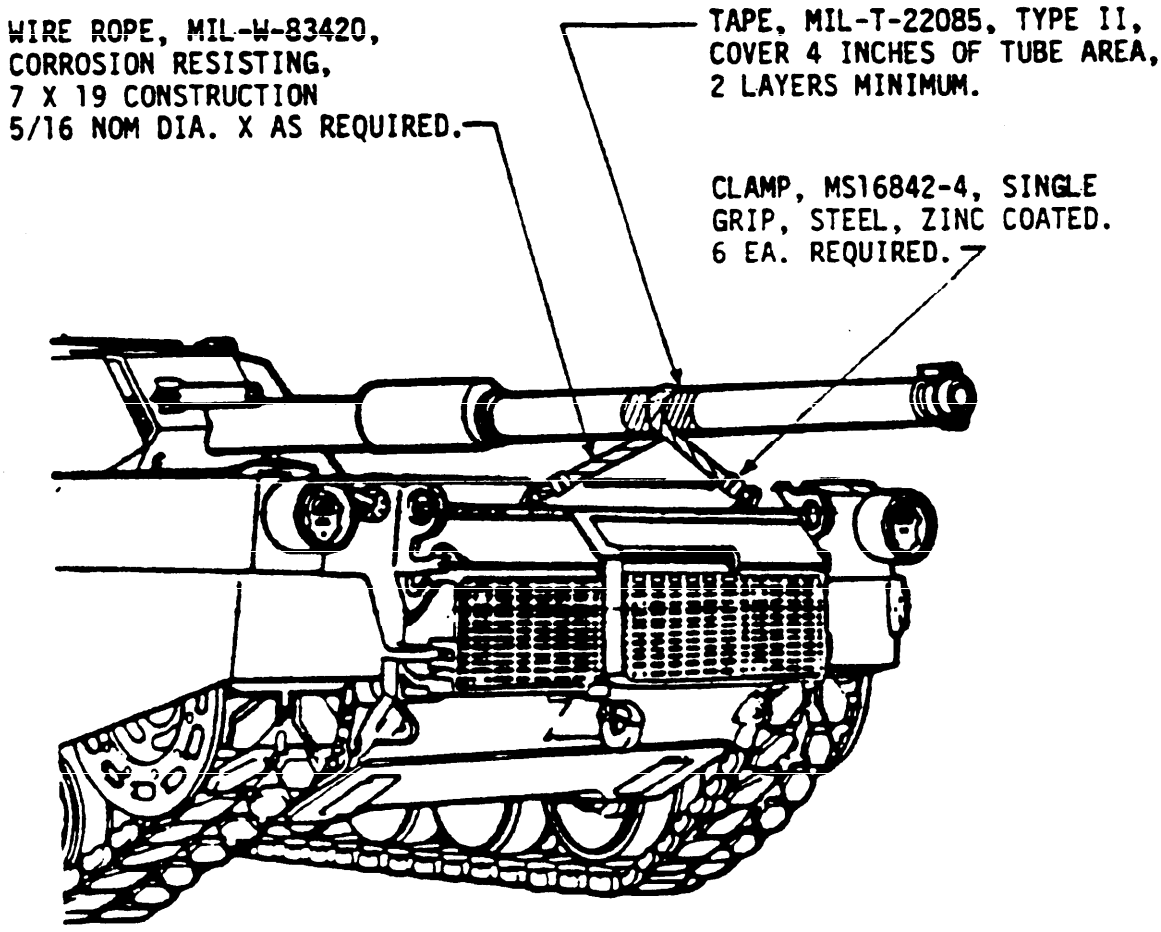



FIGURE A1. Securing of gun tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

FIGURE NUMBER	DESCRIPTION
B2	PLUGS, MUZZLE AND CHAMBER
B3	INSTALLATION ENGINE COMPARTMENT DRAIN VALVE SCREEN
B4	SCREEN (SHOWN ON FIGURE B3)
B5	INSTALLATION DRIVER COMPARTMENT DRAIN VALVE SCREEN
B6	SCREEN (SHOWN ONFIGURE B5)
B7	INSTALLATION OF SCREEN AND BAFFLE ASSY IN PERISCOPE OPENINGS
B8	WIRE (SHOWN ON FIGURE B7)
B9	SCREEN ASSEMBLY
B10	STAPLE (SHOWN ON FIGURE B9)
B11	SCREEN
B12	BLOCK
B13	SCREEN AND BAFFLE ASSY
B14	NAIL (SHOWN ON B13)
B15	BAFFLE
B16	INSTALLATION COVERS, COMMANDERS WEAPON STATION
B17	COVER, PERISCOPE COMMANDERS WEAPON STATION
B18	WASHER (SHOWN ON FIGURE B16)
B19	COVER, ELEVATION DRIVE COMMANDERS WEAPON STATION
B20	PLUGGING OF MACHINE GUN AND TELESCOPE OPENINGS
B21	PLUG
B22	PLUG

FIGURE B1. Muzzle plug and ventilation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

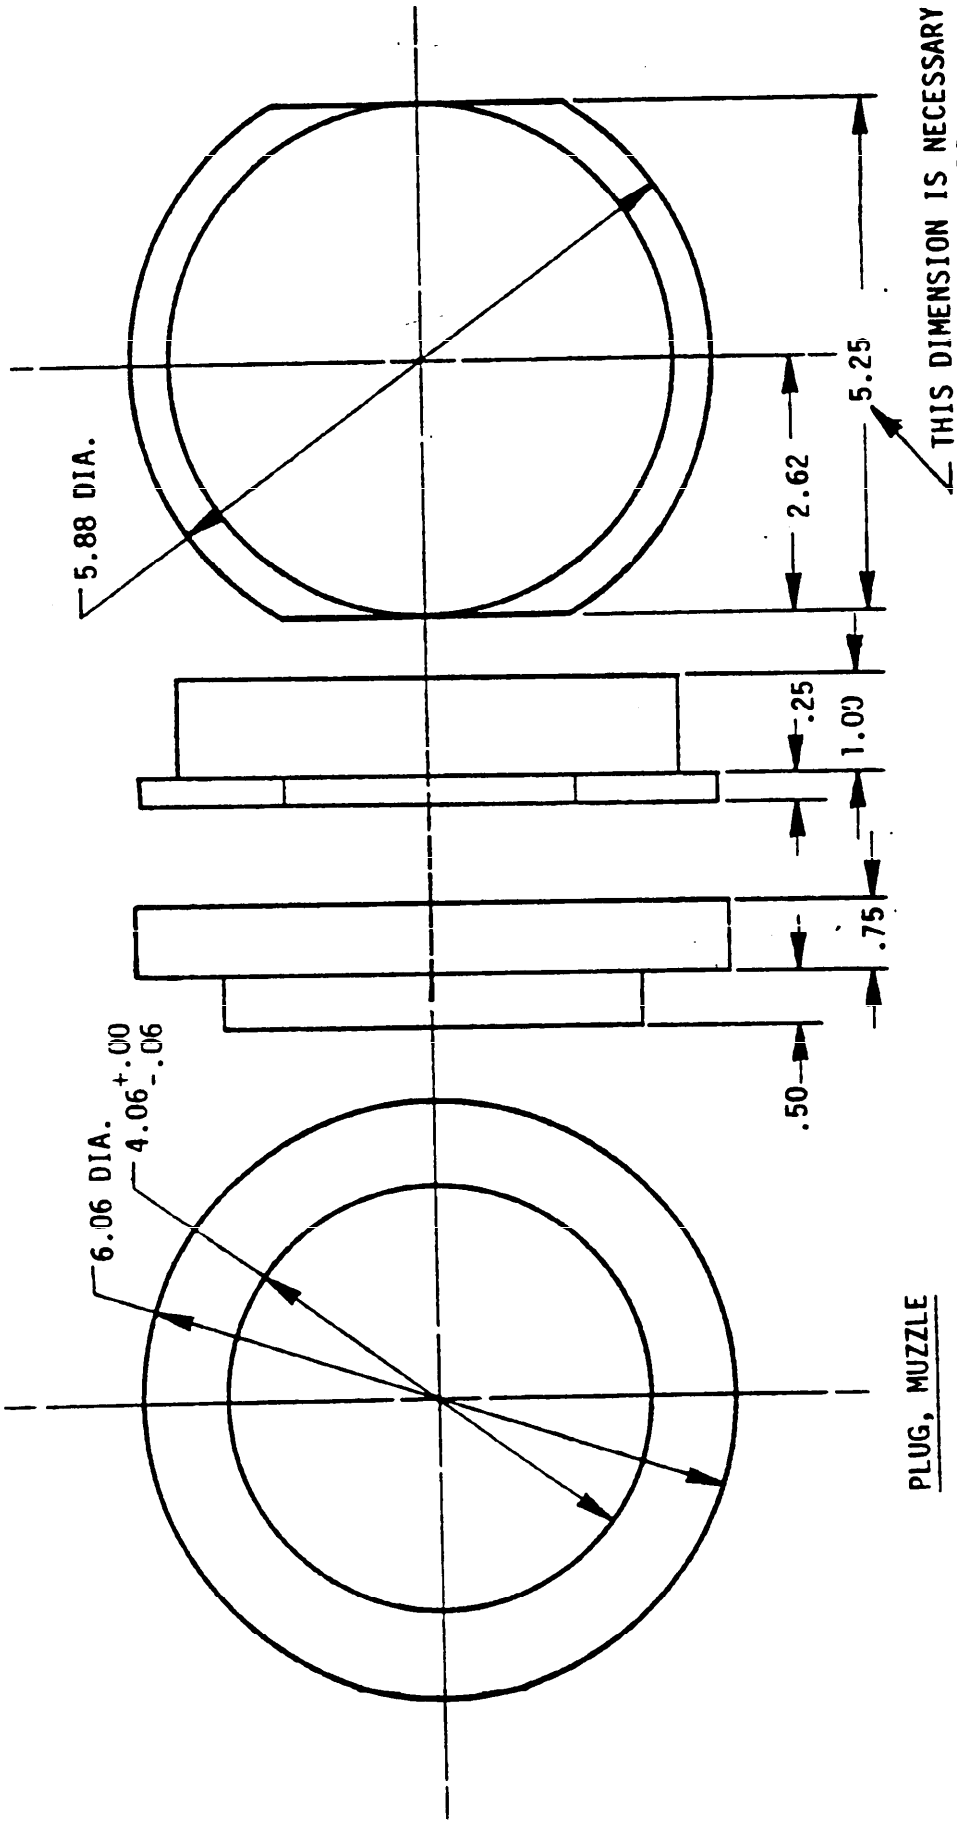

FINAL FINISH:
PAINT PER MIL-C-46168 OR MIL-C-53039, GREEN 383; 1.8 TO 2.2 MILS THICK DRY COAT.

NOTES:

MATERIAL:
WOOD, CLASS 3, GROUP II OR III, MIL-STD-731

OPTIONAL:
PLYWOOD, TYPE EXTERIOR, SPEC NN-P-530.

FIGURE B2. Plugs, muzzle & chamber.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

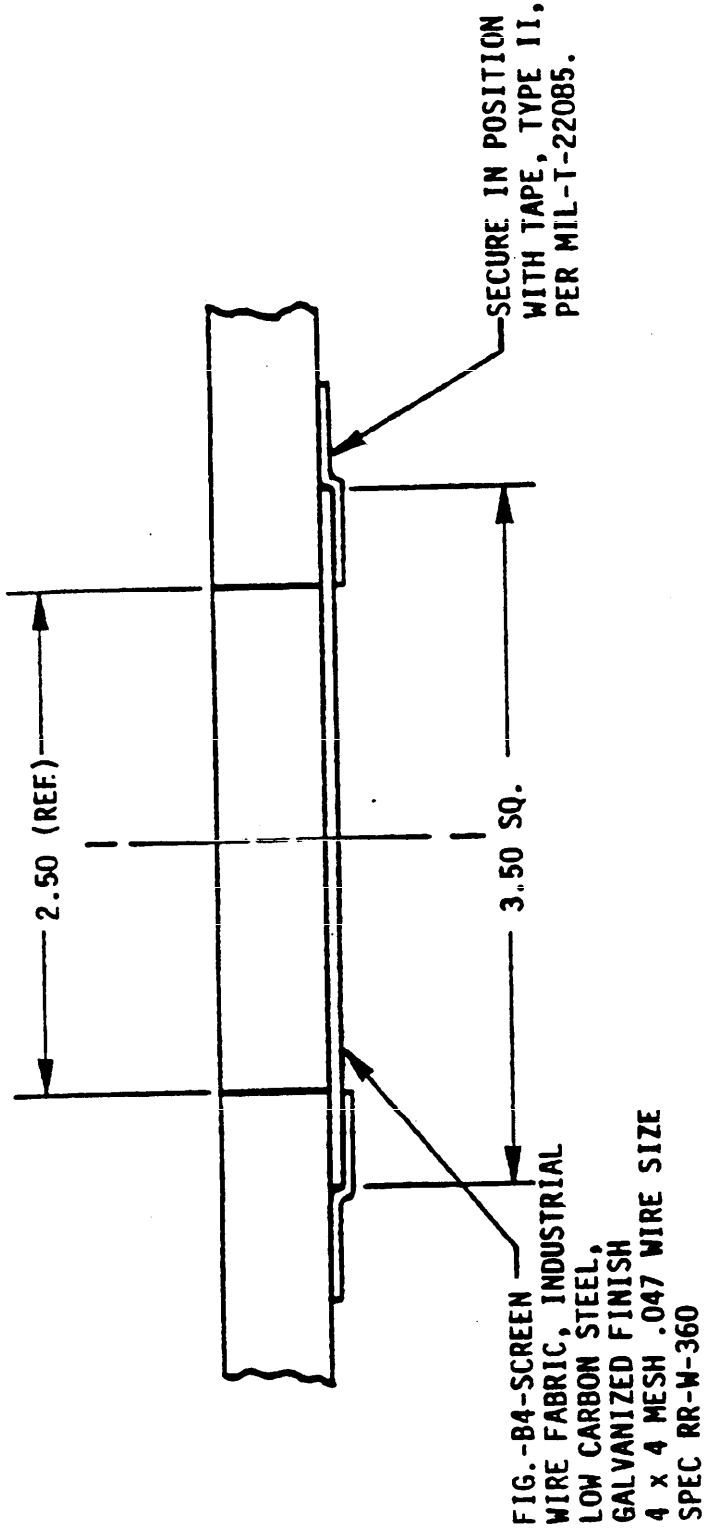


FIGURE B3. Installation engine compartment drain valve screen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

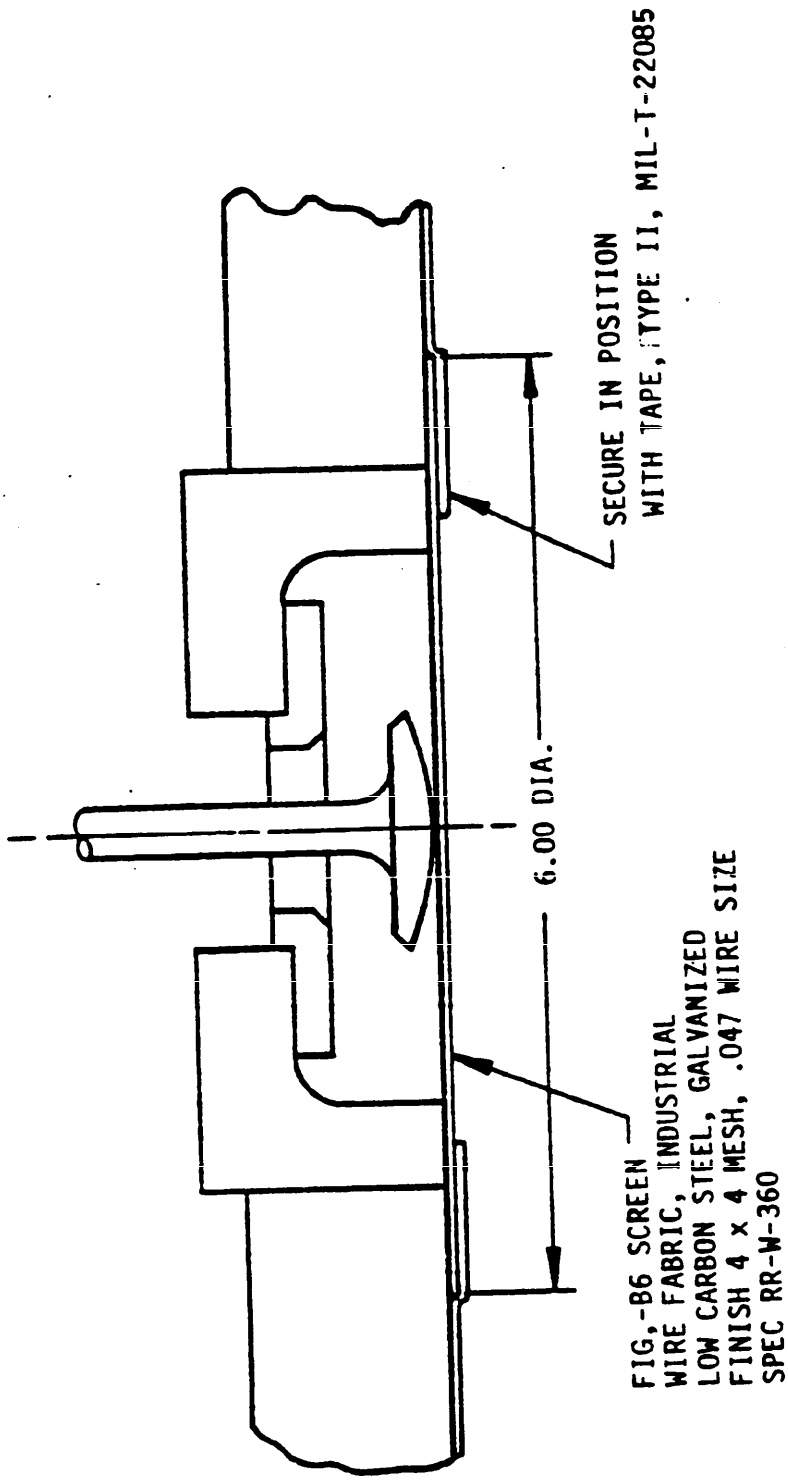


FIGURE B5. Installation drivers compartment drain valve screen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

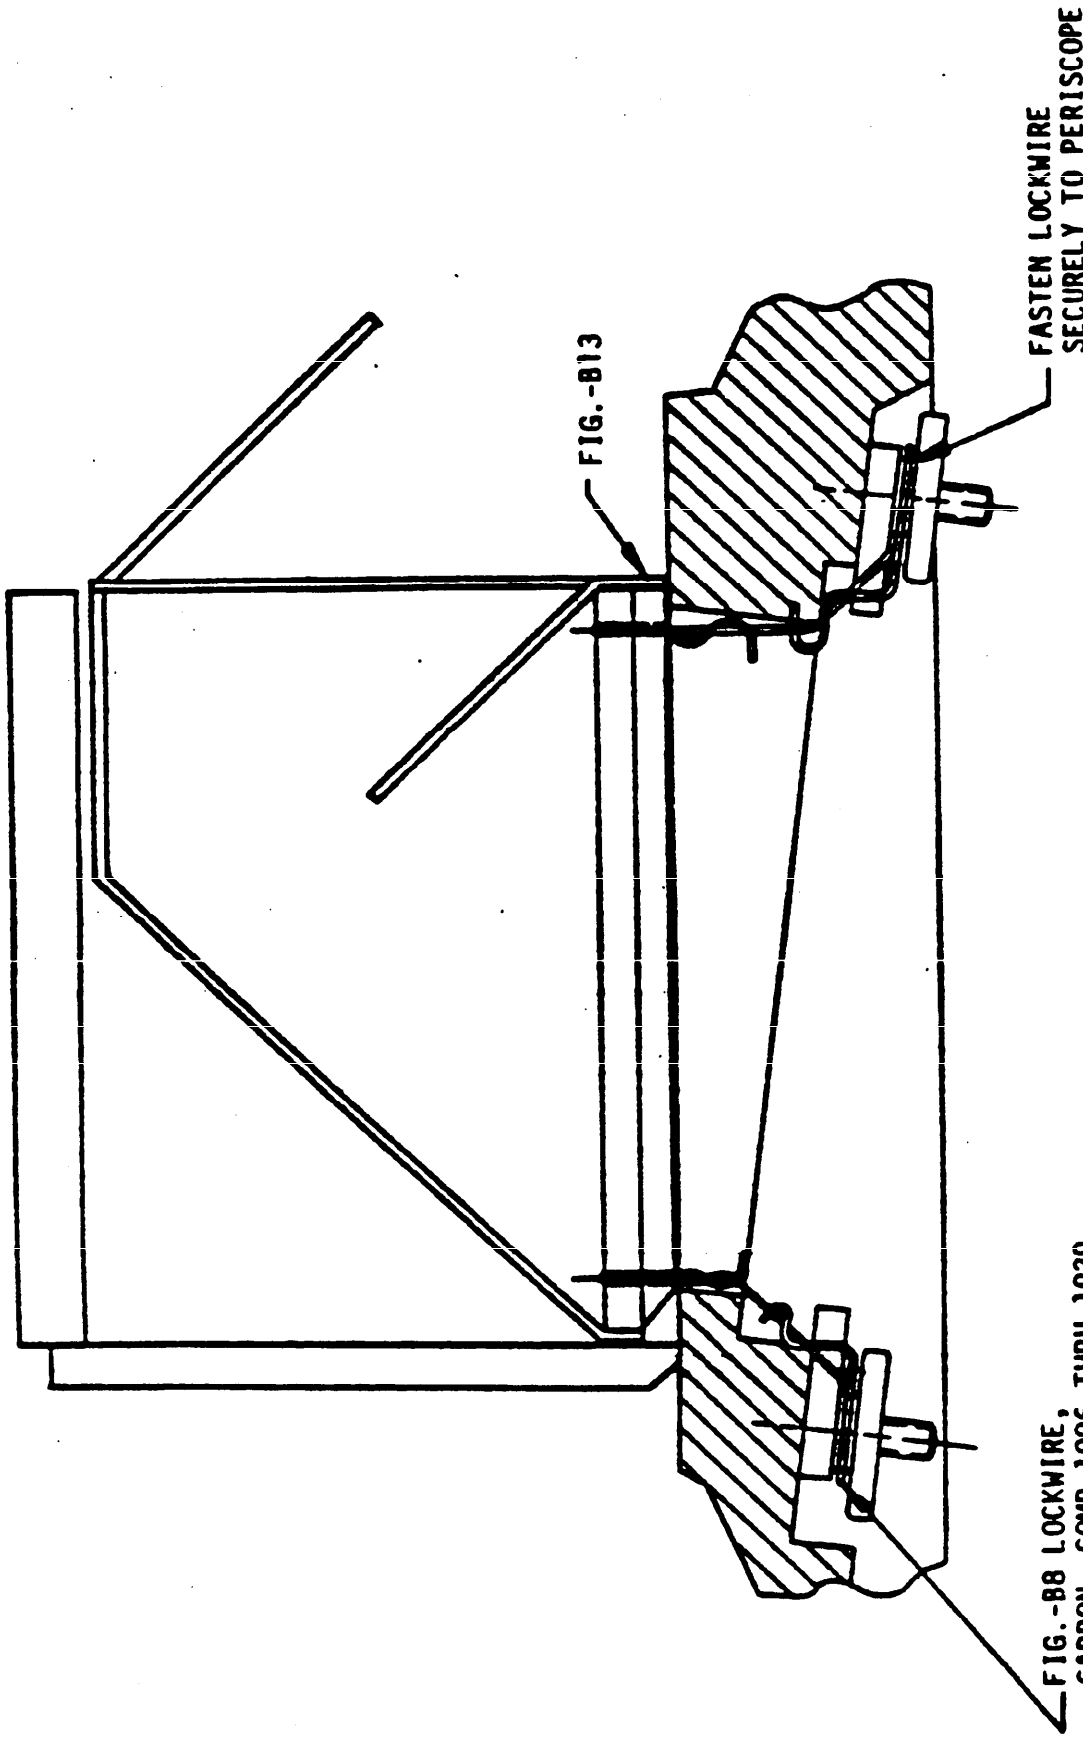


FIGURE B7. Installation of screen and baffle ass'y. in periscope openings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


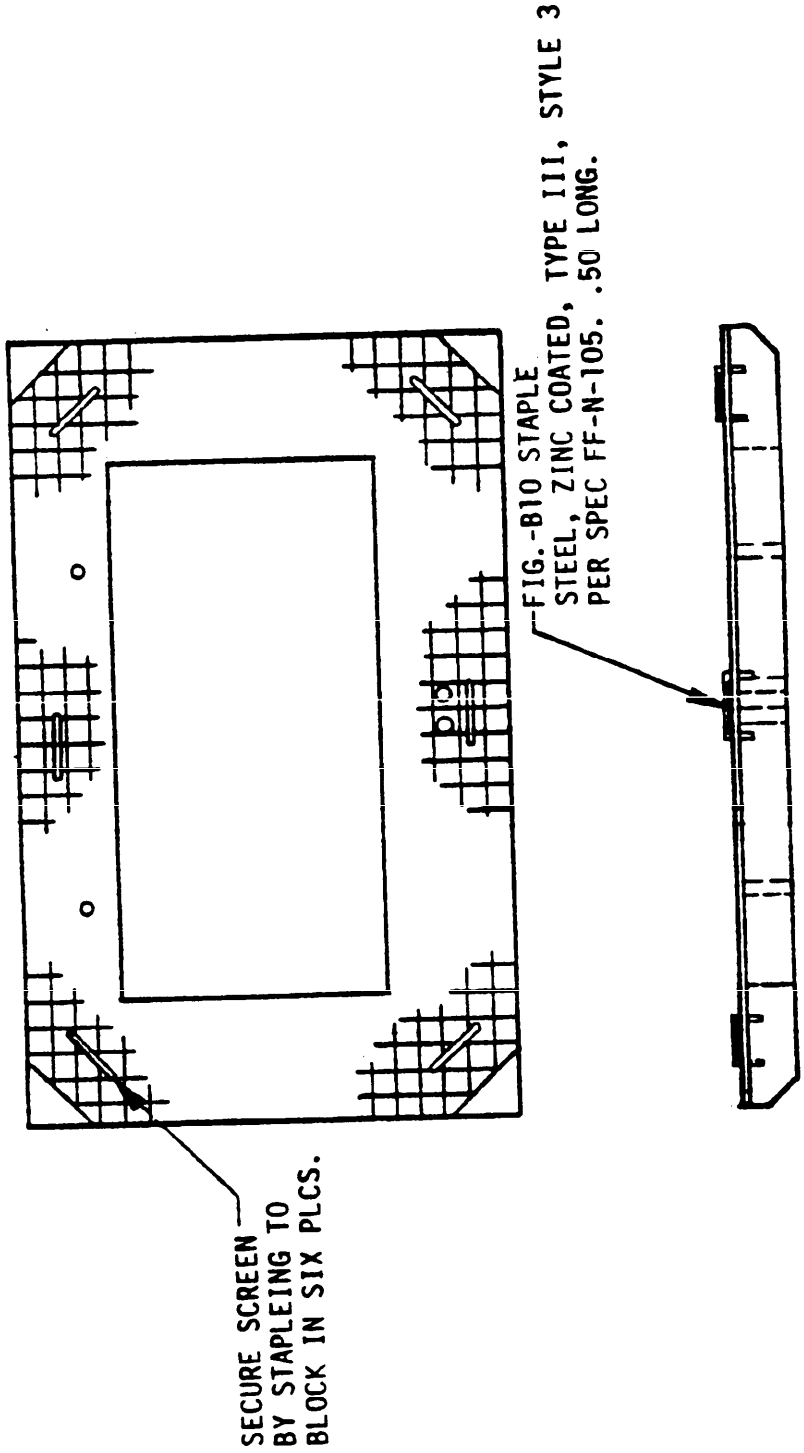


FIGURE B9. Screen assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

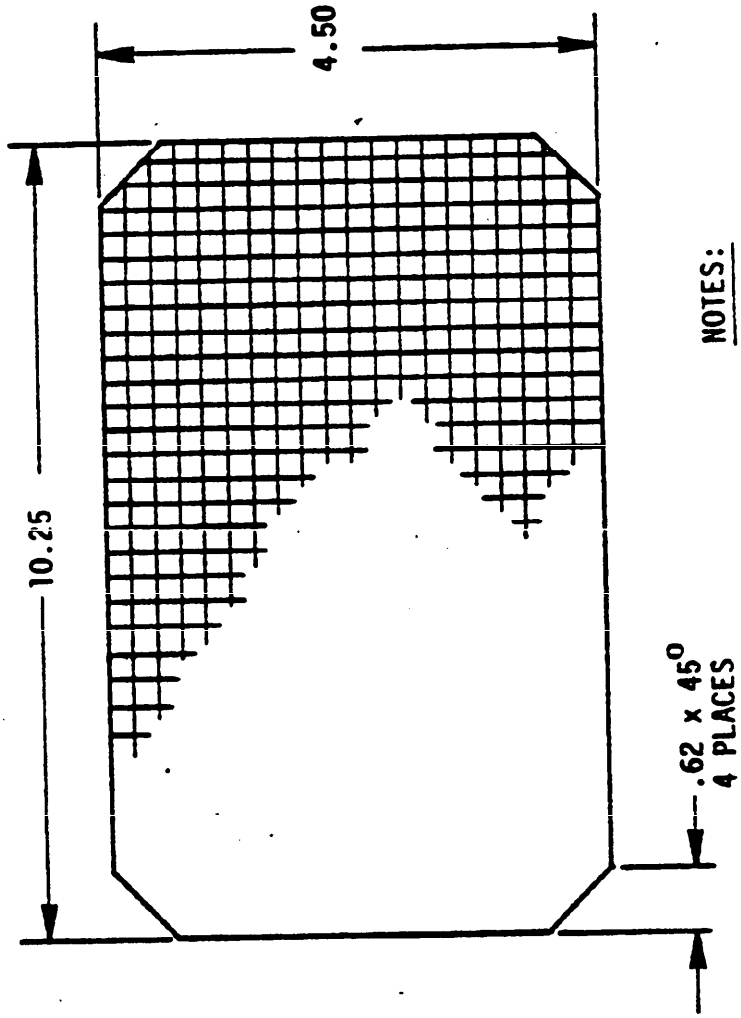


NOTES:

MATERIAL:
SCREEN, WIRE FABRIC, INDUSTRIAL LOW CARBON STEEL, GALVANIZED, FINISH 4 x 4 MESH, .047 WIRE SIZE, SPEC RR-W-360

FIGURE B 11. Screen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

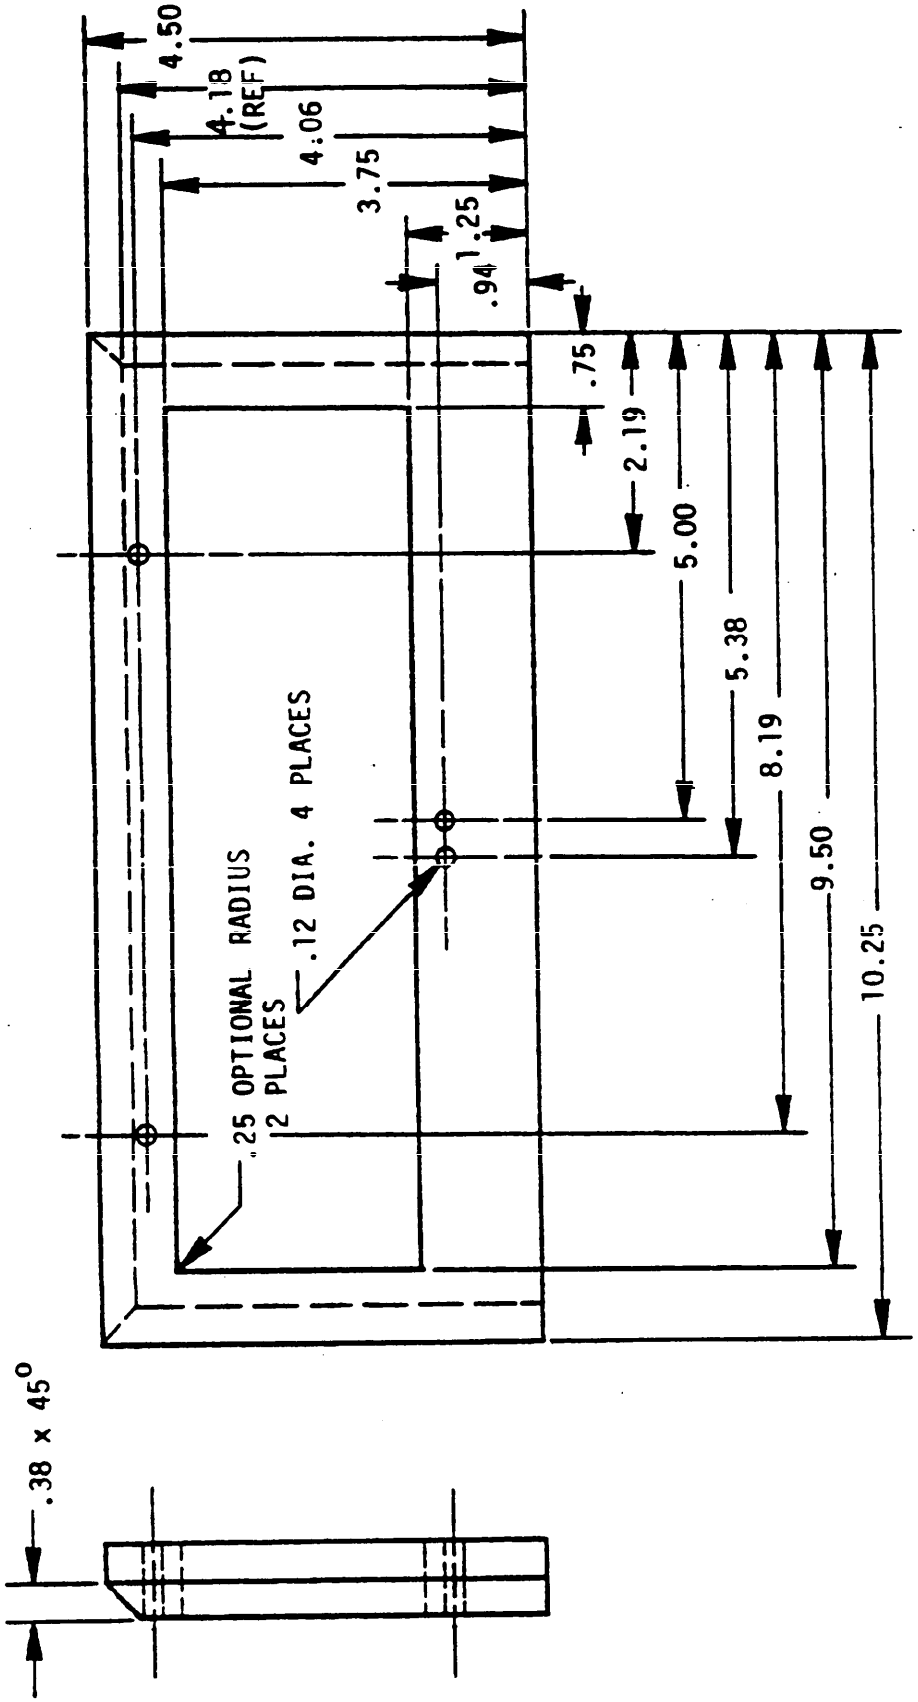

NOTES:

1. MATERIAL:
   PLYWOOD, TYPE EXTERIOR, SPEC NN-P-530, 3/4 THK.
2. FINAL PROTECTIVE FINISH:
   PAINT PER MIL-C-46168 OR MIL-C-53039, GREEN 383; 1.8 TO 2.2 MILS THK. DRY COAT.
   FIGURE B12. Block.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


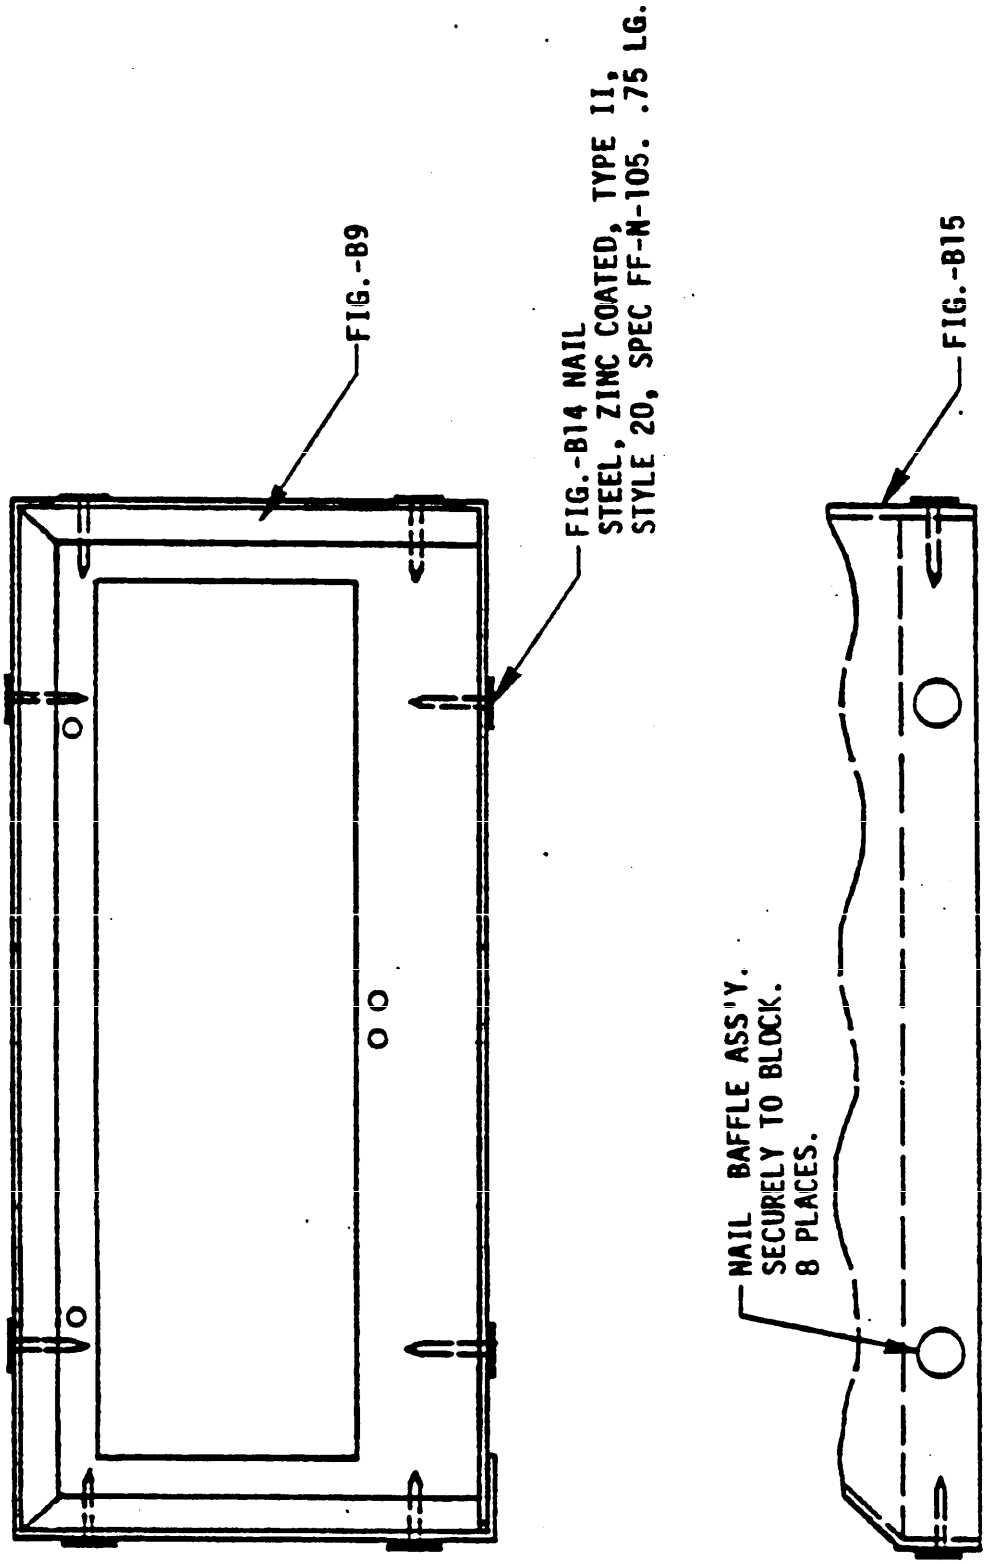


FIGURE B13. Screen and baffle ass'y.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

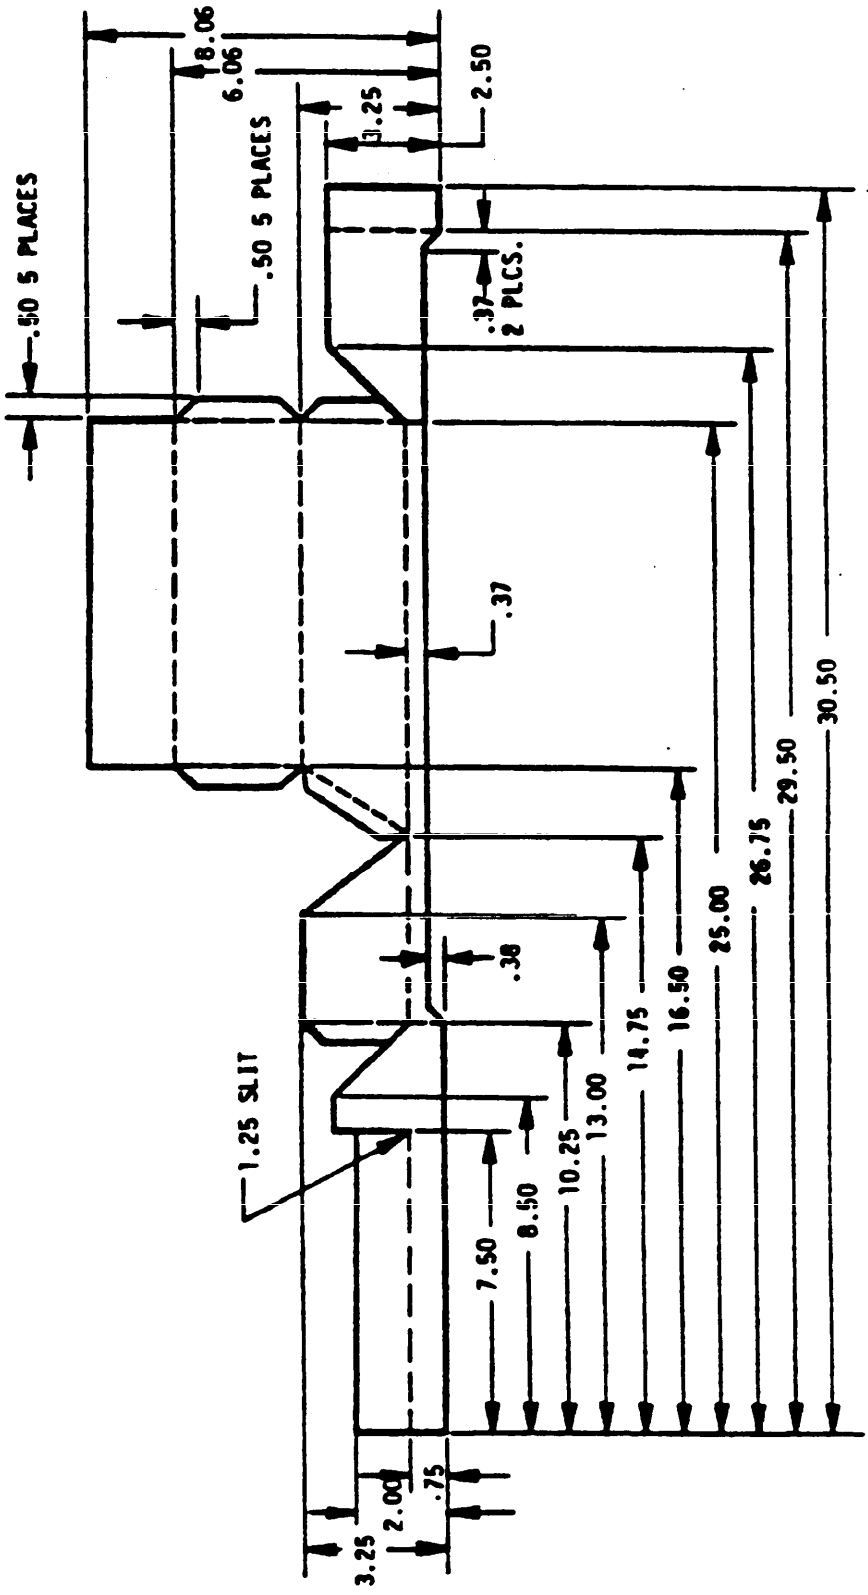

NOTE:
MATERIAL:
ALUMINUM ALLOY, QQ-A-250/8, 5052 TEMPER H32 OR H34. OPTIONAL ALUMINUM ALLOY QQ-A-250/1, 6061 TEMPER T4 OR T6, .025 THK.

FIGURE B15. Baffle (sht 1 of 2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

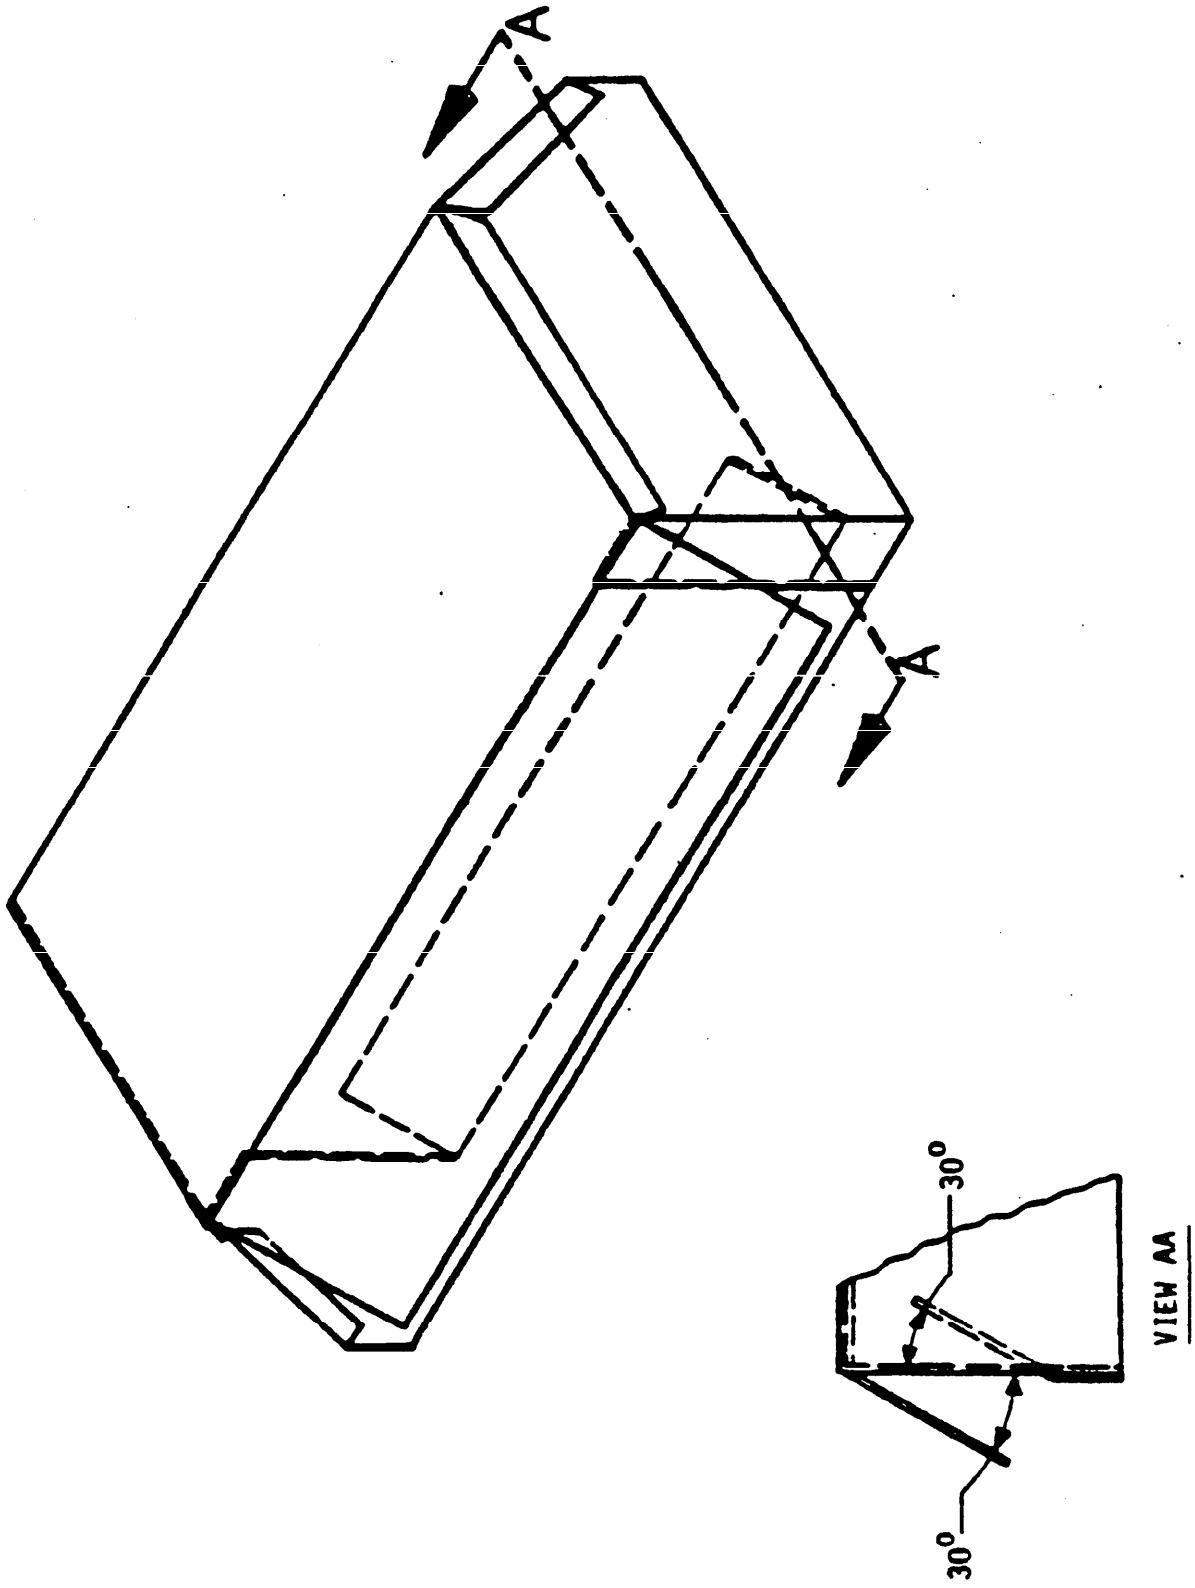


FIGURE B15. Baffle (sht. 2 of 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


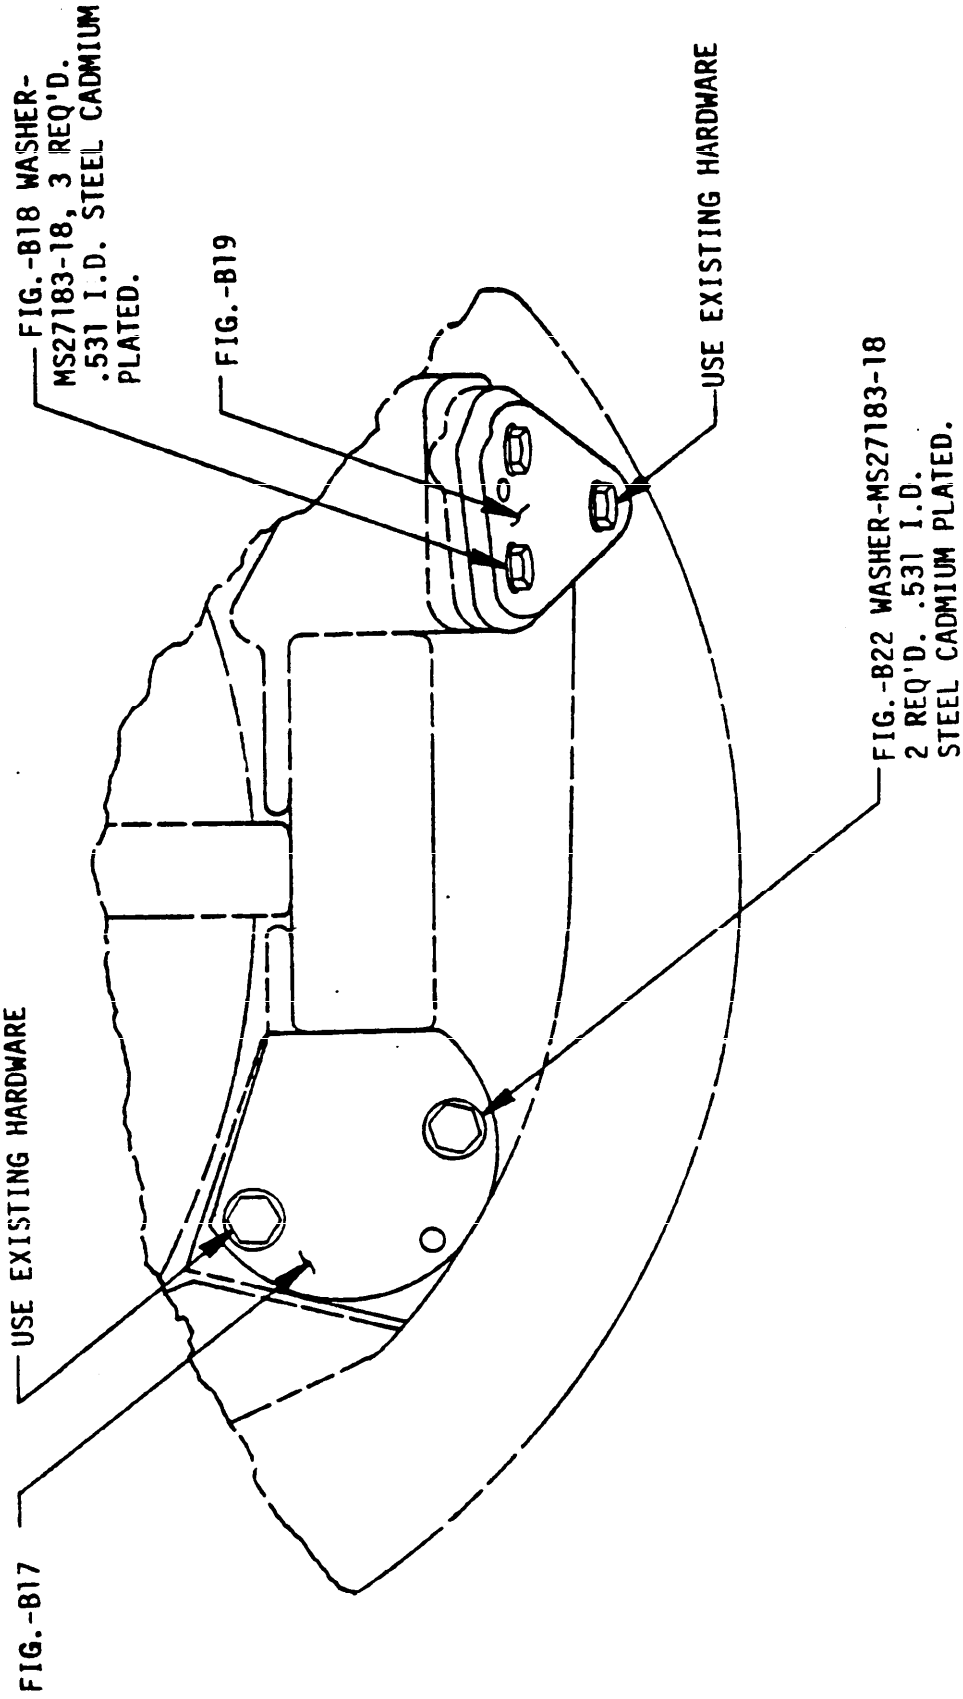


FIGURE B16. Installation covers, commanders weapon station.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

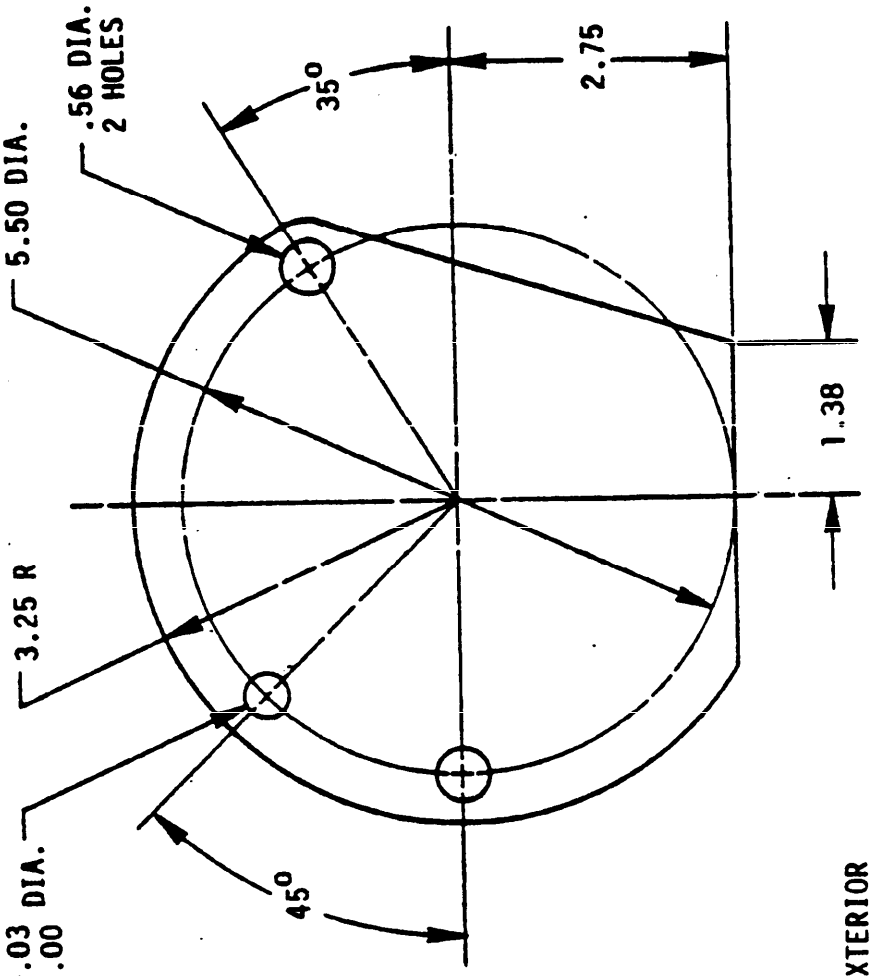

NOTES:

MATERIAL:
PLYWOOD, TYPE EXTERIOR
SPEC NN-P-530, .50 THK.

FINAL PROTECTIVE FINISH:
PAINT PER MIL-C-46168 OR MIL-C-53039, GREEN 383; 1.8 TO 2.2 MILS THK.
DRY COAT.

FIGURE 817. Cover periscope commander's weapon station.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

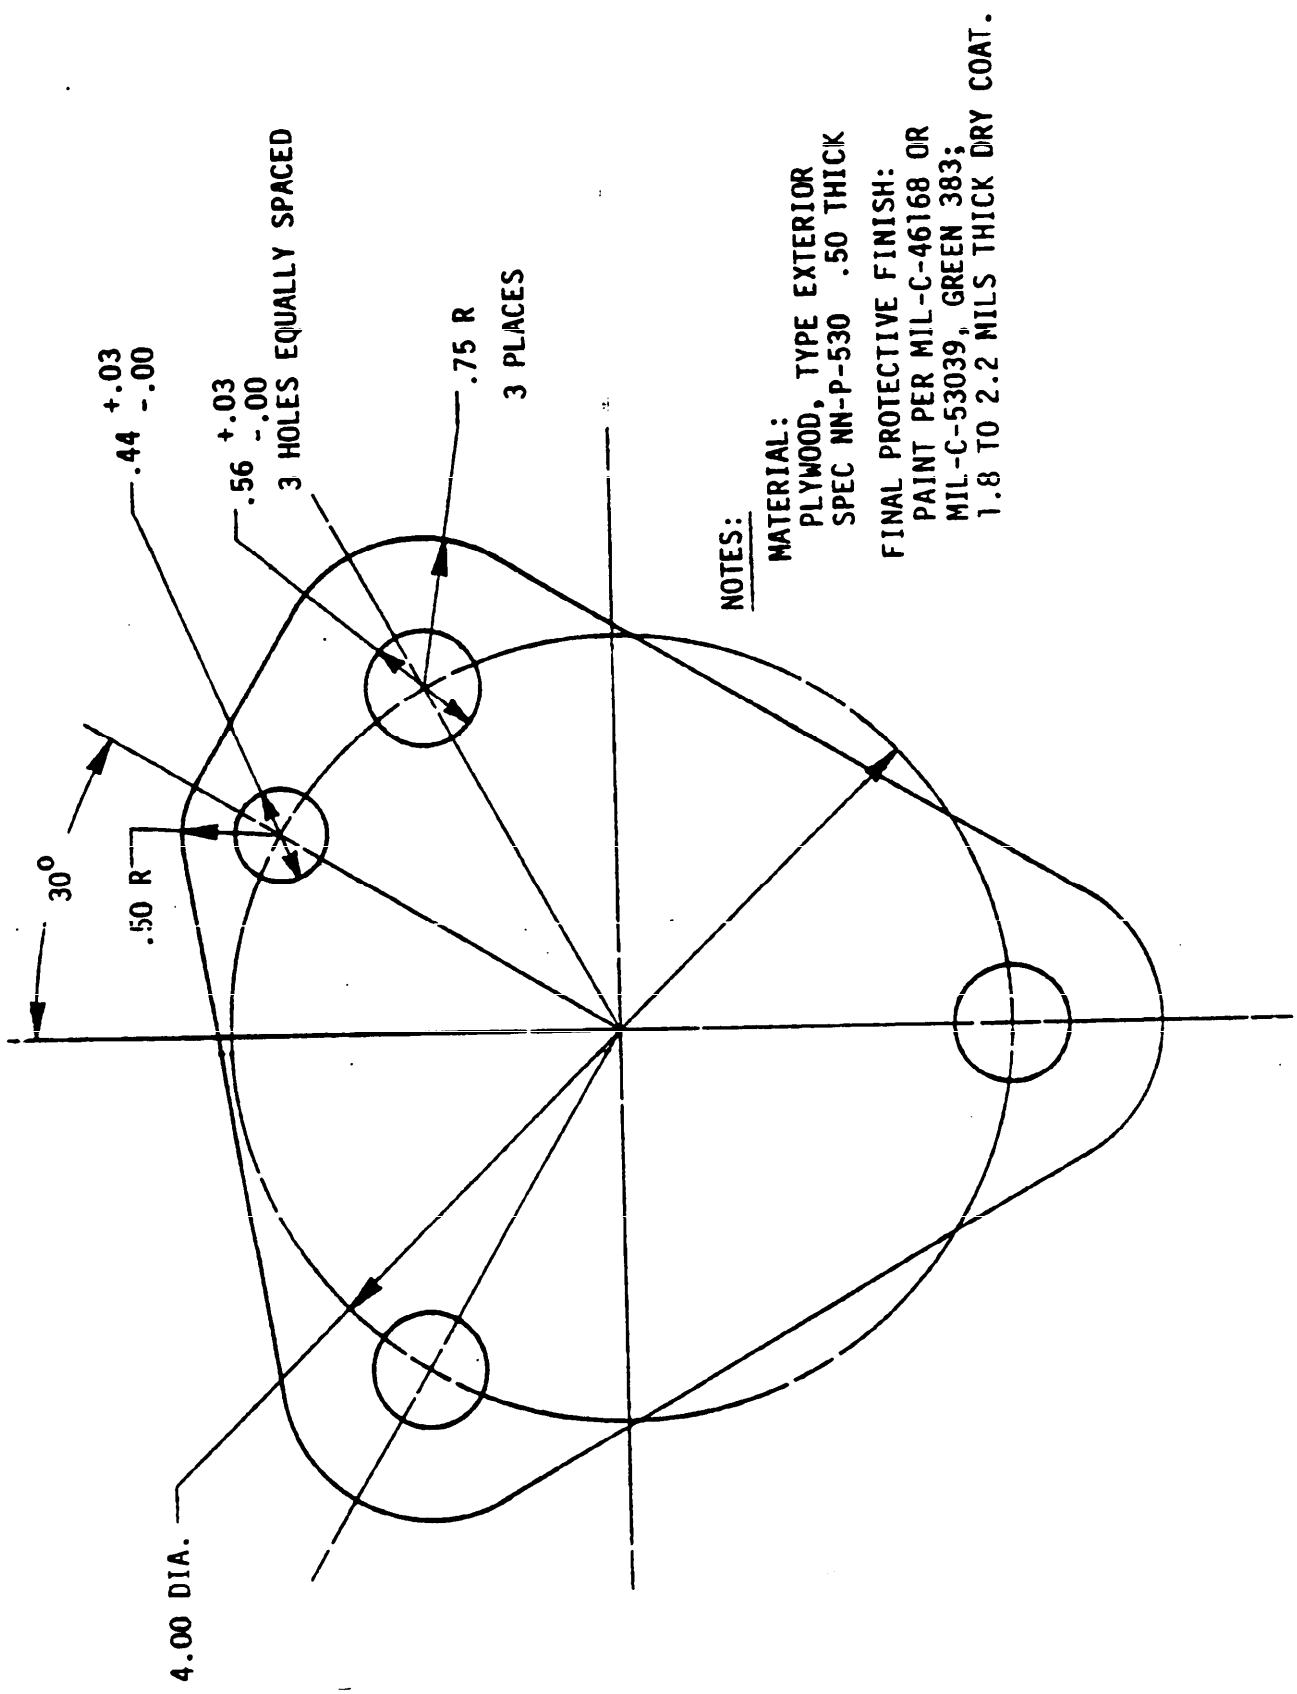


FIGURE B19. Cover, elevation drive commanders weapon station.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


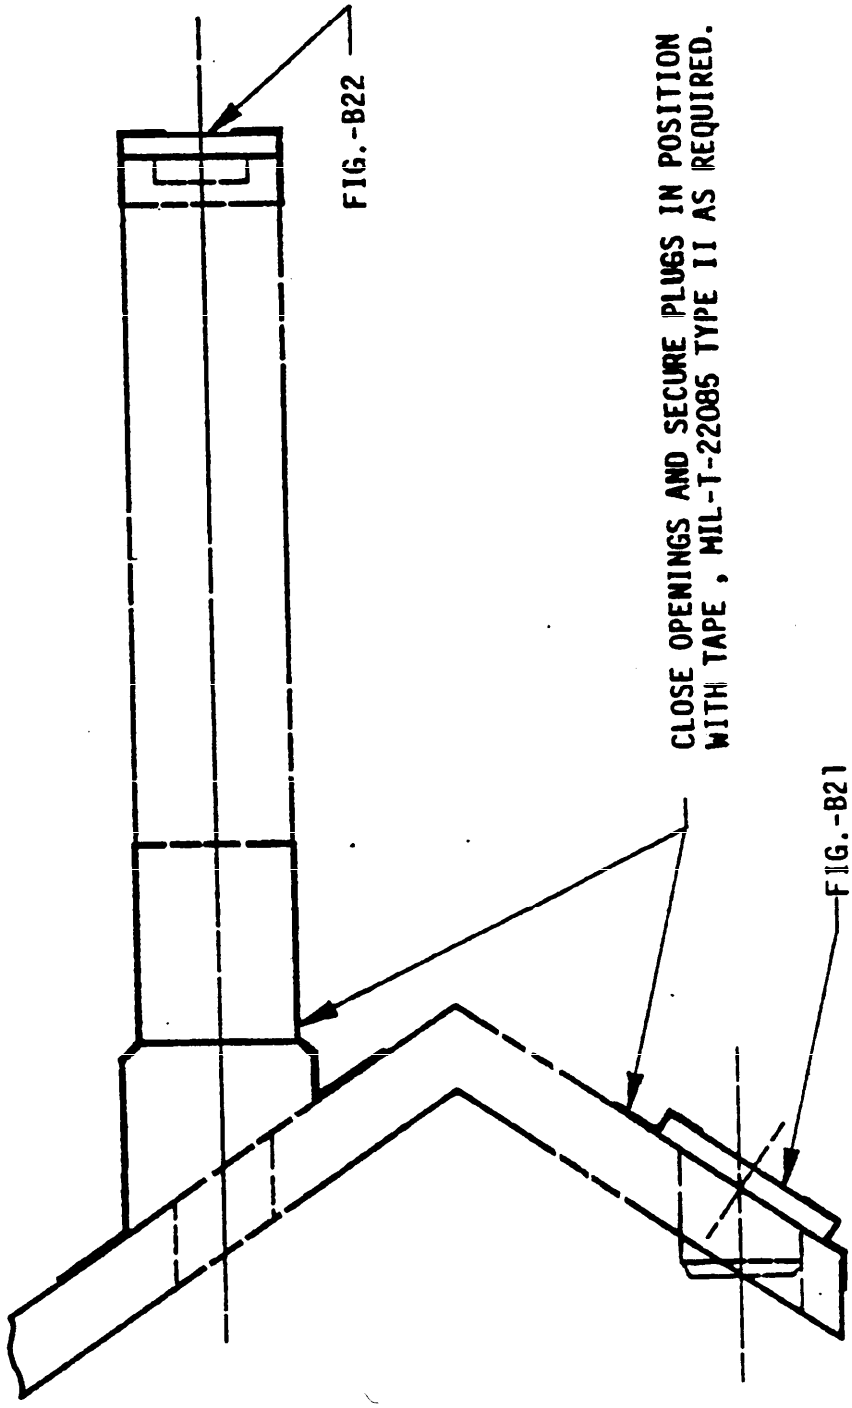


FIGURE B20. Plugging of machine gun and telescope openings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

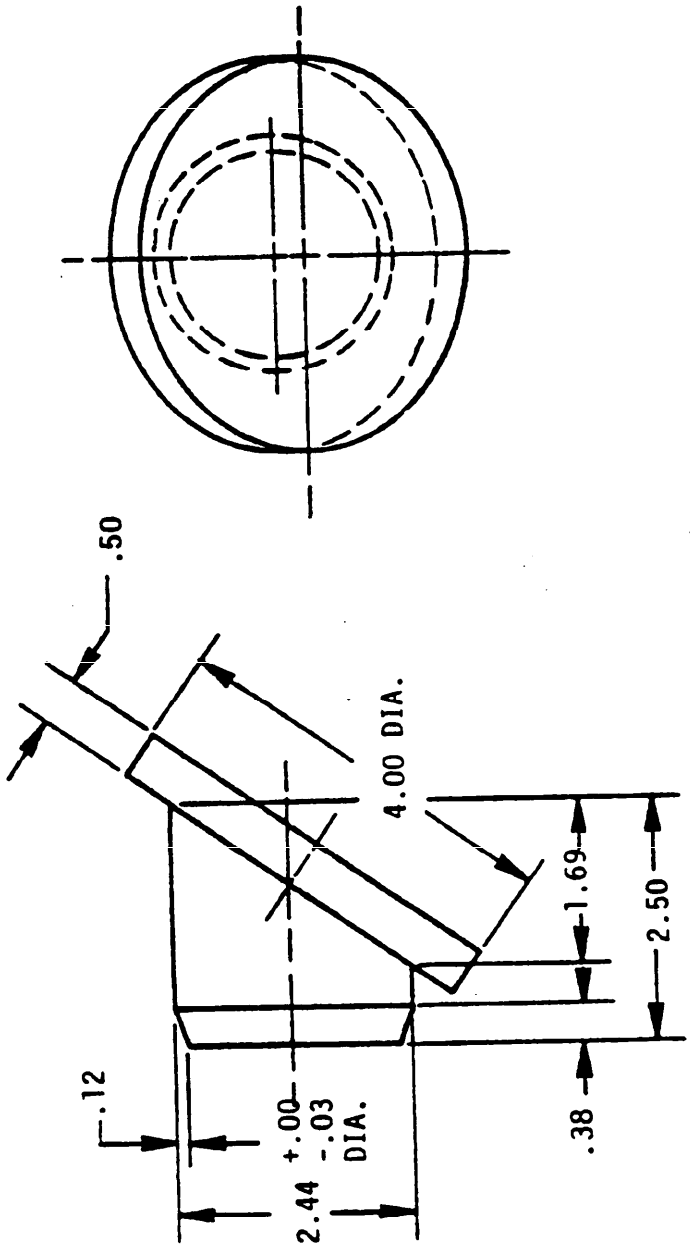


NOTES:

1. MATERIAL:
   WOOD, CLASS 3, GROUP II OR III PER MIL-STD-731.
   MIL-STD-731.

   FINAL FINISH:
   PAINT PER MIL-C-46168 OR MIL-C-53039, GREEN 383;
   1.8 TO 2.2 MILS THICK DRY COAT.

FIGURE B21. Plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

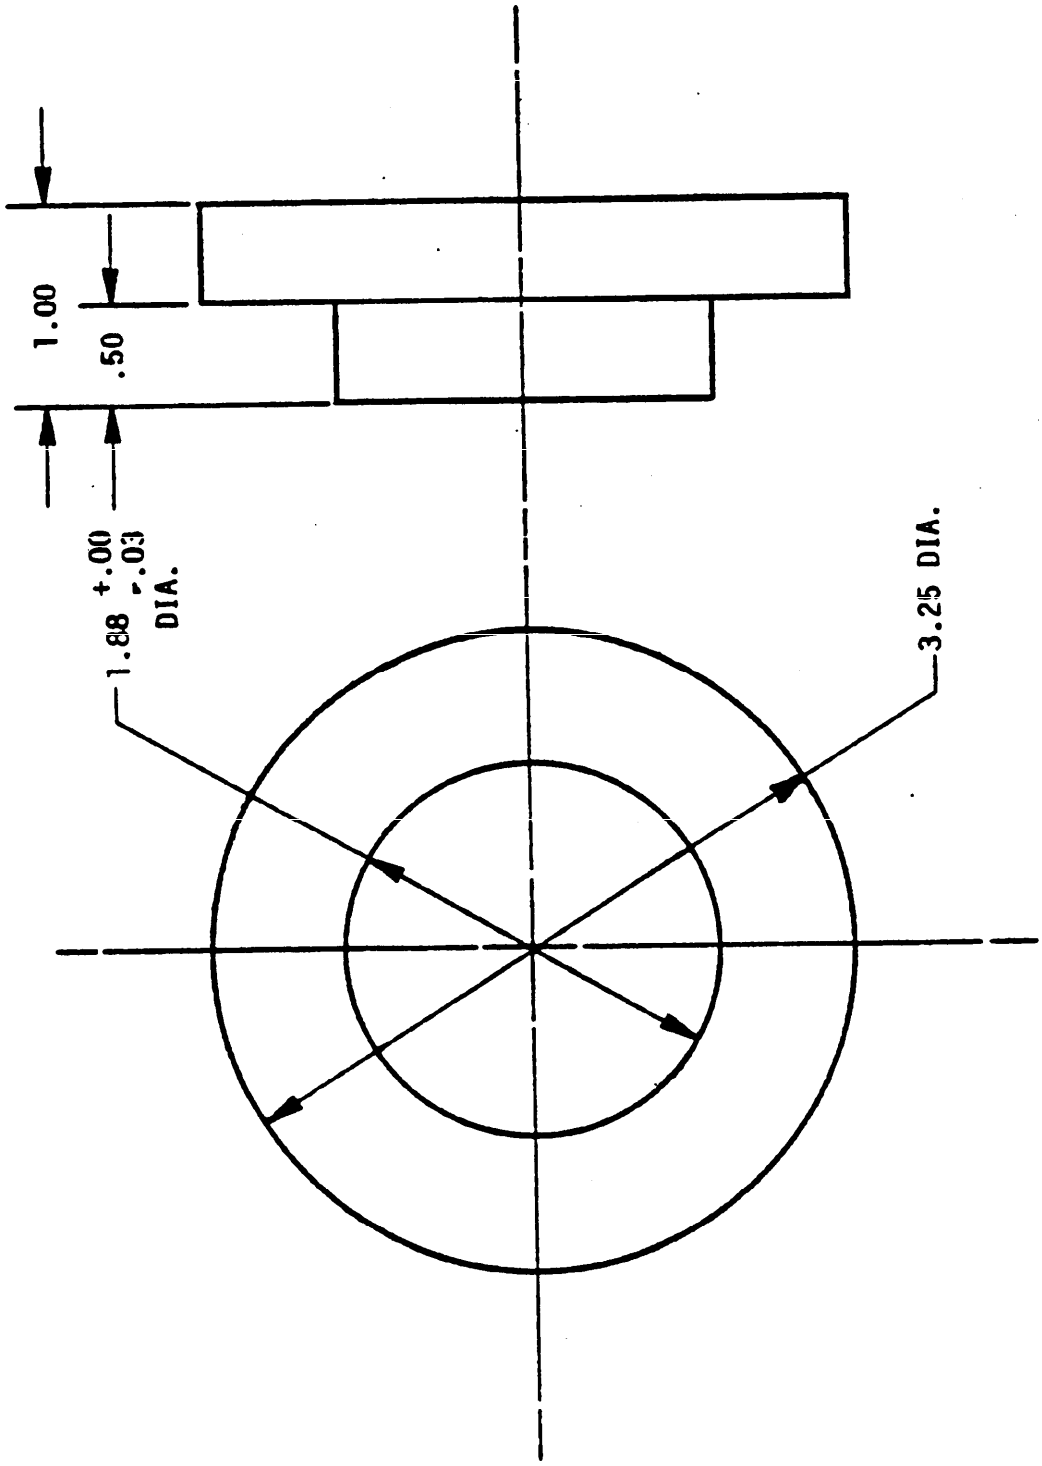

NOTES:

1. MATERIAL:
   WOOD, CLASS 3, GROUP II OR III PER MIL-STD-731.
2. FINAL FINISH:
   PAINT PER MIL-C-46168 OR MIL-C-53039, GREEN 383;
   1.8 TO 2.2 MILS THICK DRY COAT.

FIGURE B22. Plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

FIGURE NUMBER	DESCRIPTION
C2	RAIL ASSEMBLY, FRONT
C3	RAIL ASSEMBLY, REAR
C4	RAIL, FRONT
C5	END PLATE, QUANTITY 4
C6	LEG BRACE
C7	LEG BRACE
C8	LEG BRACE
C9	GUSSET, QUANTITY 2
C10	LEG, FRONT
C11	LEG, FRONT
C12	LEG, FRONT
C13	RAIL, REAR
C14	LEG, REAR
C15	LEG, REAR
C16	MS90728-60, QUANTITY 1
C17	MS90728-111, QUANTITY 3
C18	10910174-3, QUANTITY 1
C19	10910174-5, QUANTITY 3

FIGURE C1. Installation cargo rack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

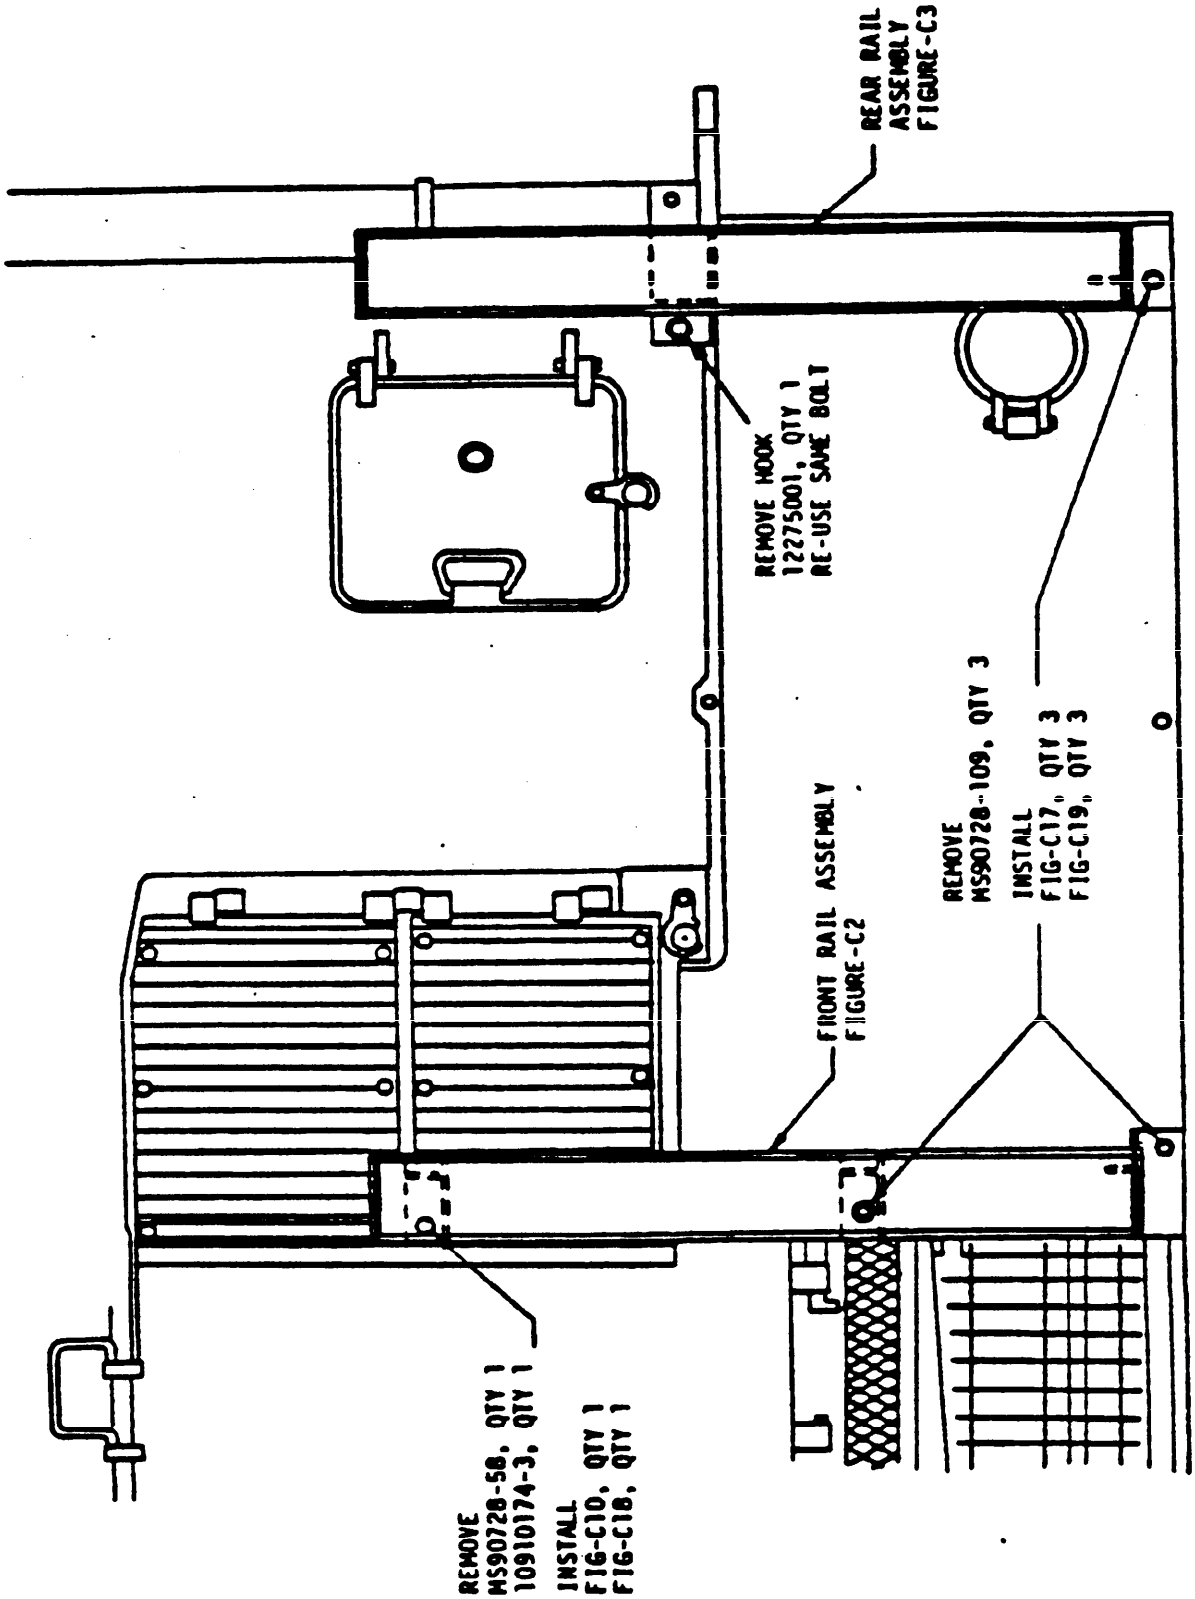


FIGURE C1. Cargo rack installation (sht. 2 of 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


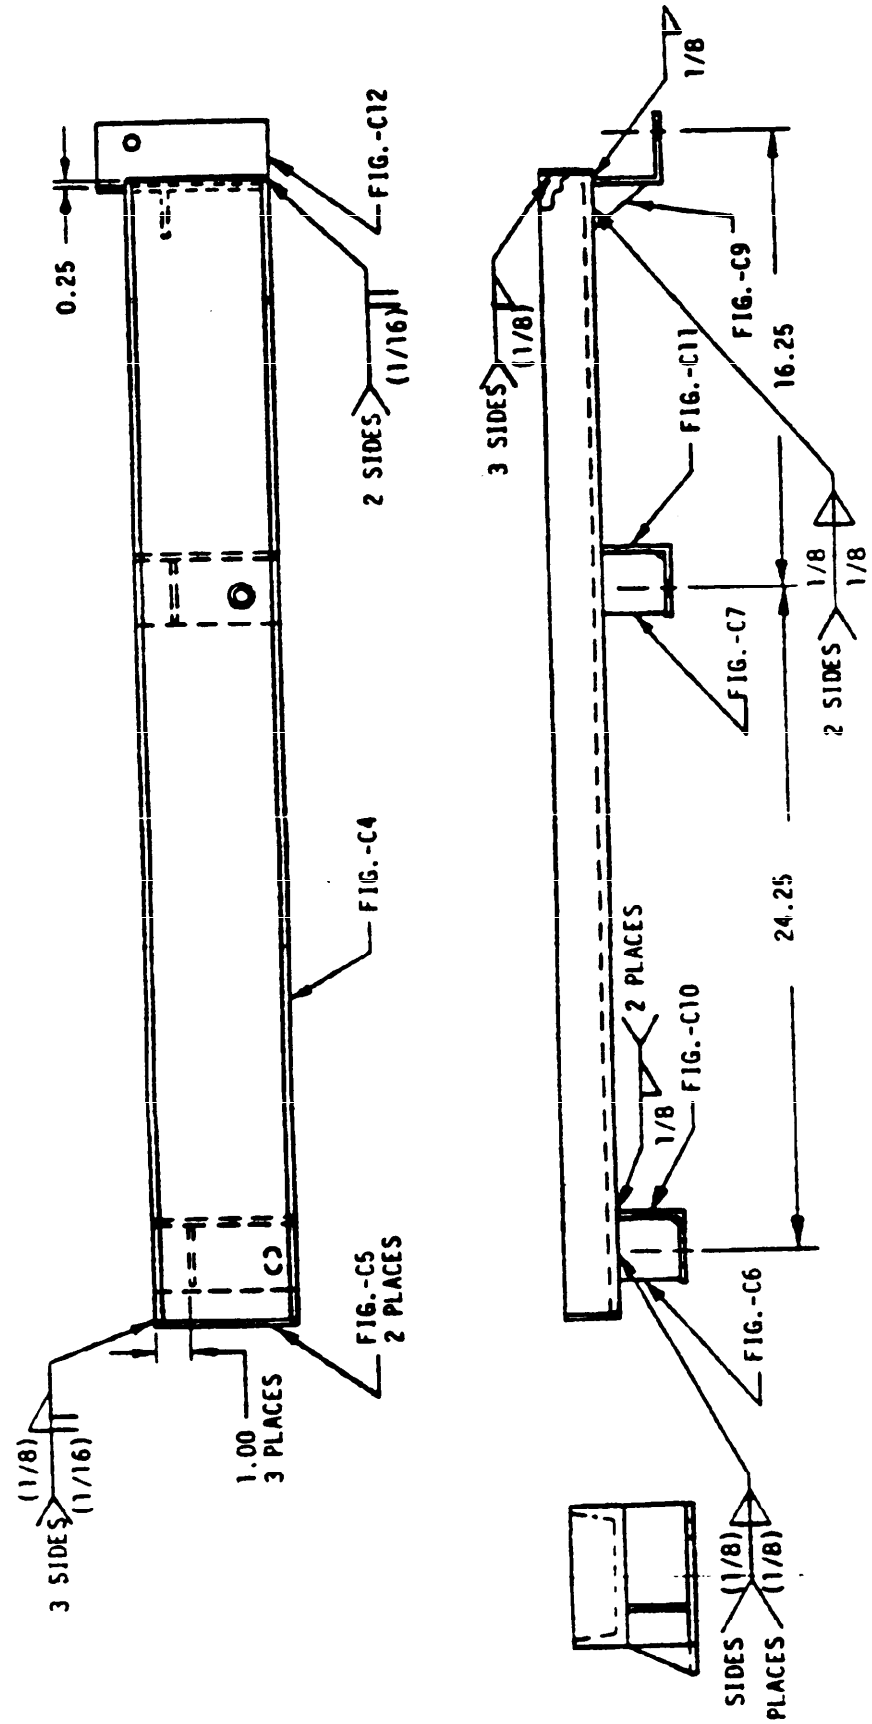


FIGURE C2. B11 rail assembly, front.

1. WELD IN ACCORDANCE WITH AWS D1.1.
2. ALL WELD SIZES ARE MINIMUM.
3. FINAL PROTECTIVE FINISH:
   TREAT PER TYPE I OR TYPE III.
   APPLY PRIMER PER MIL-P-53022 OR
   MIL-P-53030. TOPCOAT GREEN 383
   PER MIL-C-46168 OR MIL-C-53039.
4. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

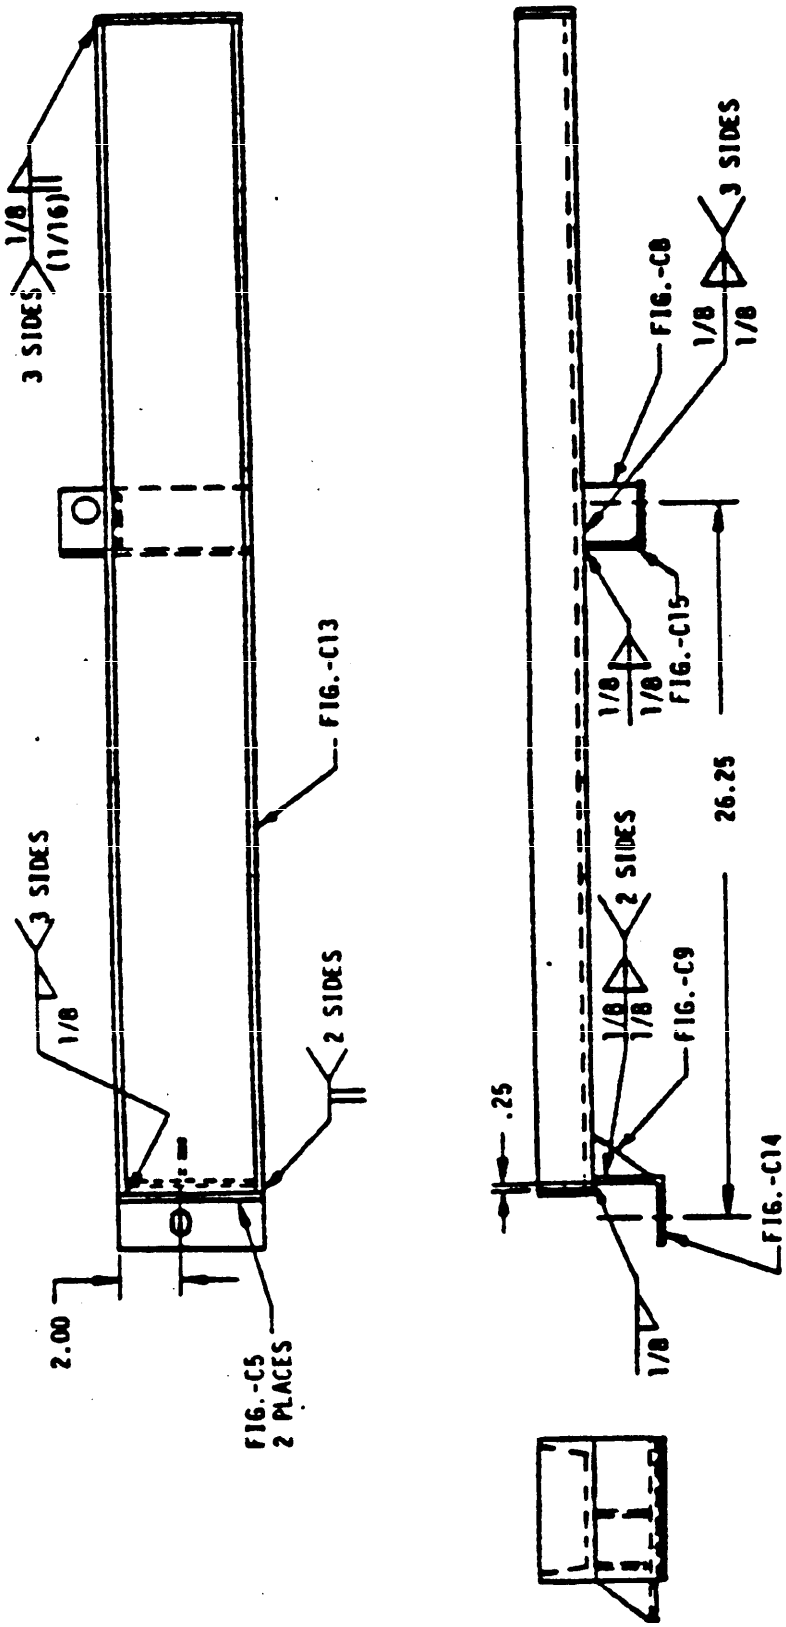

1. WELD IN ACCORDANCE WITH AWS D1.1.
2. ALL WELD SIZES ARE MINIMUM.
3. FINAL PROTECTIVE FINISH:
   TREAT PER TYPE I OR TYPE III.
   APPLY PRIMER PER MIL-P-53022 OR
   MIL-P-53030. TOPCOAT GREEN 383
   PER MIL-C-46168 OR MIL-C-53039.
4. TOLERANCES ON 2 PLACE DECIMALS: ±0.02.

FIGURE C3. B11 rail assembly, rear.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

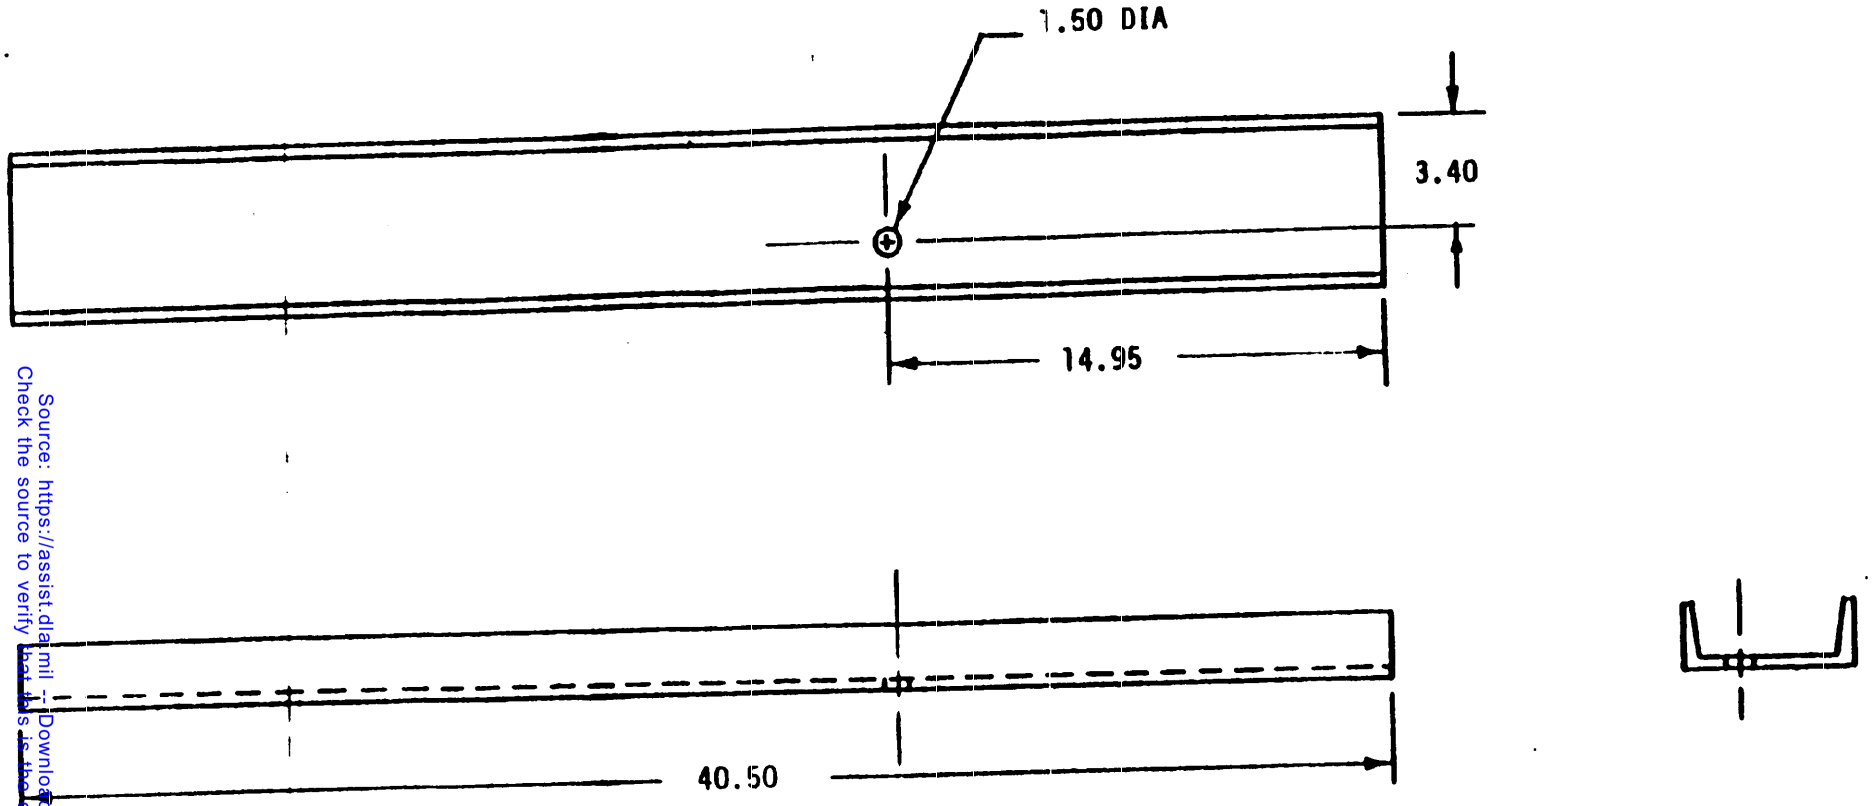

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


1. MATERIAL:

   STEEL C CHANNEL (STRUCTURAL)
   ASTM A-36, ASME SA-36
   5.00 x 1.885 x 0.325

2. REMOVE ALL BURRS AND SHARP EDGES.

3. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02


FIGURE C4. Rail, front.

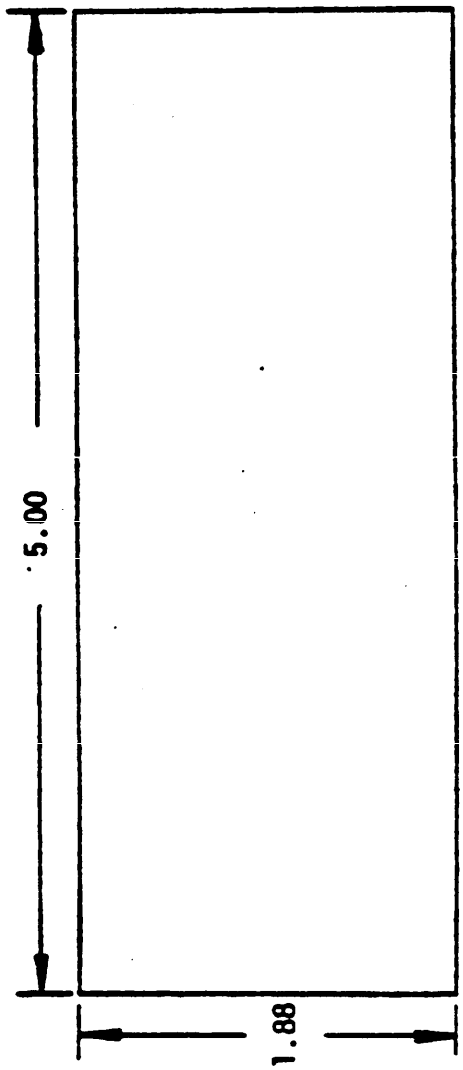

1. MATERIAL:
   STEEL PLATE
   ASTM A-36, ASME SA-36
   0.25 THICKNESS
2. REMOVE ALL BURRS AND SHARP EDGES.
3. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02

FIGURE C5. End plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

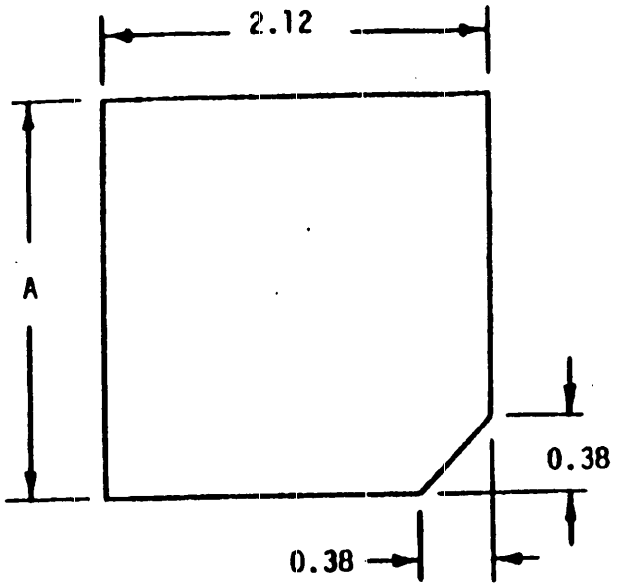

	DIMENSION A	QUANTITY
FIGURE -C6	2.13	1
FIGURE -C7	2.25	1
FIGURE -C8	1.85	1


1. MATERIAL:

   STEEL PLATE
   ASTM A-36, ASME SA-36
   0.25 THICKNESS

2. REMOVE ALL BURRS AND SHARP EDGES.
3. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02

FIGURES C6, C7, C Leg brace.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

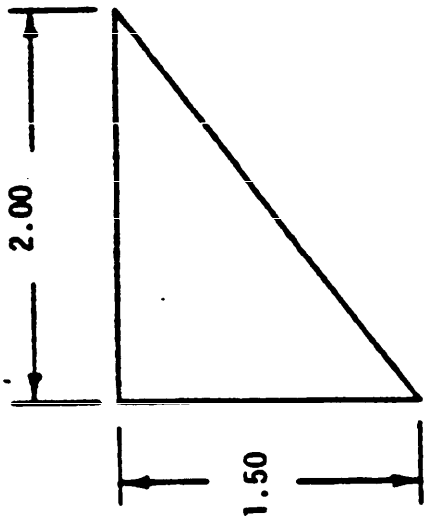

1. MATERIAL:
   STEEL PLATE
   ASTM A-36, ASME SA-36
   0.25 THICKNESS
2. REMOVE ALL BURRS AND SHARP EDGES.
3. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02

FIGURE C9. Gusset.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

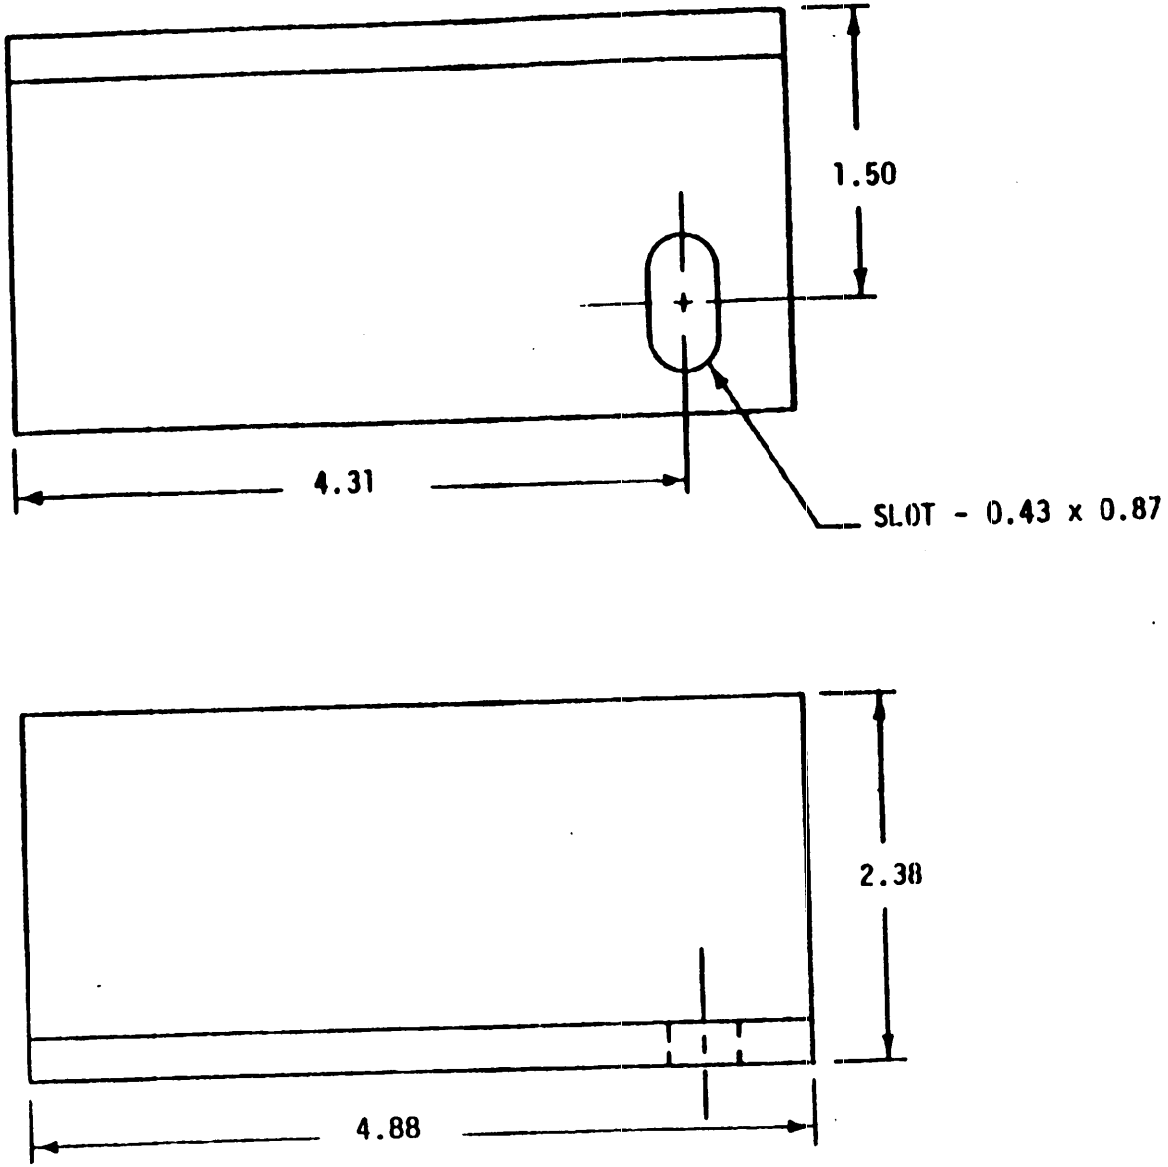


1. MATERIAL:

   STEEL ANGLE-BAR SIZE
   ASTM A-36 OR M1020
   MERCHANT QUALITY
   2.50 x 2.50 x 0.25
   MACHINE TO SPECIFIED HEIGHT

2. REMOVE ALL BURRS AND SHARP EDGES.
3. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02

FIGURE C10. 9, front.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

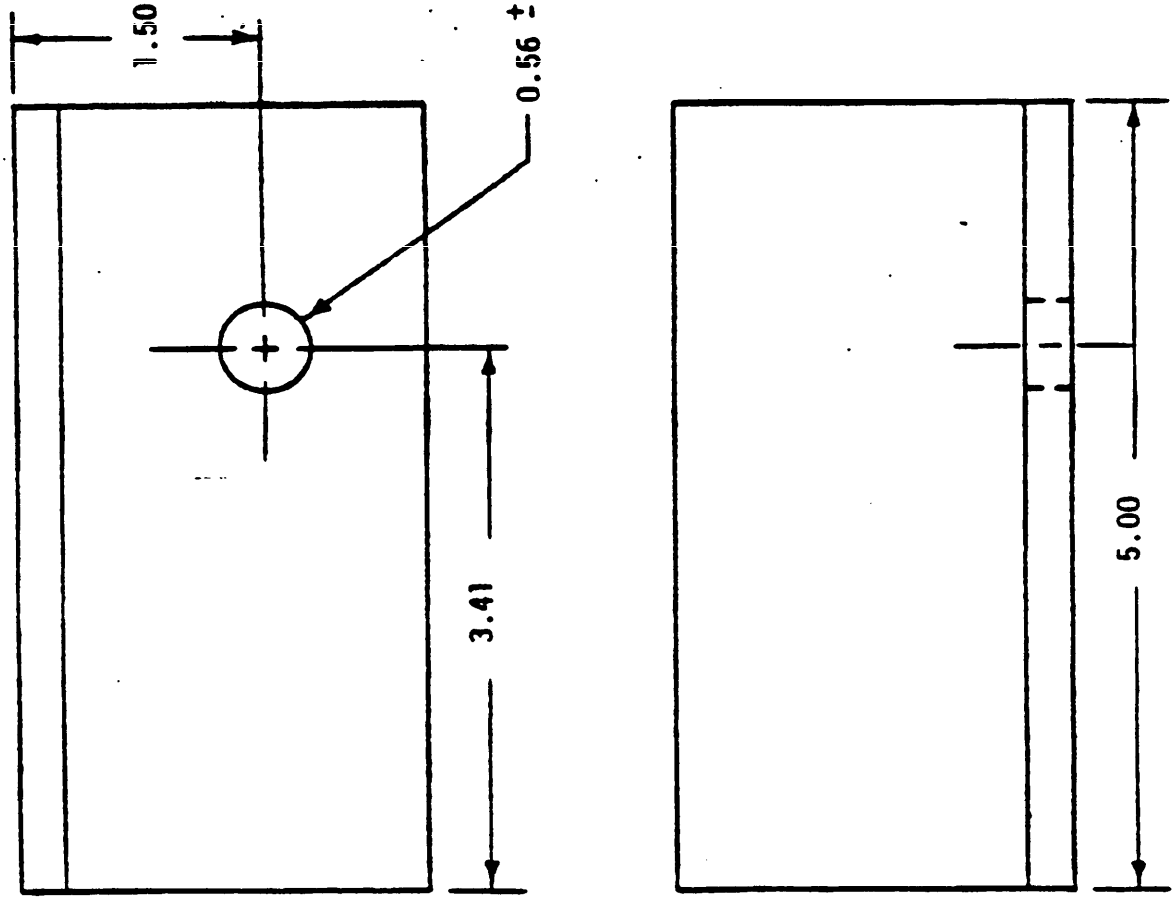

1. MATERIAL:
   STEEL ANGLE-BAR SIZE
   ASTM A-36 OR M1020
   2.50 x 2.50 x 0.25
2. REMOVE ALL BURRS AND SHARP EDGES.
3. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02

FIGURE C11. Leg, front.


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

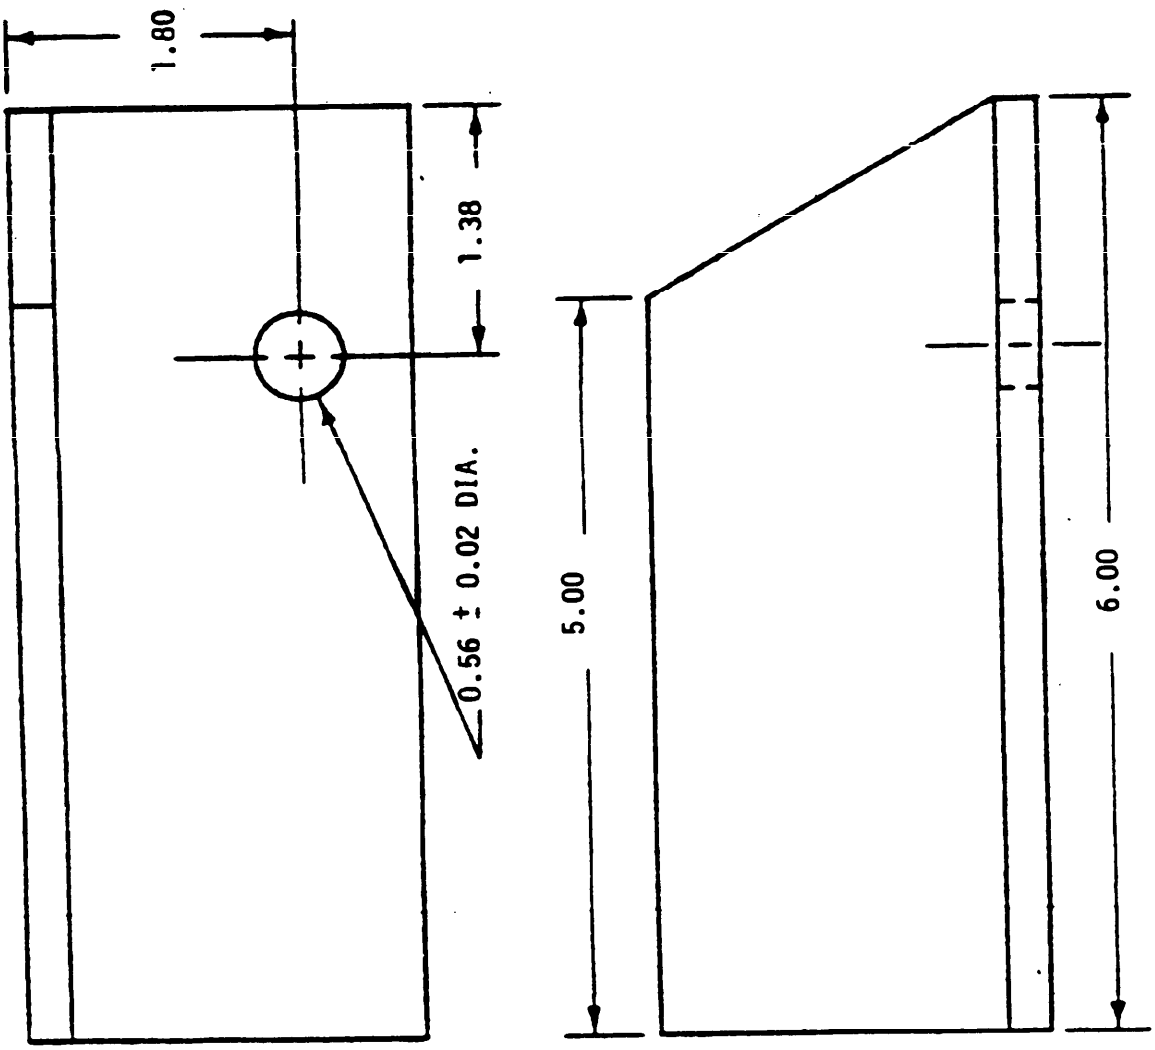

1. MATERIAL:
   STEEL ANGLE-BAR SIZE
   ASTM A-36 OR M1020
   MERCHANT QUALITY
   2.50 x 2.50 x 0.25
2. REMOVE ALL BURRS AND SHARP EDGES.
3. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02

FIGURE C12. Leg, front.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

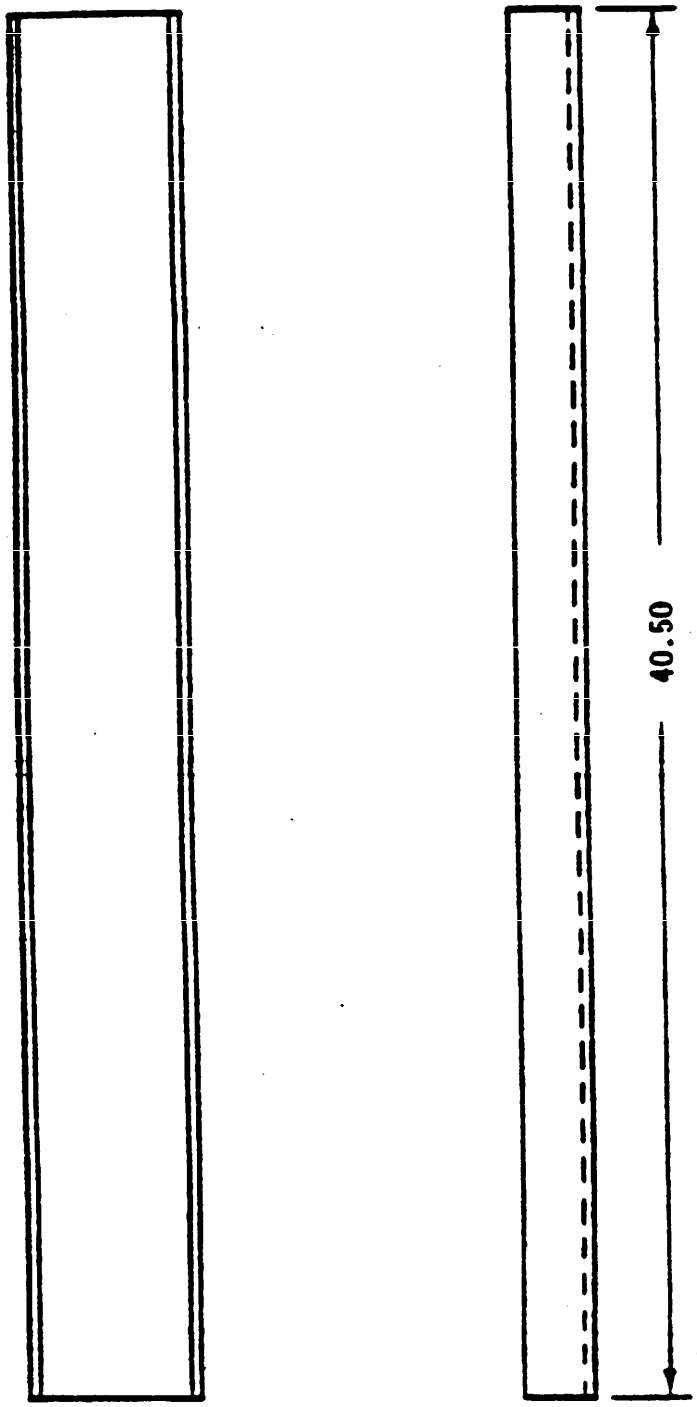


1. MATERIAL:
   STEEL C CHANNEL (STRUCTURAL)
   ASTM A-36, ASME SA-36
   5.00 x 1.885 x 0.325
2. REMOVE ALL BURRS AND SHARP EDGES.
3. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02

FIGURE C13. Rail, rear.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

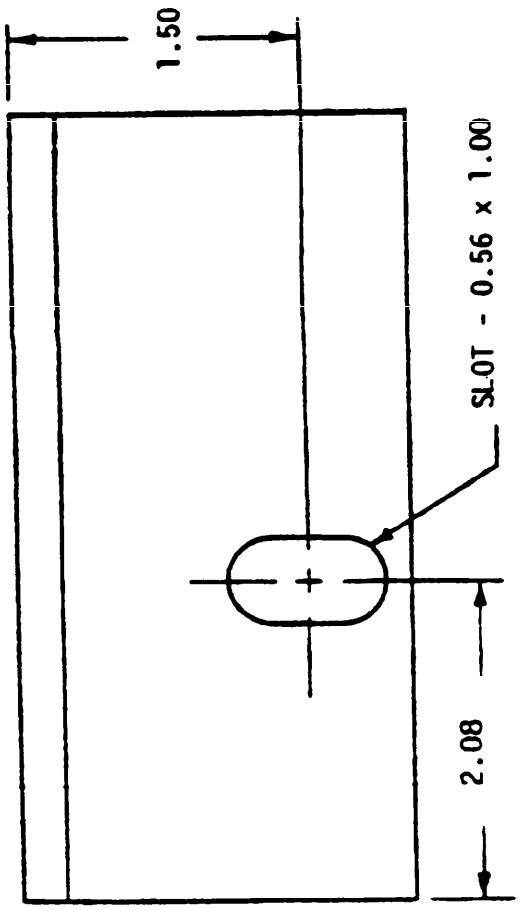

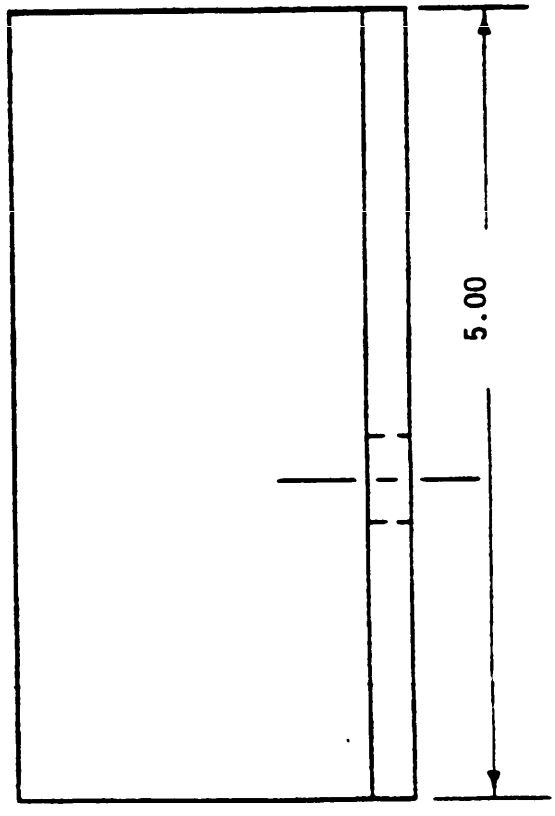


1. MATERIAL:
STEEL ANGLE-BAR SIZE
ASTM A-36 OR M1020
MERCHANT QUALITY
2.50 x 2.50 x 0.25

2. REMOVE ALL BURRS AND SHARP EDGES.

3. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02

FIGURE C14. Leg, rear.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

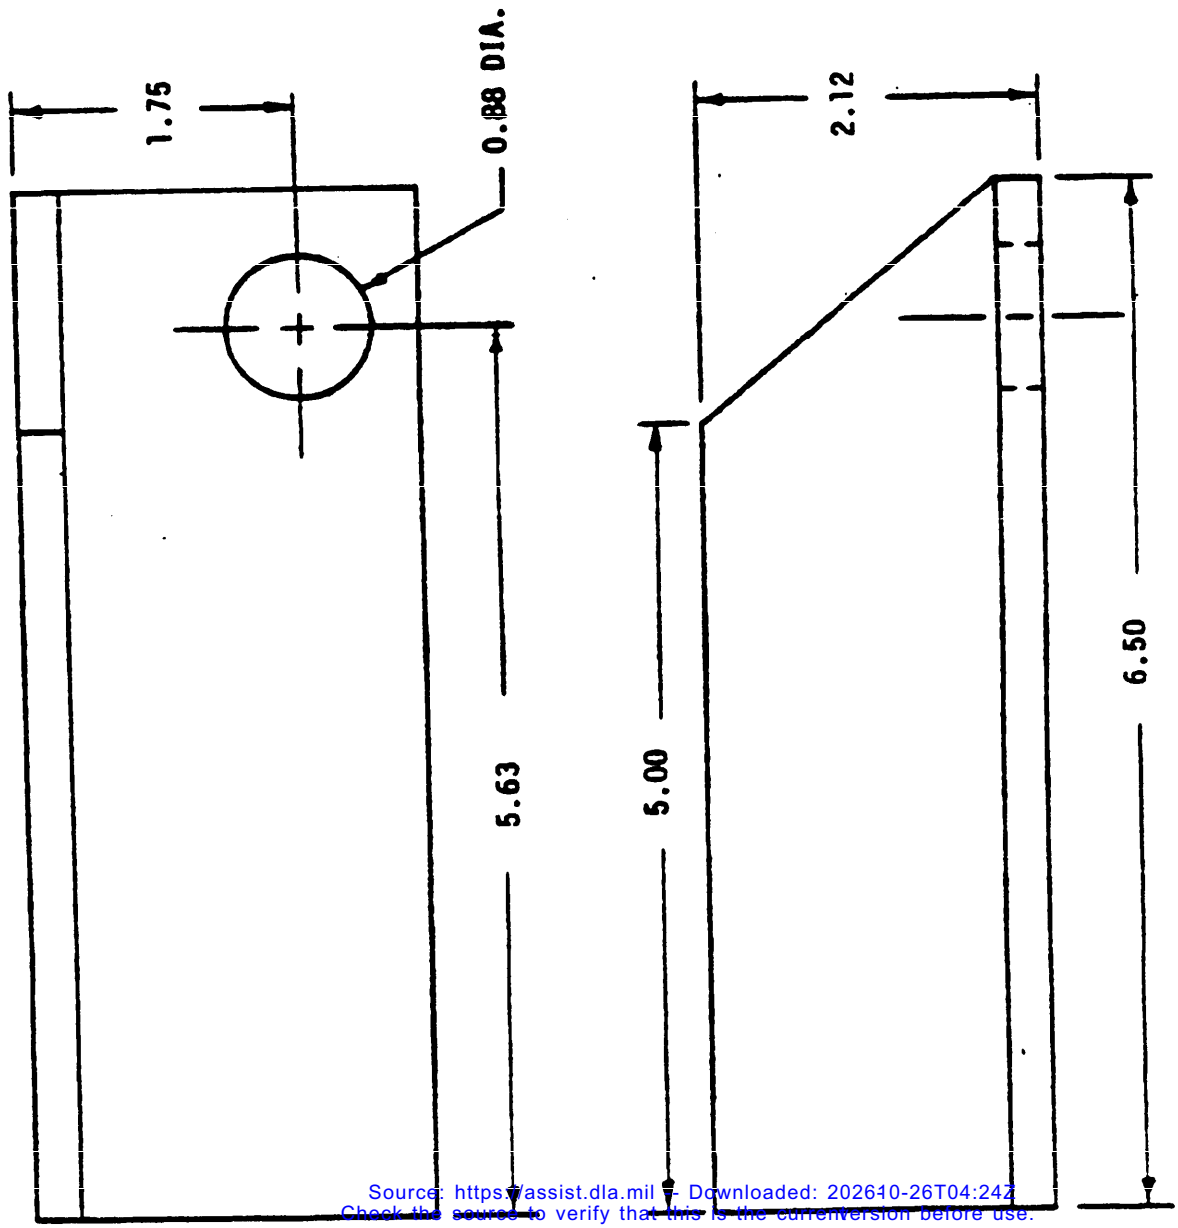

1. MATERIAL:
   STEEL ANGLE-BAR SIZE
   ASTM A-36 OR M1020
   MERCHANT QUALITY
   2.50 x 2.50 x 0.25
   MACHINE TO SPECIFIED HEIGHT
2. REMOVE ALL BURRS AND SHARP EDGES.
3. TOLERANCES ON 2 PLACE DECIMALS: ± 0.02

FIGURE C15. Leg, rear.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

RETURNED TO SERVICE. PRESERVATION MUST BE

FIGURE NUMBER	DESCRIPTION
D2	FRAME ASSEMBLY
D3	PLAN VIEW, FRAME
D4	LEFT ELEVATION, FRAME
D5	RIGHT ELEVATION, FRAME
D6	FRONT ELEVATION, FRAME
D7	REAR ELEVATION, FRAME
D8	BASE, FRAME
D9	BASE FRAME ASSEMBLY
D10	BASE, FRAME
D11	BASE FRAME ASSEMBLY
D12	BASE, FRAME
D13	BASE FRAME ASSEMBLY
D14	BASE, FRAME
D15	BASE FRAME ASSEMBLY
D16	BASE, FRAME
D17	BASE FRAME ASSEMBLY
D18	BASE, FRAME
D19	BASE FRAME ASSEMBLY
D20	BASE, FRAME
D21	BASE FRAME ASSEMBLY
D22	BASE, FRAME
D23	BASE FRAME ASSEMBLY
D24	BASE, FRAME
D25	BASE FRAME ASSEMBLY
D26	BASE, FRAME
D27	BASE FRAME ASSEMBLY
D28	BASE, FRAME
D29	BASE FRAME ASSEMBLY
D30	BASE, FRAME
D31	BASE FRAME ASSEMBLY
D32	ENGAGEMENT PIPE
D33	SPLICE PLATE
D34	CLAMP
D35	BASE FRAME SPLICE
D36	CORNER CONSTRUCTION
D37	TUBE, BASE FRAME CORNER
D38	TUBE, TOP FRAME
D39	PLATE
D40	SPLICE PLATE
D41	TUBE, TOP FRAME
D42	TUBE, TOP FRAME
D43	LINK FRAME
D44	TUBE, UPPER BRACE
D45	PLATE
D46	TUBE ASSEMBLY
D47	TUBE, TOP FRAME
D48	LINK, FRAME
D49	TUBE BRACE
D50	TUBE BRACE
D51	BRACKET
D52	BRACE
D53	TUBE TOP FRAME
D54	TUBE TOP FRAME
D55	BRACKET
D56	BRACKET
D57	FRAME TO VEHICLE INSTALLATION
D58	FRAME TO VEHICLE INSTALLATION
D59	SUPPORT
D60	SUPPORT
D61	SUPPORT
D62	BRACE
D63	FRAME TO VEHICLE INSTALLATION
D64	BRACKET
D65	FRAME TO VEHICLE INSTALLATION
D66	BRACKET
D67	BRACKET (M1A1 USE ONLY)
D68	TUBE TOP FRAME
D69	TUBE TOP FRAME
D70	BRACKET
D71	PLATE, SPLICE
D72	PLATE
D73	BRACKET
D74	FRAME TO VEHICLE INSTALLATION
D75	CHANNEL
D76	CHANNEL
D77	CHANNEL
D78	FRAME TO VEHICLE INSTALLATION
D79	FRAME TO VEHICLE INSTALLATION
D80	FRAME TO VEHICLE INSTALLATION
D81	BRACKET
D82	FRAME TO VEHICLE INSTALLATION
D83	BOLT
D84	HARDWARE, BASE, FRAME

FIGURE D1. Frame and base for closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

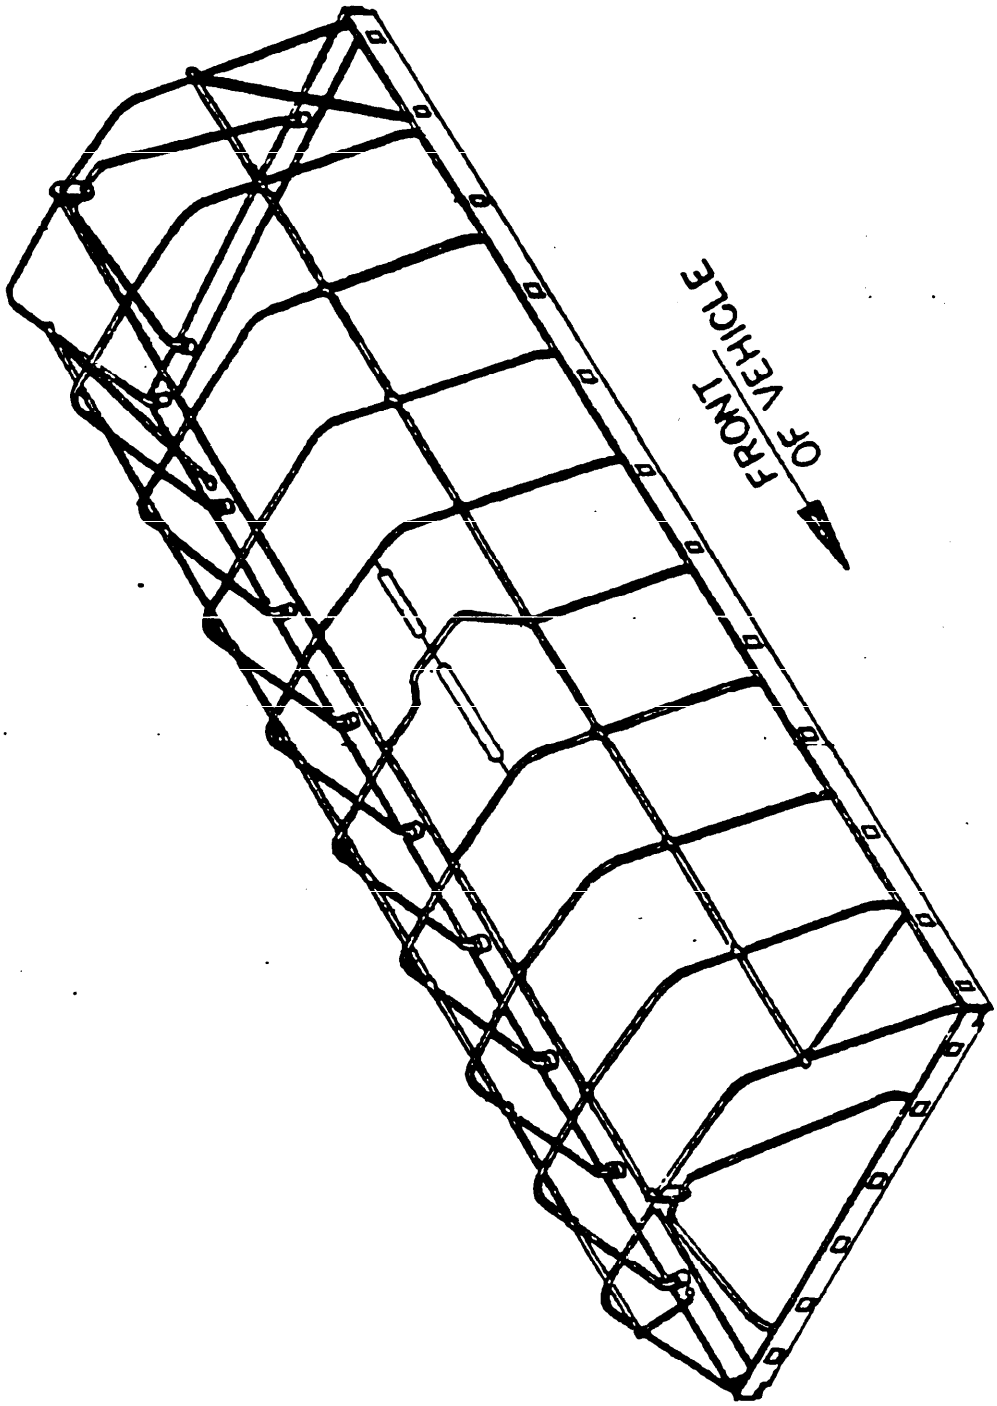


FIGURE D2. Frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

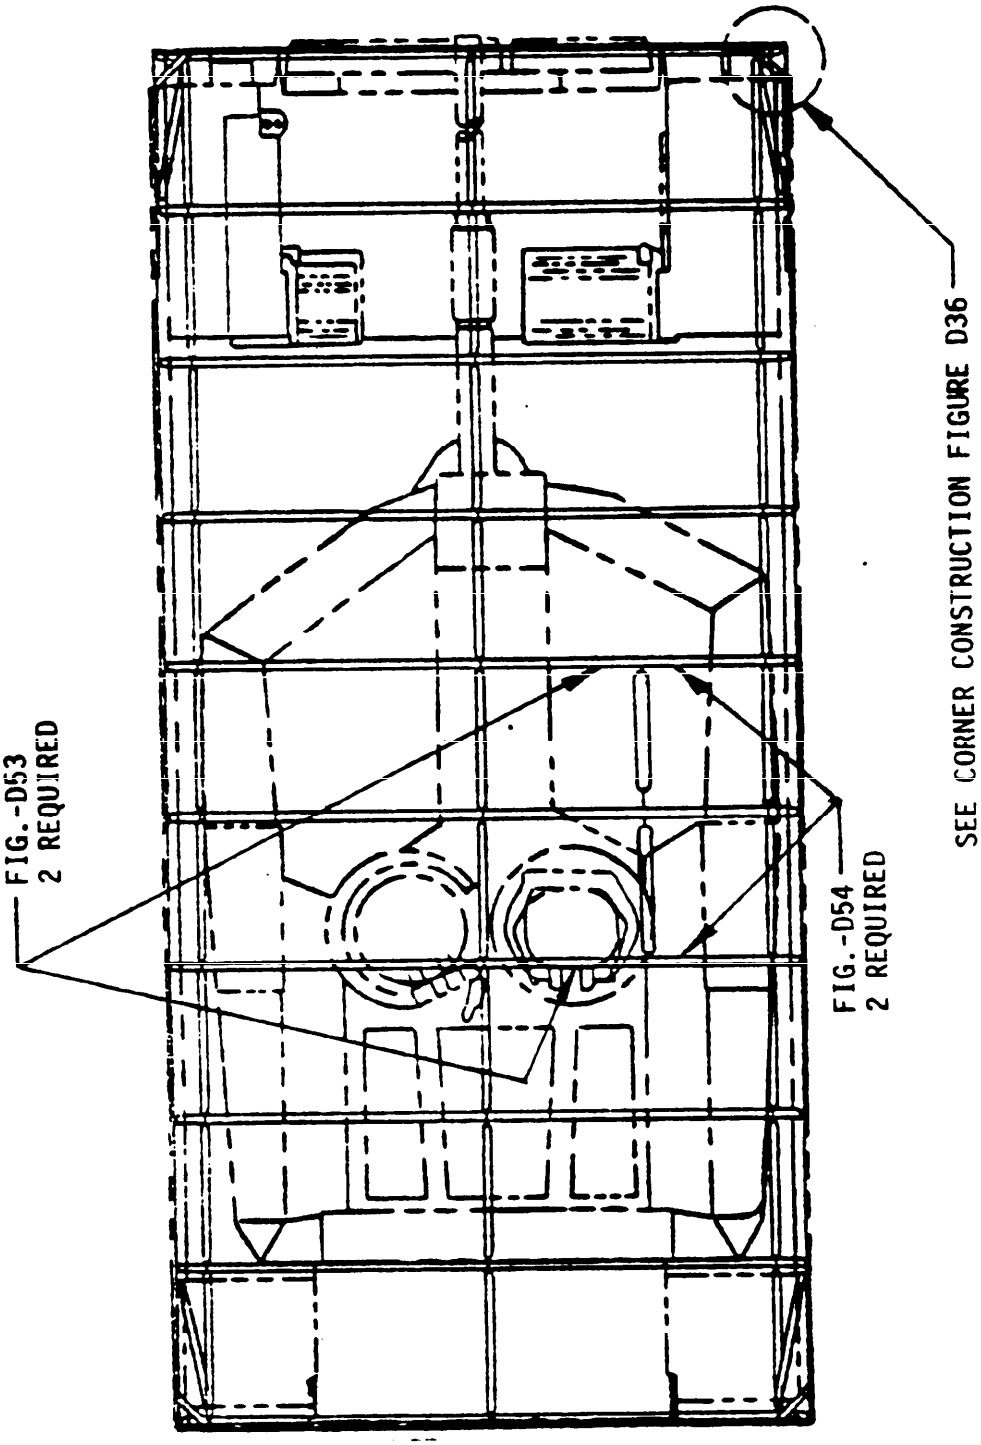


FIGURE D3. Plan view, frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

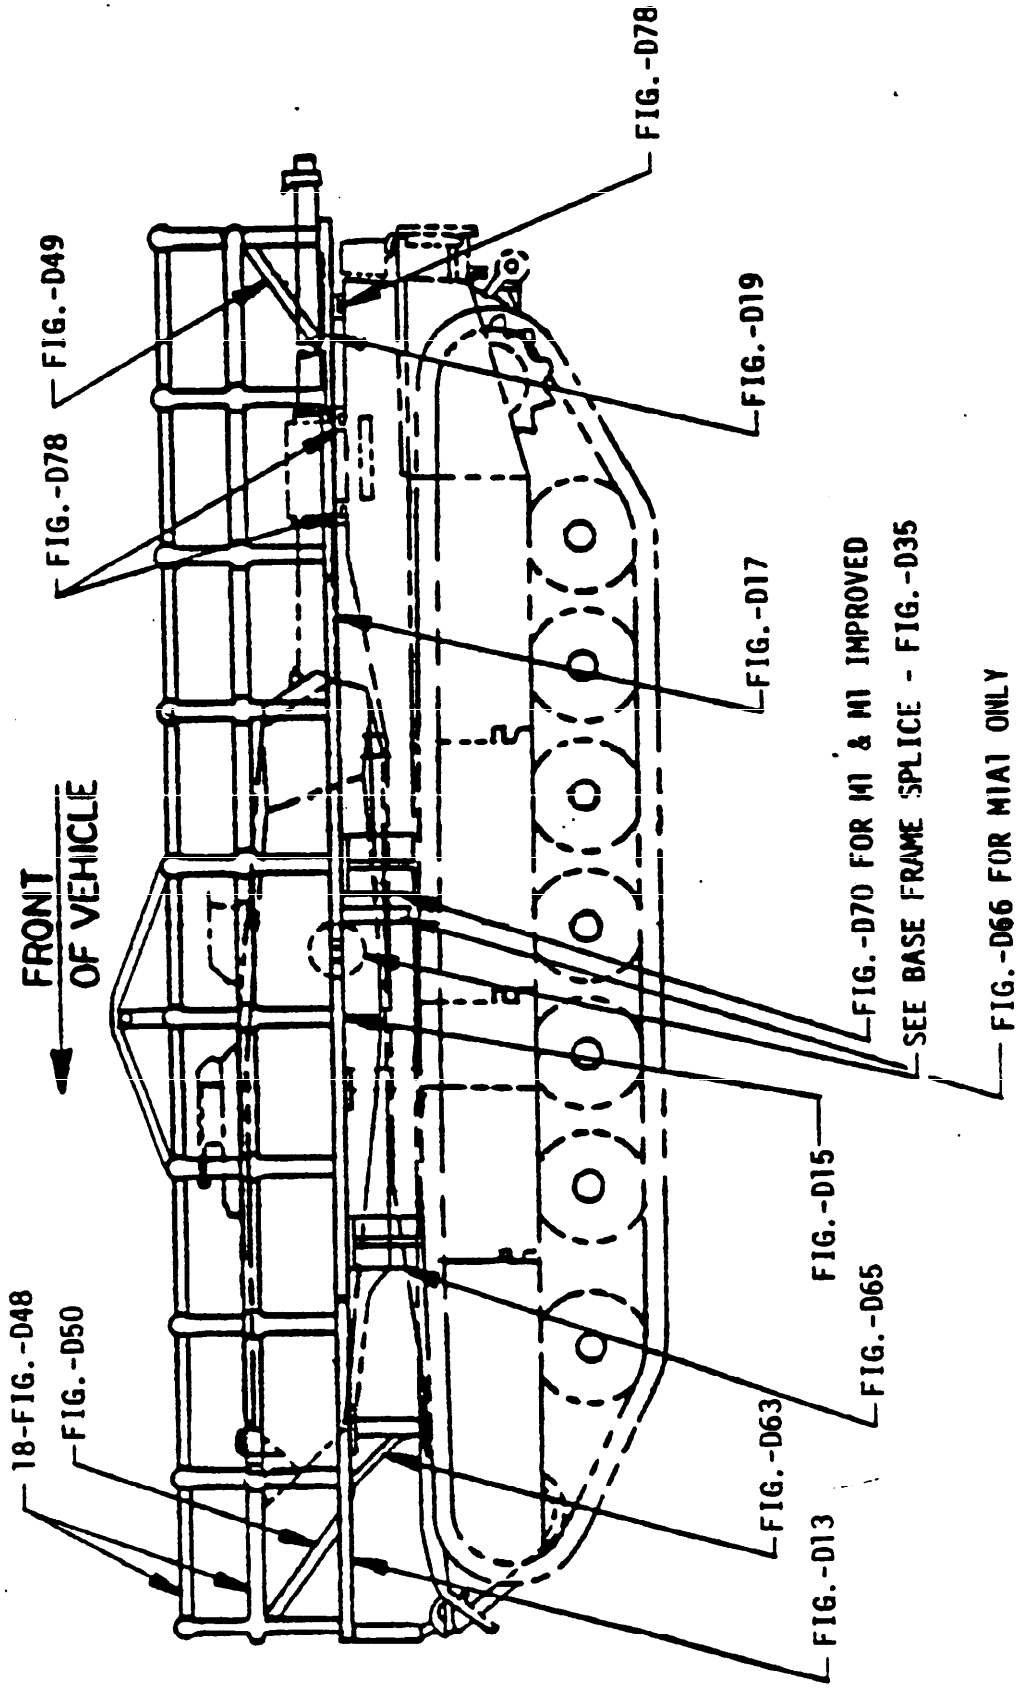


FIGURE D4. Left elevation, frame.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

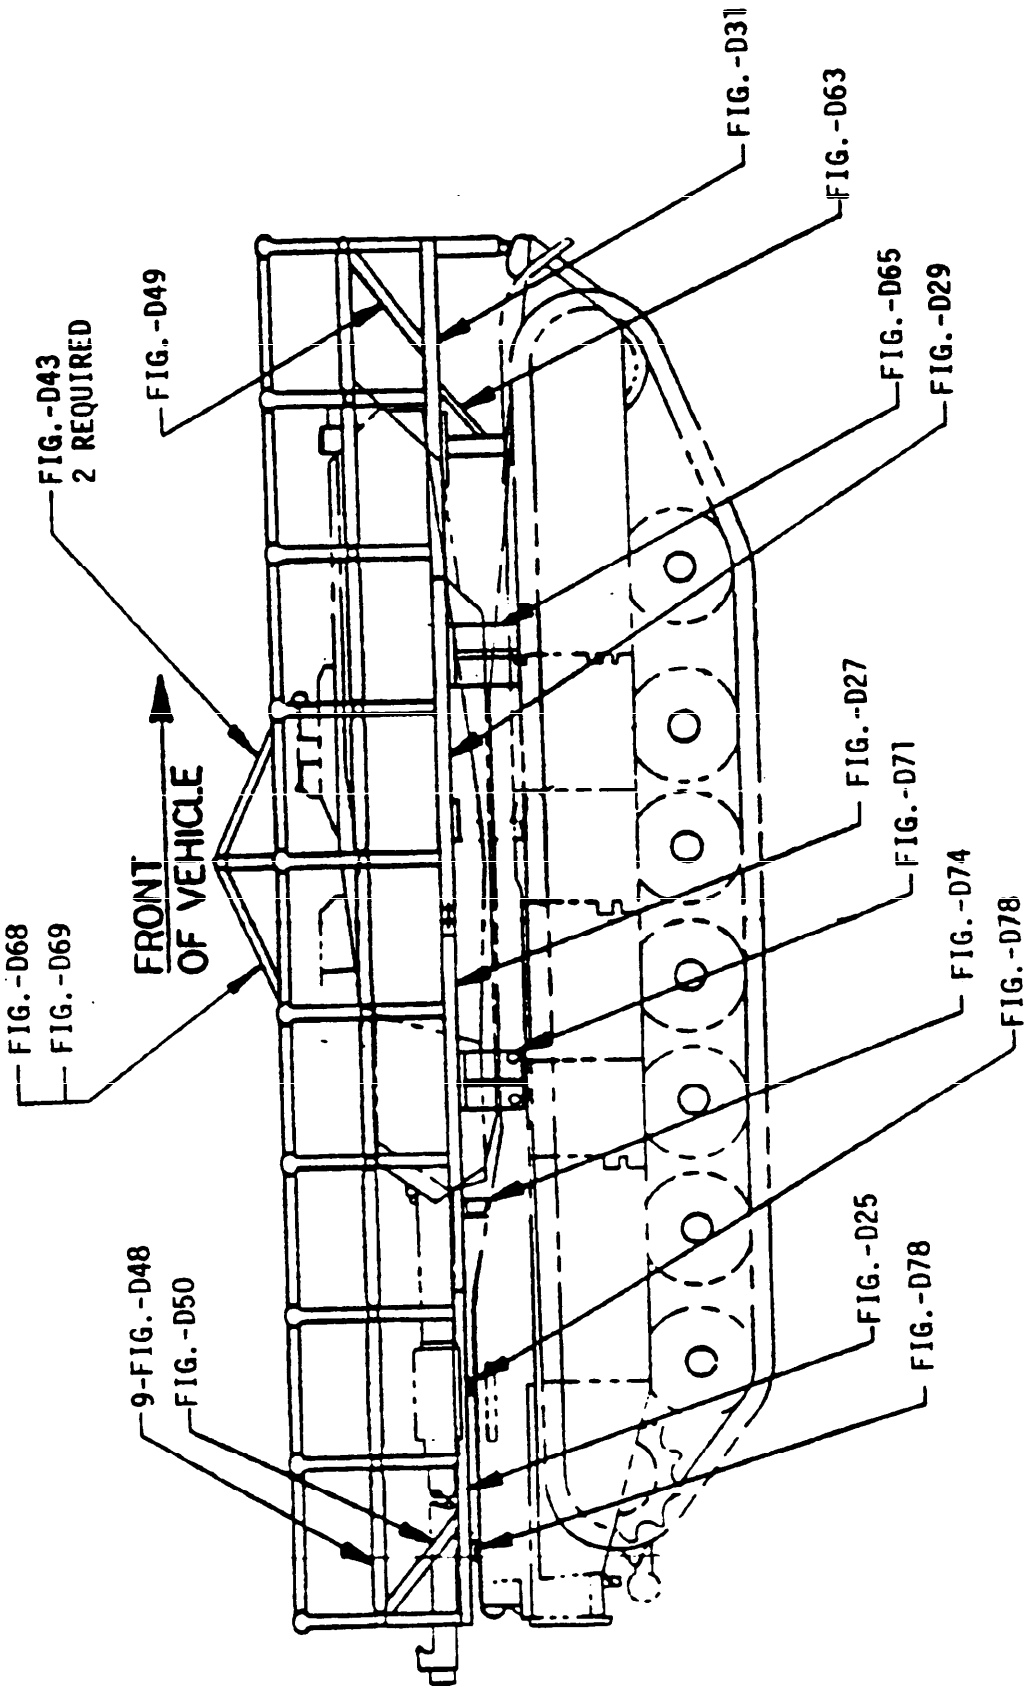


FIGURE D5. Right elevation, frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

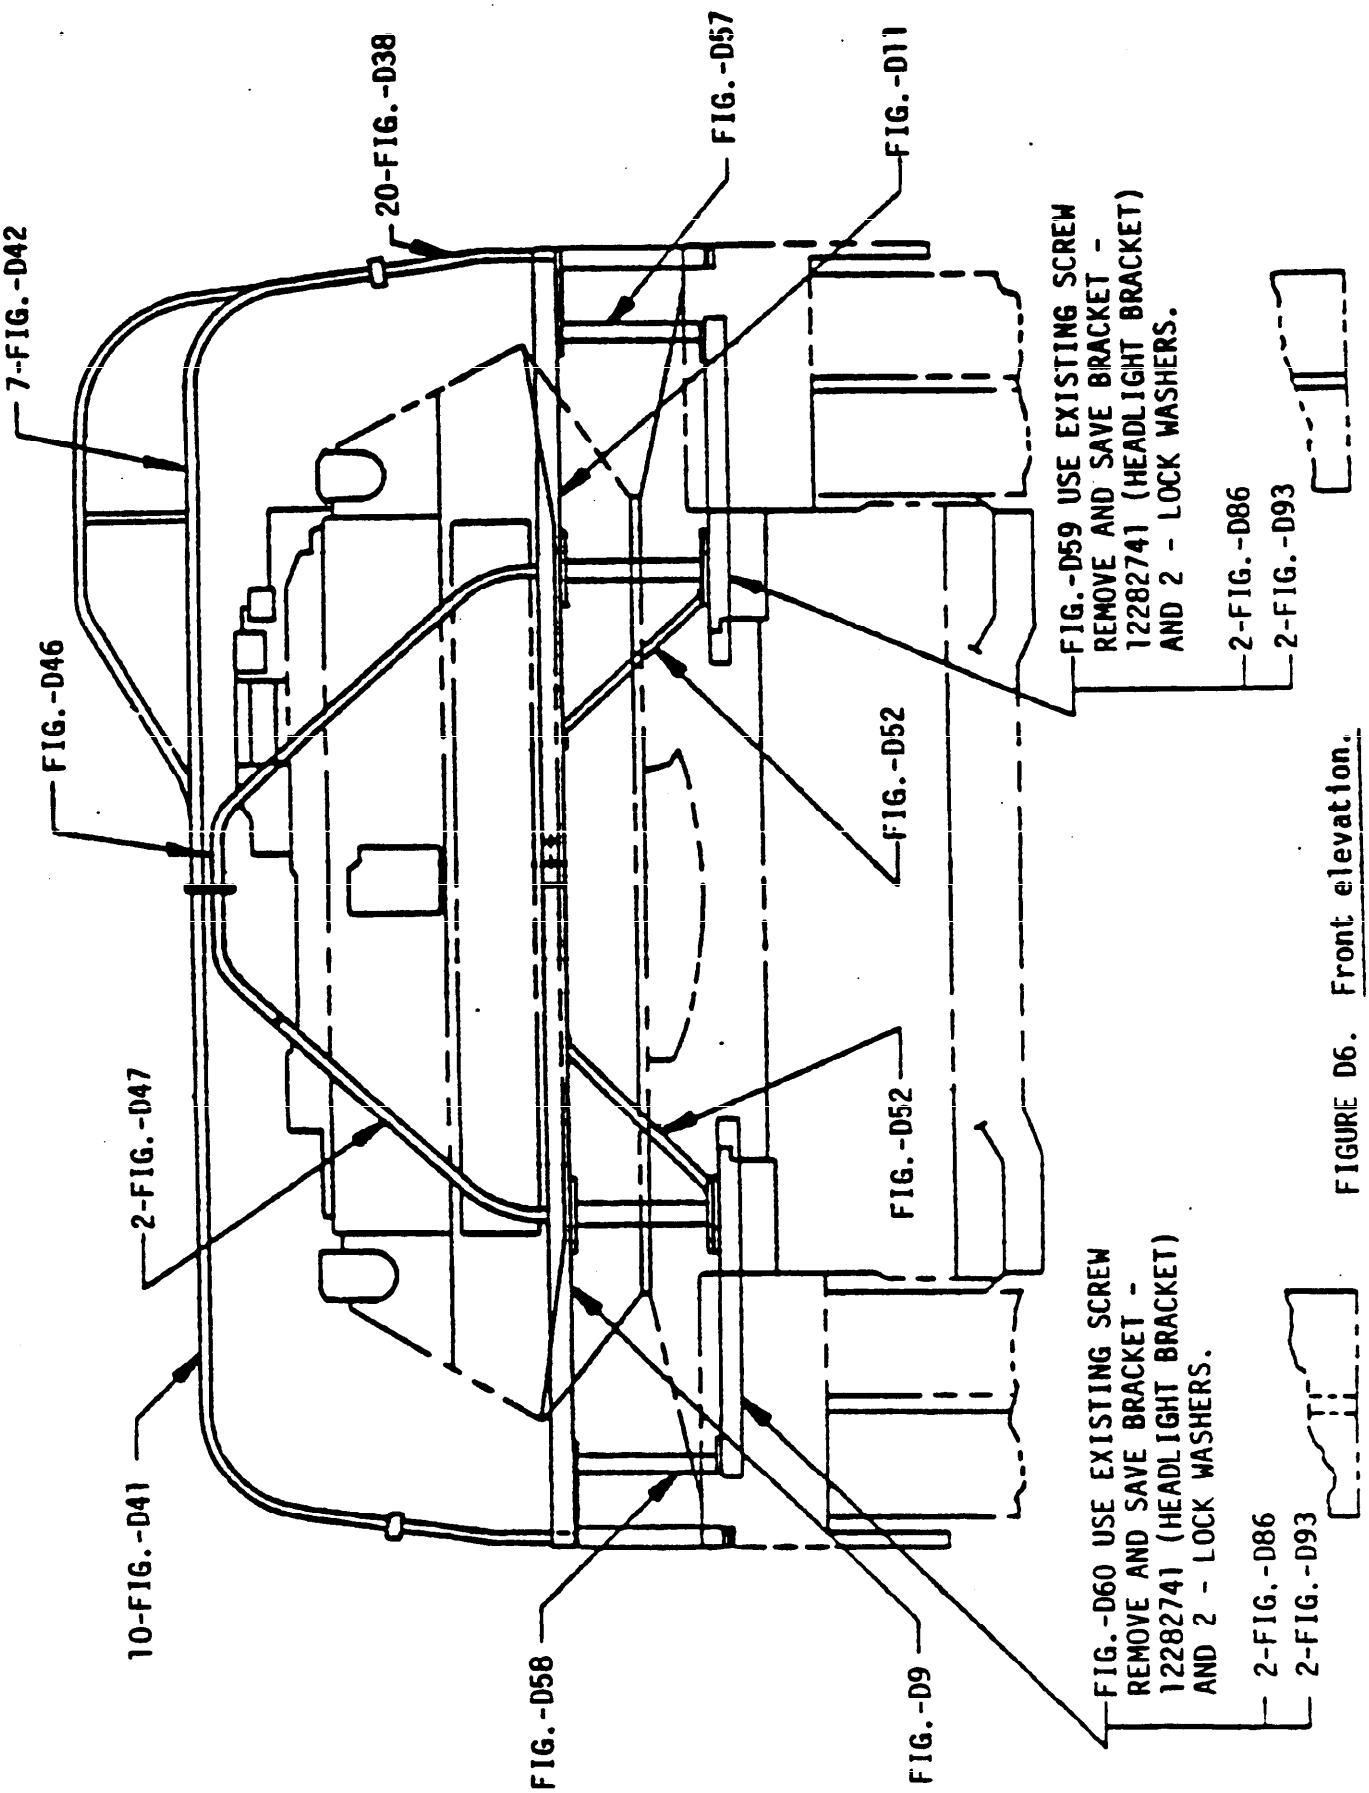


FIGURE D6. Front elevation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

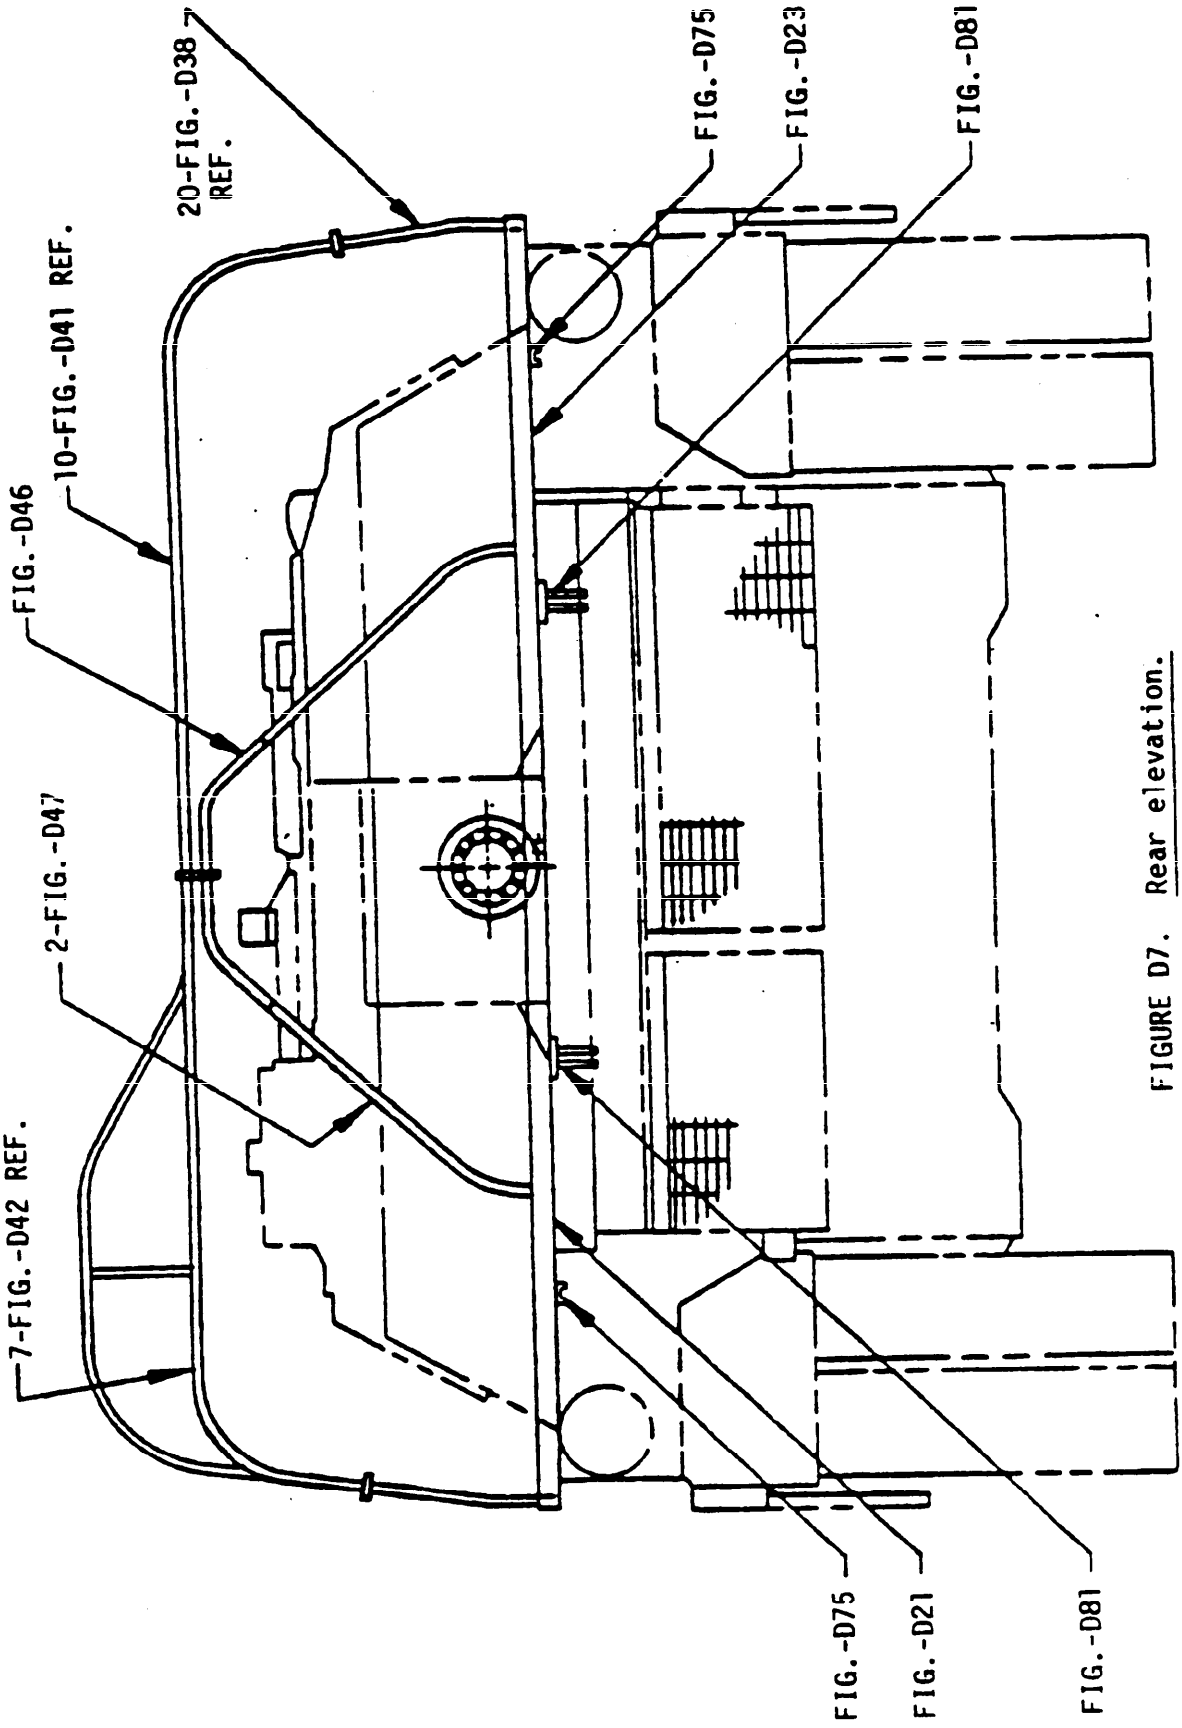


FIGURE D7. Rear elevation.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.


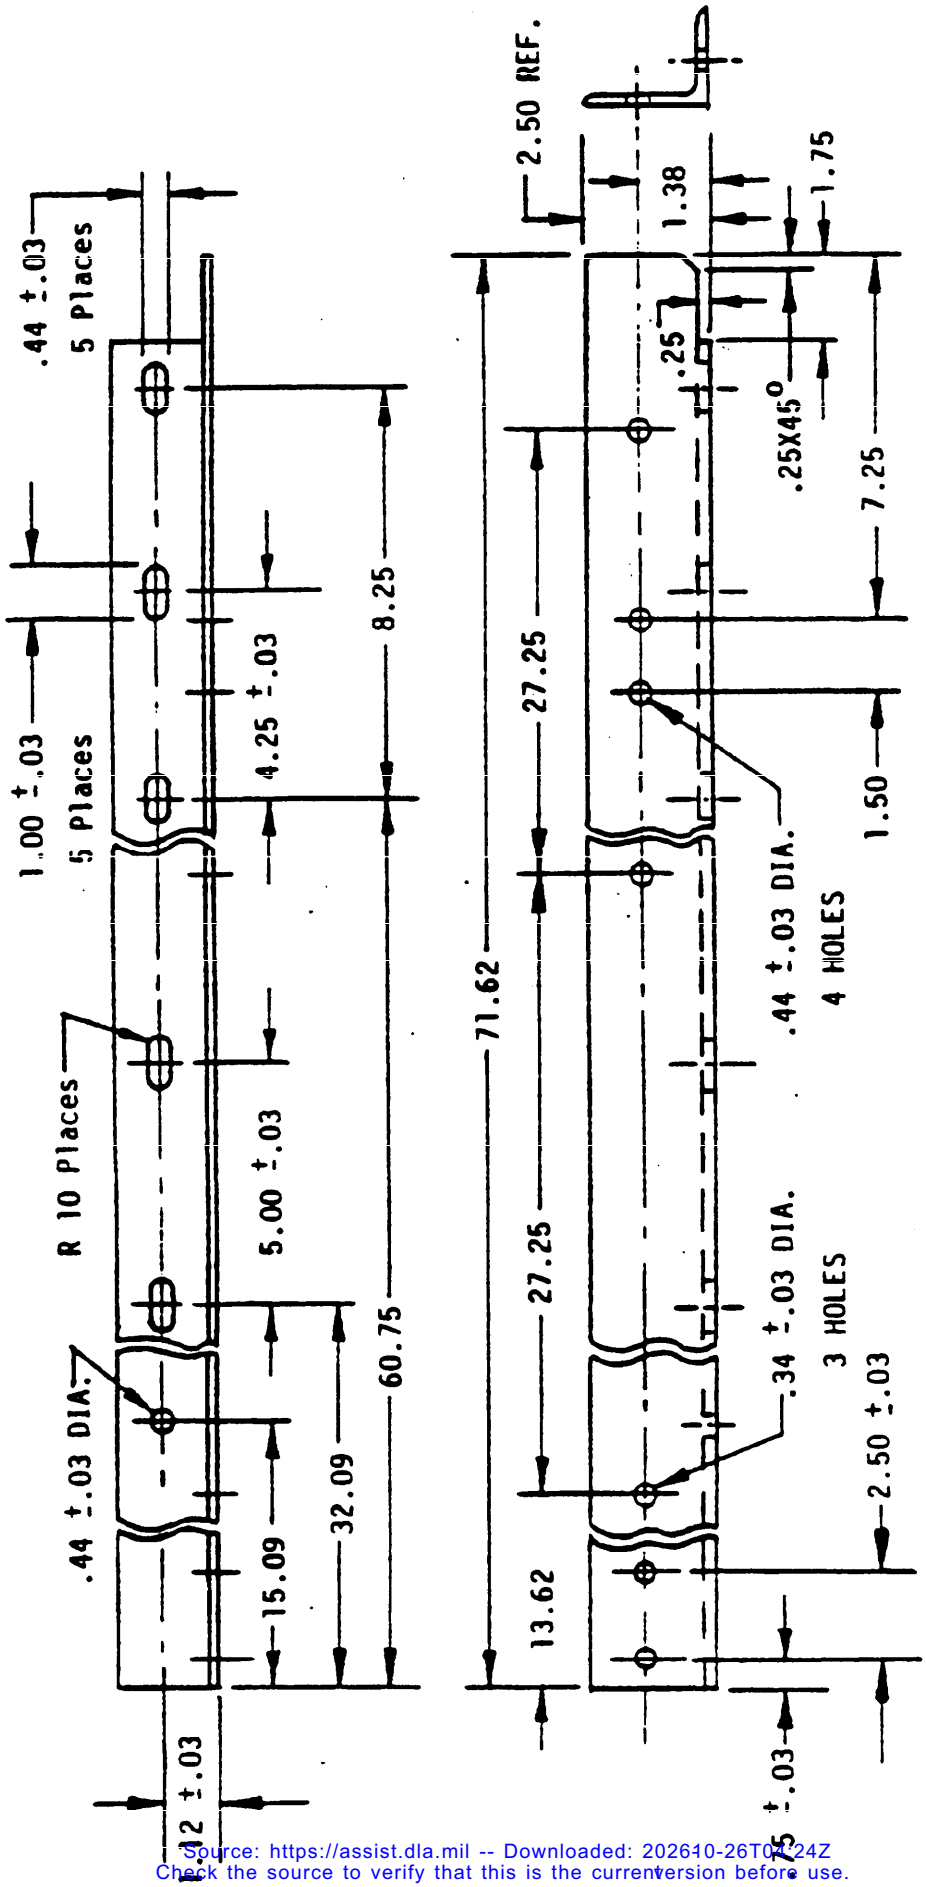


FIGURE D8. Base frame.

NOTES:

1. MATERIAL
   ALUMINUM ALLOY 6061
   TEMPER T6, SPEC. QQ-A-200/8
   2-1/2 X 2 X 1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

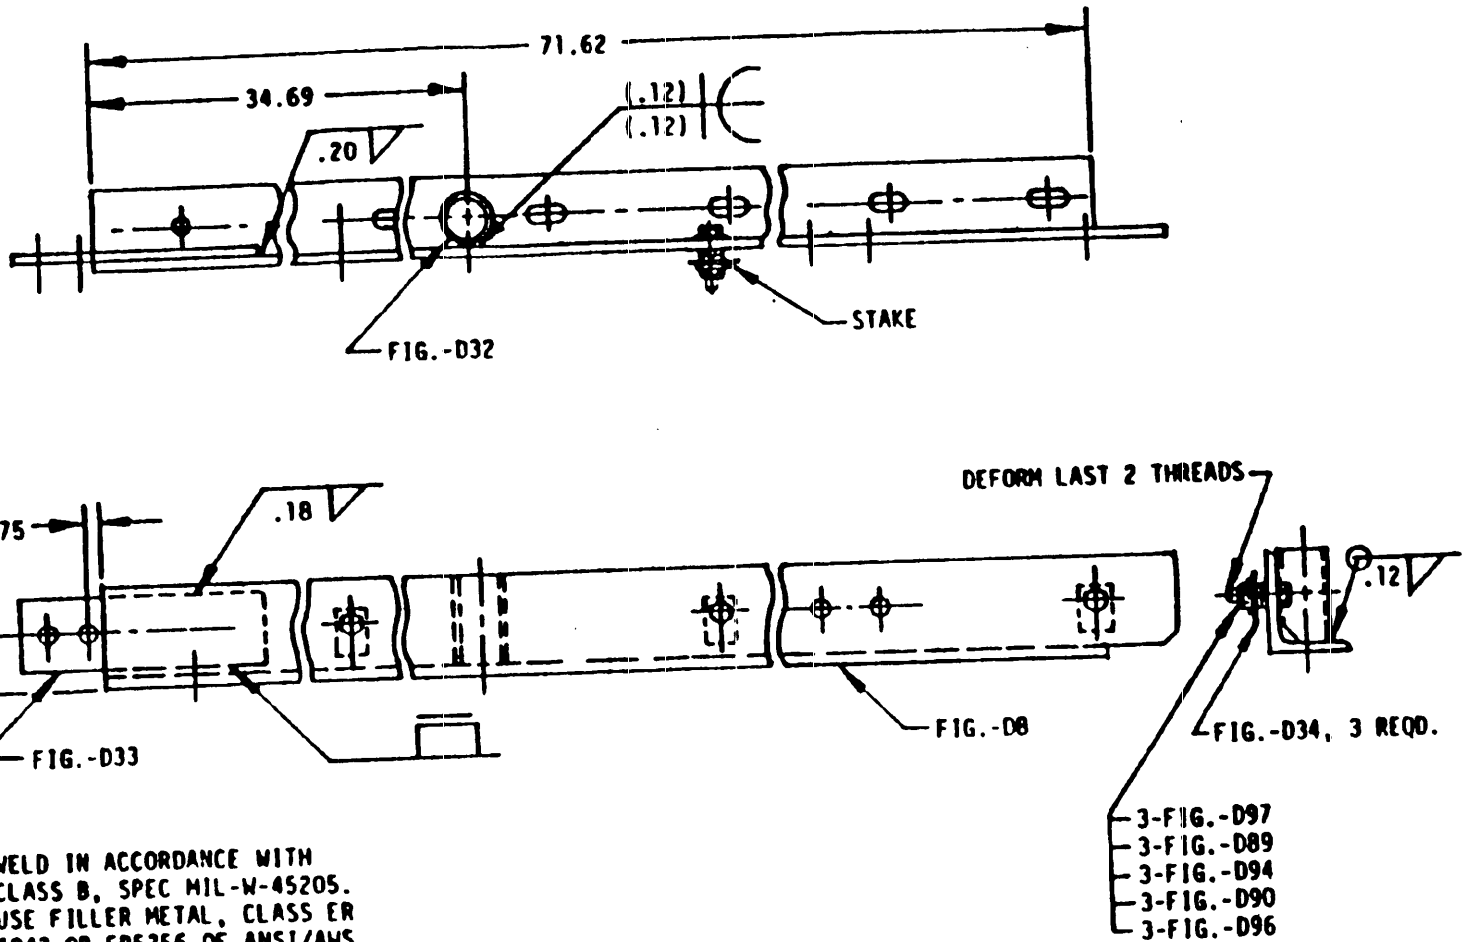


NOTES:

1. WELD IN ACCORDANCE WITH CLASS B, SPEC MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER5356 OF ANSI/AWS A5.10.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D9. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

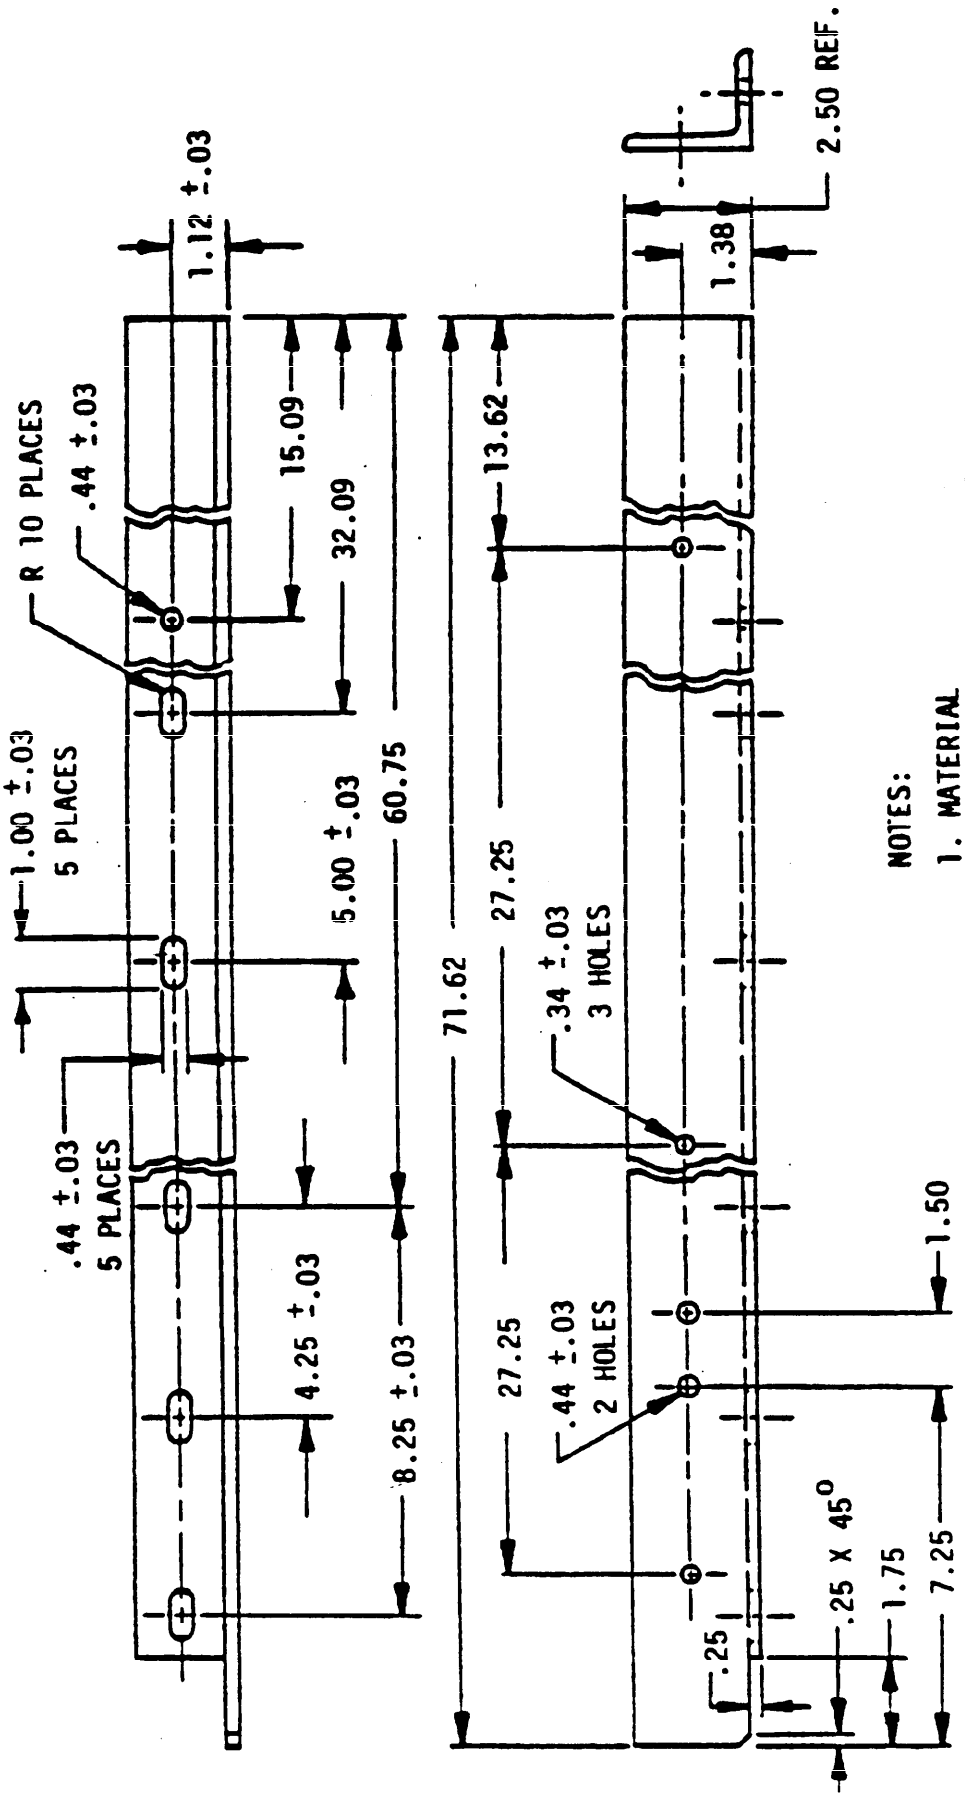


NOTES:

1. MATERIAL
   ALUMINUM ALLOY 6061
   TEMPER T6, SPEC. QQ-A-200/8
   2-1/2 X 2 X 1/4

FIGURE D10. Base frame.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

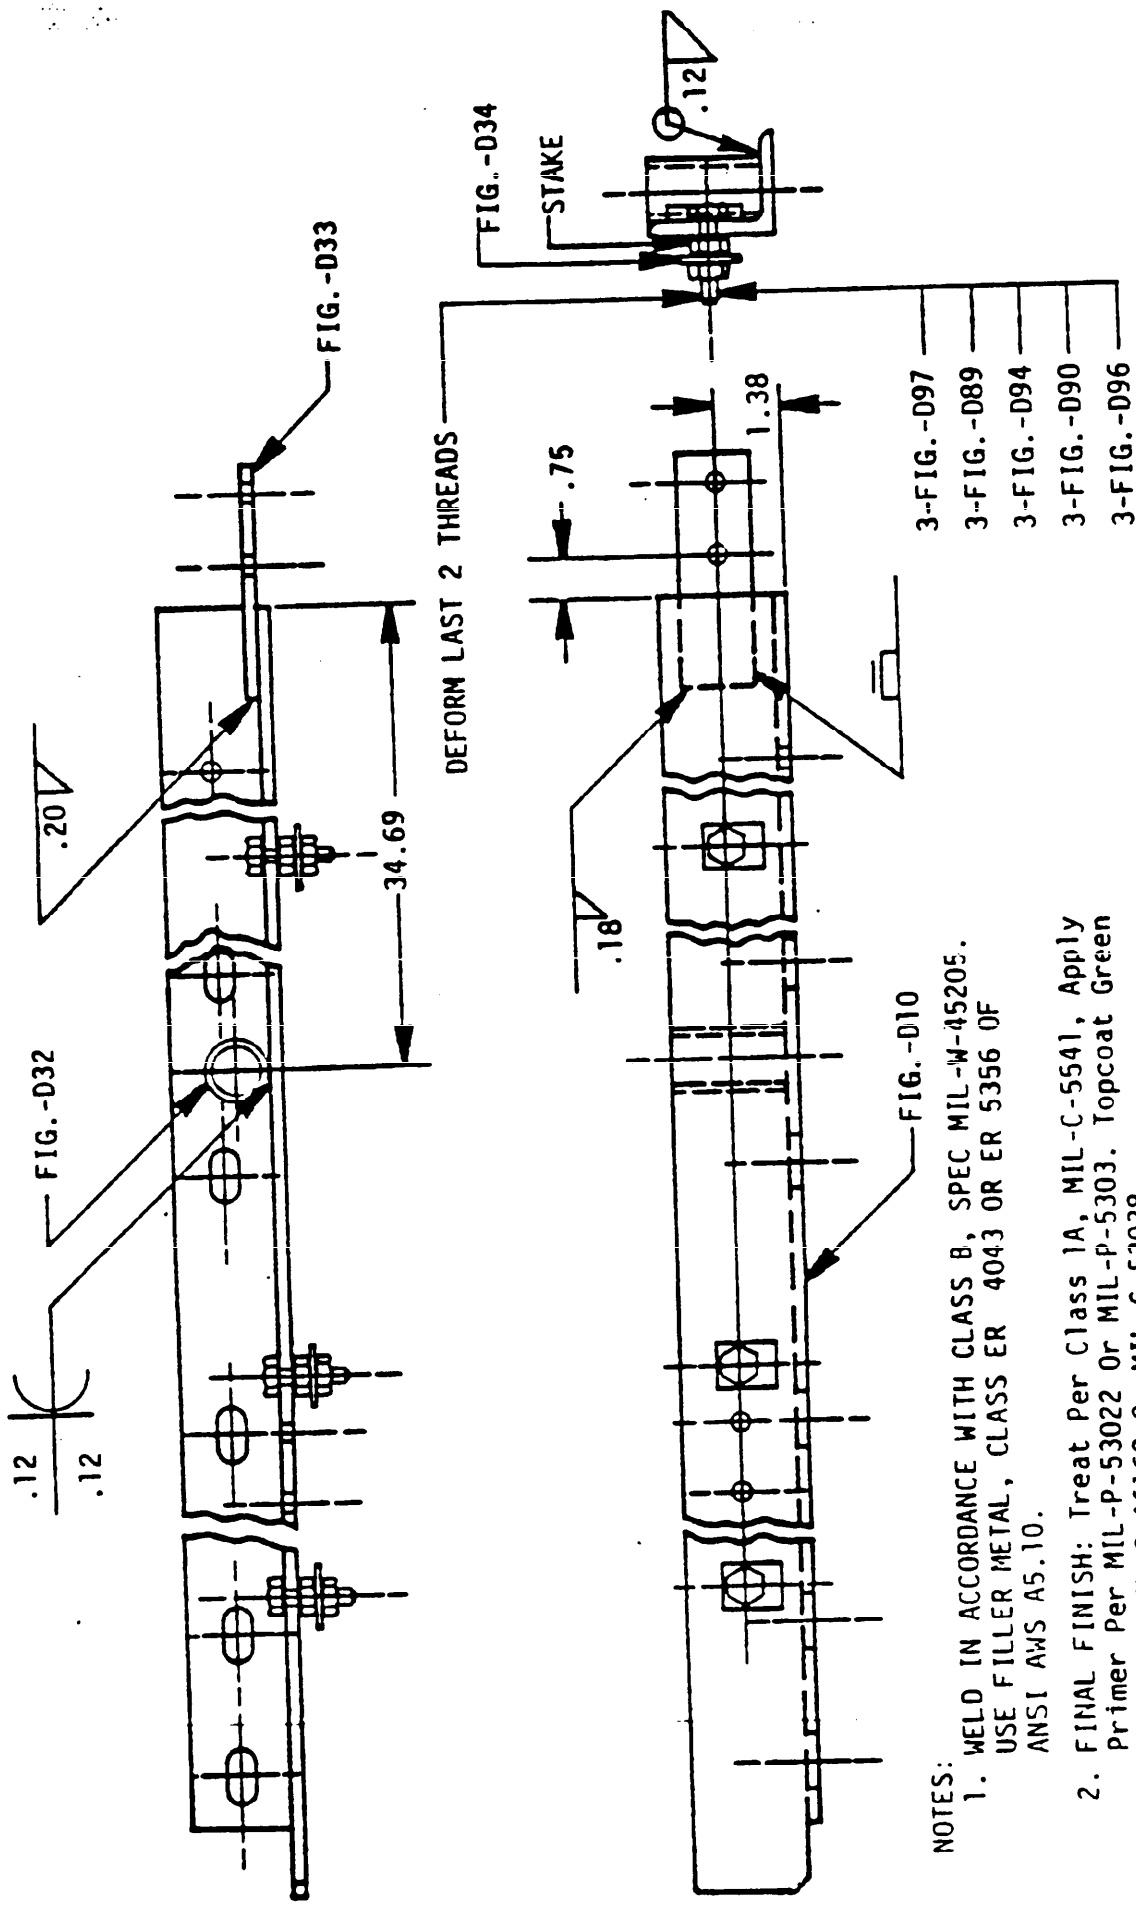

NOTES:
1. WELD IN ACCORDANCE WITH CLASS B, SPEC MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER 5356 OF ANSI AWS A5.10.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D11. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

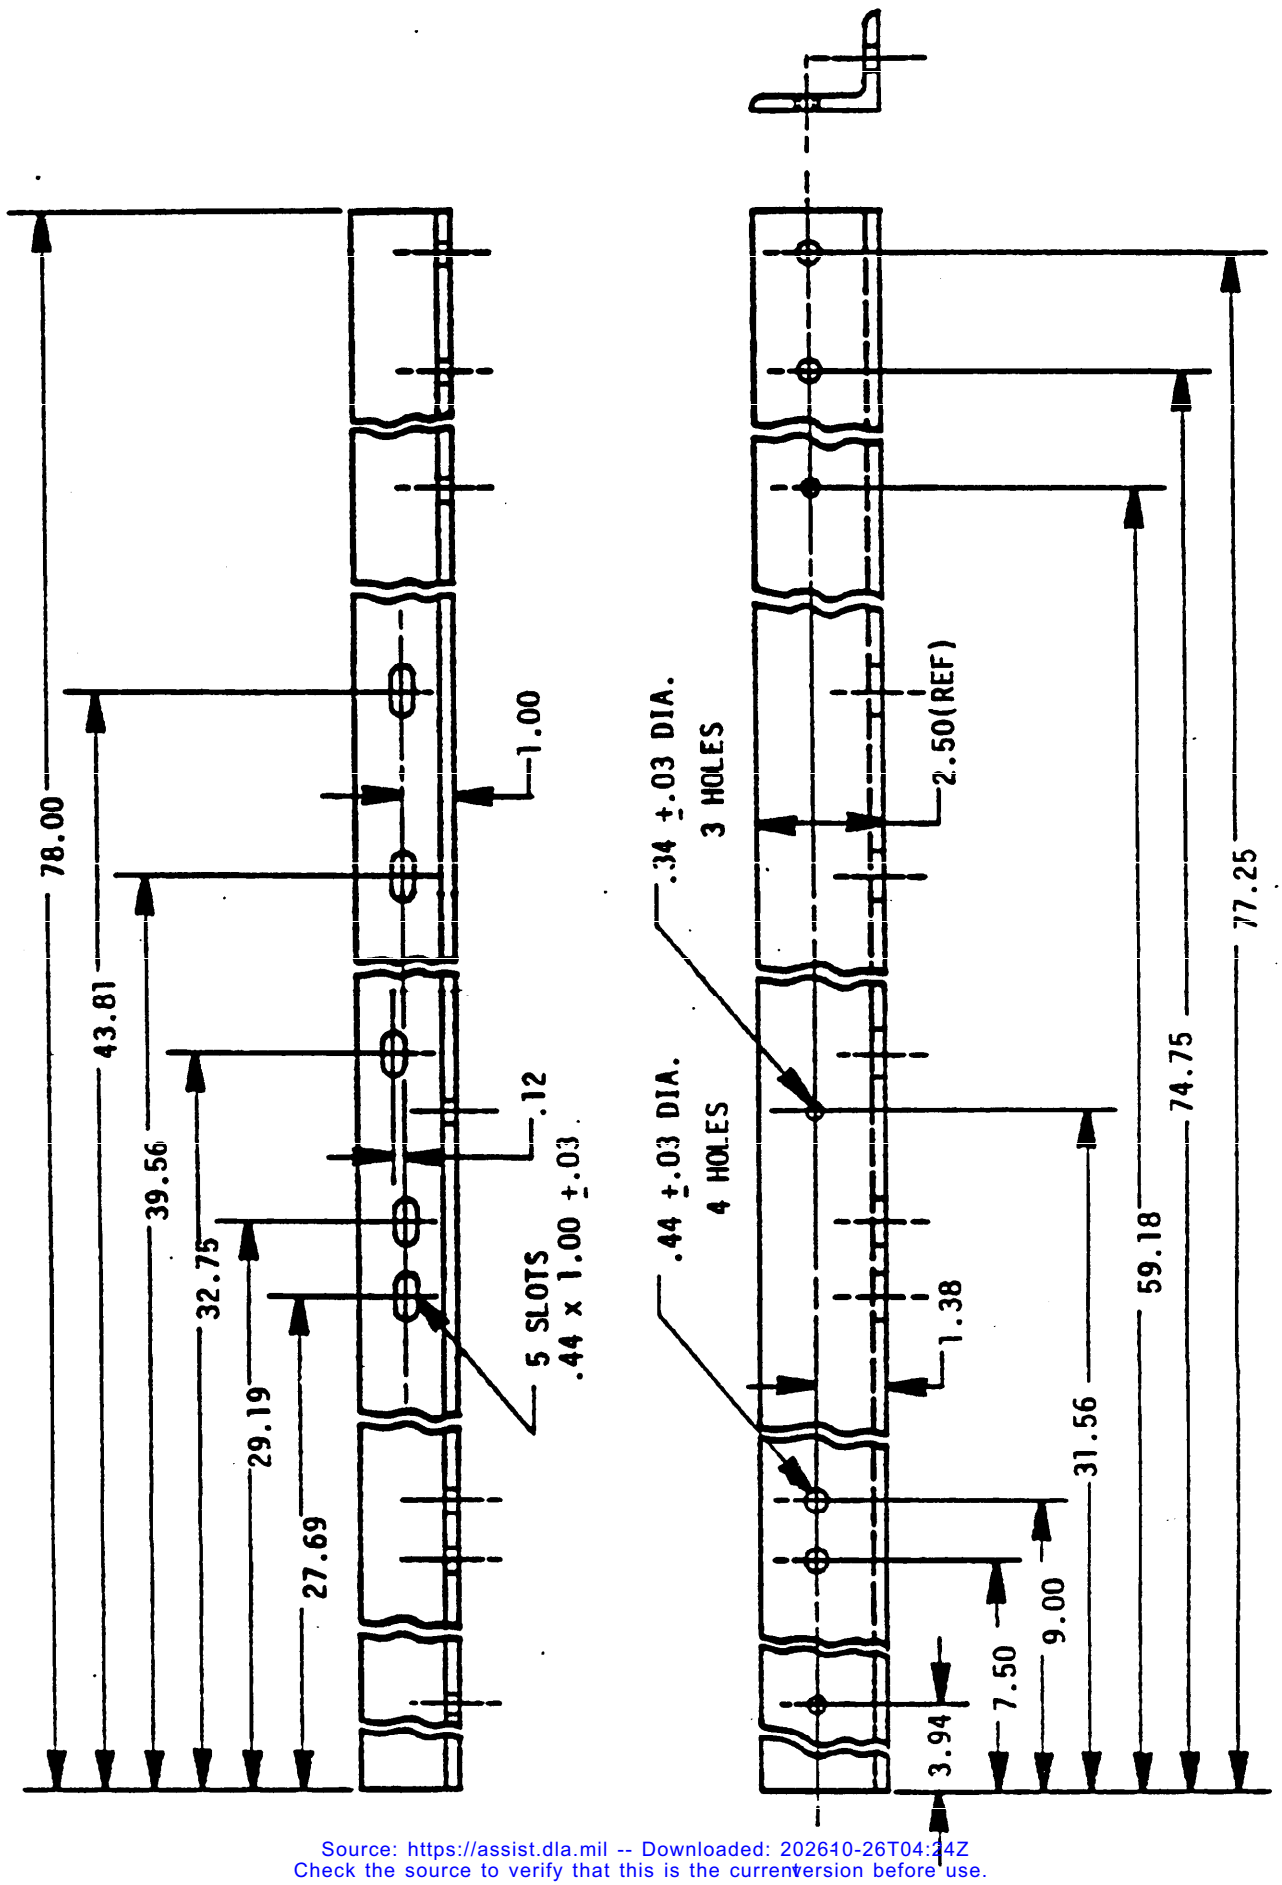


NOTES:

1. MATERIAL: ALUMINUM ALLOY 6061, TEMPER T6, SPEC QQ-A-200/8. 2-1/2 x 2-1/4.

FIGURE D12. Base frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

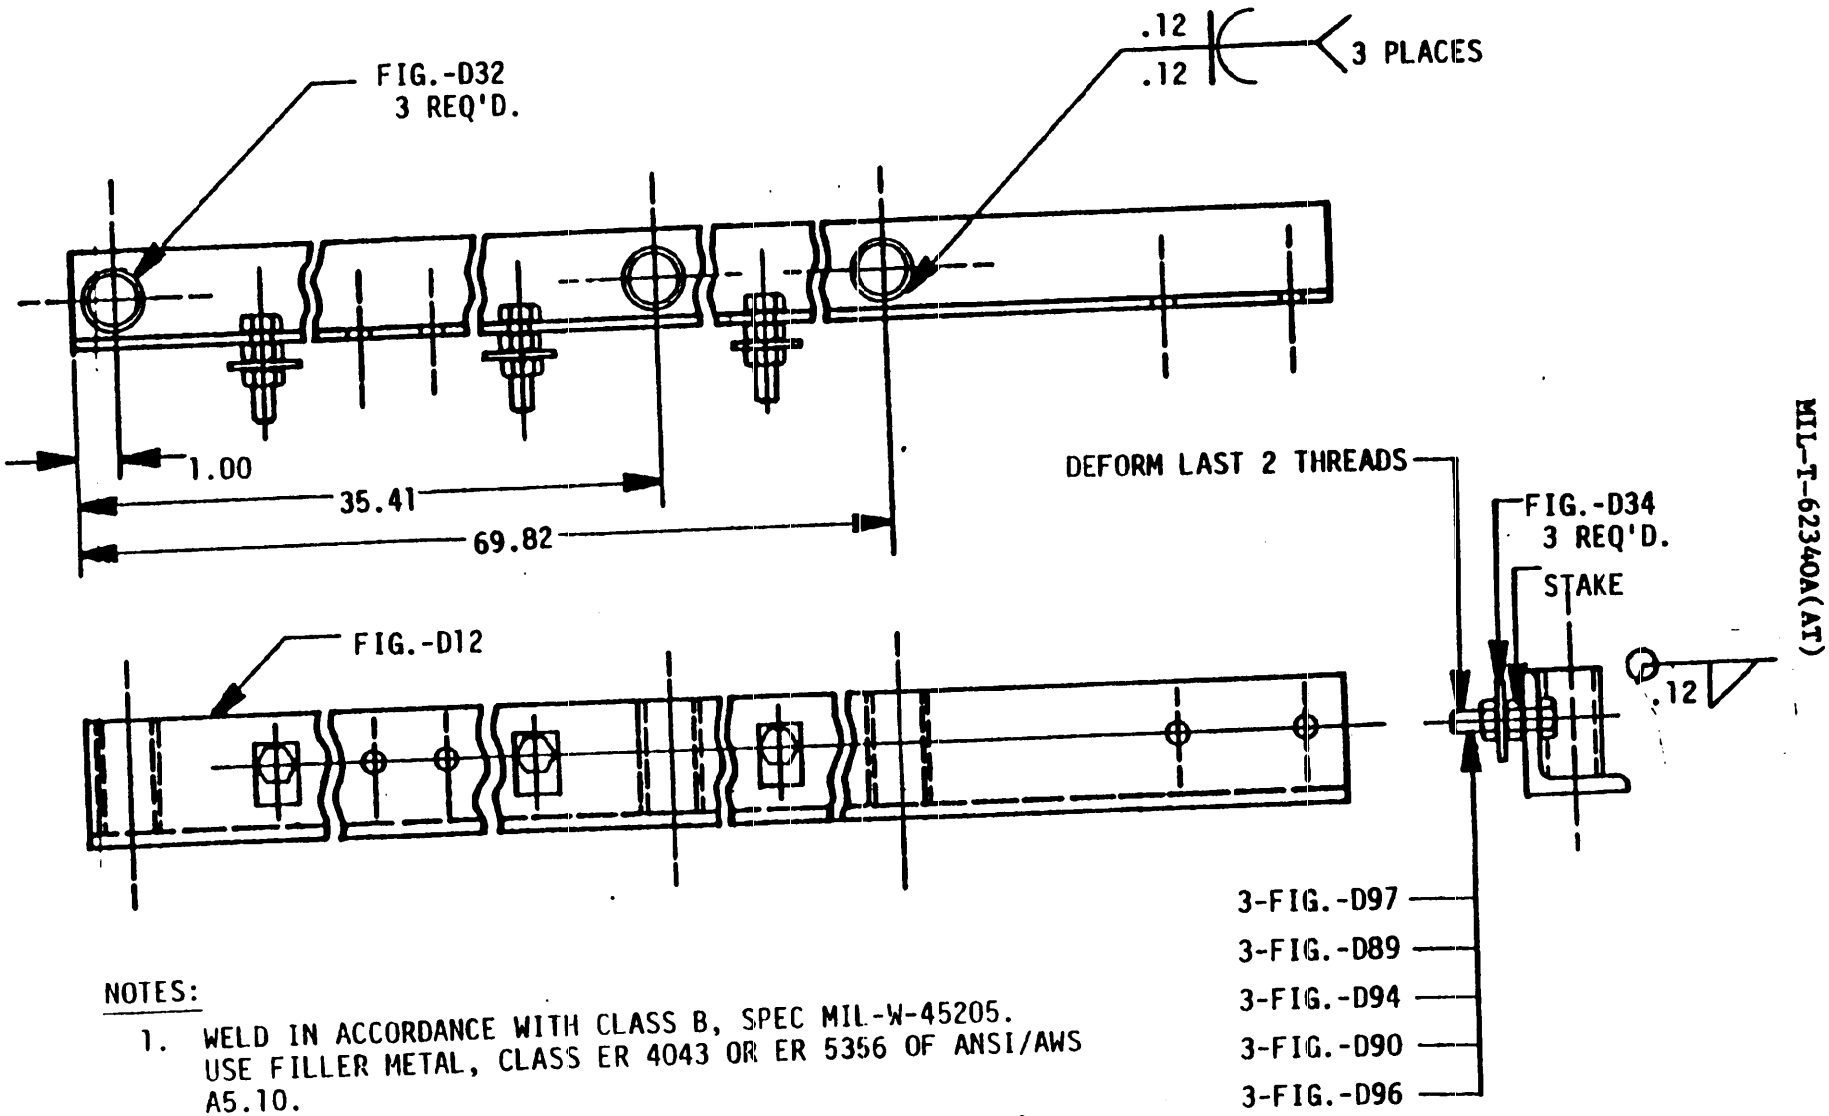


NOTES:

1. WELD IN ACCORDANCE WITH CLASS B, SPEC MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER 5356 OF ANSI/AWS A5.10.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D13. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

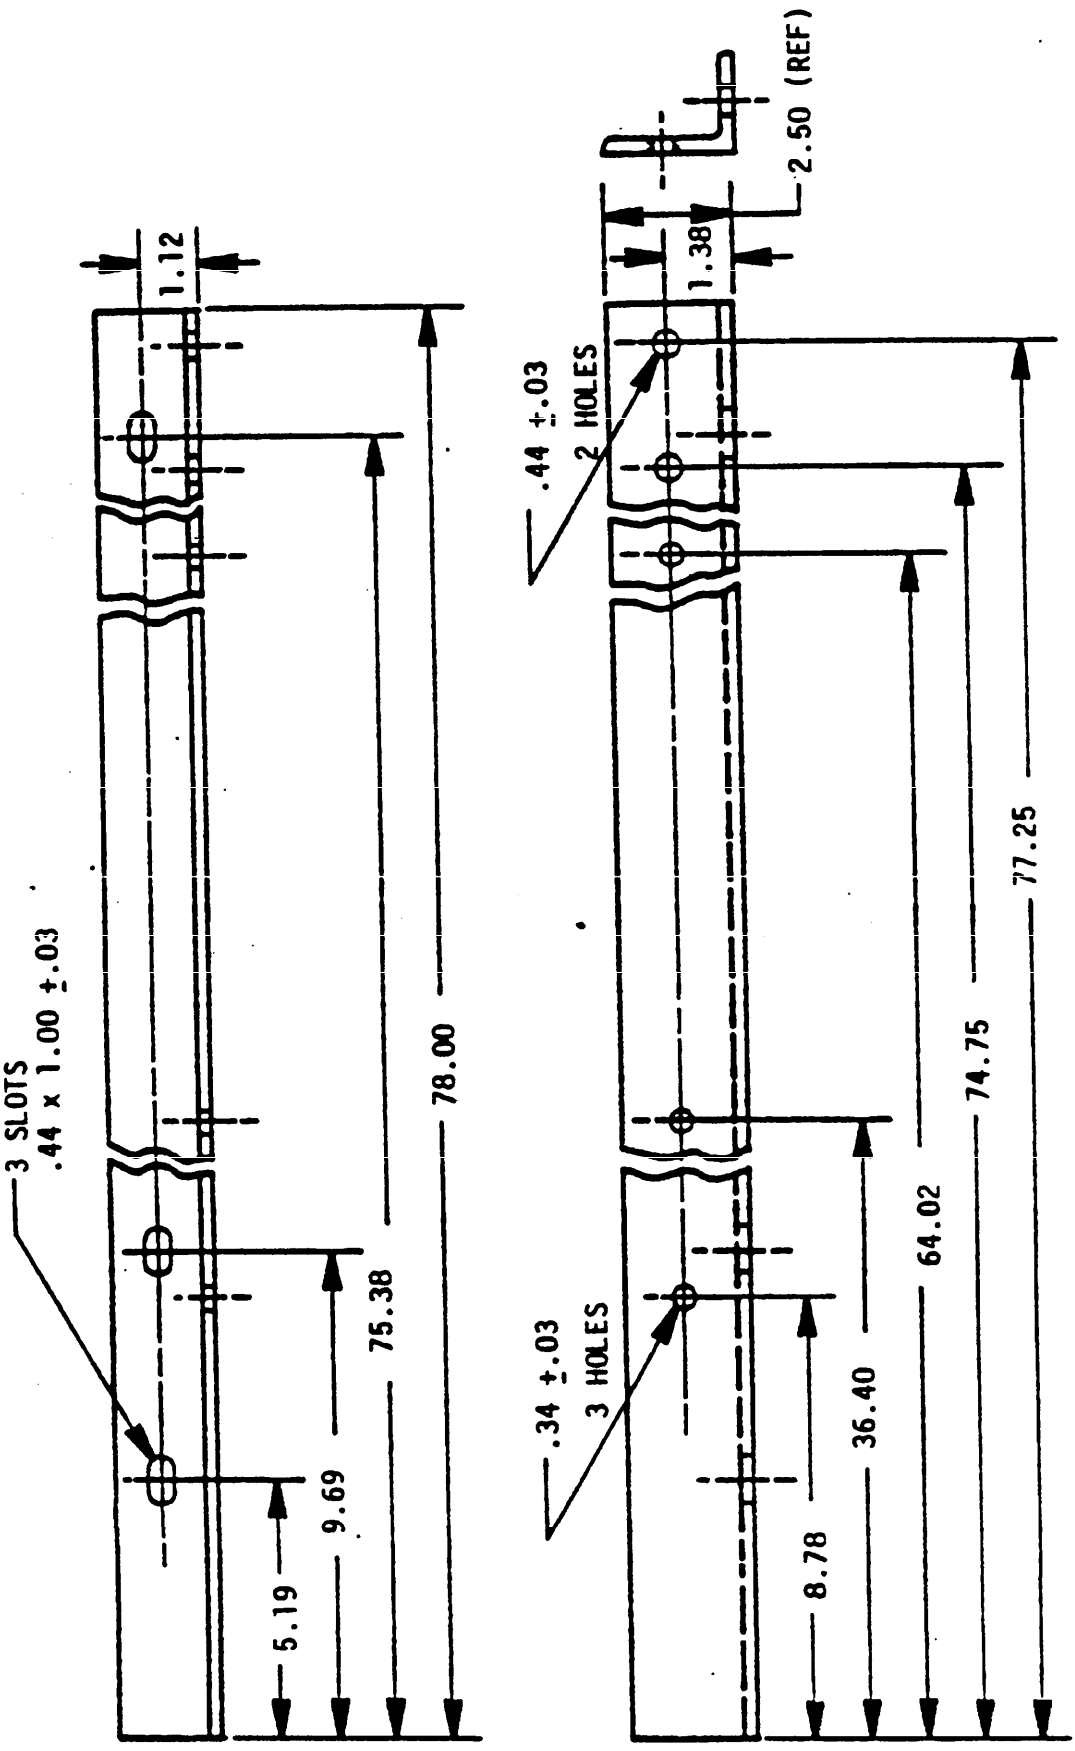


NOTES:

1. MATERIAL: ALUMINUM ALLOY 5061, TEMPER T6, SPEC QQ-A-200/8. 2-1/2 x 2-1/4.

FIGURE D14. Base frame.


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

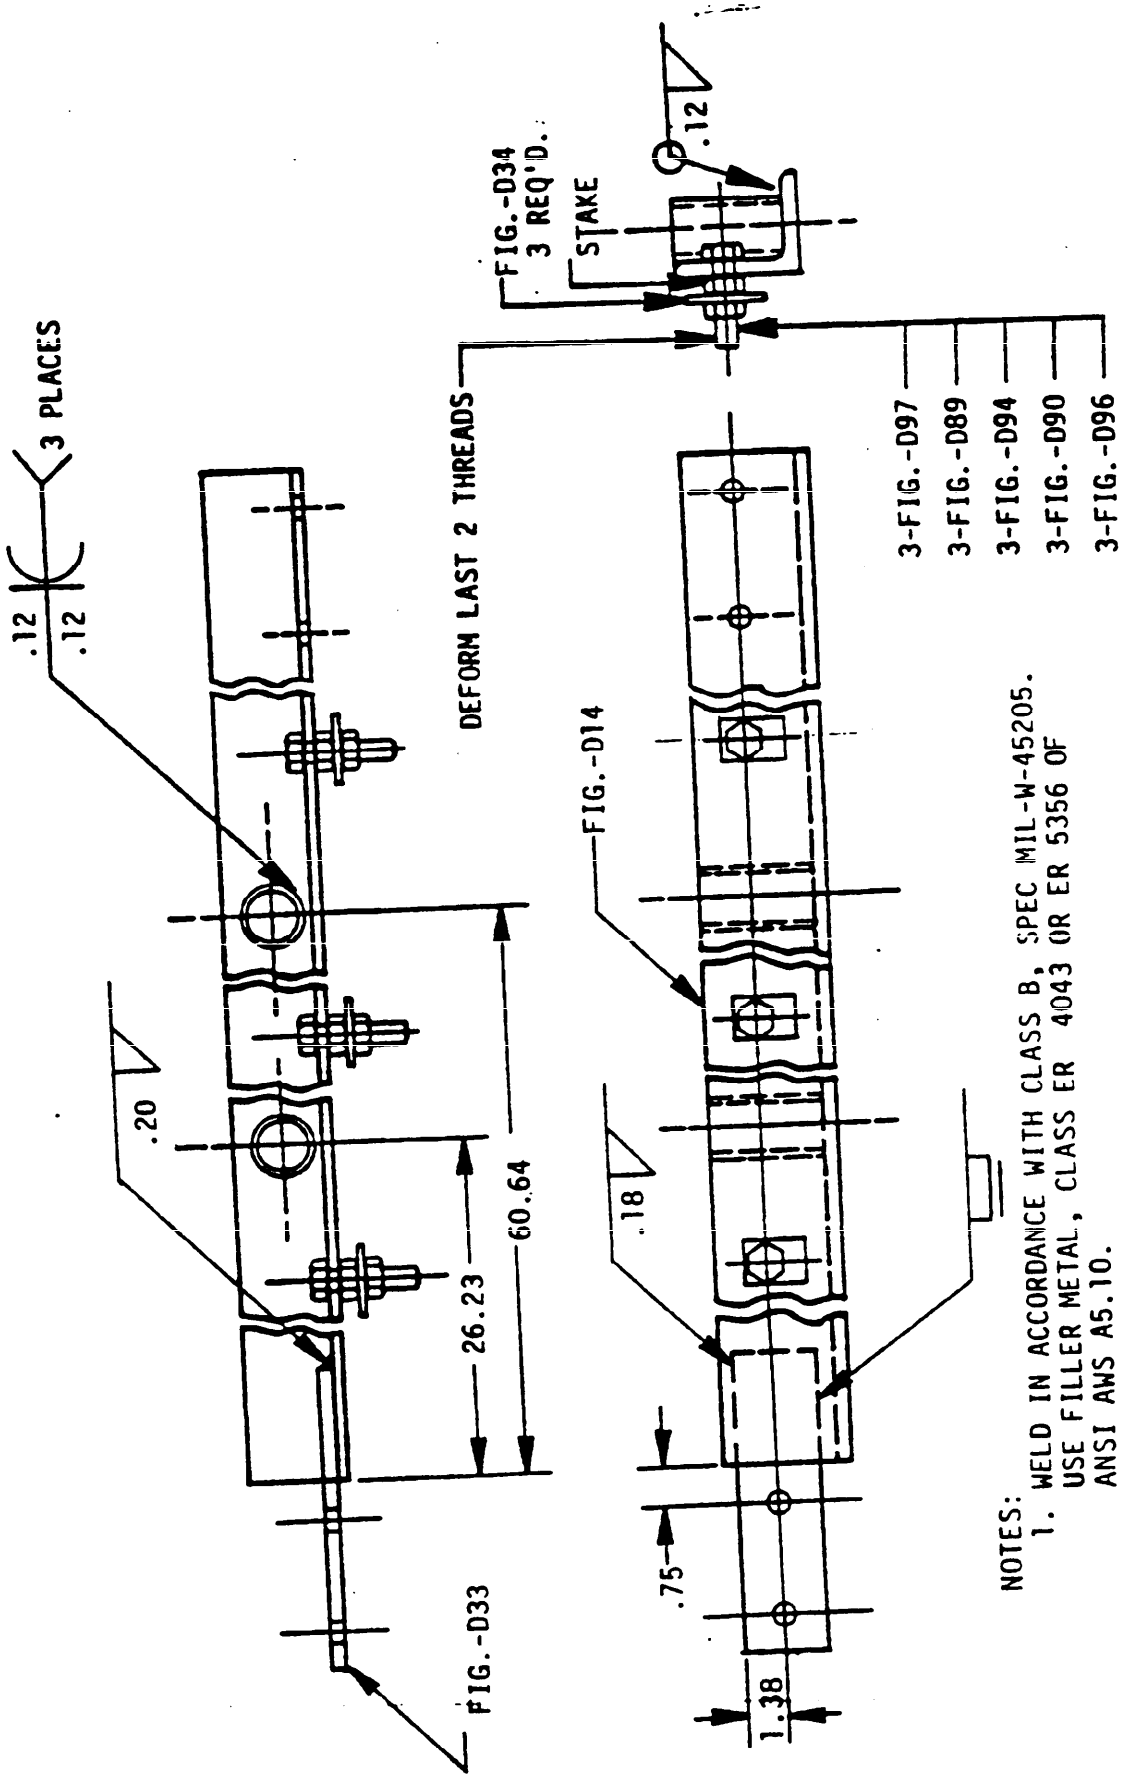

NOTES:
1. WELD IN ACCORDANCE WITH CLASS B, SPEC MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER 5356 OF ANSI AWS A5.10.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D15. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

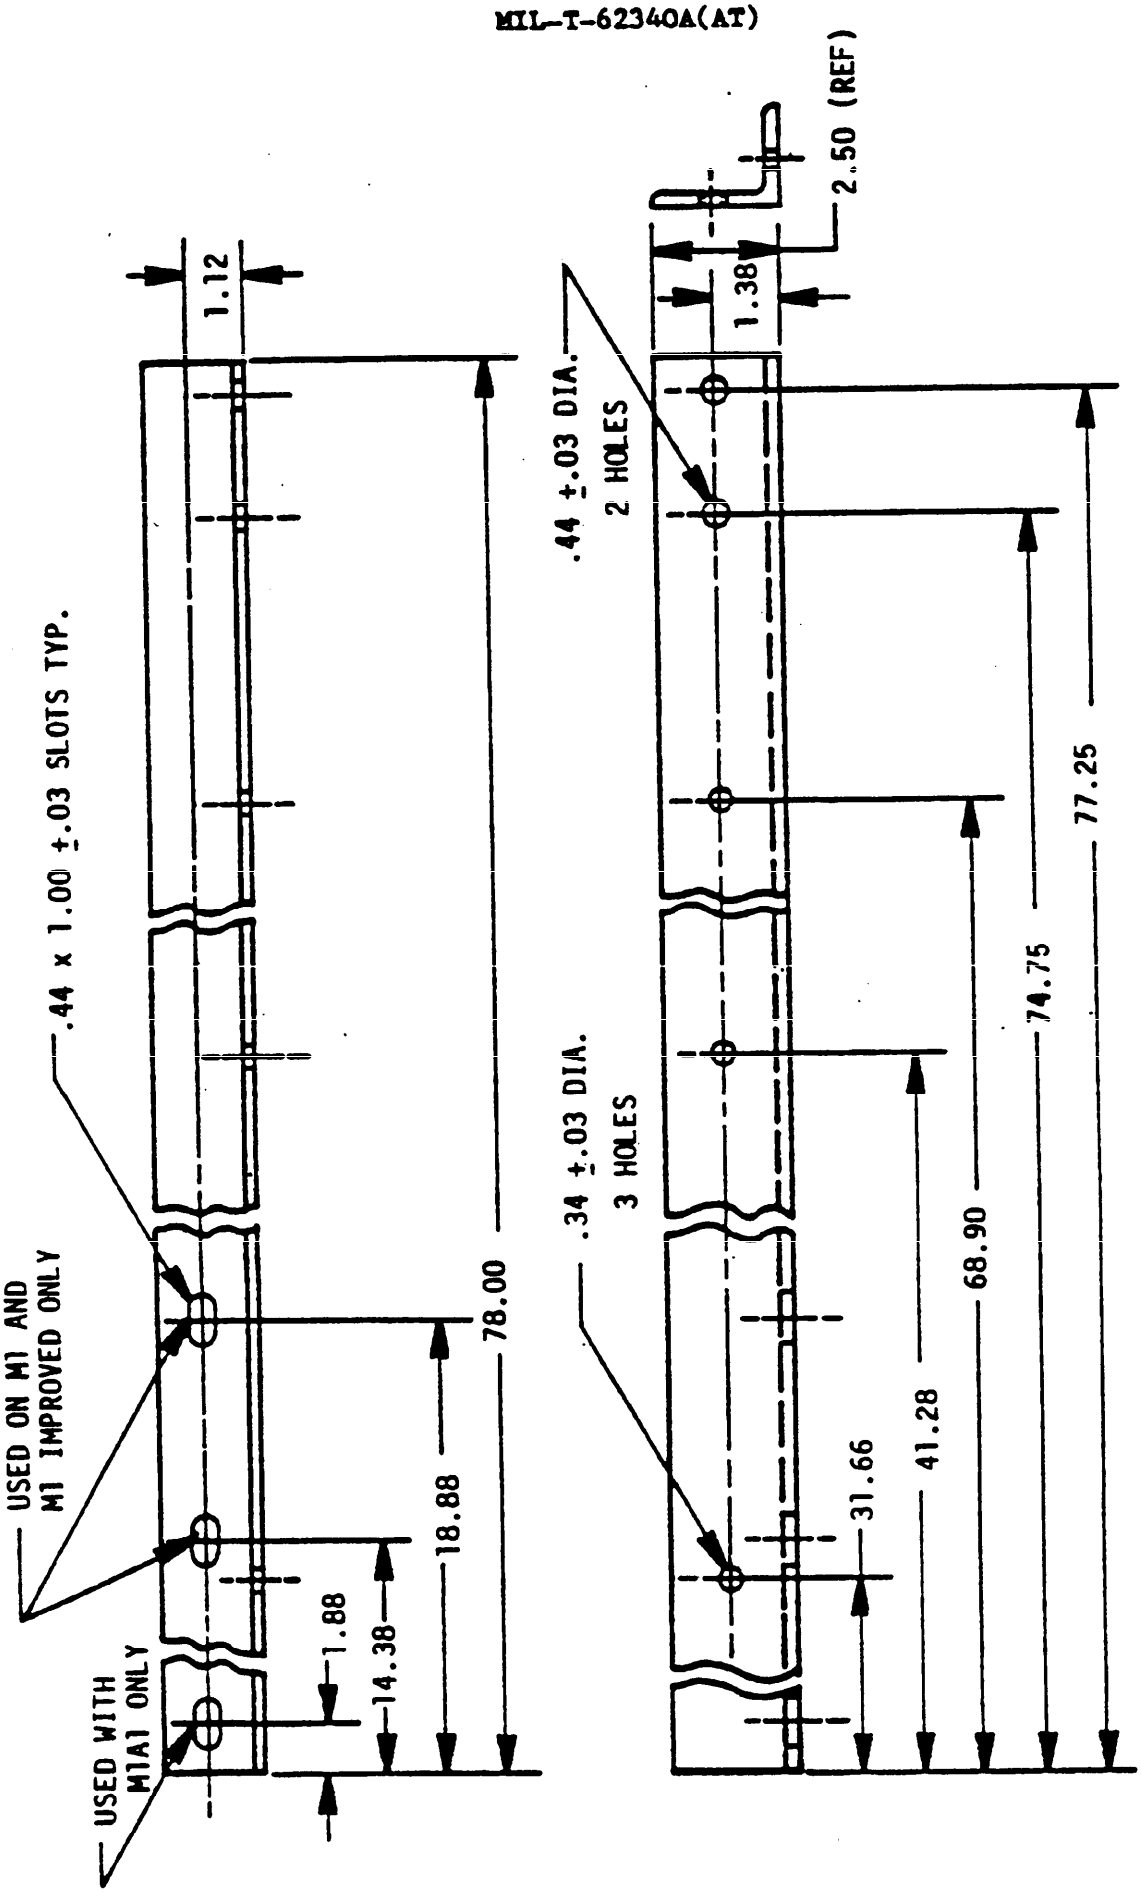


NOTES:

1. MATERIAL: ALUMINUM ALLOY 6061, TEMPER T6, SPEC QQ-A-200/8. 2-1/2 x 2-1/4.

FIGURE D16. Base frame.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

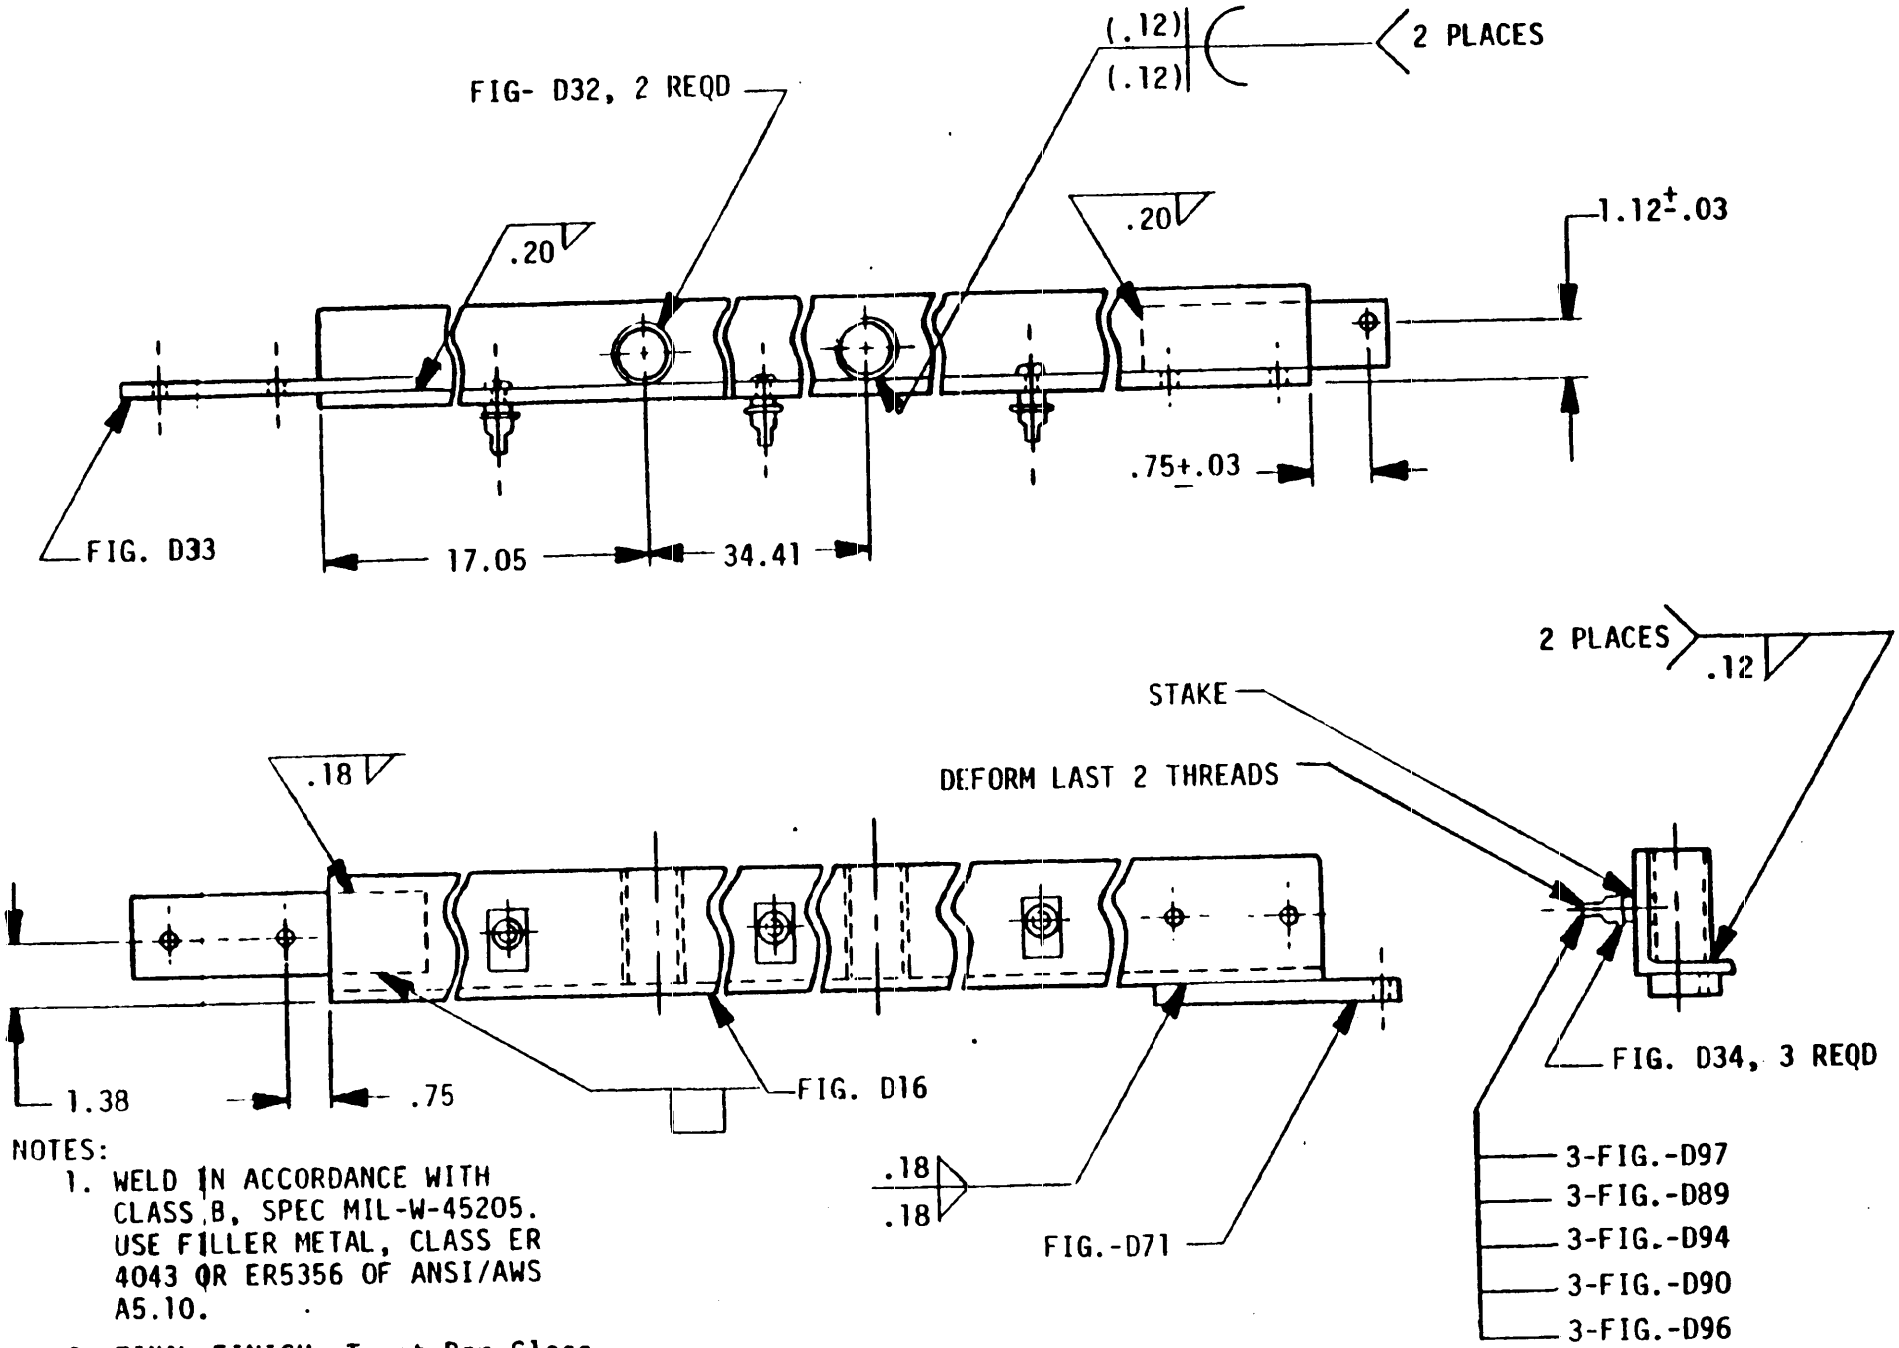


NOTES:

1. WELD IN ACCORDANCE WITH CLASS B, SPEC MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER5356 OF ANSI/AWS A5.10.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer MIL-P-53022 Or MIL-P-5303. Coat Green 383 Per

FIGURE D17. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

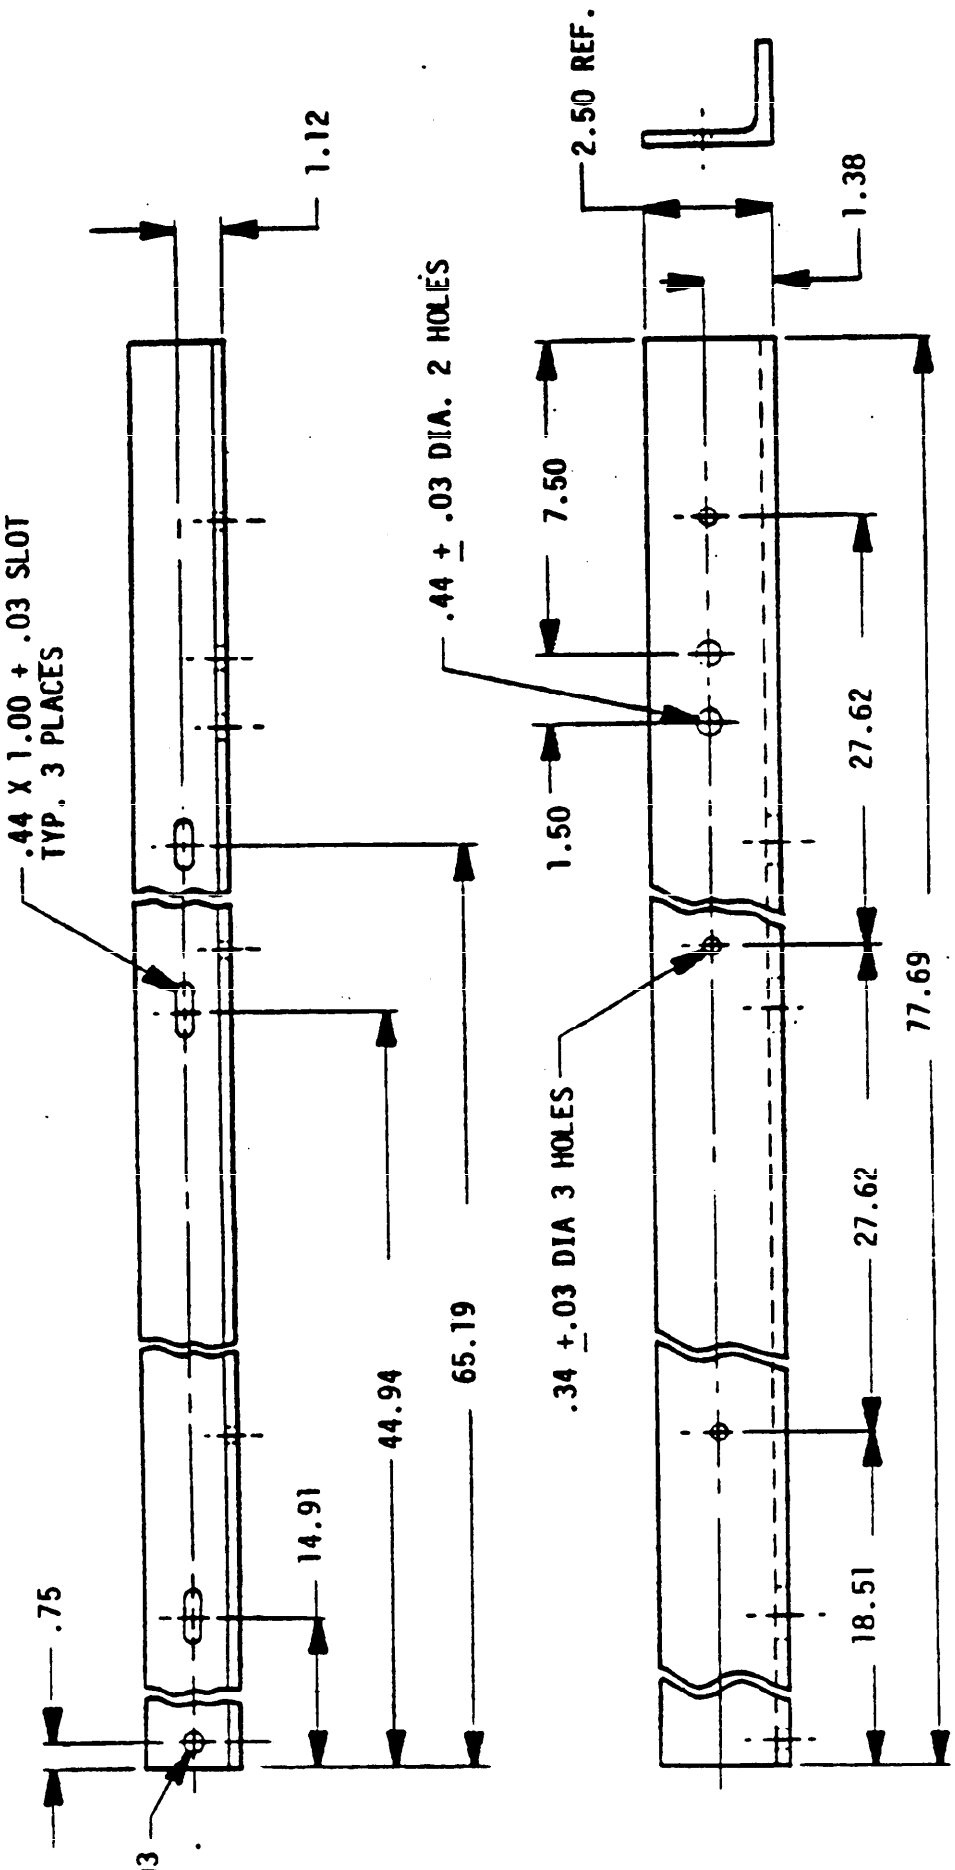


NOTES:

1. MATERIAL:
   ALUMINUM ALLOY 6061
   TEMPER T6, SPEC QQ-A-200/8
   2½ X 2 X ¼

FIGURE D18. Base frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

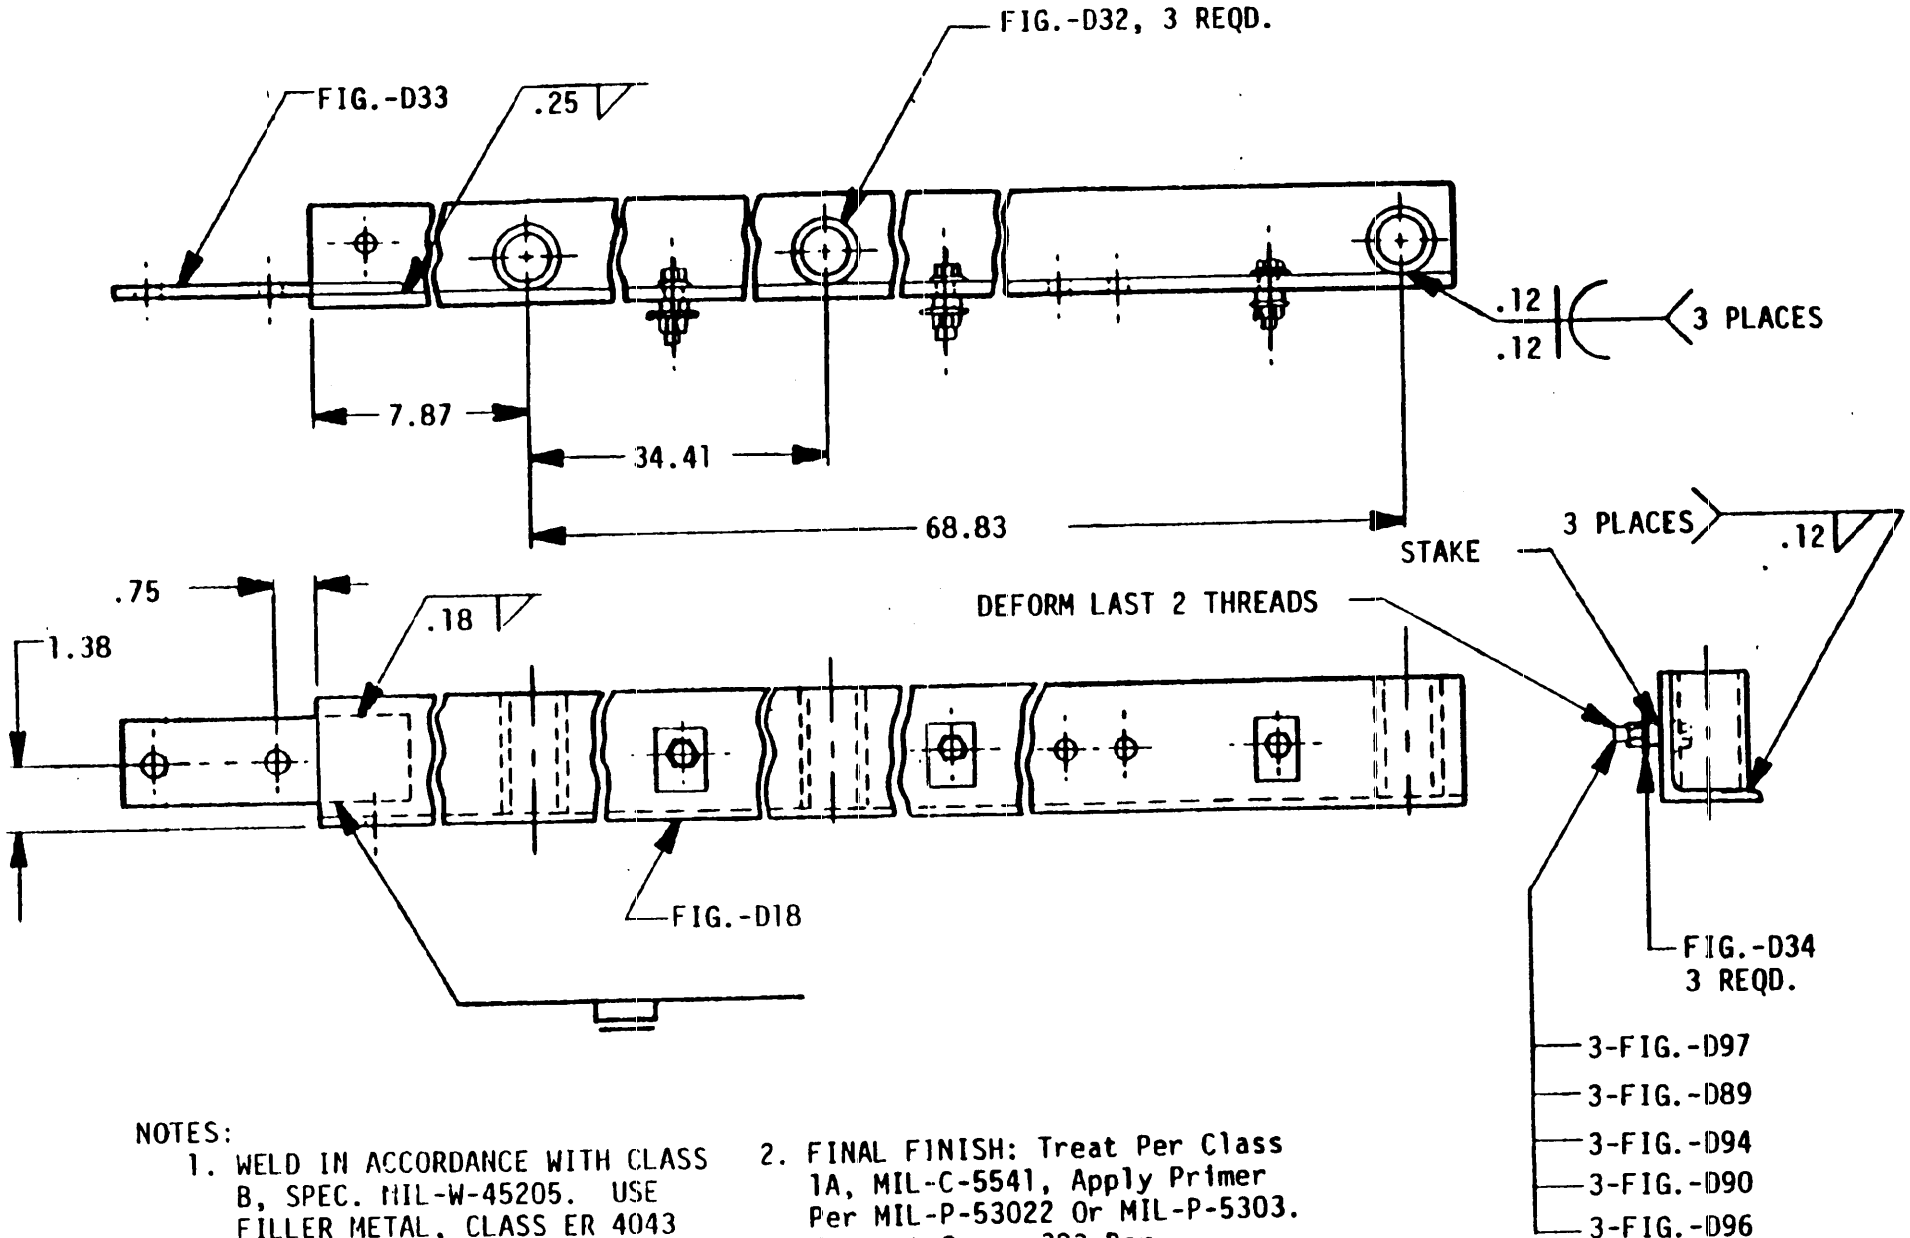


NOTES:

1. WELD IN ACCORDANCE WITH CLASS B, SPEC. MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OF ANSI/AWS A5.10.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D19. Base frame assembly.


Source: https://assist.dla.mil -- Downloaded: 2026/10-26T04:24Z
Check the source to verify that this is the current version before use.

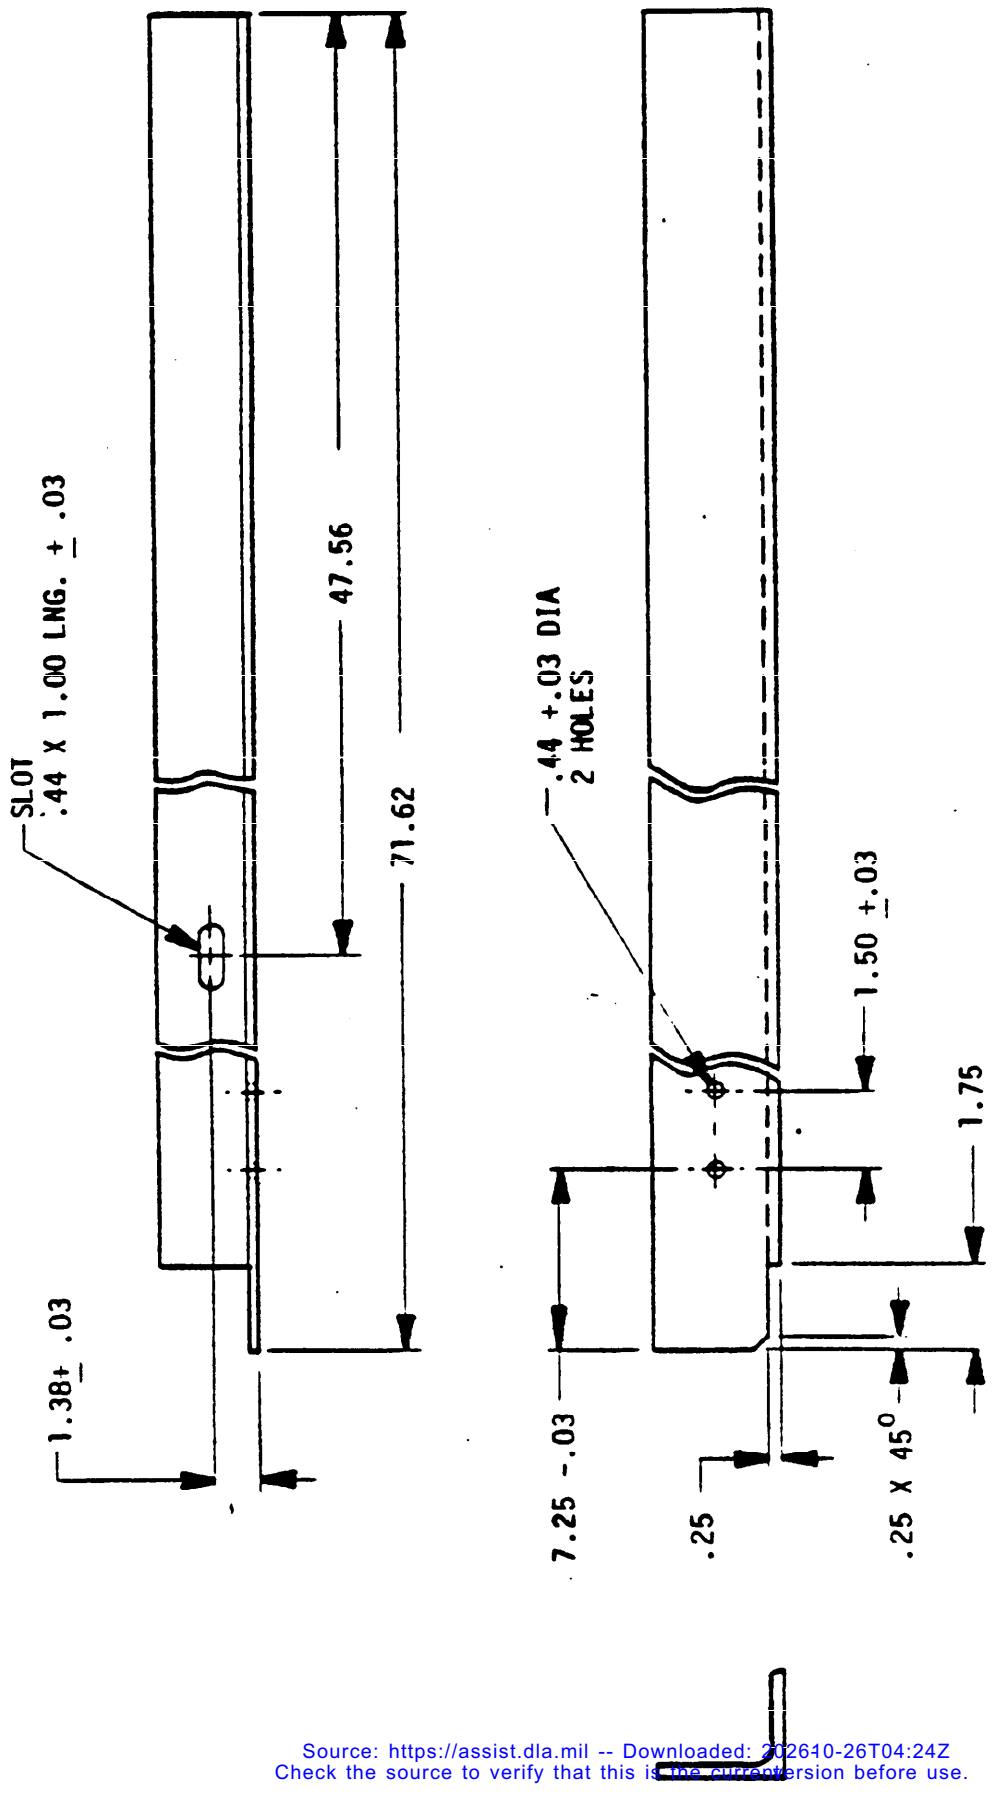

NOTE:
1. MATERIAL
ALUMINUM ALLOY 6061
TEMPER T6, SPEC. QQ-A-200/8
2½ X 2 X ¼

FIGURE D20. Base frame.


Source: https://assist.dla.mil -- Downloaded: 2026-26T04:24Z
Check the source to verify that this is the current version before use.

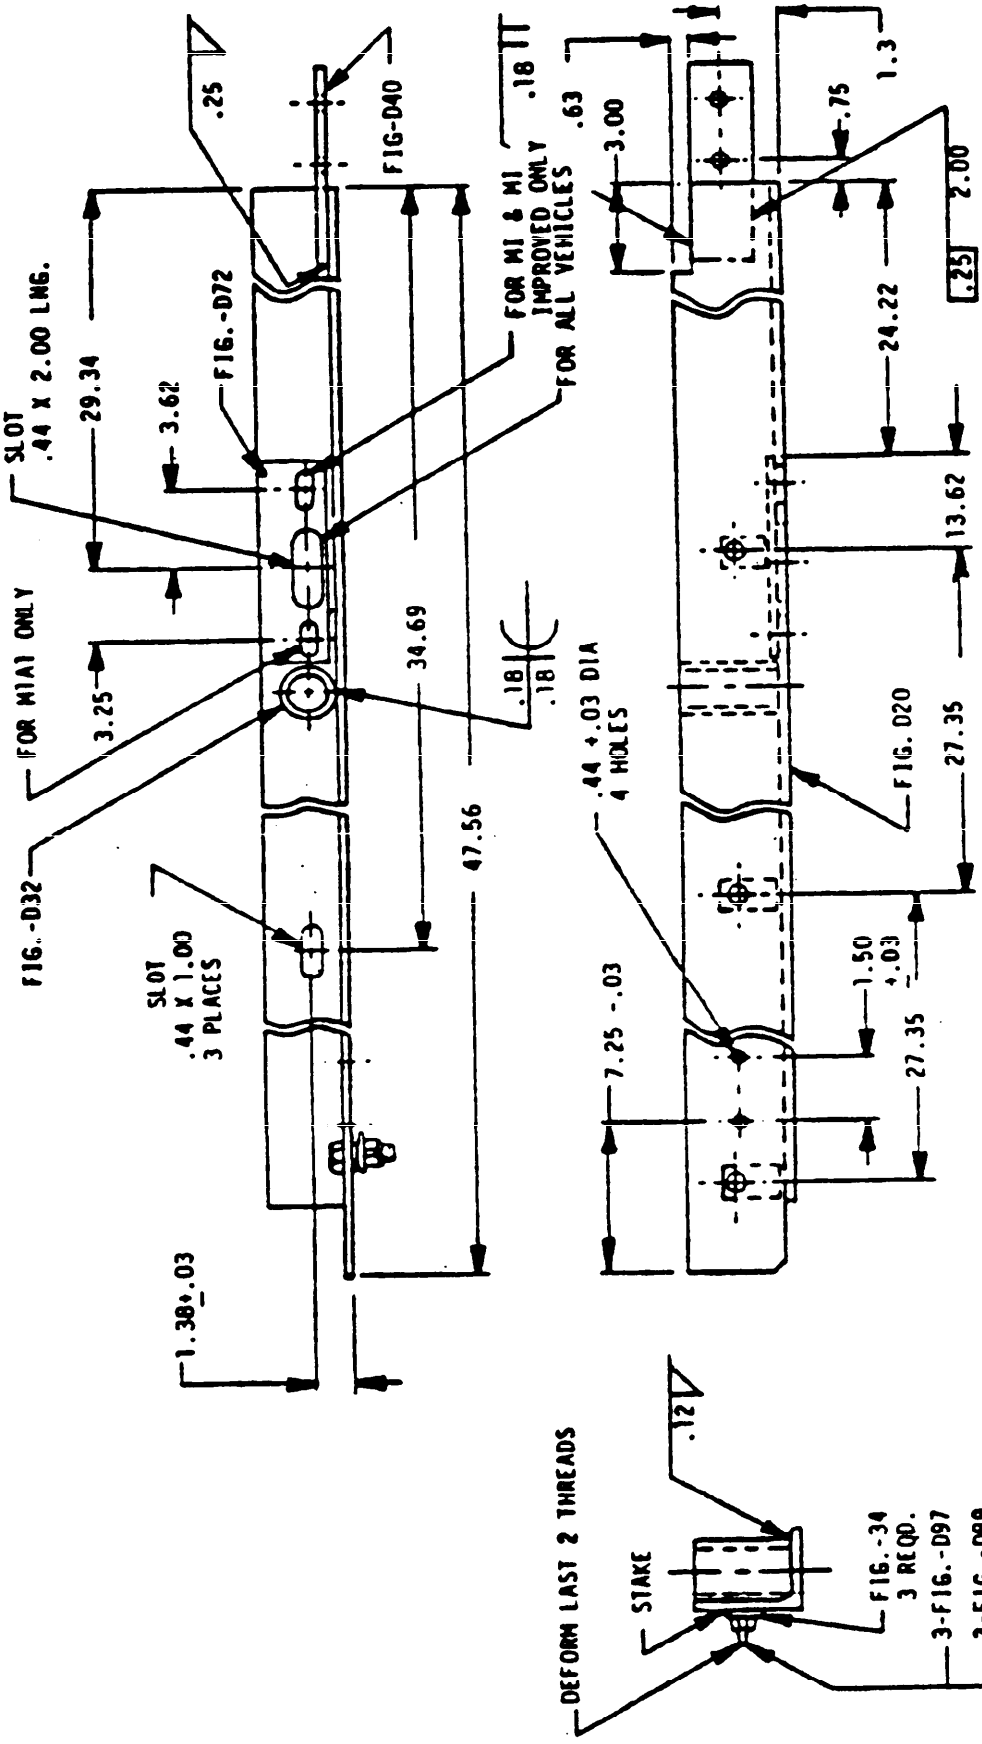


NOTE:
1. WELD IN ACCORDANCE WITH CLASS B SPEC. MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER 5356 OF ANSI/AWS A5.10.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53039.

FIGURE D21. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

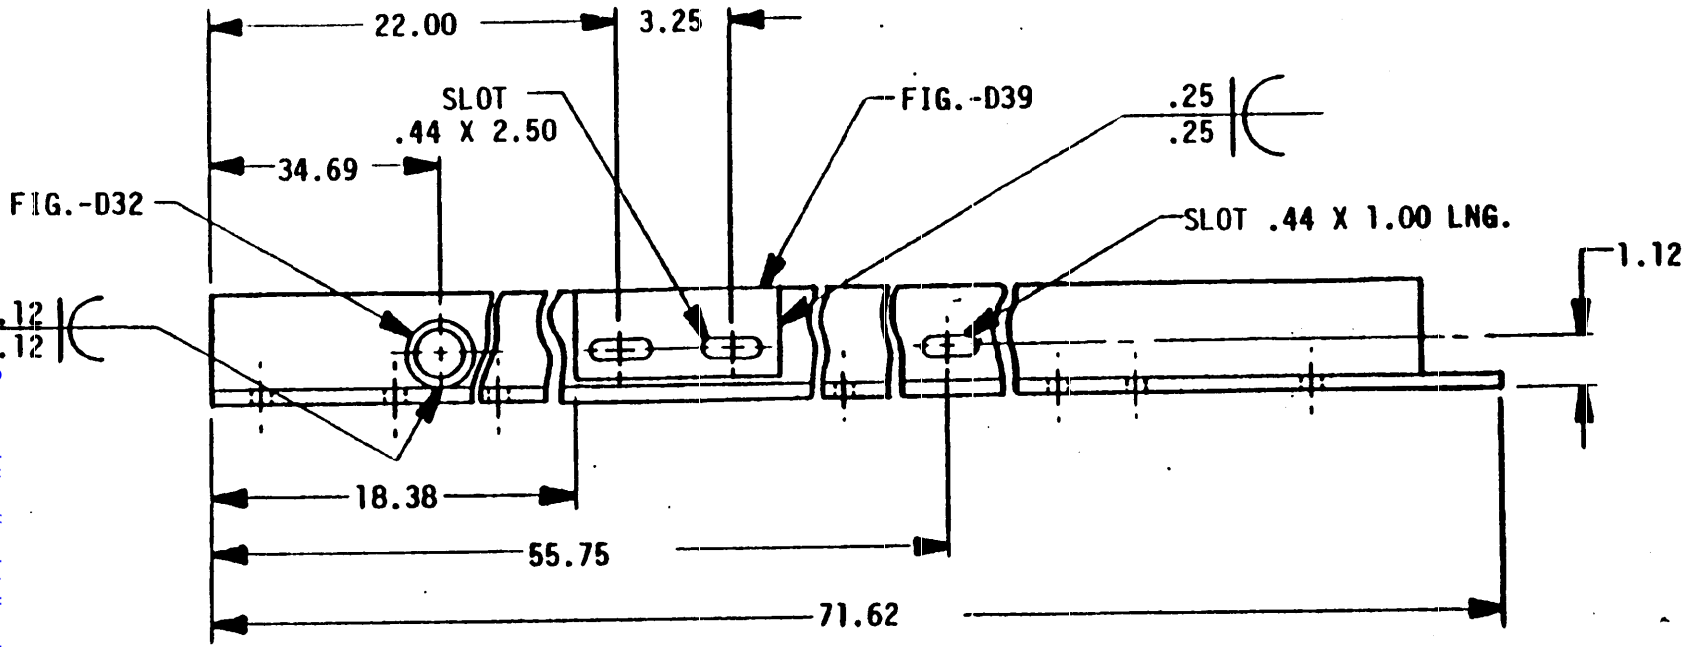

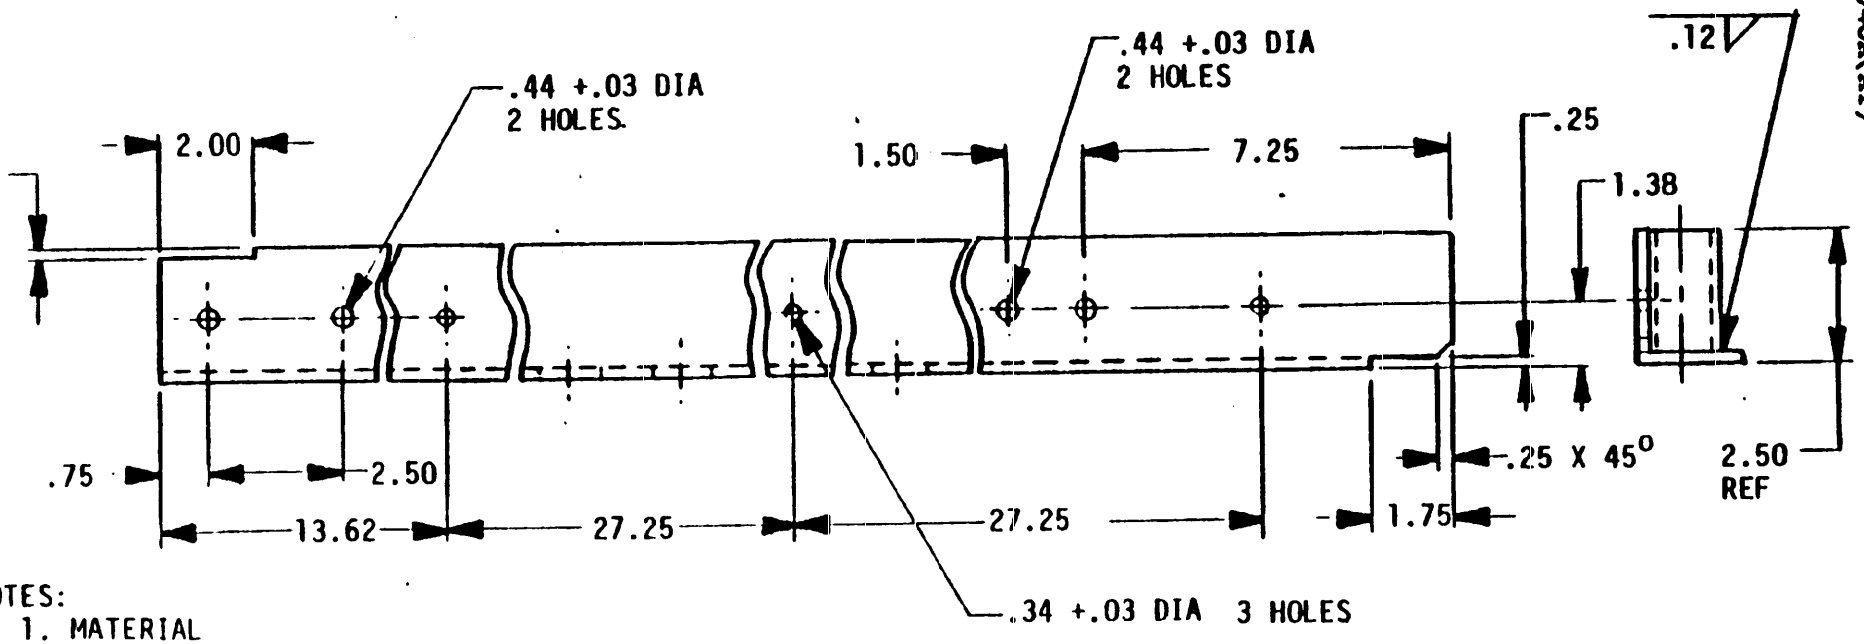

NOTES:

1. MATERIAL
   ALUMINUM ALLOY 6061
   TEMPER T6 SPEC QQ-A-200/8
   2½ X 2 X ¼

2. WELD IN ACCORDANCE WITH CLASS B, SPEC. MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER 5356 OF ANSI/AWS5.10.

3. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


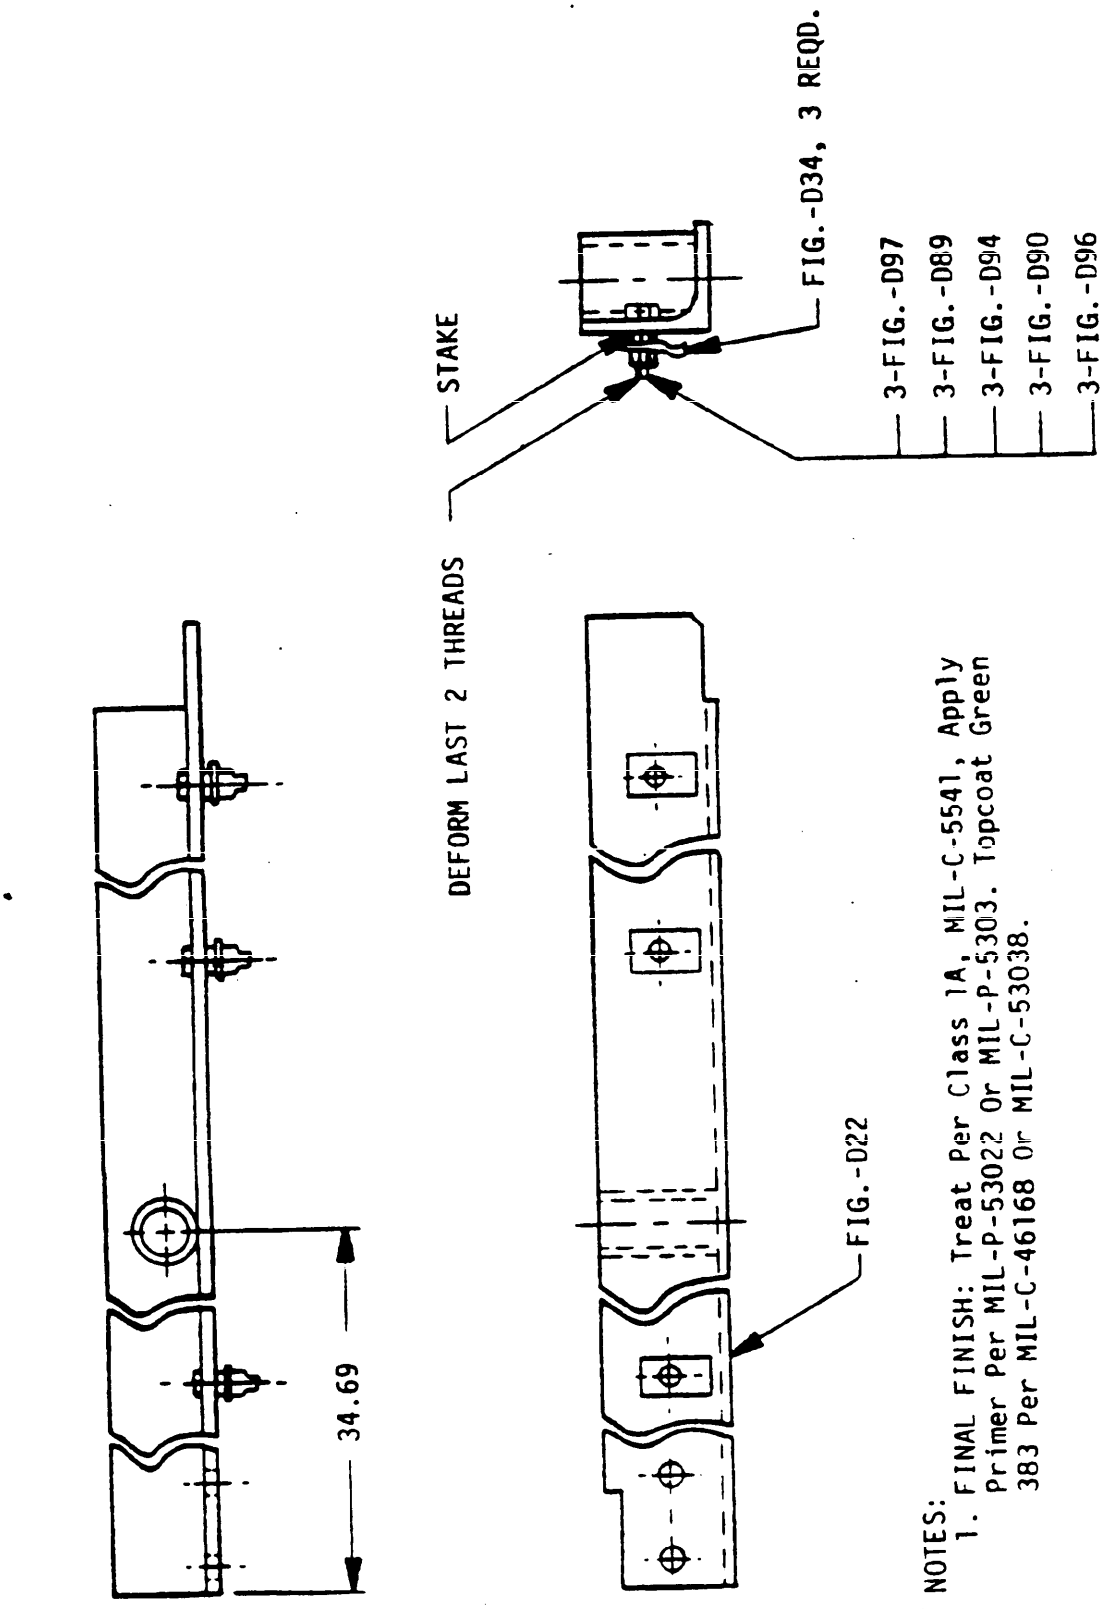


FIGURE D23. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

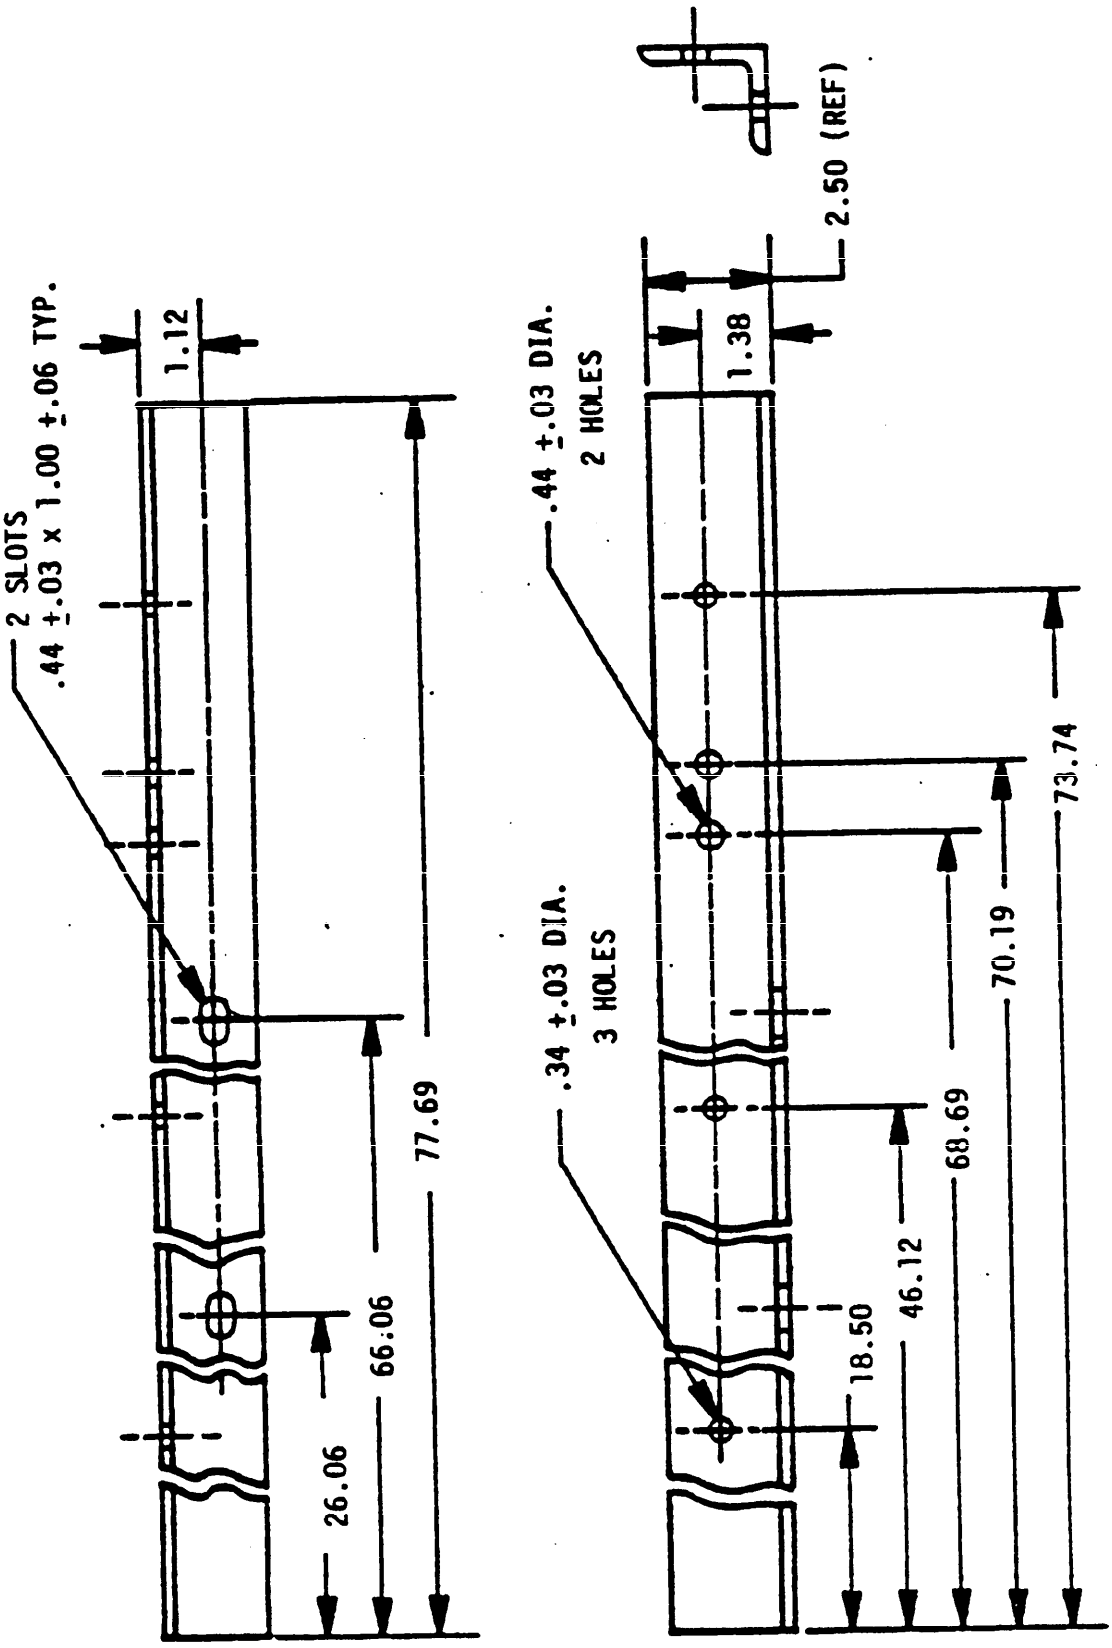


NOTES:

1. MATERIAL: ALUMINUM ALLOY 6061, TEMPER T6, SPEC QQ-A-200/8. 2-1/2 x 2-1/4.

FIGURE D24. Base frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

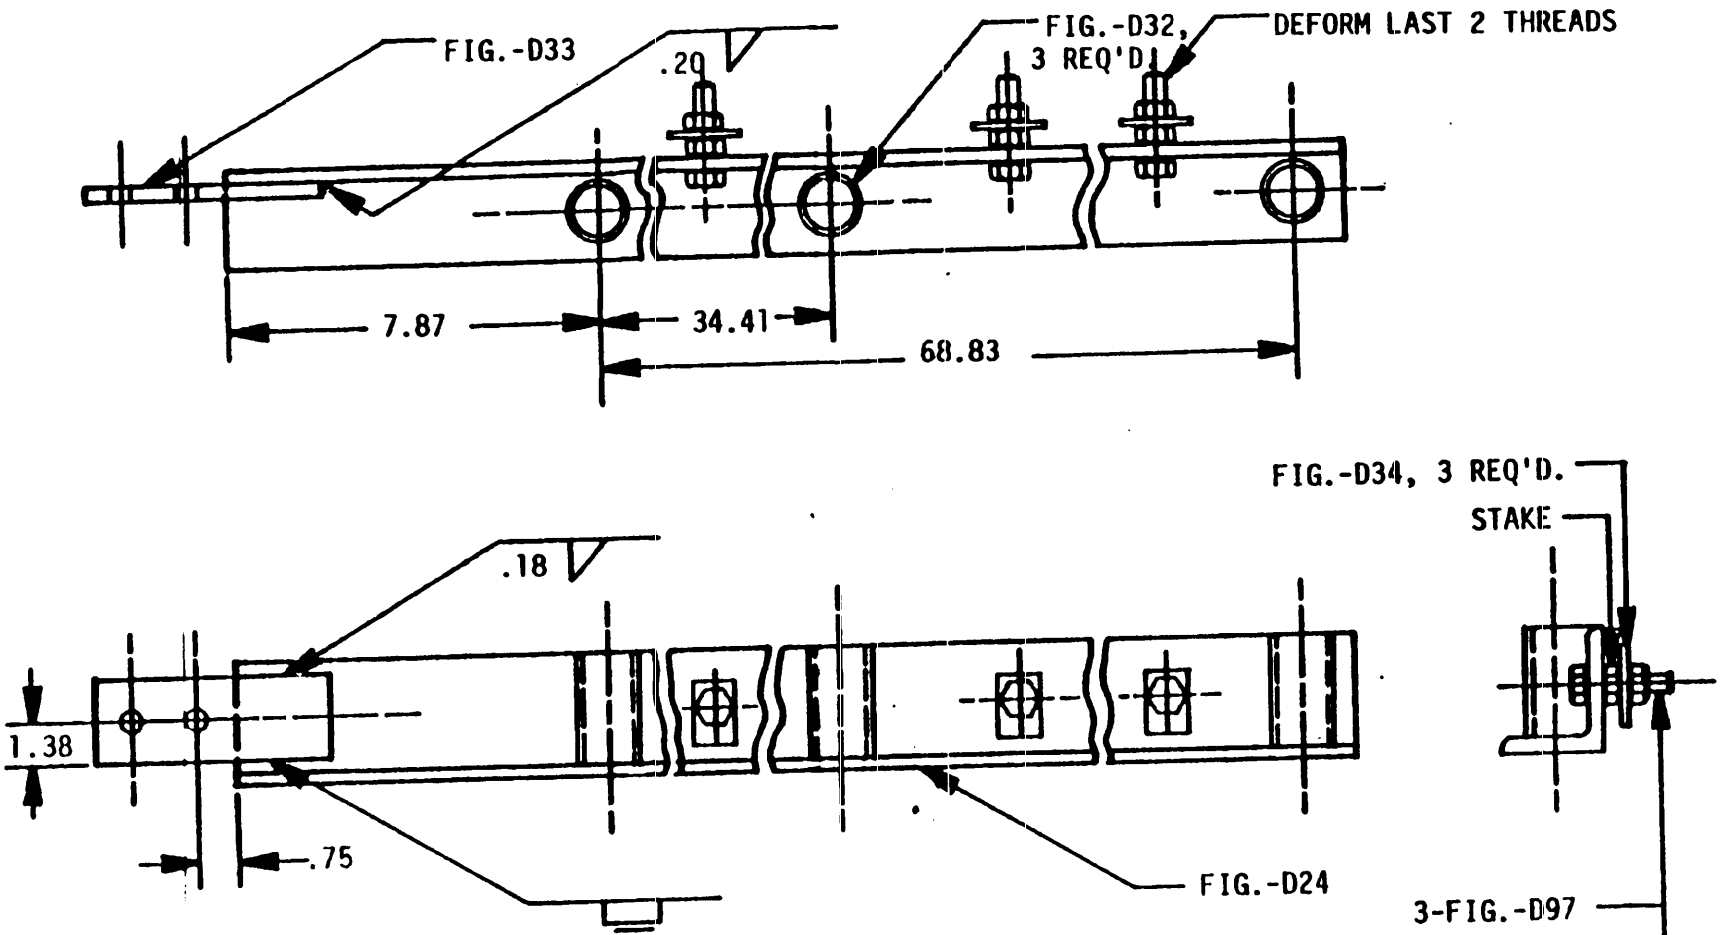


NOTES:

1. WELD IN ACCORDANCE WITH CLASS B, SPEC MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER 5356 OF ANSI/AWS A5.10.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D25. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

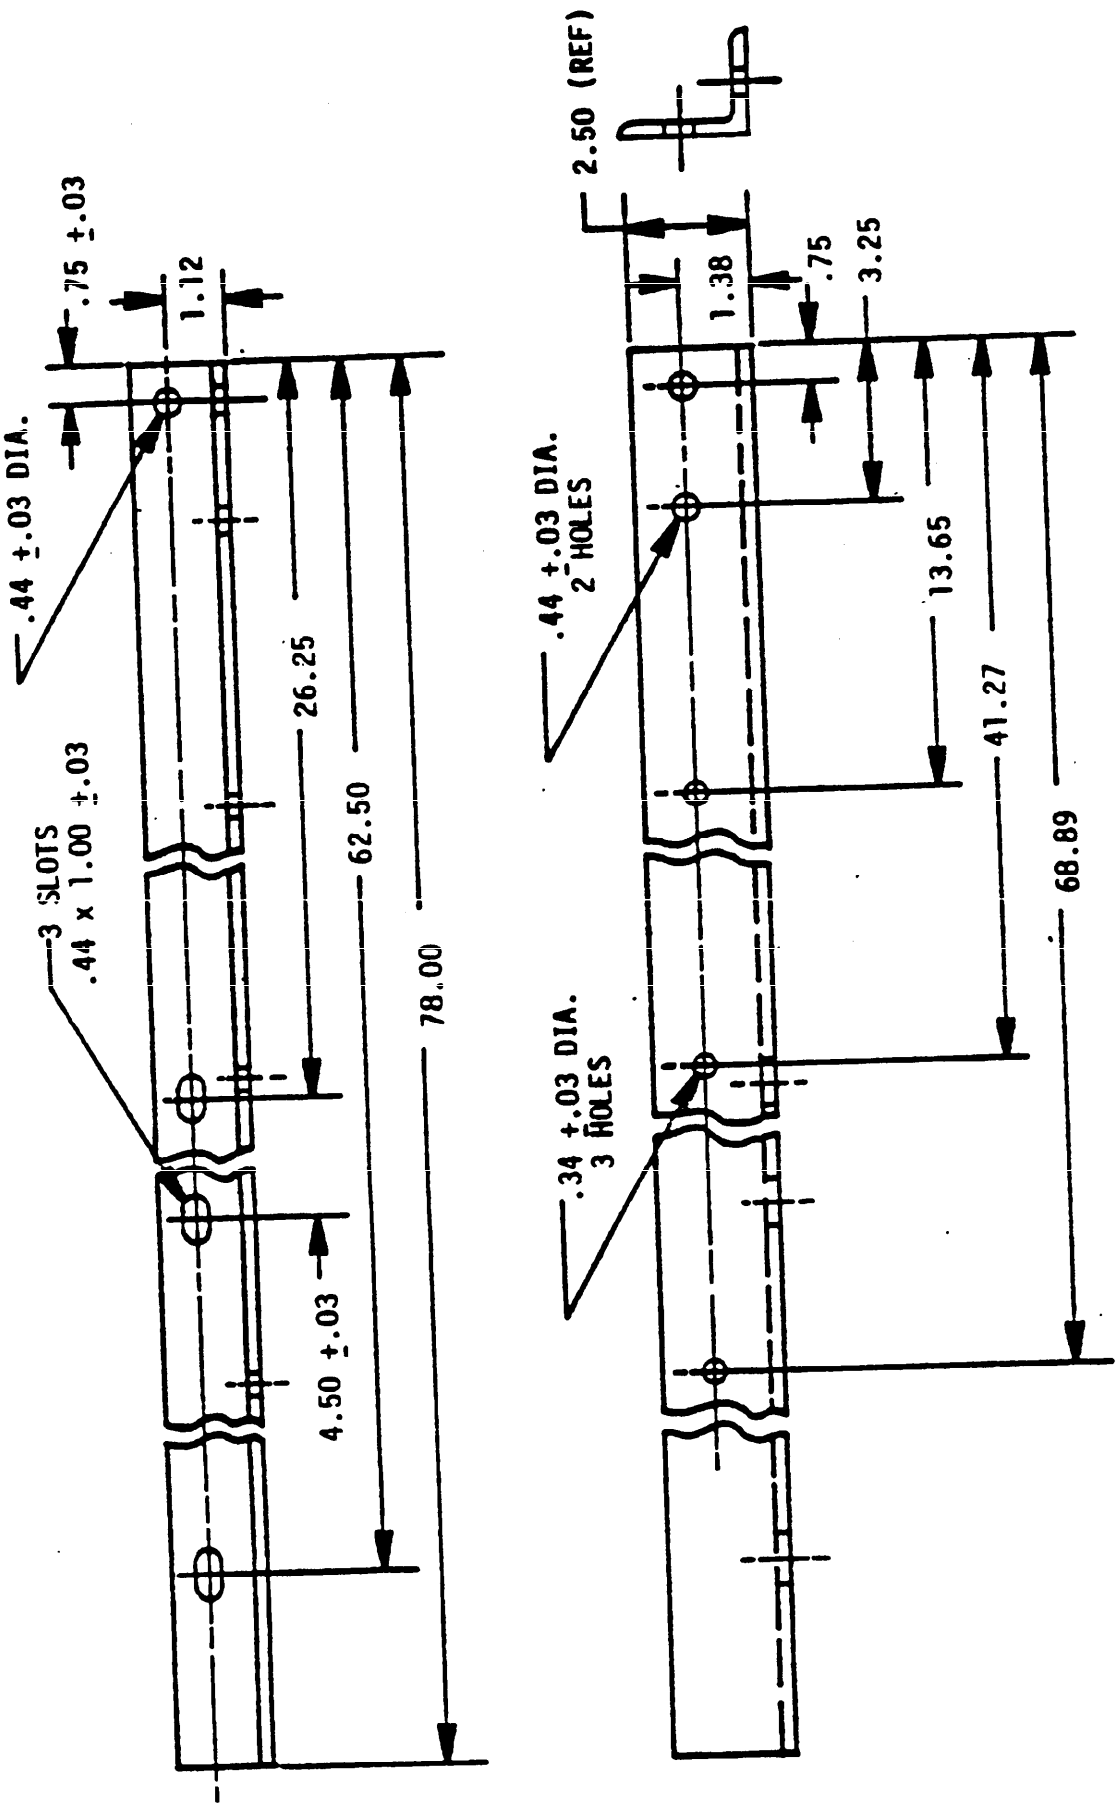


NOTES:

1. MATERIAL: ALUMINUM ALLOY 6061, TEMPER T6, SPEC QQ-A-200/8. 2-1/2 x 2-1/4.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D26. Base frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

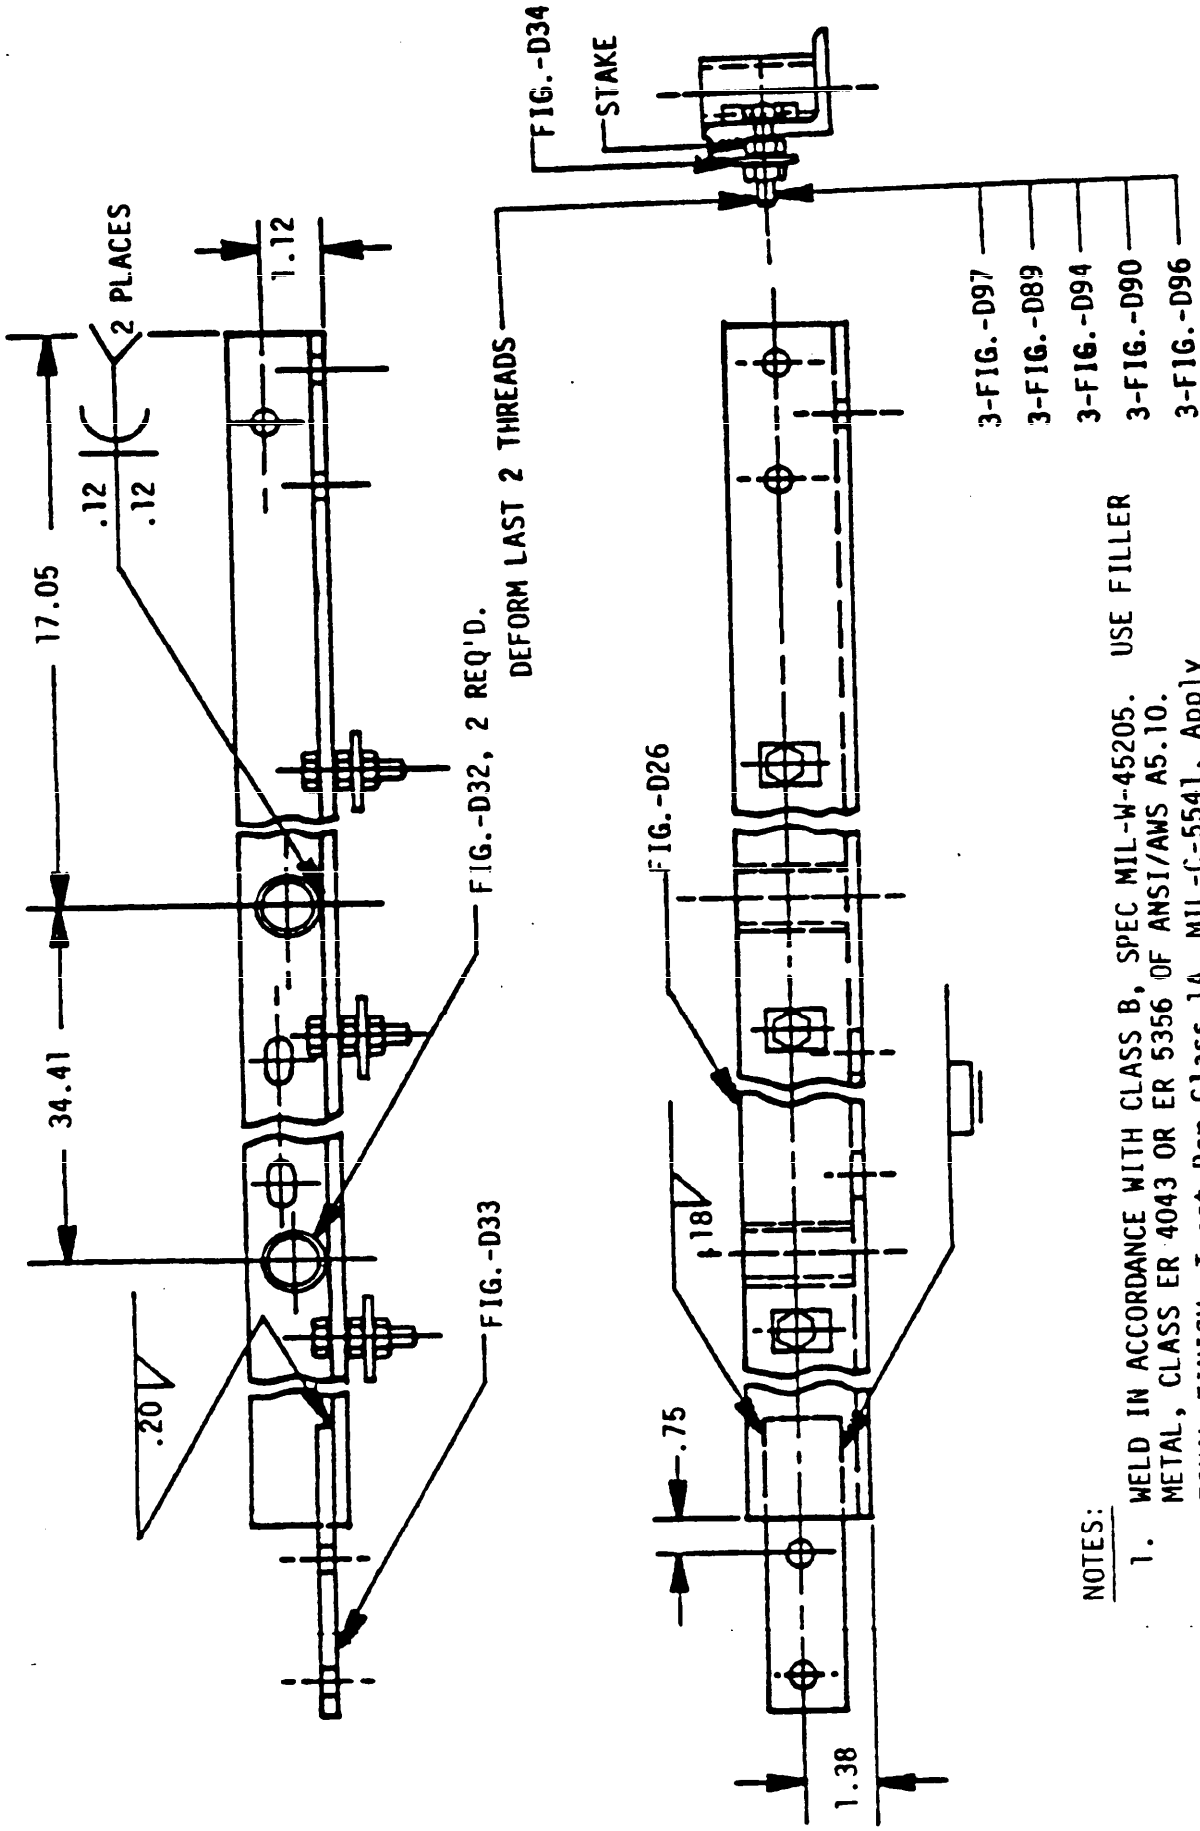


NOTES:

1. WELD IN ACCORDANCE WITH CLASS B, SPEC MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER 5356 OF ANSI/AWS A5.10.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D27. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

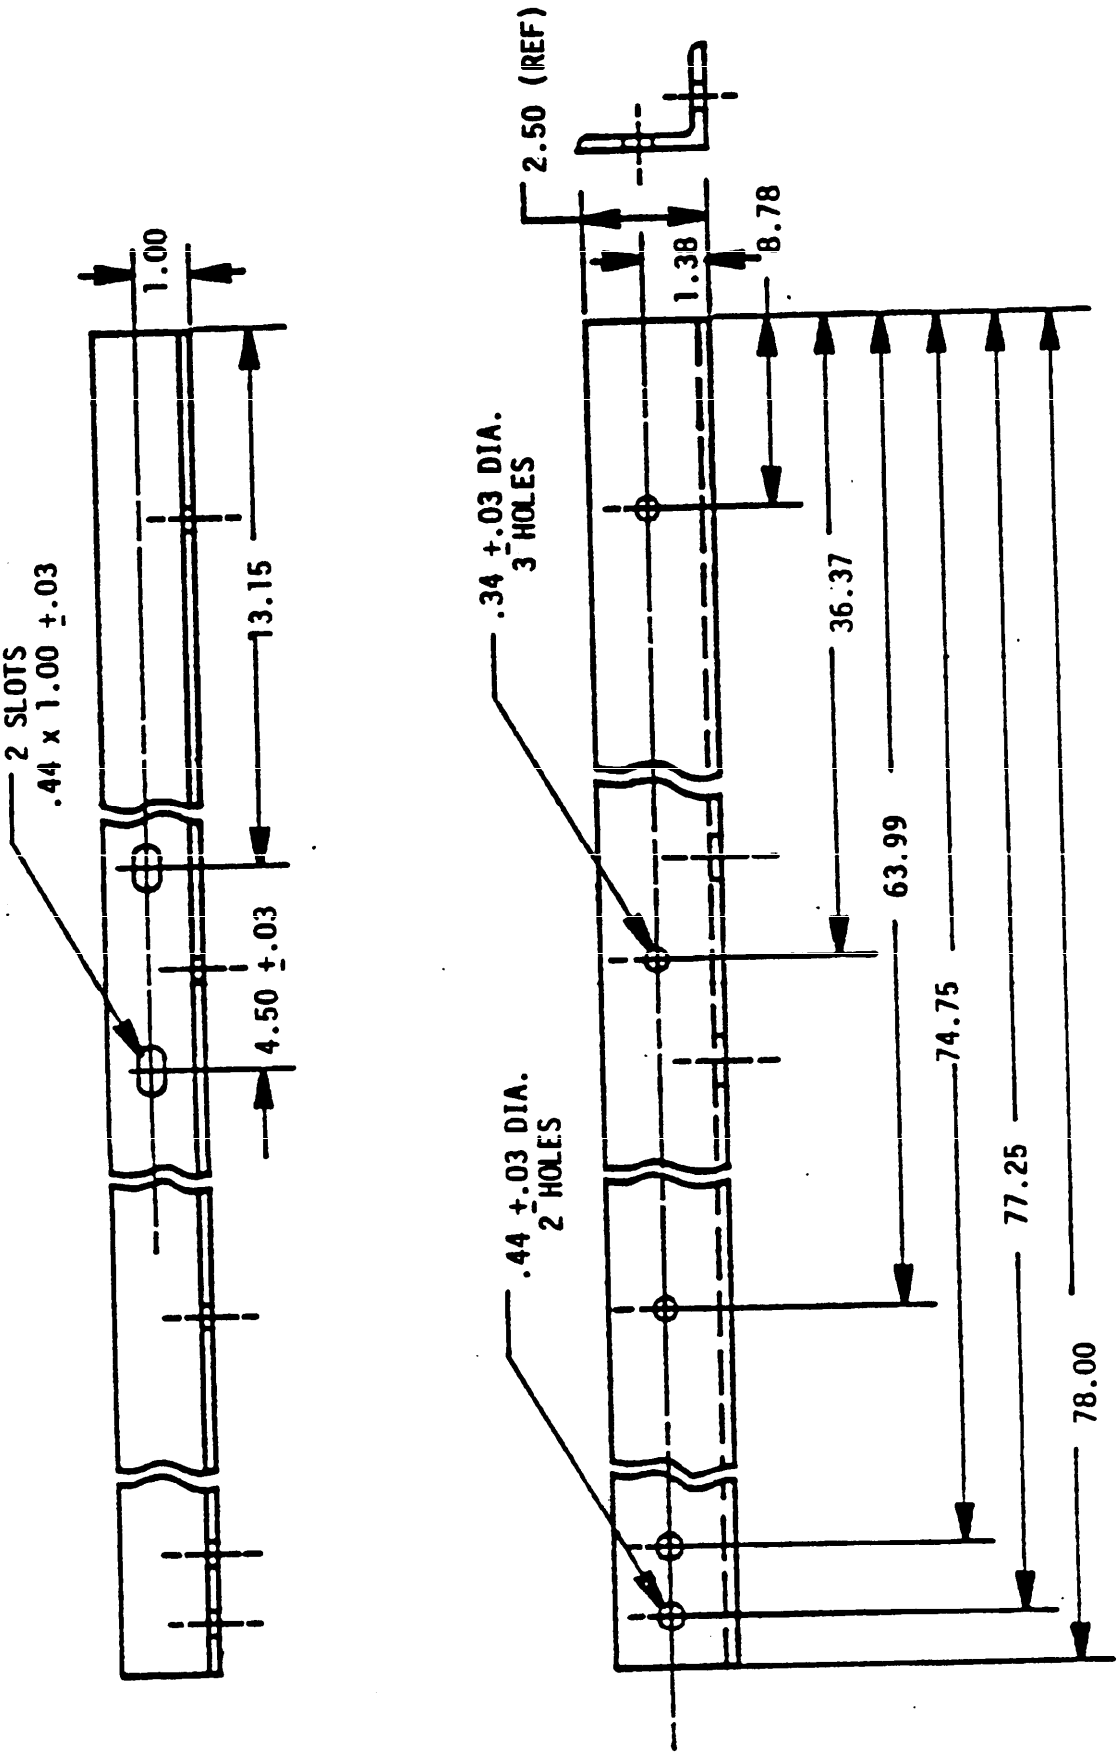


NOTES:

1. MATERIAL: ALUMINUM ALLOY 6061, TEMPER T6, SPEC QQ-A-200/8. 2-1/2 x 2-1/4.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D28. Base frame.


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

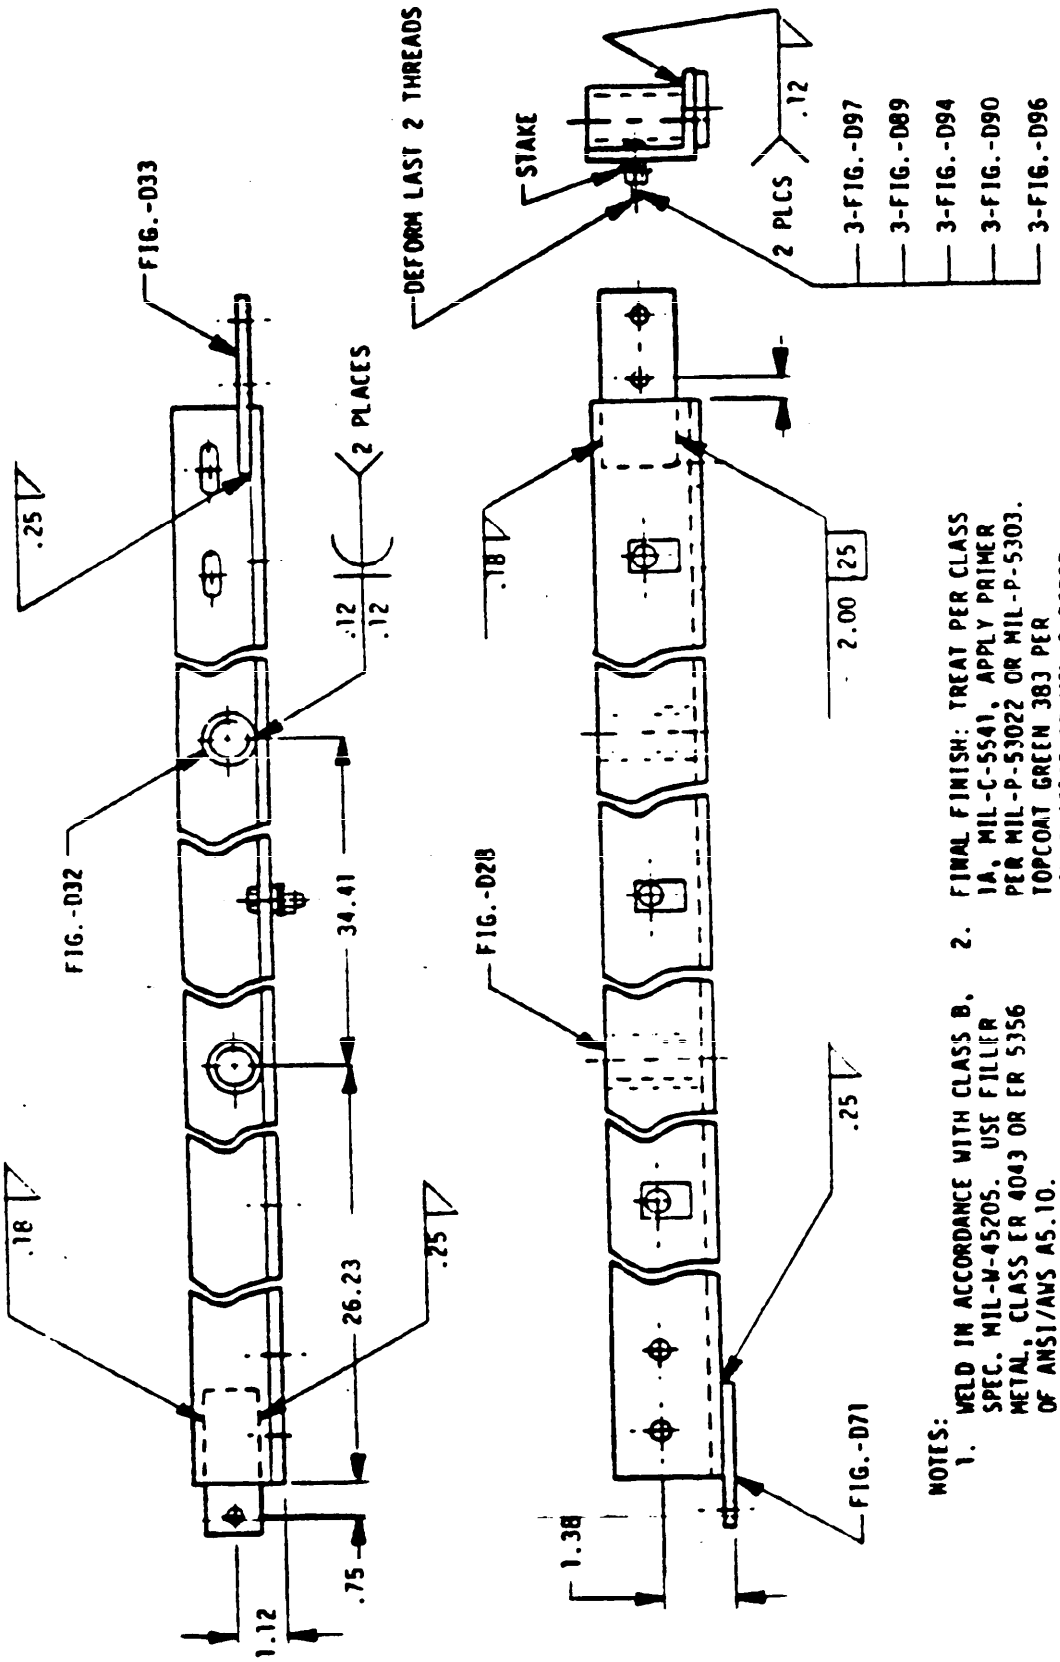

NOTES:
1. WELD IN ACCORDANCE WITH CLASS B. SPEC. MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER 5356 OF ANSI/AWS A5.10.
2. FINAL FINISH: TREAT PER CLASS 1A, MIL-C-5541, APPLY PRIMER PER MIL-P-53022 OR MIL-P-5303. TOPCOAT GREEN 383 PER MIL-C-46168 OR MIL-C-53038.

FIGURE D29. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

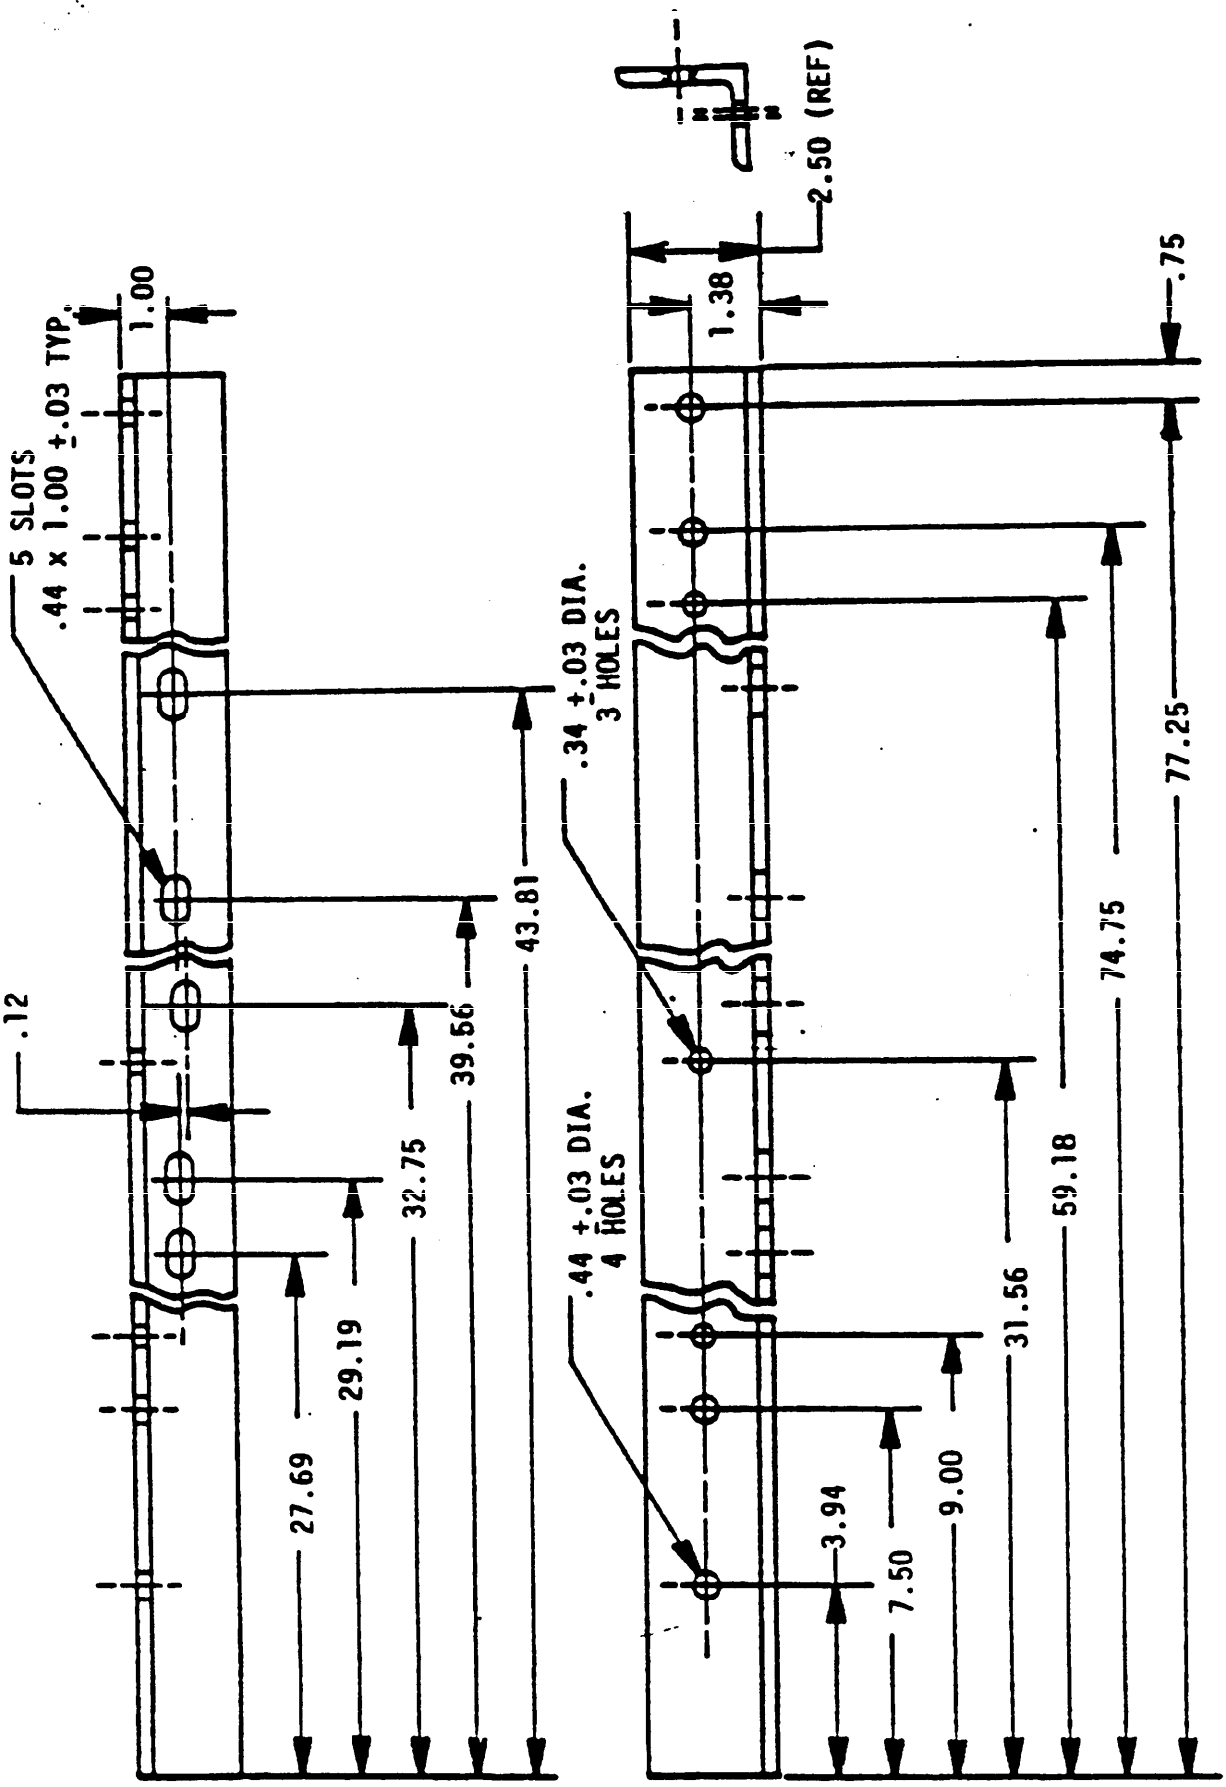


NOTES:

1. MATERIAL: ALUMINUM ALLOY 6061, TEMPER T6, SPEC QQ-A-200/8. 2-1/2 x 2-1/4.
2. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D30. Base frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

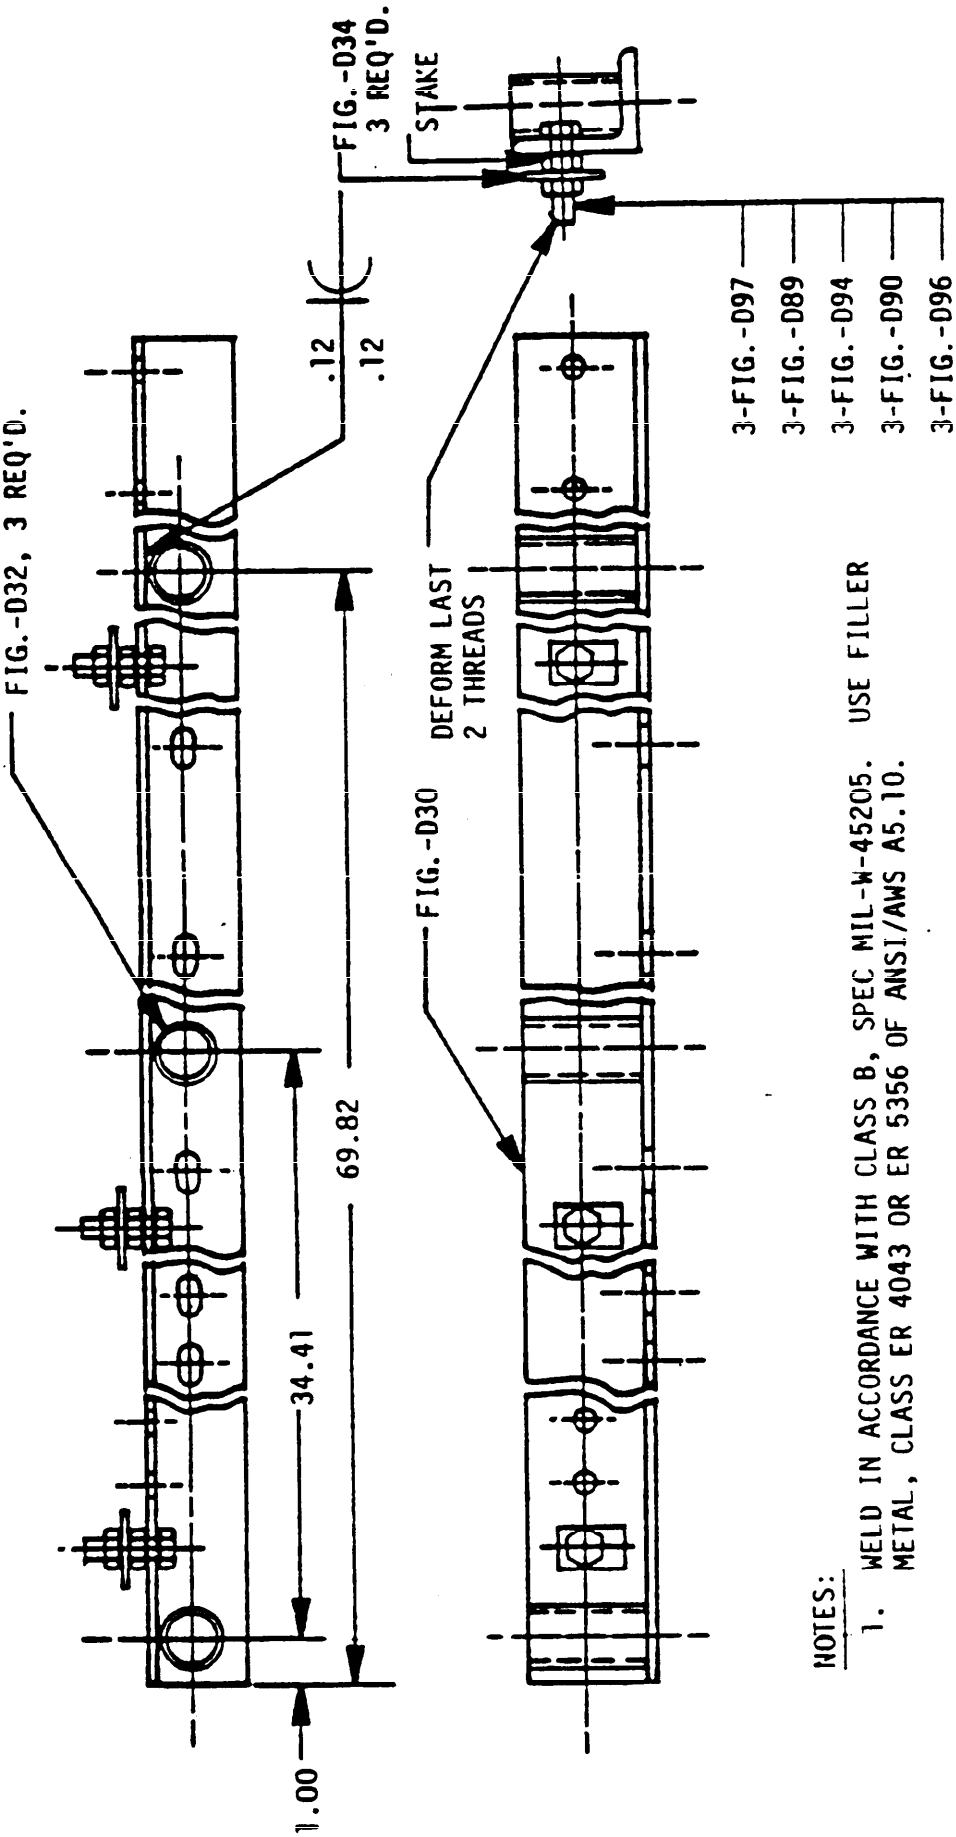


NOTES:

1. WELD IN ACCORDANCE WITH CLASS B, SPEC MIL-W-45205. USE FILLER METAL, CLASS ER 4043 OR ER 5356 OF ANSI/AWS A5.10.

FIGURE D31. Base frame assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

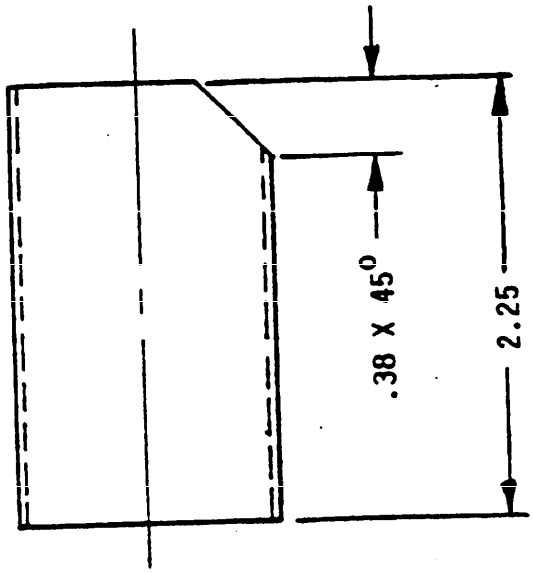


NOTES:

1. MATERIAL
   TUBE, ALUMINUM ALLOY 6061
   TEMPER T6, SPEC. WW-T-700/6
   1.315 O.D. X 1.33 WALL
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE D32. Engagement pipe. (24 required)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

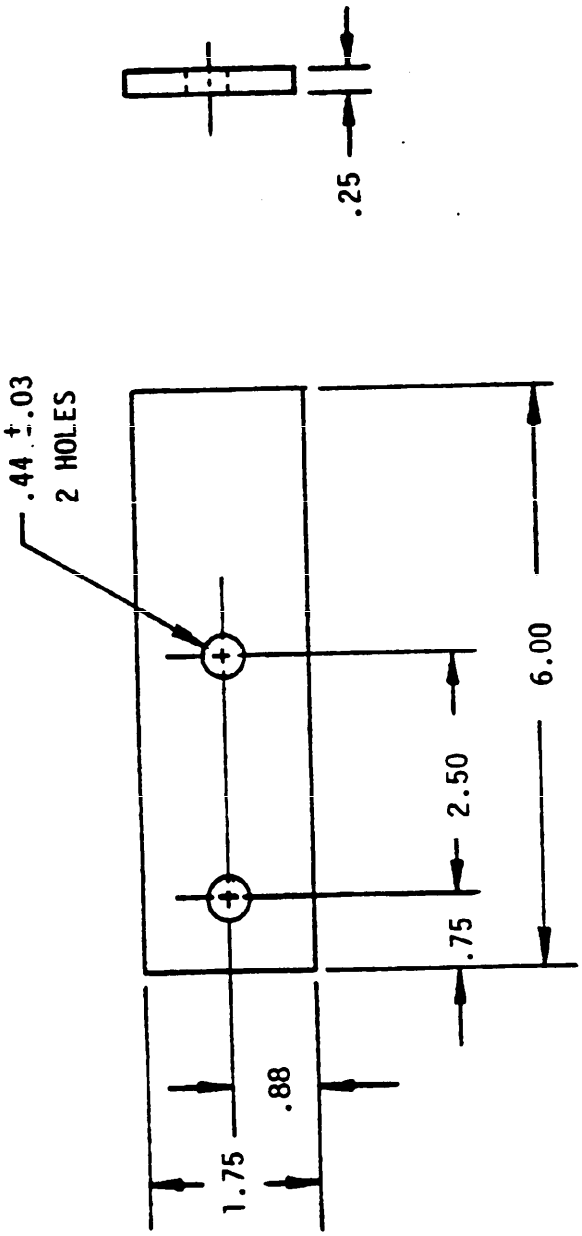

NOTES:
1. MATERIAL
   ALUMINUM ALLOY 6061
   TEMPER T6, SPEC. QQ-A-250/11
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE D33. Splice plate. (8 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

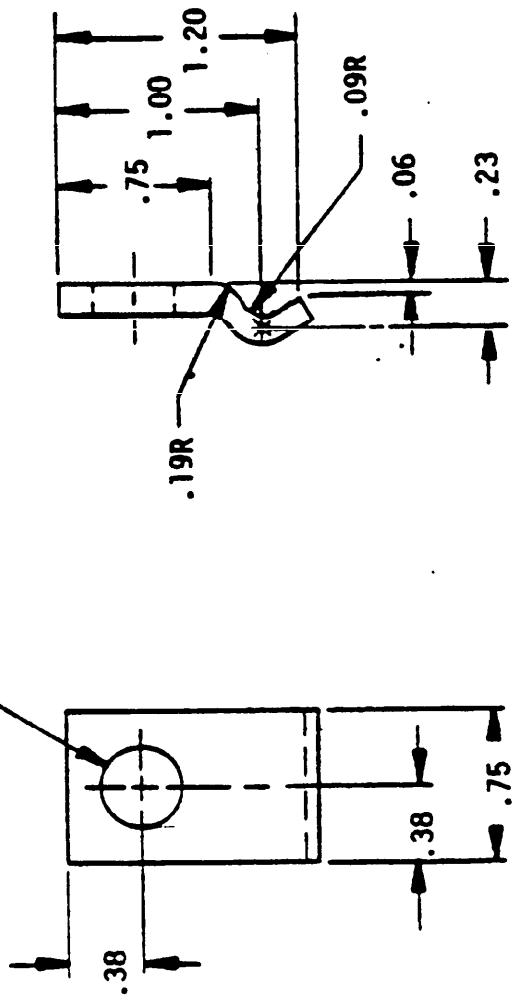

NOTES:

1. MATERIAL:
   STEEL COMMERCIAL QUALITY
   ASTM-A569 OR ASTM-A366
   .0897 (NO. 13 MS GA) THICK
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D34. Clamp. (36 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

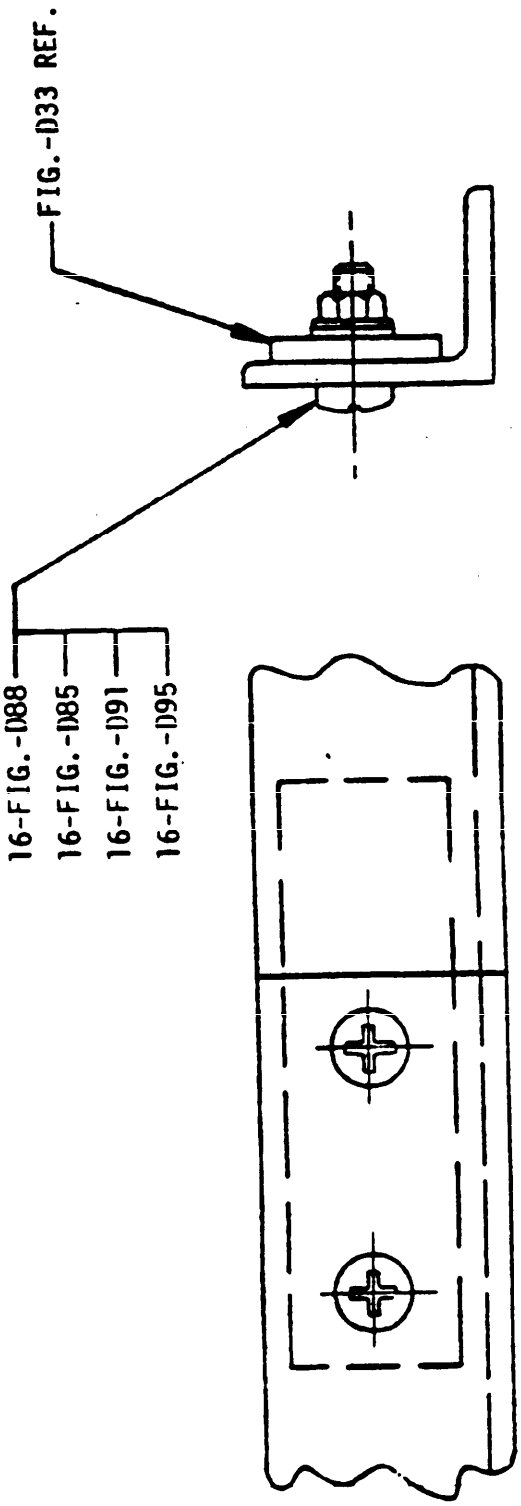


FIGURE D35. Base frame splice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


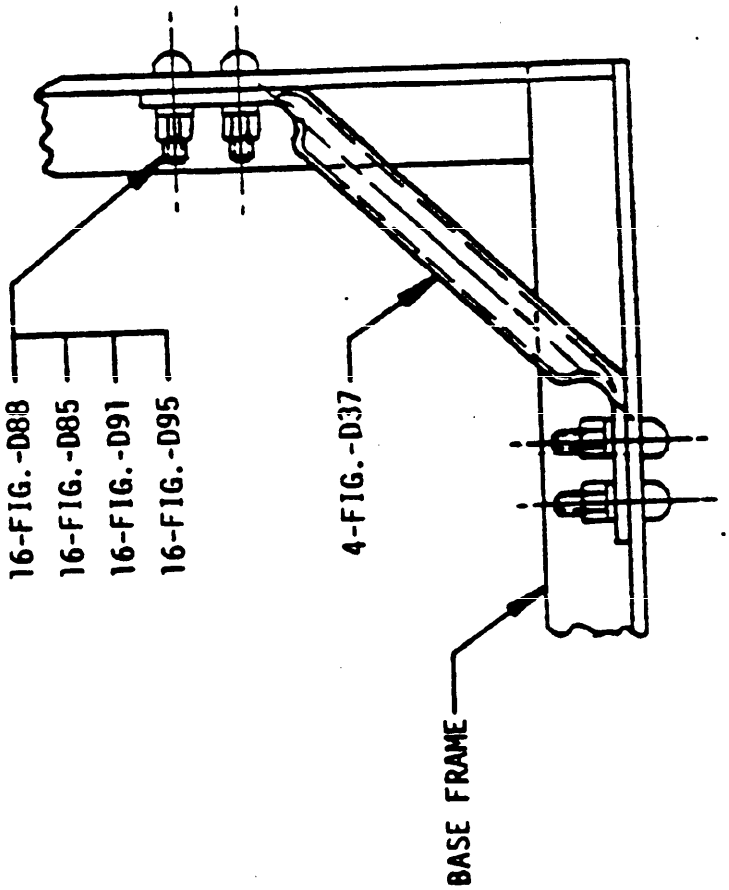


FIGURE D36. Corner construction, base frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

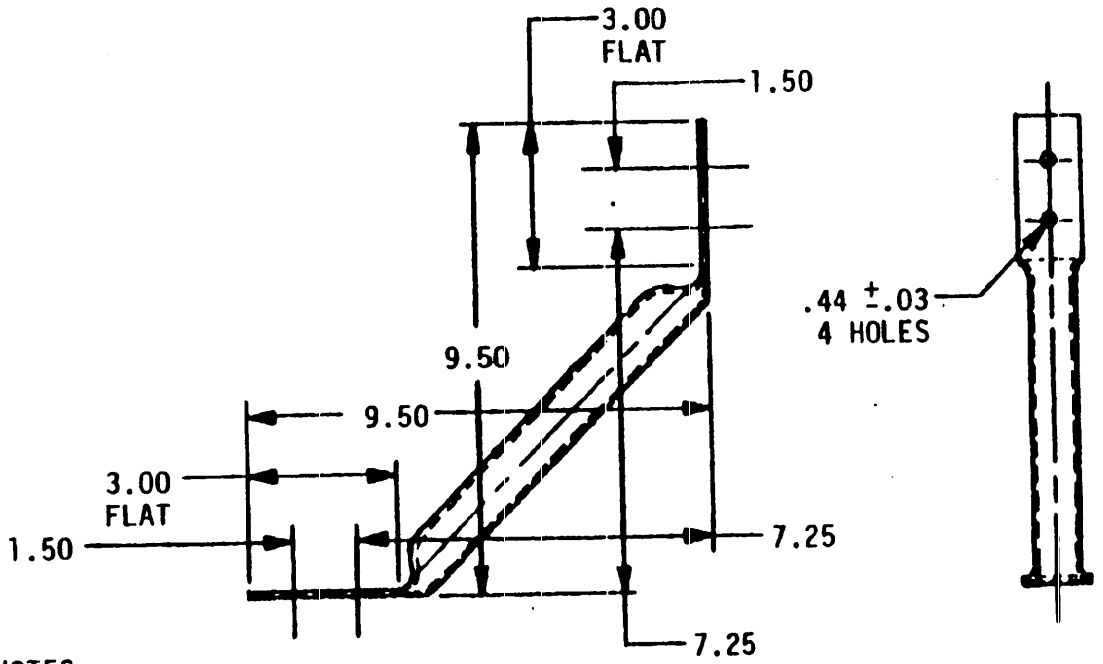


NOTES:

1. MATERIAL:
   TUBE STEEL, WELDED
   MT 1010 TO MT 1020
   TYPE OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D37. Tube, base frame corner.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

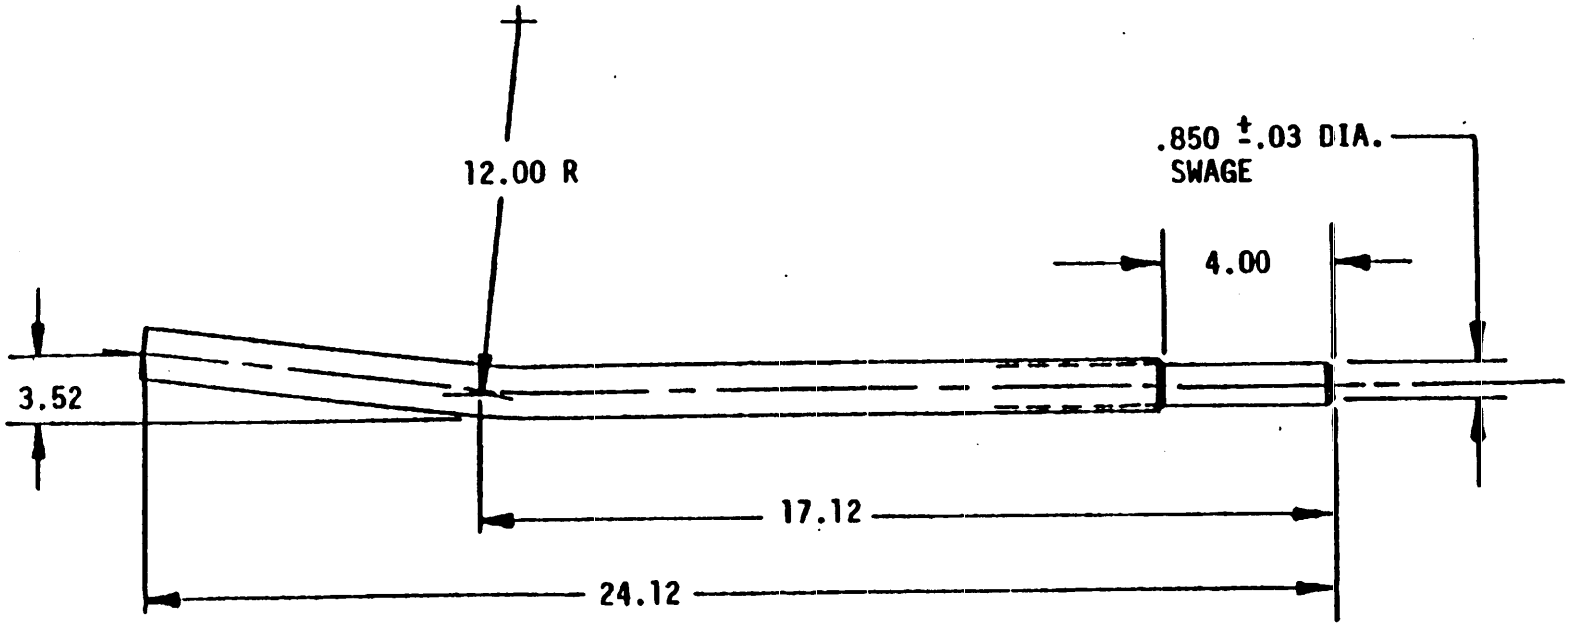


NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE OPTIONAL
   ASTM-A513
   1.00 O.D. X .058 WALL
2. I.D. OF TUBE MUST BE FREE OF BURRS.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D38. Tube, top frame. (20 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

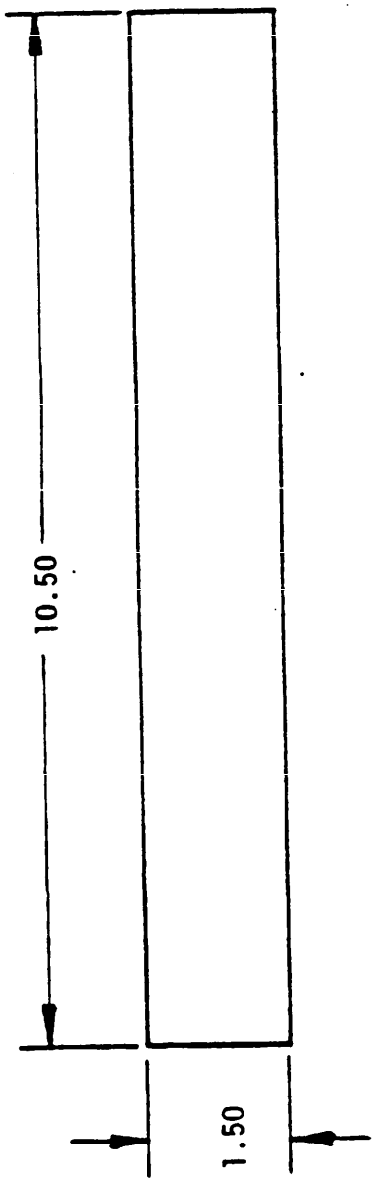


NOTES:

1. MATERIAL:
   ALUMINUM ALLOY 6061
   TEMPER T6, SPEC. QQ-A-250/11
   .25 THICK

2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE D39. Plate.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

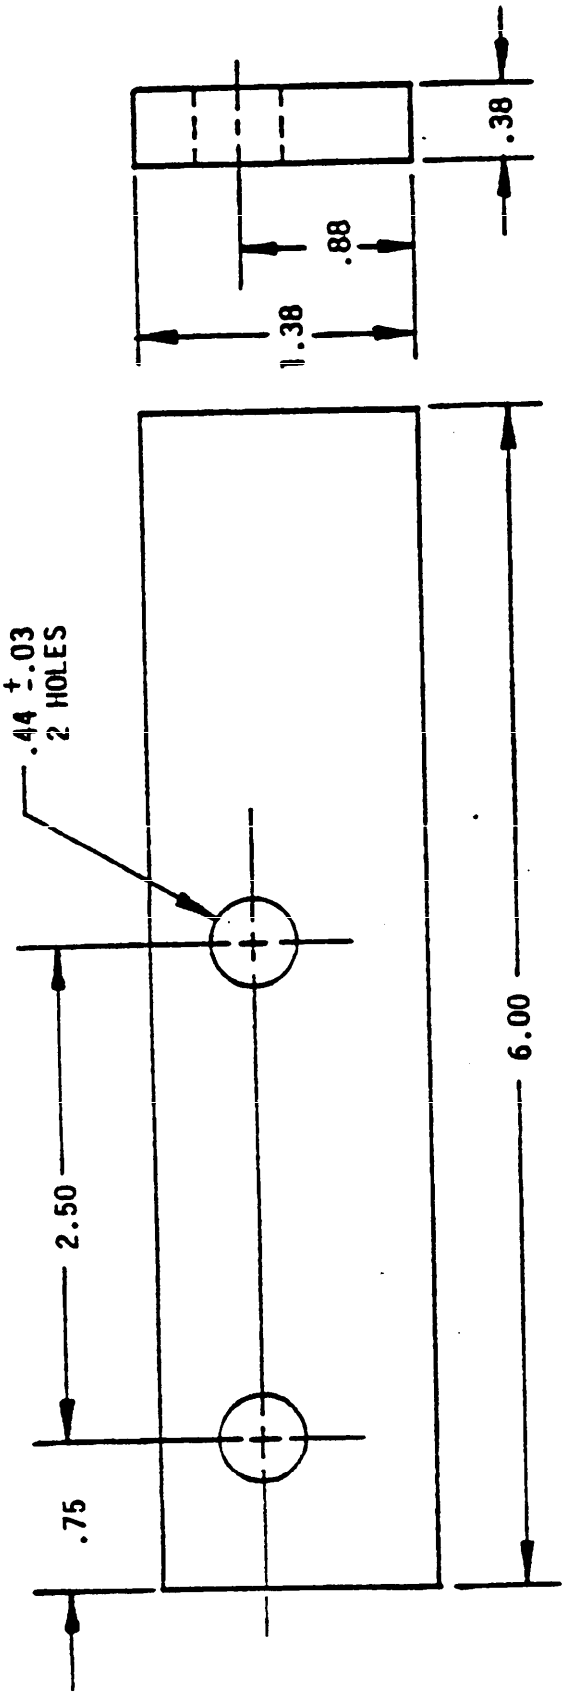

NOTES:
1. MATERIAL:
   ALUMINUM ALLOY 6061
   TEMPER T6, SPEC. QQ-A-250/11
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE D40. Splice plate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

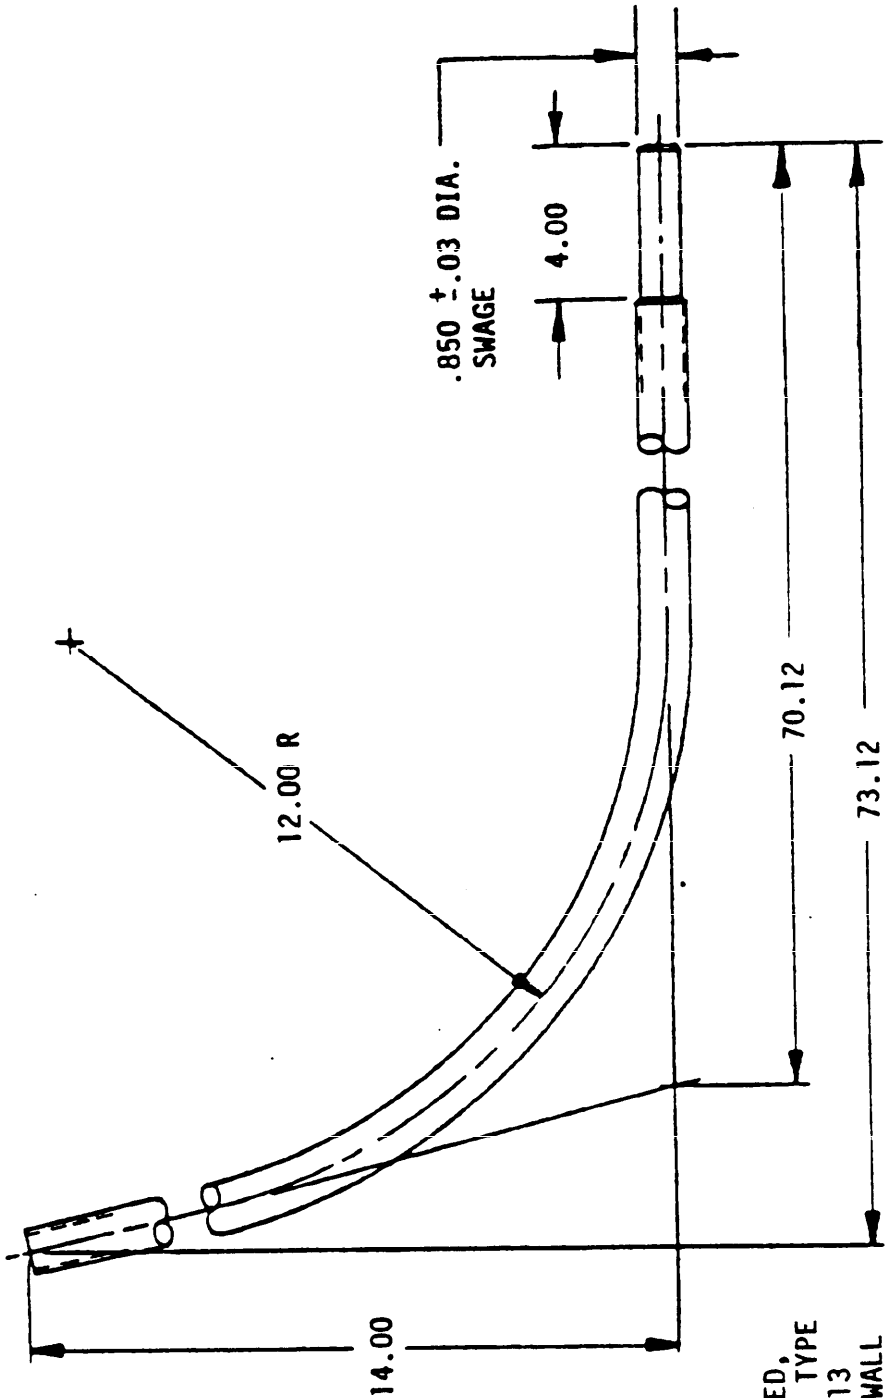


NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE
   OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. I.D. OF TUBE MUST BE FREE OF BURRS.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D41. Tube, top frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

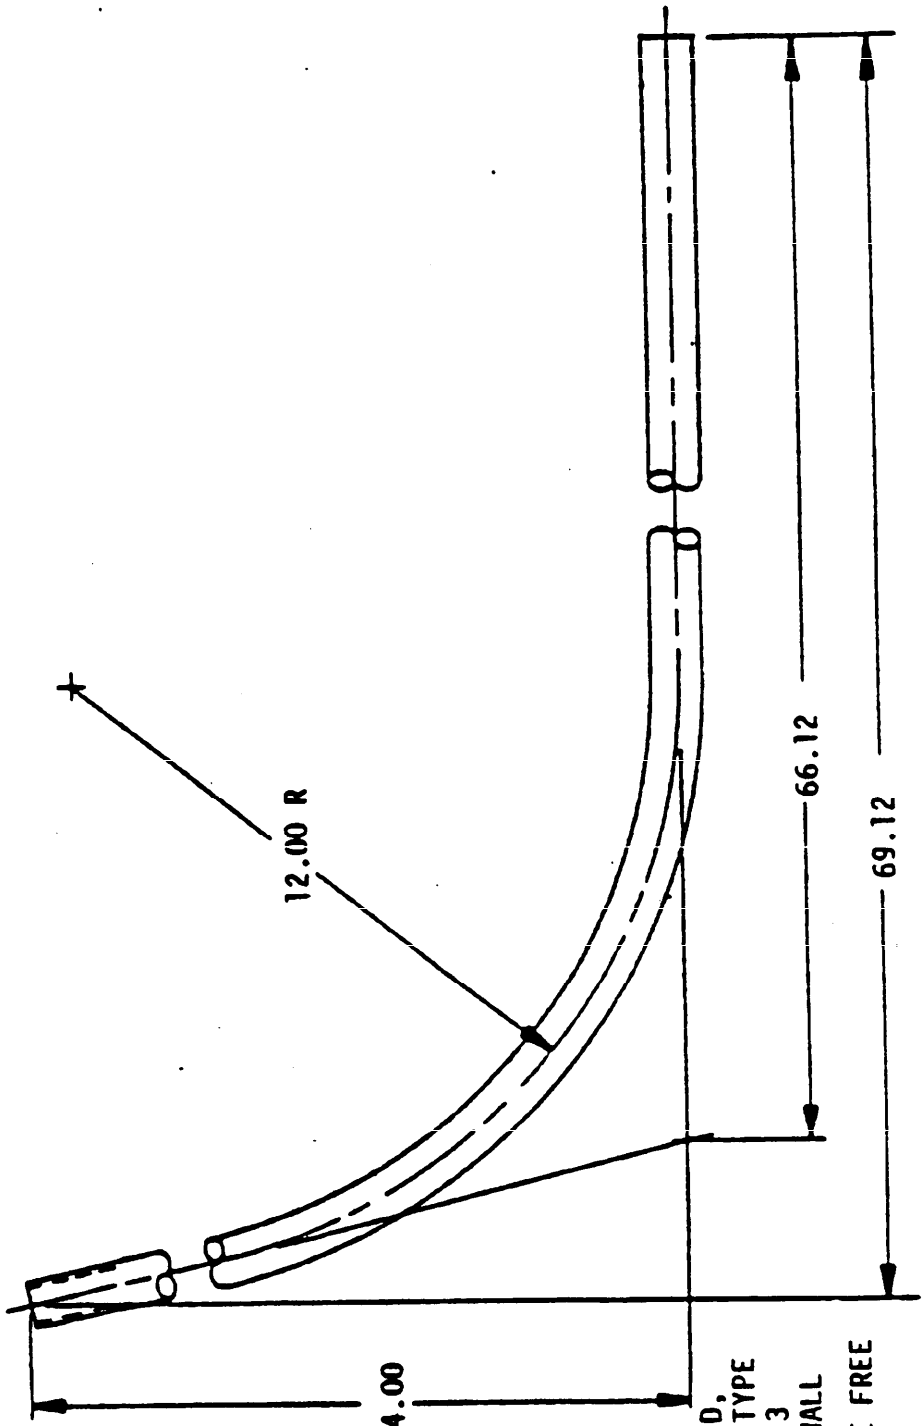


NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE
   OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. I.D. OF TUBE MUST BE FREE
   OF BURRS.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D42. Tube, top frame. (7 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

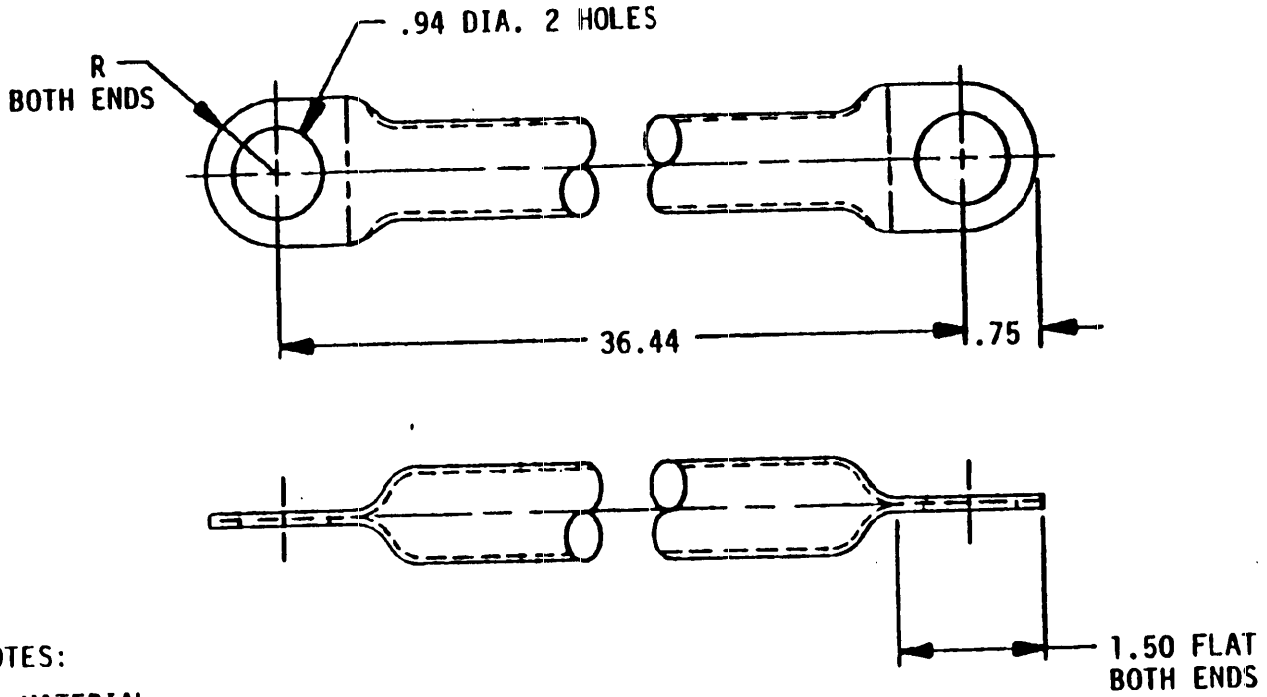


NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE OPTIONAL,
   ASTM-A513
   1.00 O.D. X .058 WALL
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D43. Link, frame. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

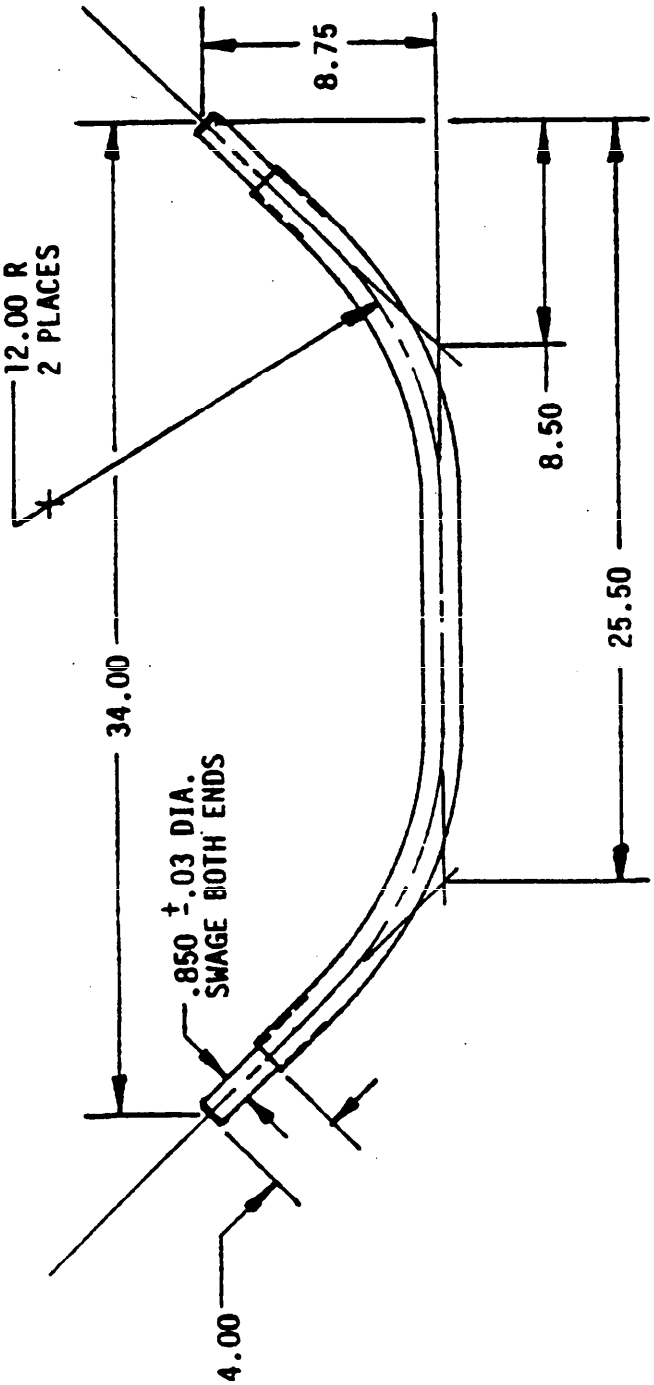


NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE OPTIONAL,
   ASTM-A513
   1.00 O.D. X .058 WALL
2. I.D. OF TUBE MUST BE FREE OF BURRS.


FIGURE D44. Tube, upper brace. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

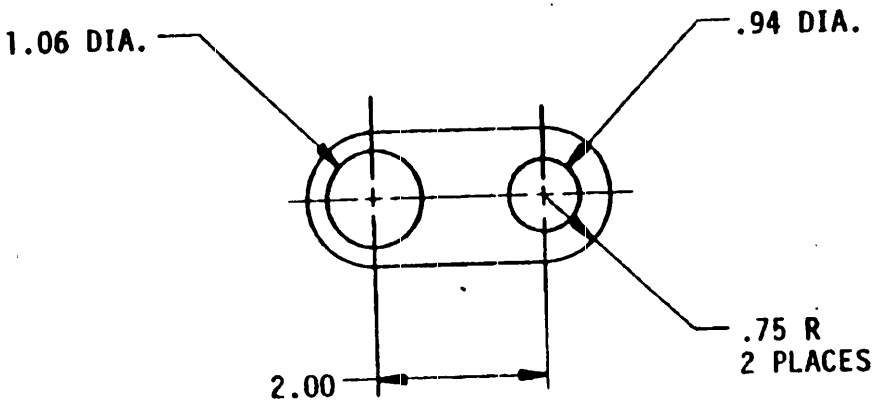

NOTES:


1. MATERIAL:
   STEEL, COMMERCIAL QUALITY
   ASTM-A569 OR ASTM-A366
   .1196 (NO.11 MSGA) THICK



2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL FINISH: Treat Per Class 1A, MIL-C-5541, Apply Primer Per MIL-P-53022 Or MIL-P-5303. Topcoat Green 383 Per MIL-C-46168 Or MIL-C-53038.

FIGURE D45. Plate. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

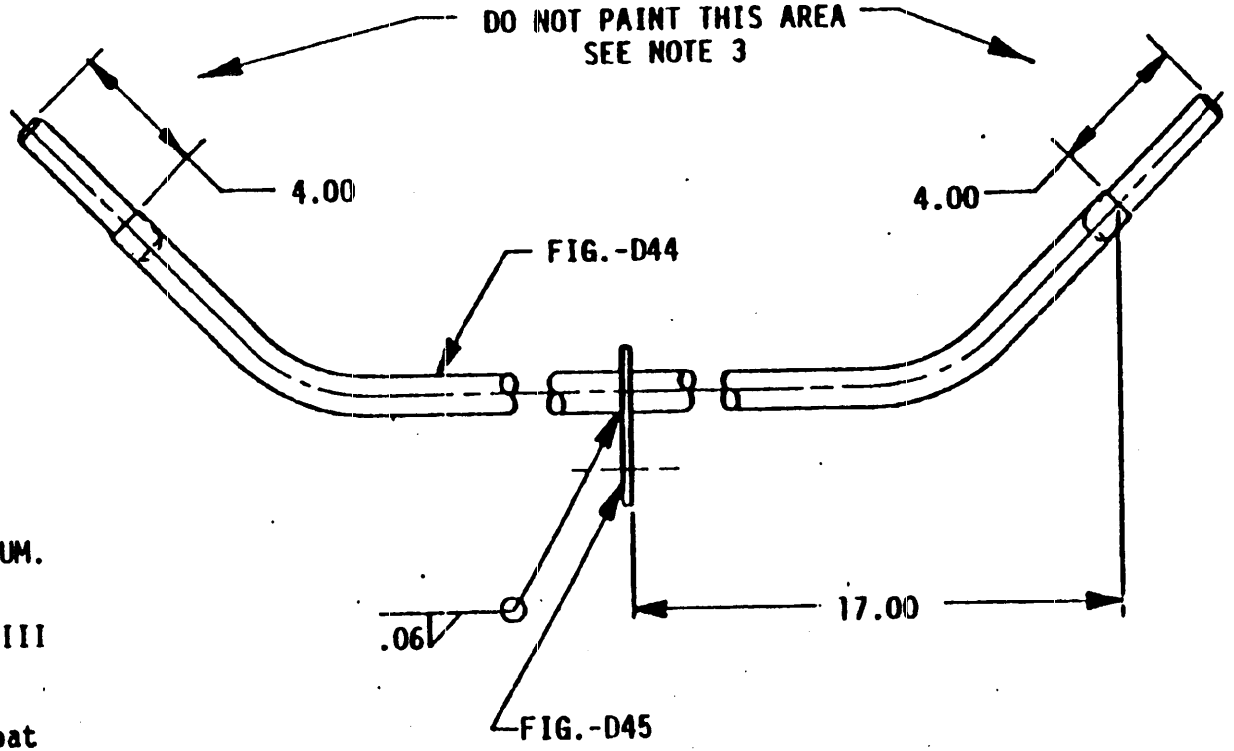


NOTE:

1. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS 1
2. ALL WELD SIZES ARE MINIMUM.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

   UNPAINTED AREA TO BE COATED WITH CORROSION PREVENTIVE COMPOUND GRADE I, SPEC. MIL-C-16173.

FIGURE D46. Tube assembly. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

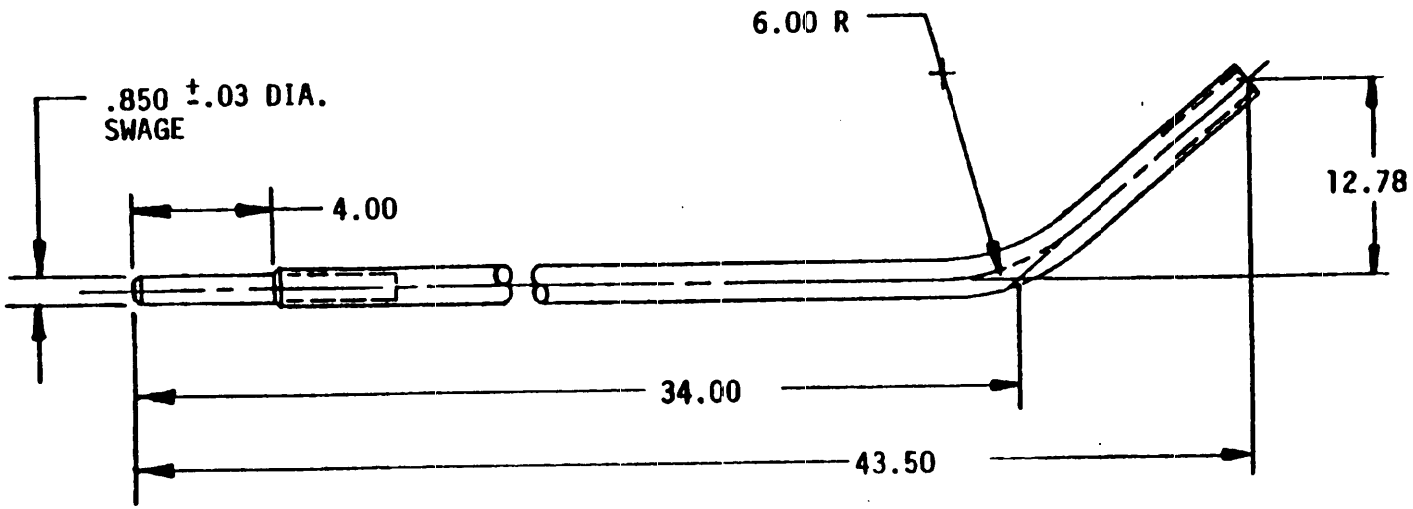


NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE
   OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. I.D. OF TUBE MUST BE FREE OF BURRS.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D47. Tube, top frame. (4 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

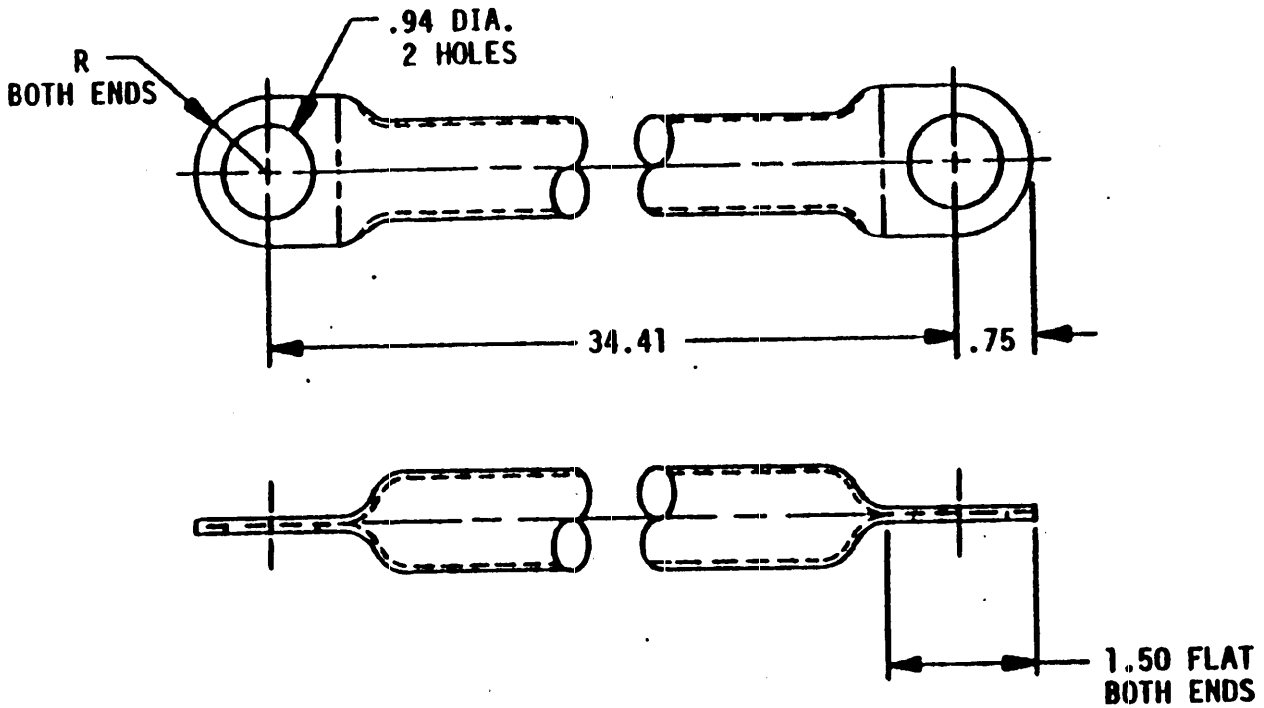


NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE
   OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D48. Link, frame. (25 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

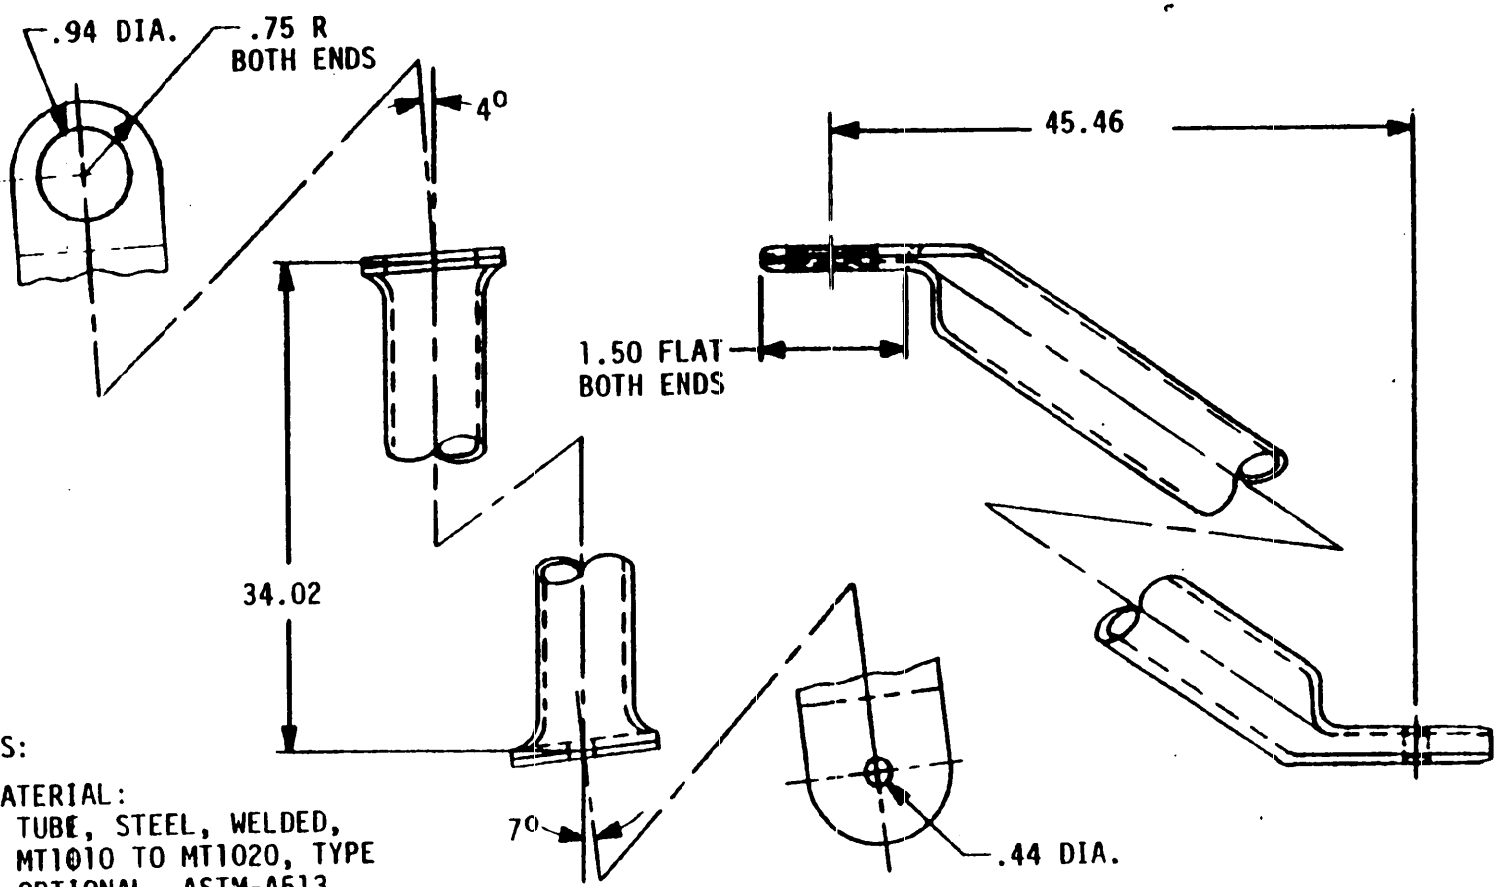

NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE
   OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D49. Tube brace. shown (2 required)

FIGURE D50. Tube brace. opposite (2 required)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL:
   1.1 STEEL, CARBON, ANGLE, ASTM-A36
   2-1/2 X 2 X 1/4
   1.2 STEEL, 1015 TO 1025 ASTM-A576 OR ASTM-A108
   .25 THICK
2. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS I.
3. ALL WELD SIZES ARE MINIMUM.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

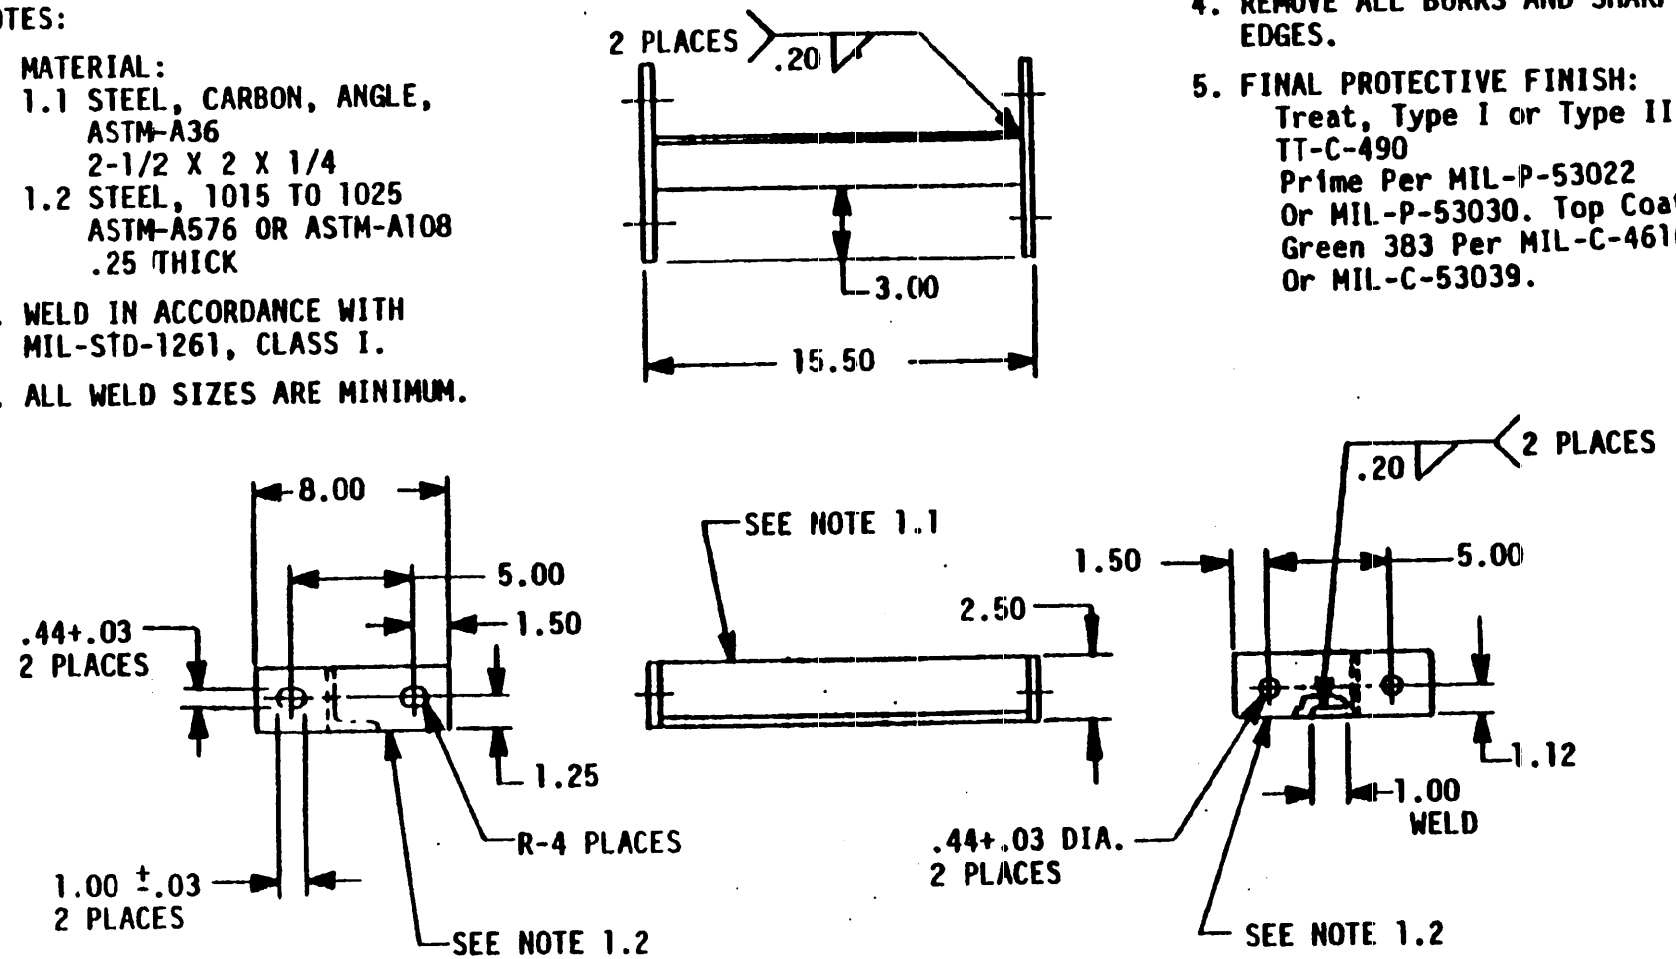


FIGURE D51. Bracket. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE
   OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.


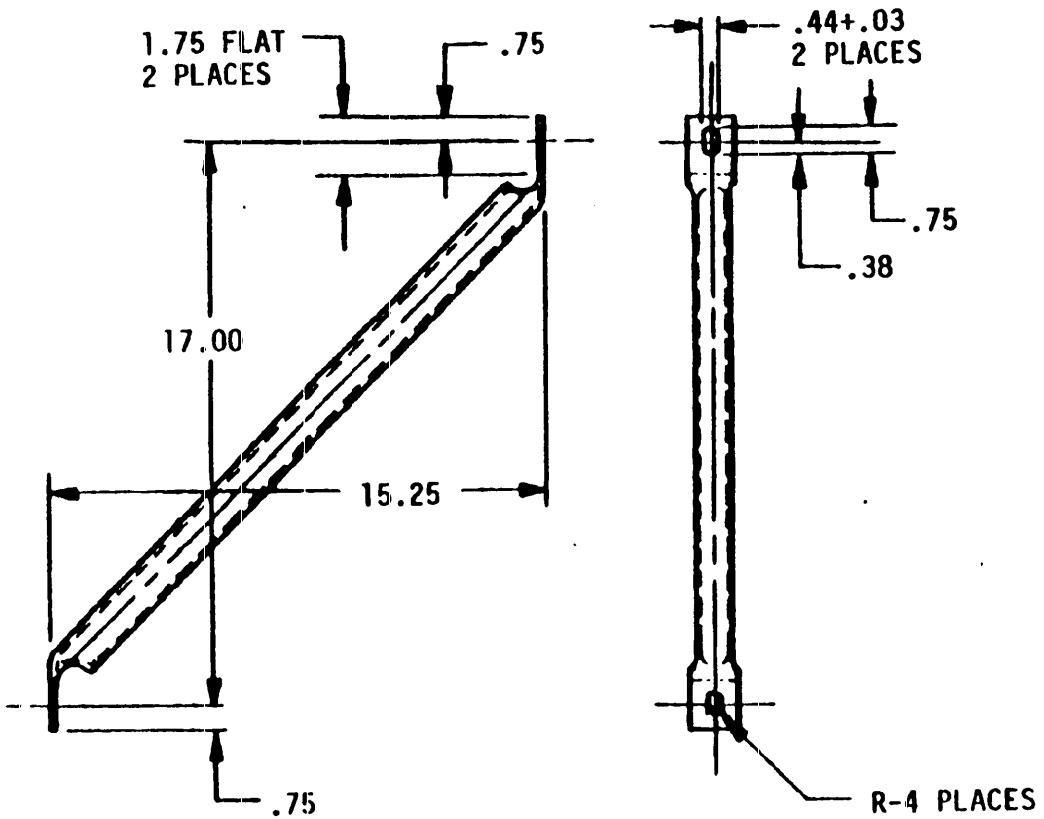


FIGURE D52. Brace. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

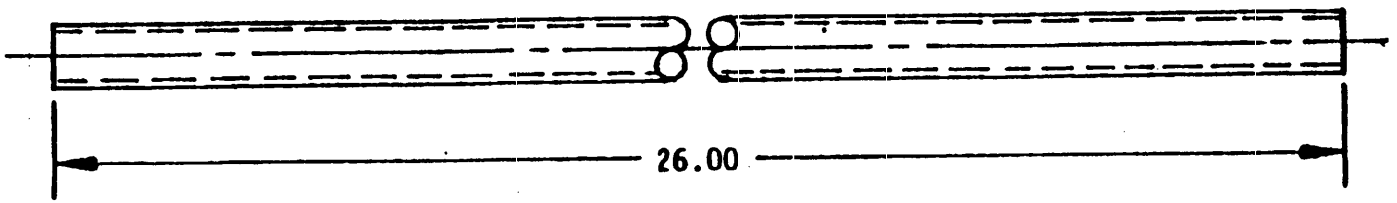


NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE
   OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. I.D. OF TUBE MUST BE FREE
   OF BURRS.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D53. Tube, top frame. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

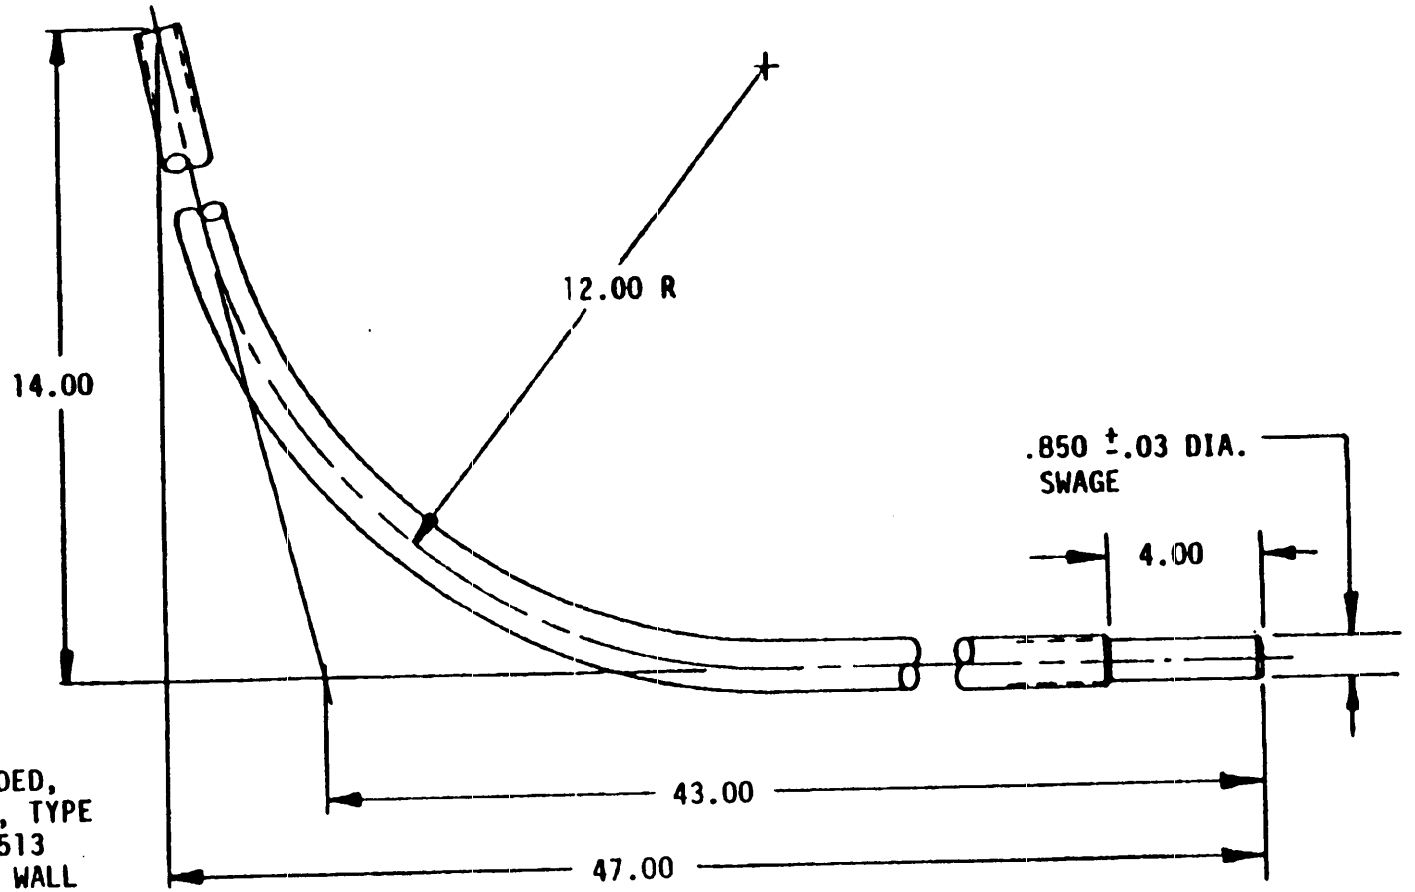


NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE
   OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. I.D. OF TUBE MUST BE FREE OF BURRS.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D54. Tube, top frame. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

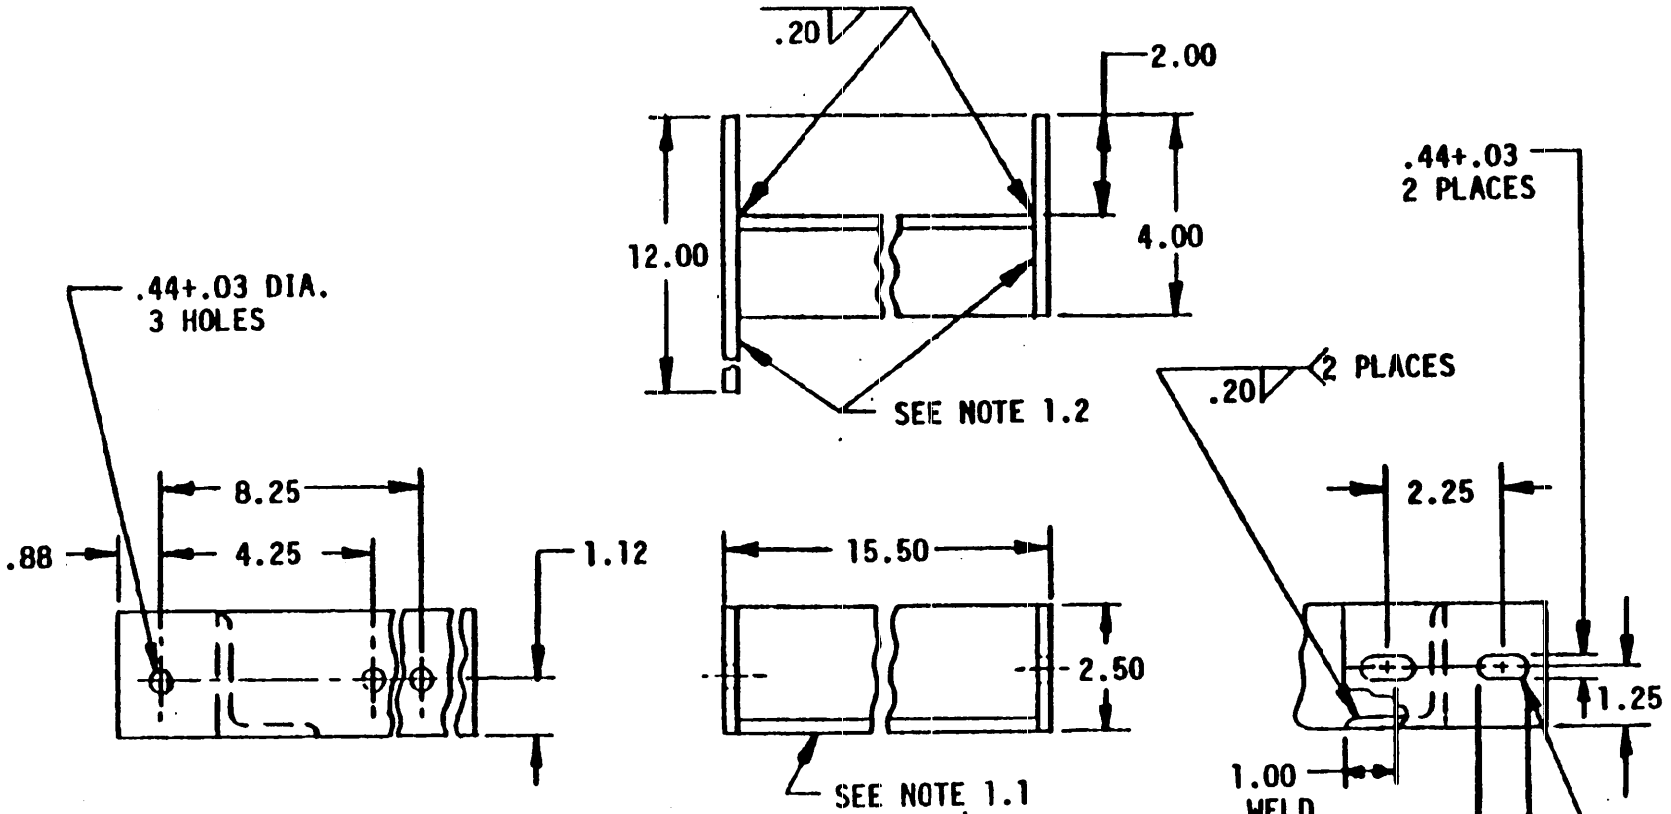


NOTES:

1. MATERIAL:
   1.1 STEEL, CARBON, ANGLE, ASTM-A36
   2-1/2 X 2 X 1/4
   1.2 STEEL, 1015 TO 1025 ASTM-A576 OR ASTM-A108
   .25 THICK
2. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS I.
3. ALL WELD SIZES ARE MINIMUM.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D55. Bracket, shown

FIGURE D56. Bracket, opposite


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

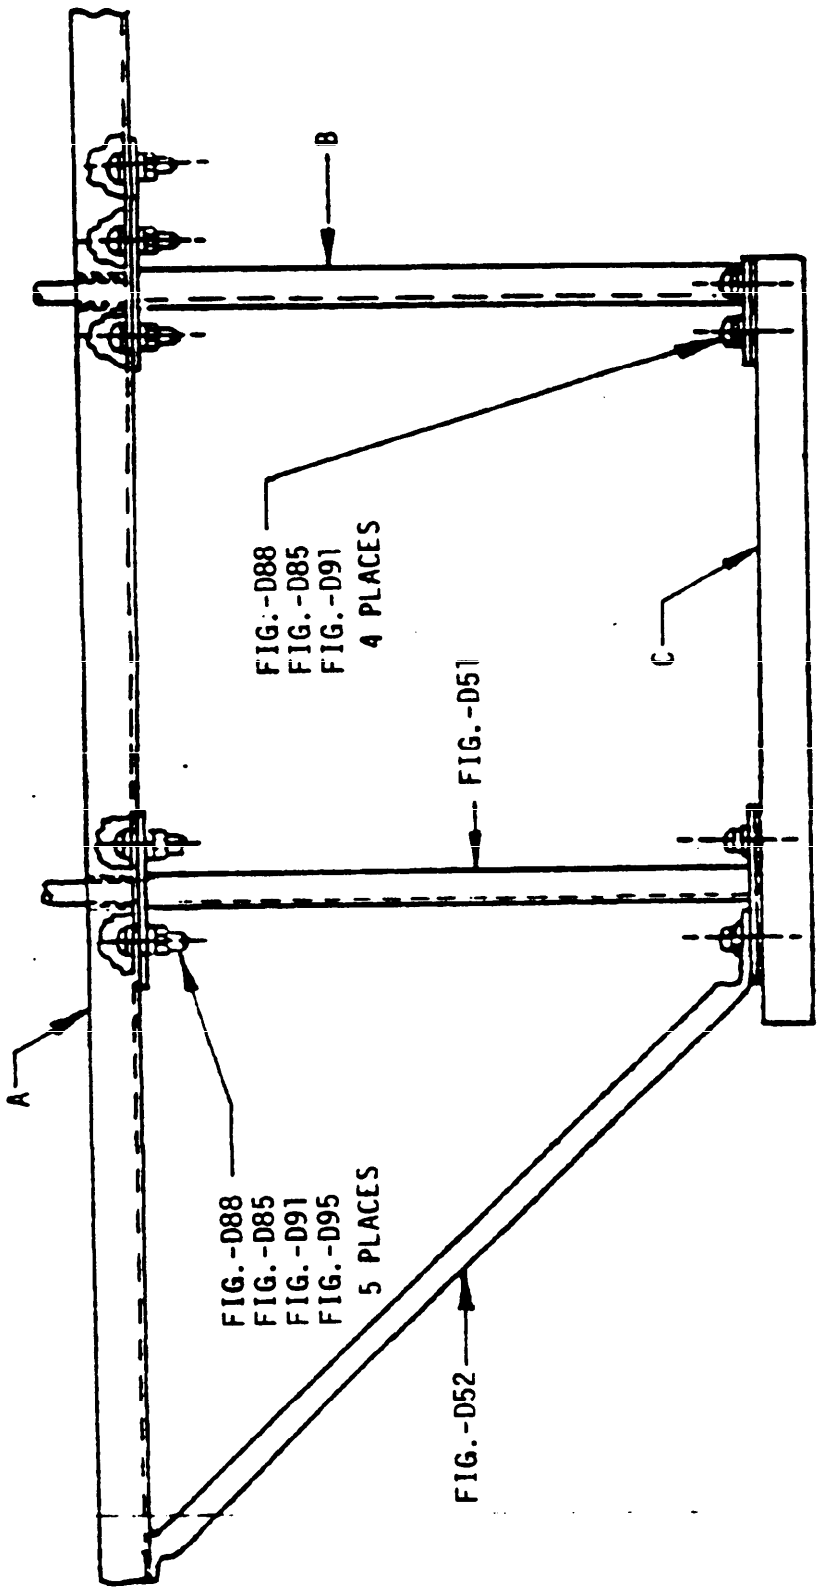

	A	B	C
SHOWN	FIG.-D11	FIG.-D55	FIG.-D59
OPPOSITE	FIG.-D 9	FIG.-D56	FIG.-D60

FIGURE D57. Frame to vehicle installation, head light bracket.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

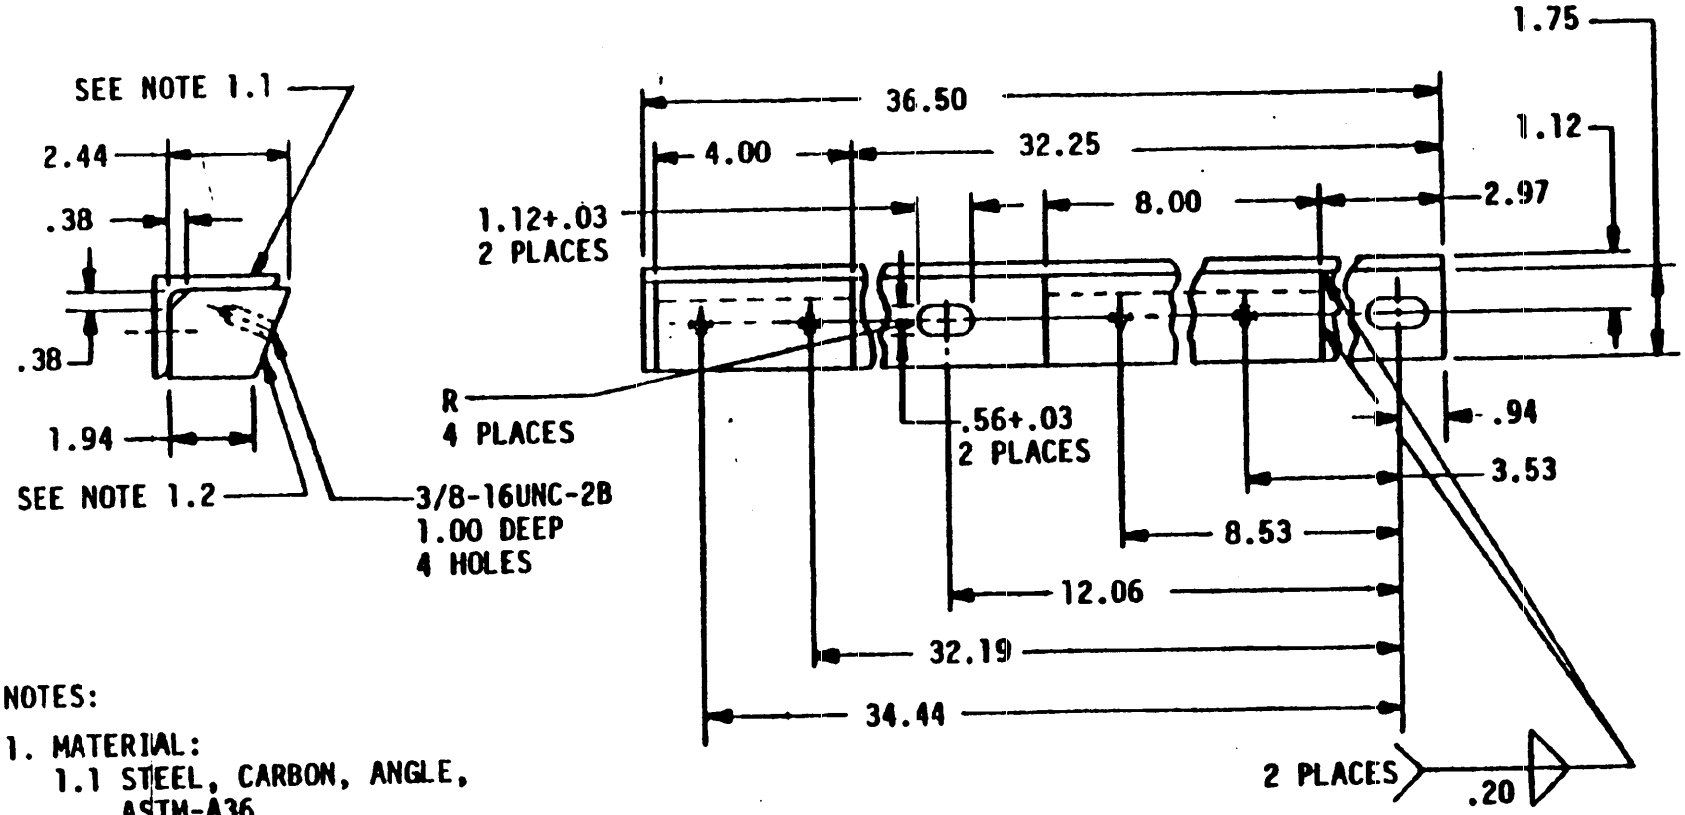

NOTES:

1. MATERIAL:
   1.1 STEEL, CARBON, ANGLE, ASTM-A36
   2-1/2 X 2 X 1/4
   1.2 STEEL, 1015 TO 1025 ASTM-A576 OR ASTM-A108
   1.75 X 2.50 X 12.00
2. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS I.
3. ALL WELD SIZES ARE MINIMUM.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D59. Support, shown

FIGURE D60. Support, opposite

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T04:24Z
Check the source to verify that this is the current version before use.


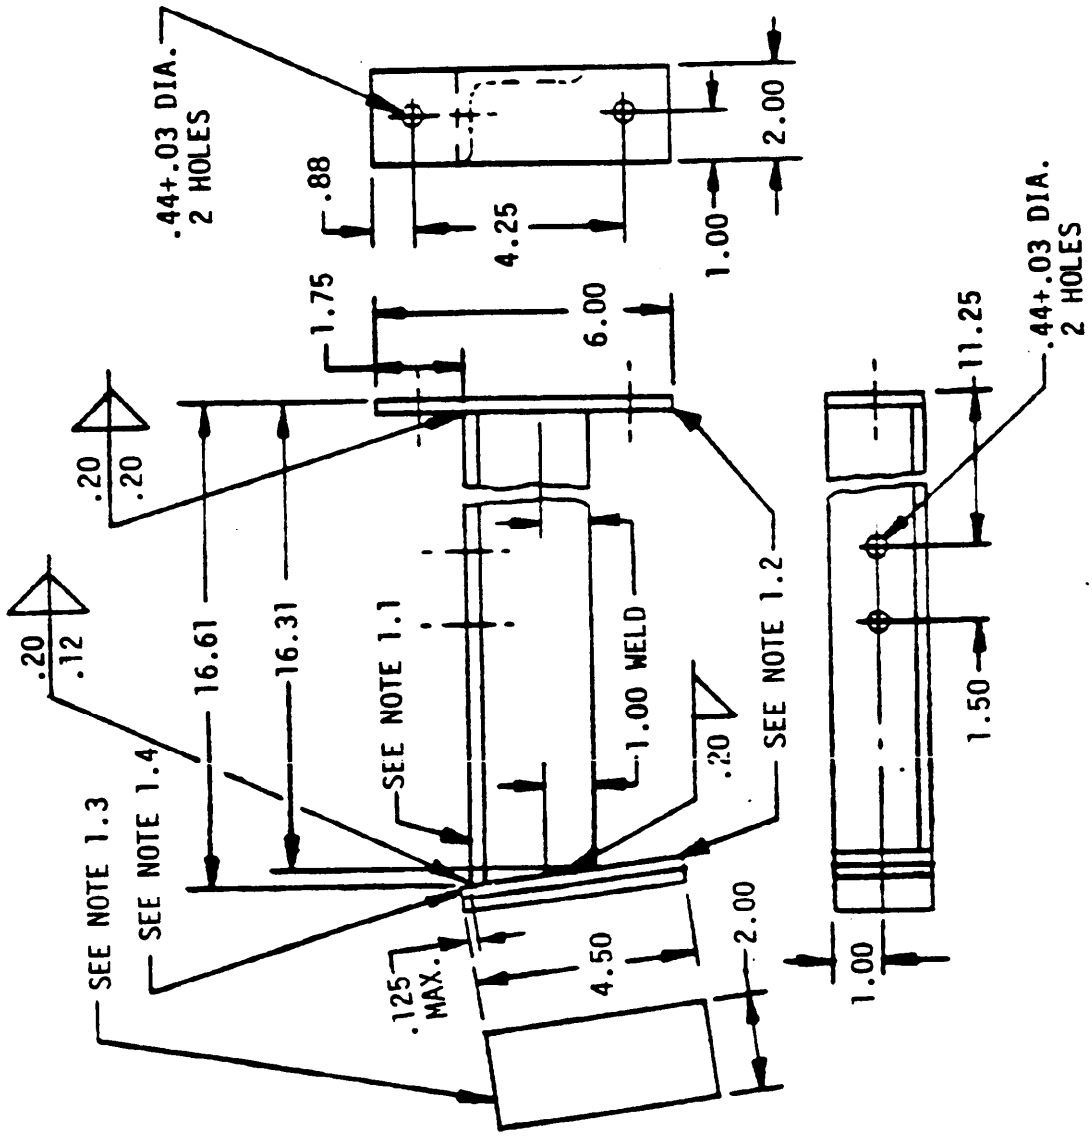


FIGURE D61. Support (2 Required)

NOTES:

1. MATERIAL:
   1.1 STEEL, CARBON, ANGLE, ASTM-A36
   2-1/2 X 2 X 1/4
   1.2 STEEL, 1015 TO 1025 ASTM-A576 OR ASTM-A108
   .25 THICK
   1.3 RUBBER, PER MIL-R-3065 AND ASTM-D2000
   3BC 715A14 B14
   .25 THICK
   1.4 ADHESIVE, TYPE II, SPEC. MMM-A-1617
2. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS I.
3. ALL WELD SIZES ARE MINIMUM.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

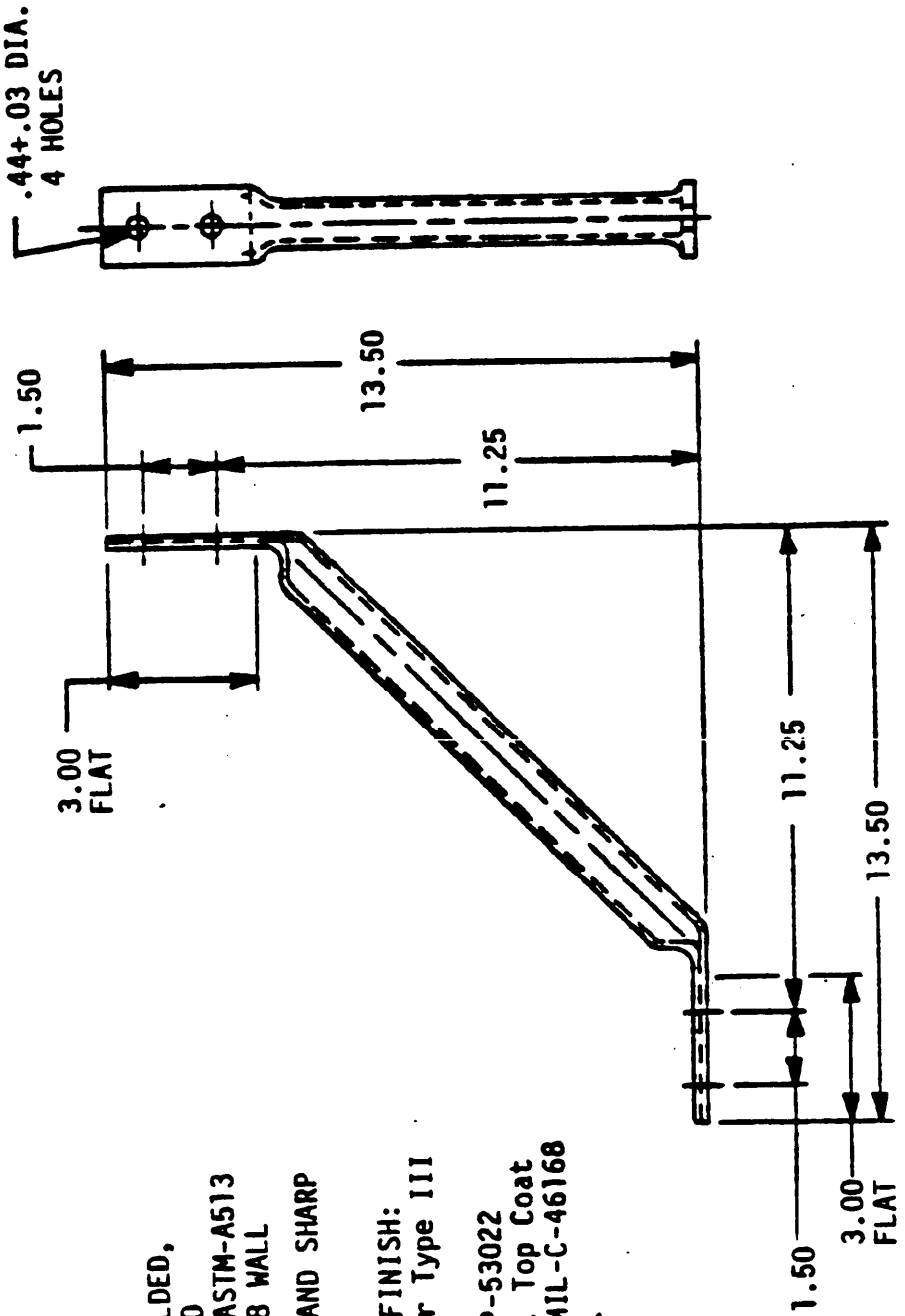

NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020
   TYPE OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D62. Brace (2 Required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

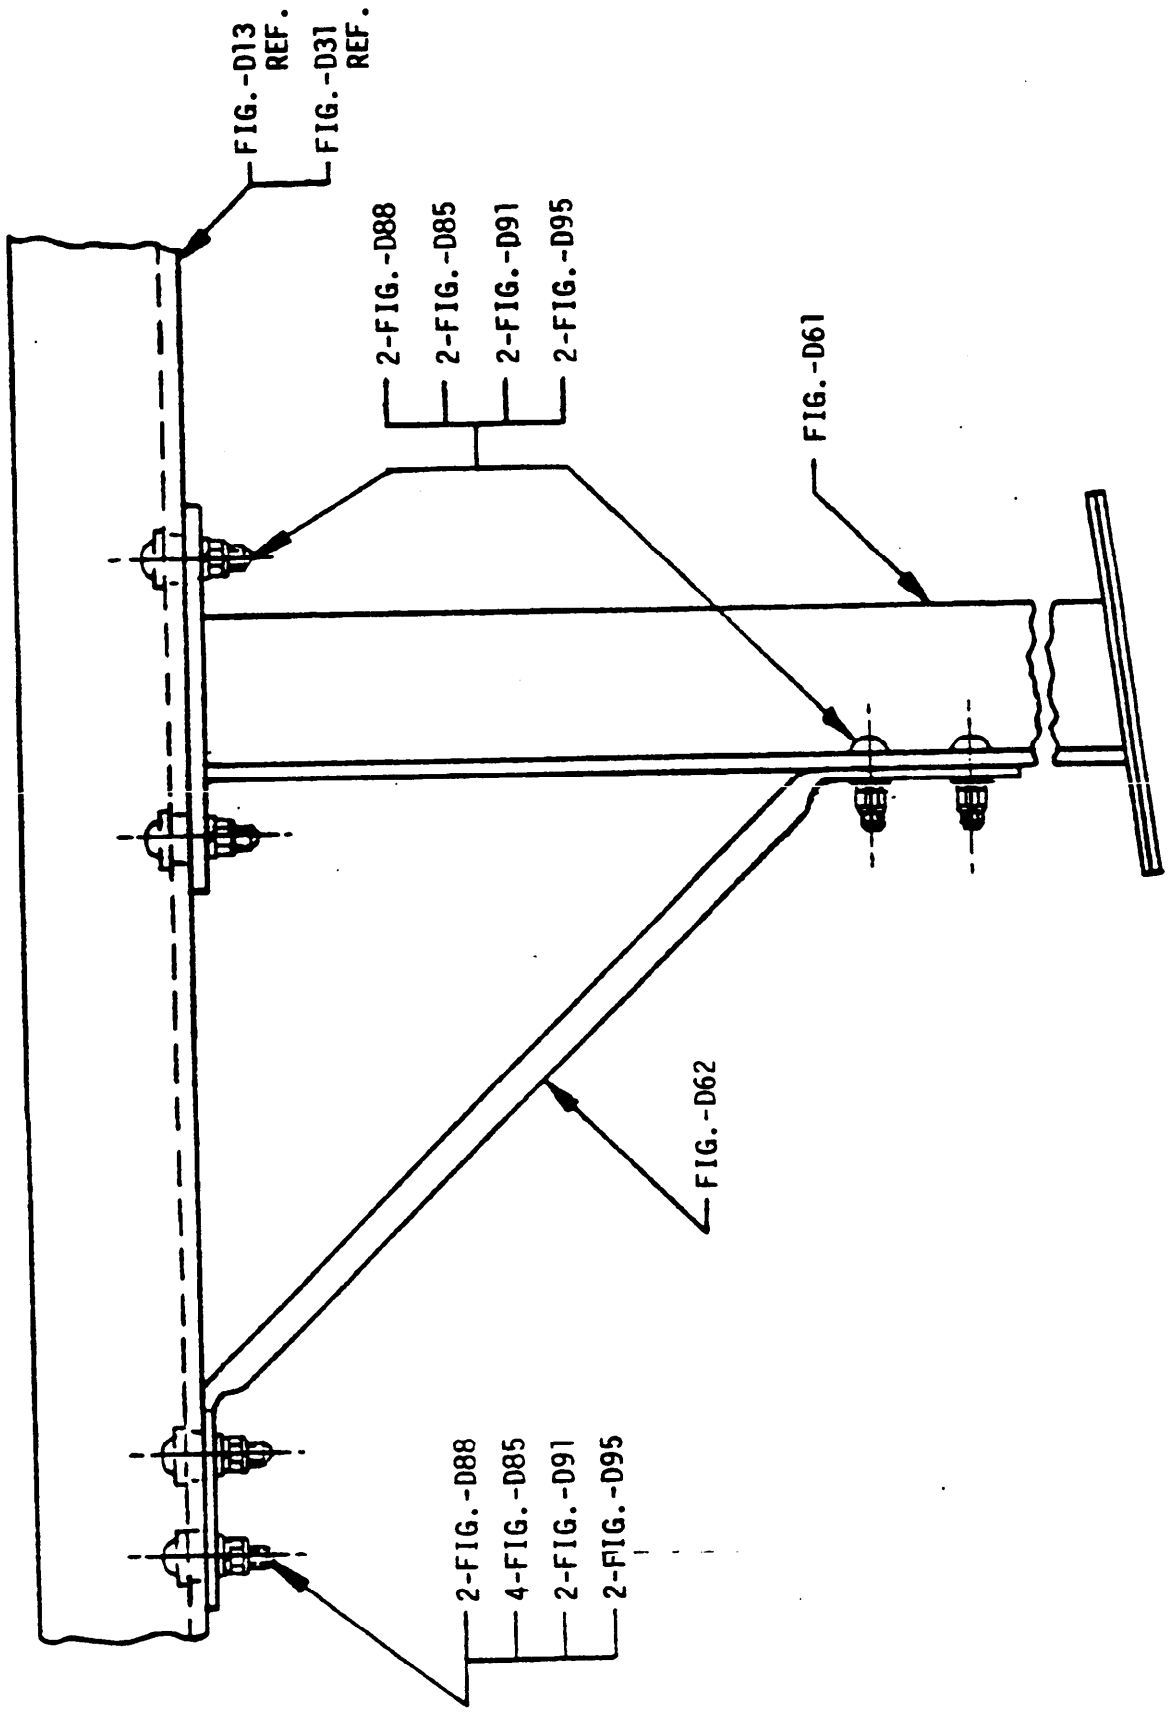


FIGURE D63. Frame to vehicle installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

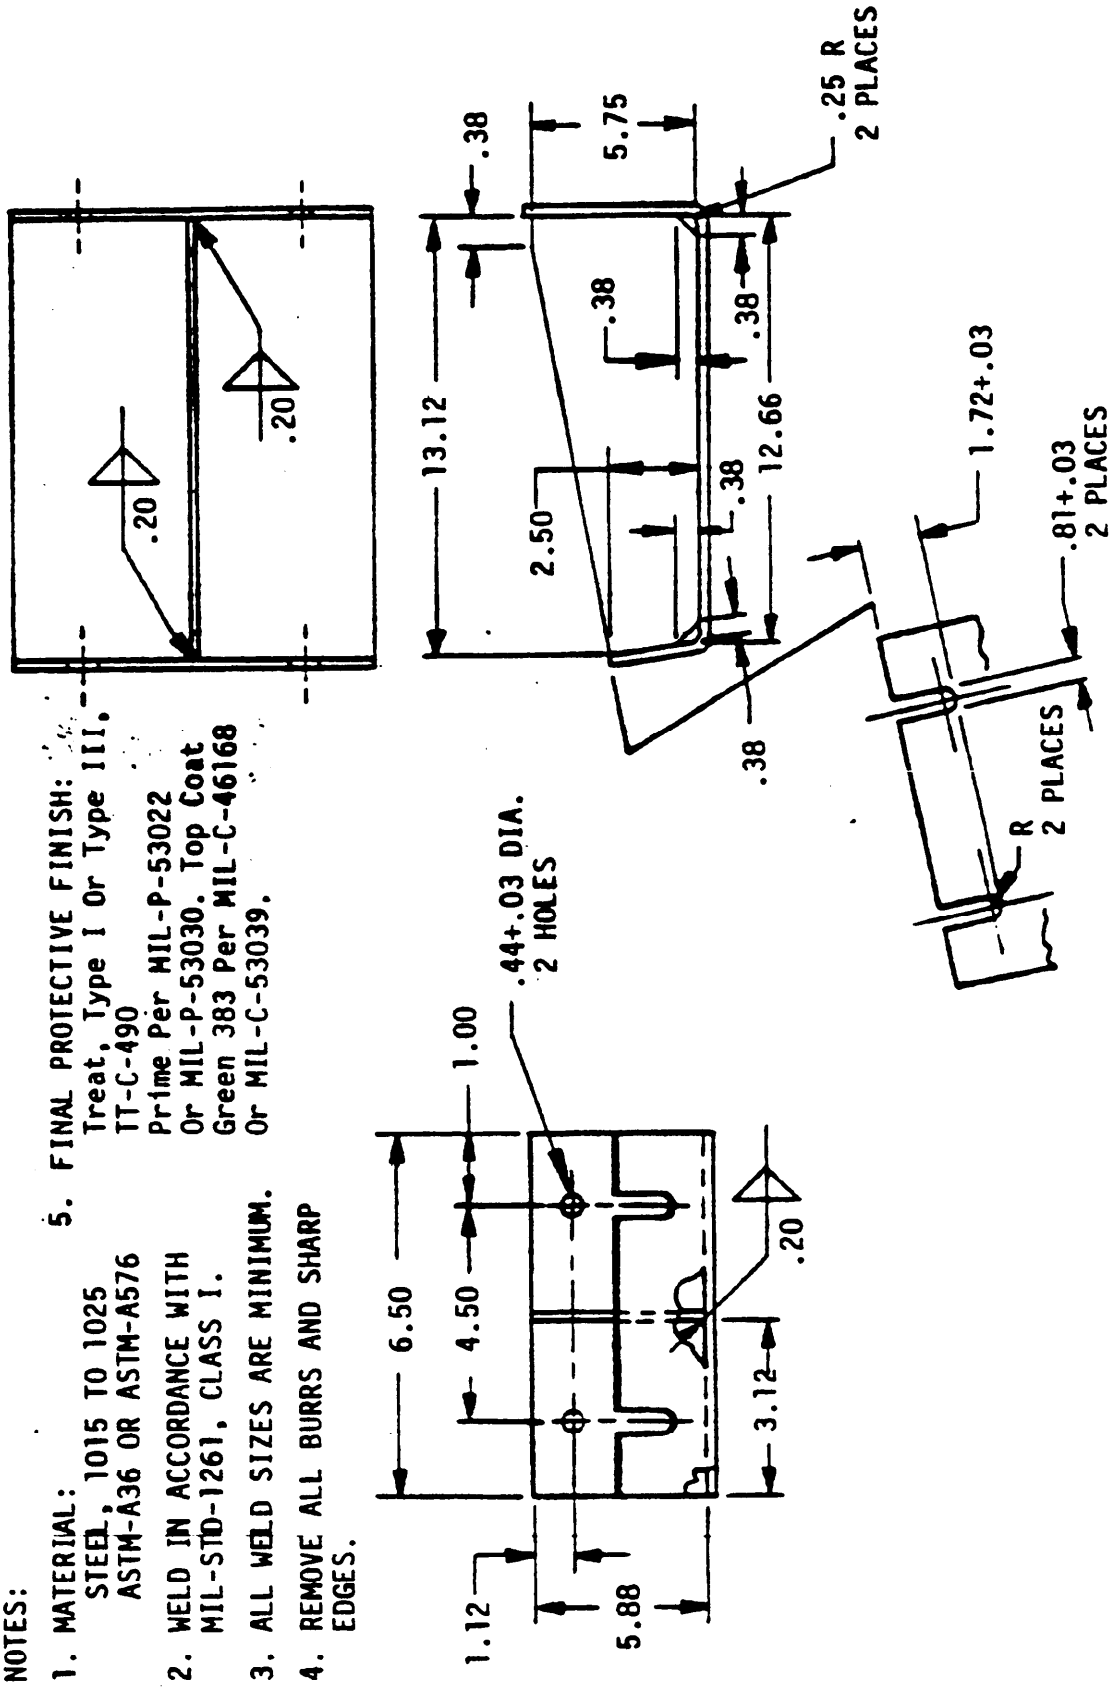


FIGURE D64. Bracket (2 Required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


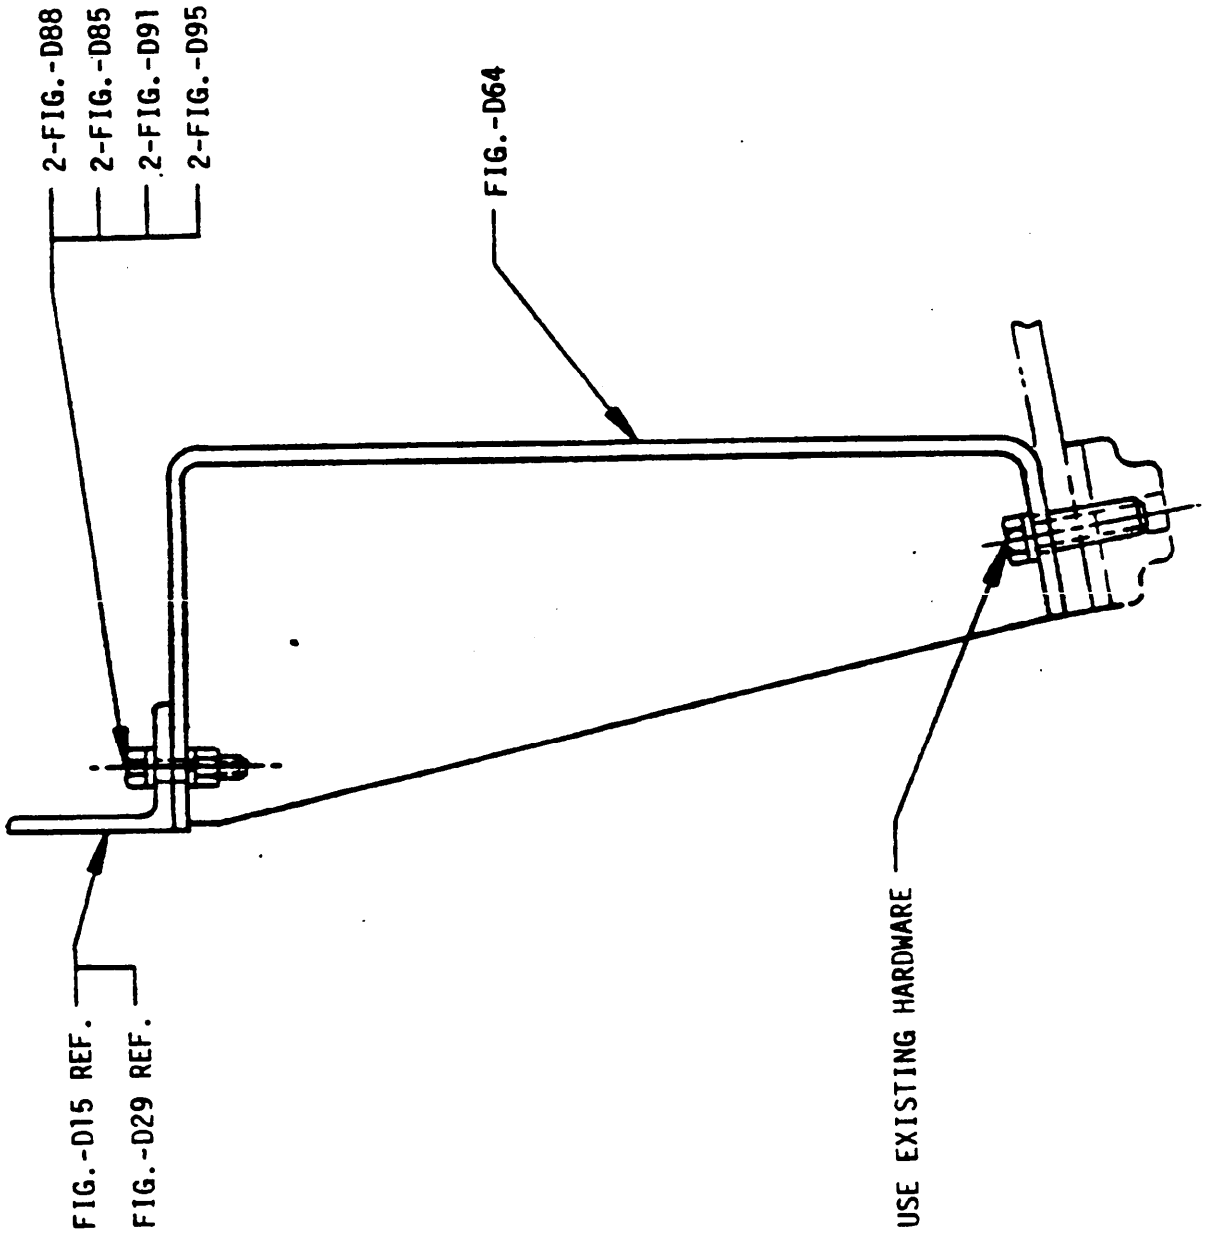


FIGURE D65, Frame to vehicle installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

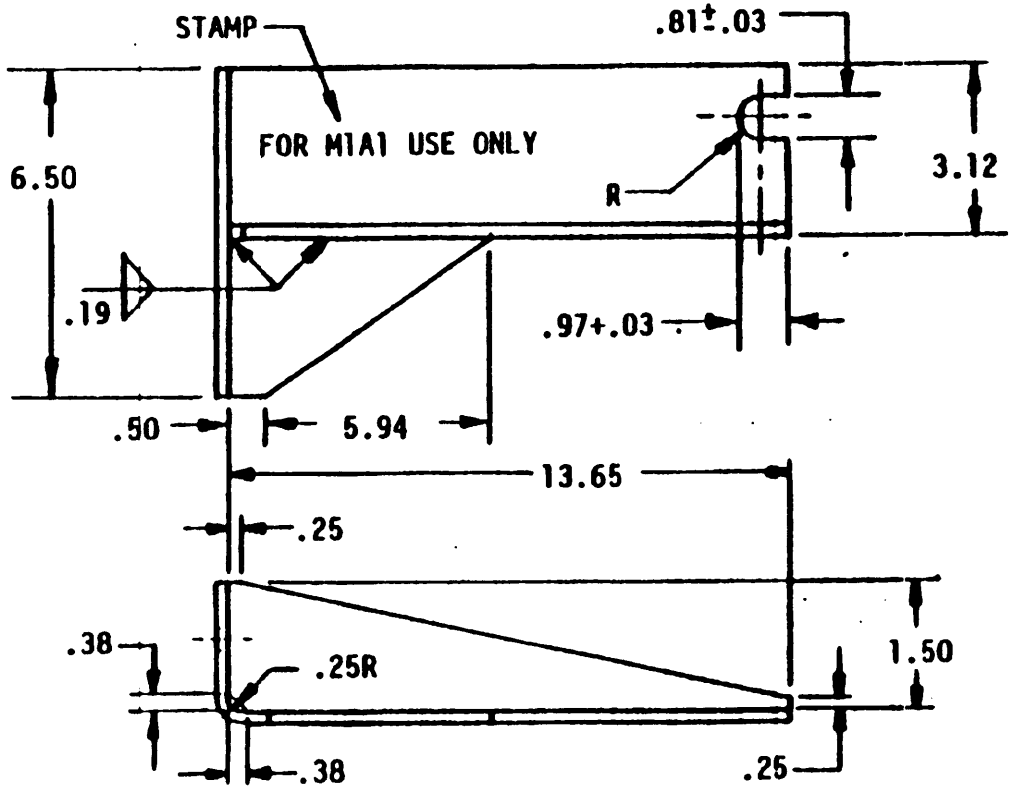

NOTES:

1. MATERIAL:
   STEEL, 1015 TO 1025
   ASTM-A36 OR ASTM-A576
   .25 THICK
2. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS I.
3. ALL WELD SIZES ARE MINIMUM.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Apply Primer MIL-P-52995
   PAINT PER MIL-C-46168 OR MIL-C-53039, GREEN 383; 1.8 TO 2.2 MILS THICK DRY COAT.

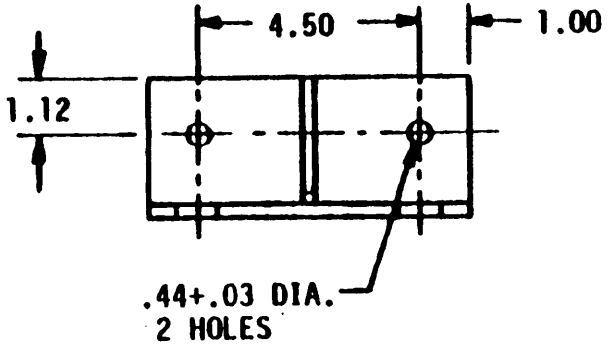


FIGURE D66. Bracket

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


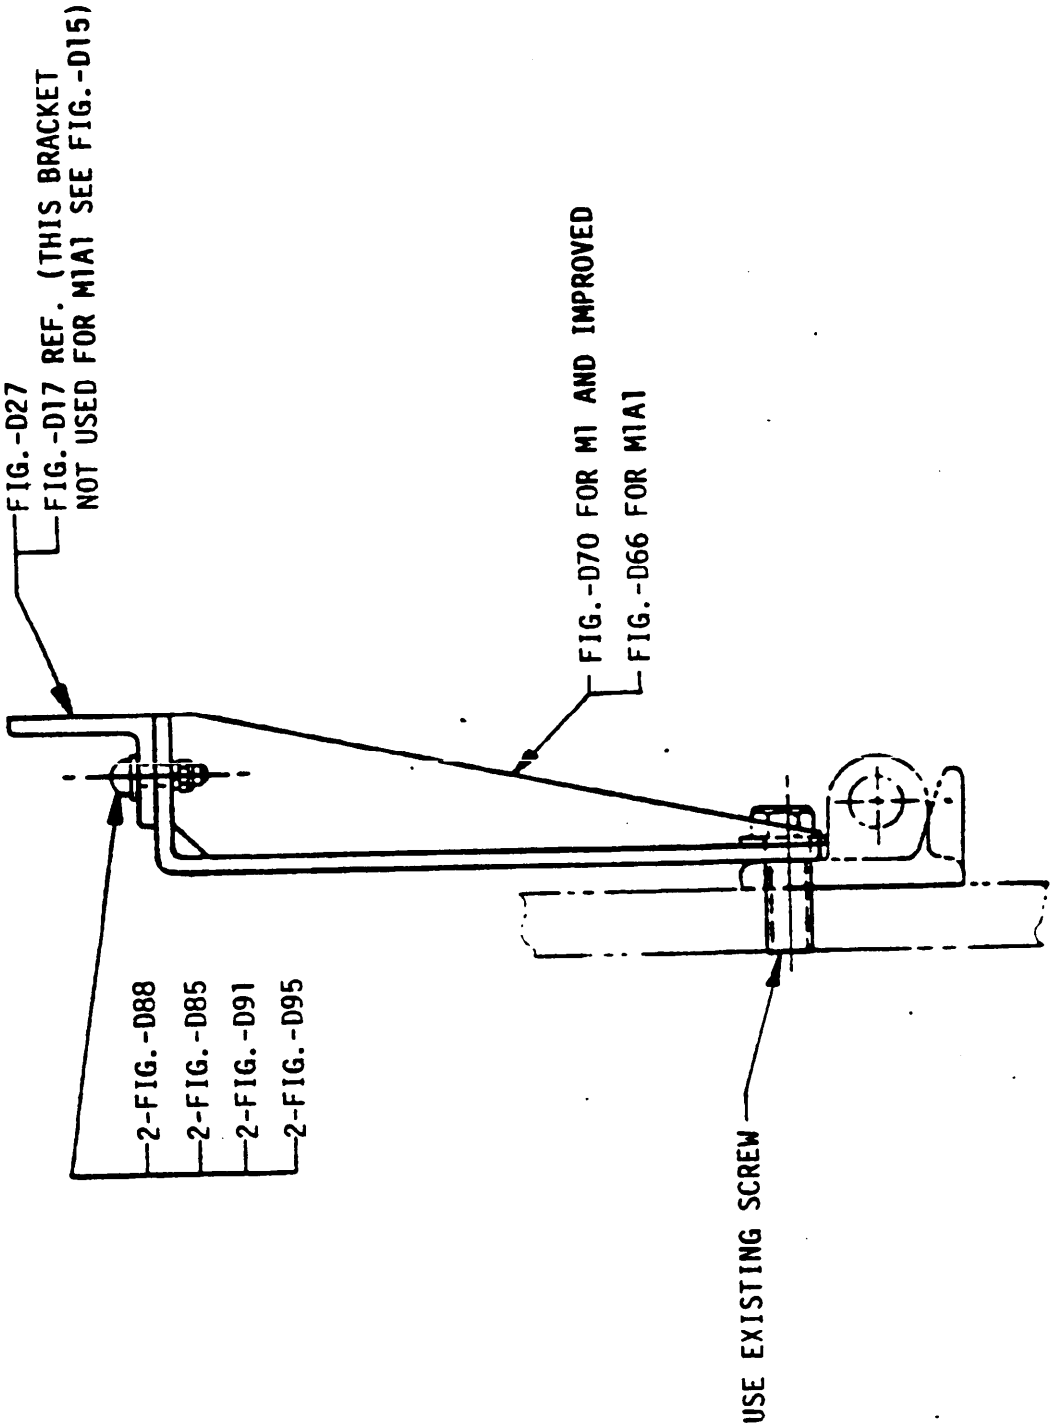


FIGURE D67. Frame to vehicle installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

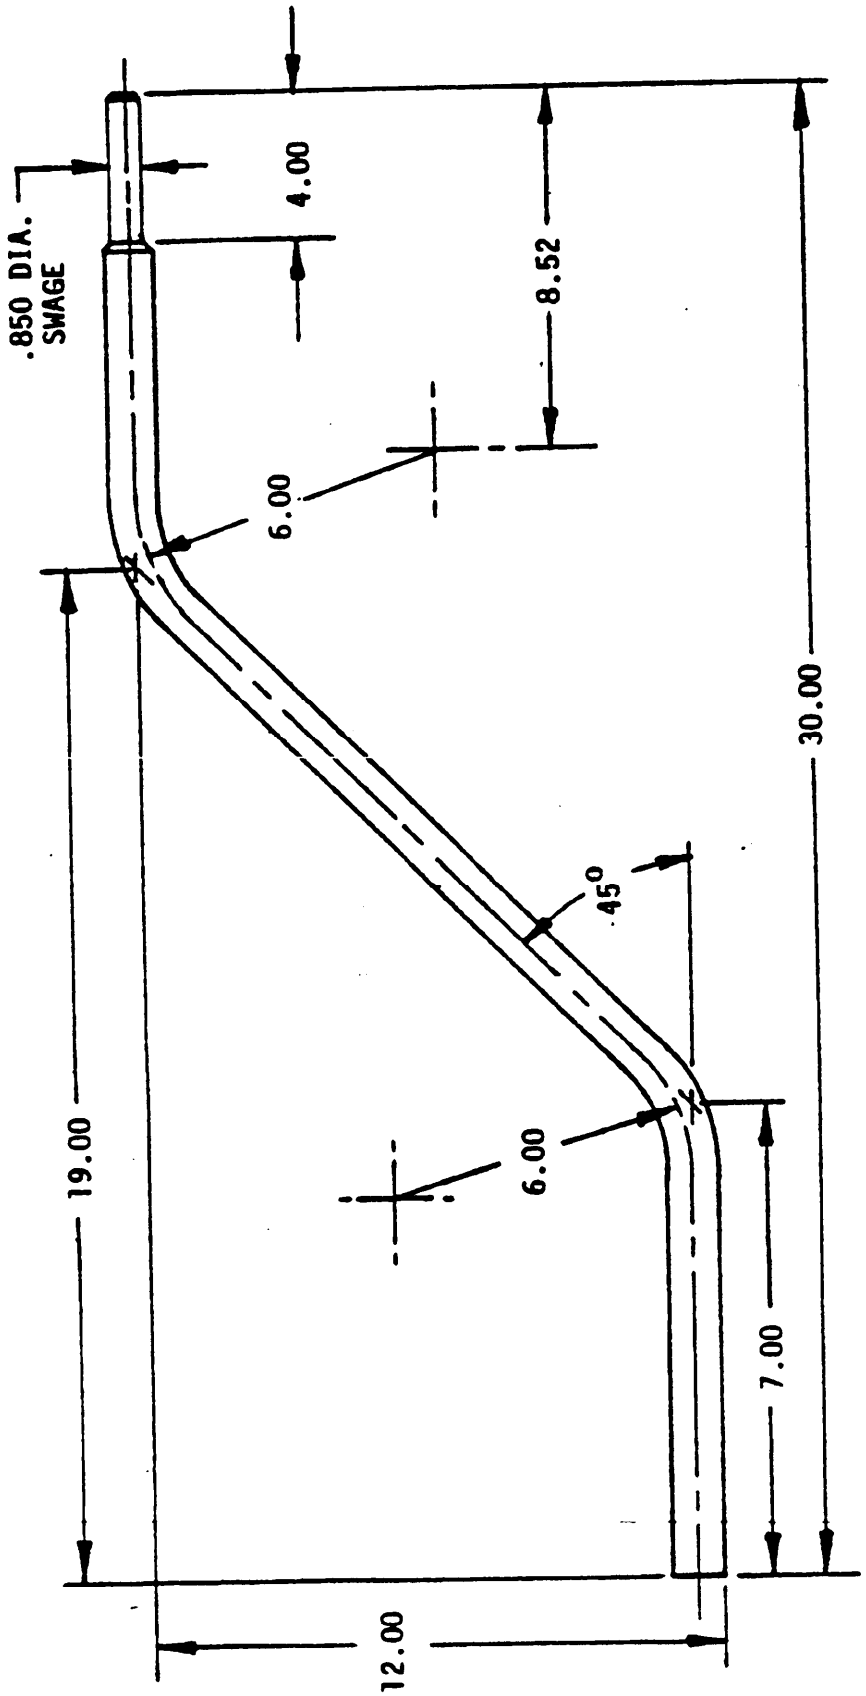

NOTE:


1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE
   OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL

2. I.D. OF TUBE MUST BE FREE OF BURRS.

3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D68. Tube top frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

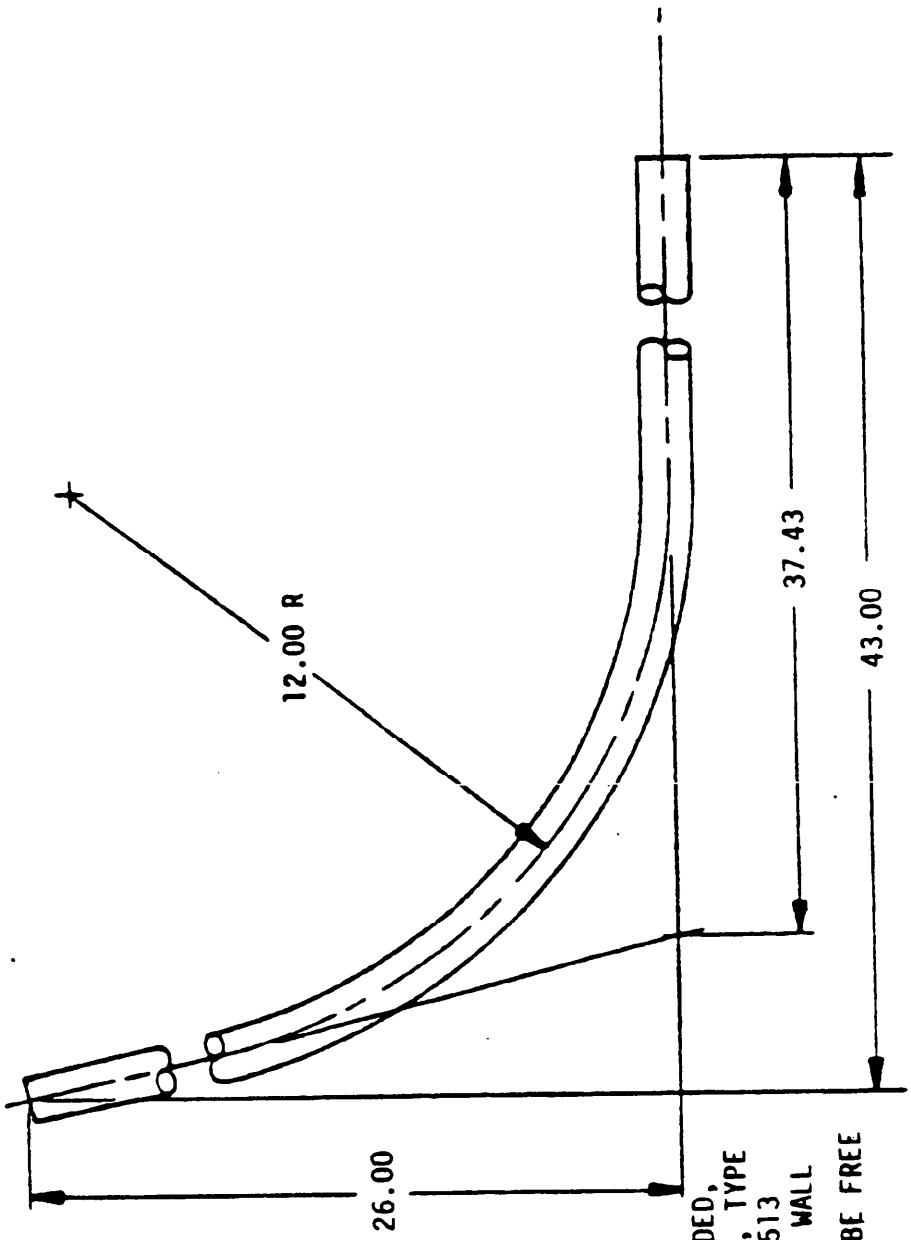

NOTES:

1. MATERIAL:
   TUBE, STEEL, WELDED,
   MT1010 TO MT1020, TYPE
   OPTIONAL, ASTM-A513
   1.00 O.D. X .058 WALL
2. I.D. OF TUBE MUST BE FREE OF BURRS.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D69. Tube, top frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


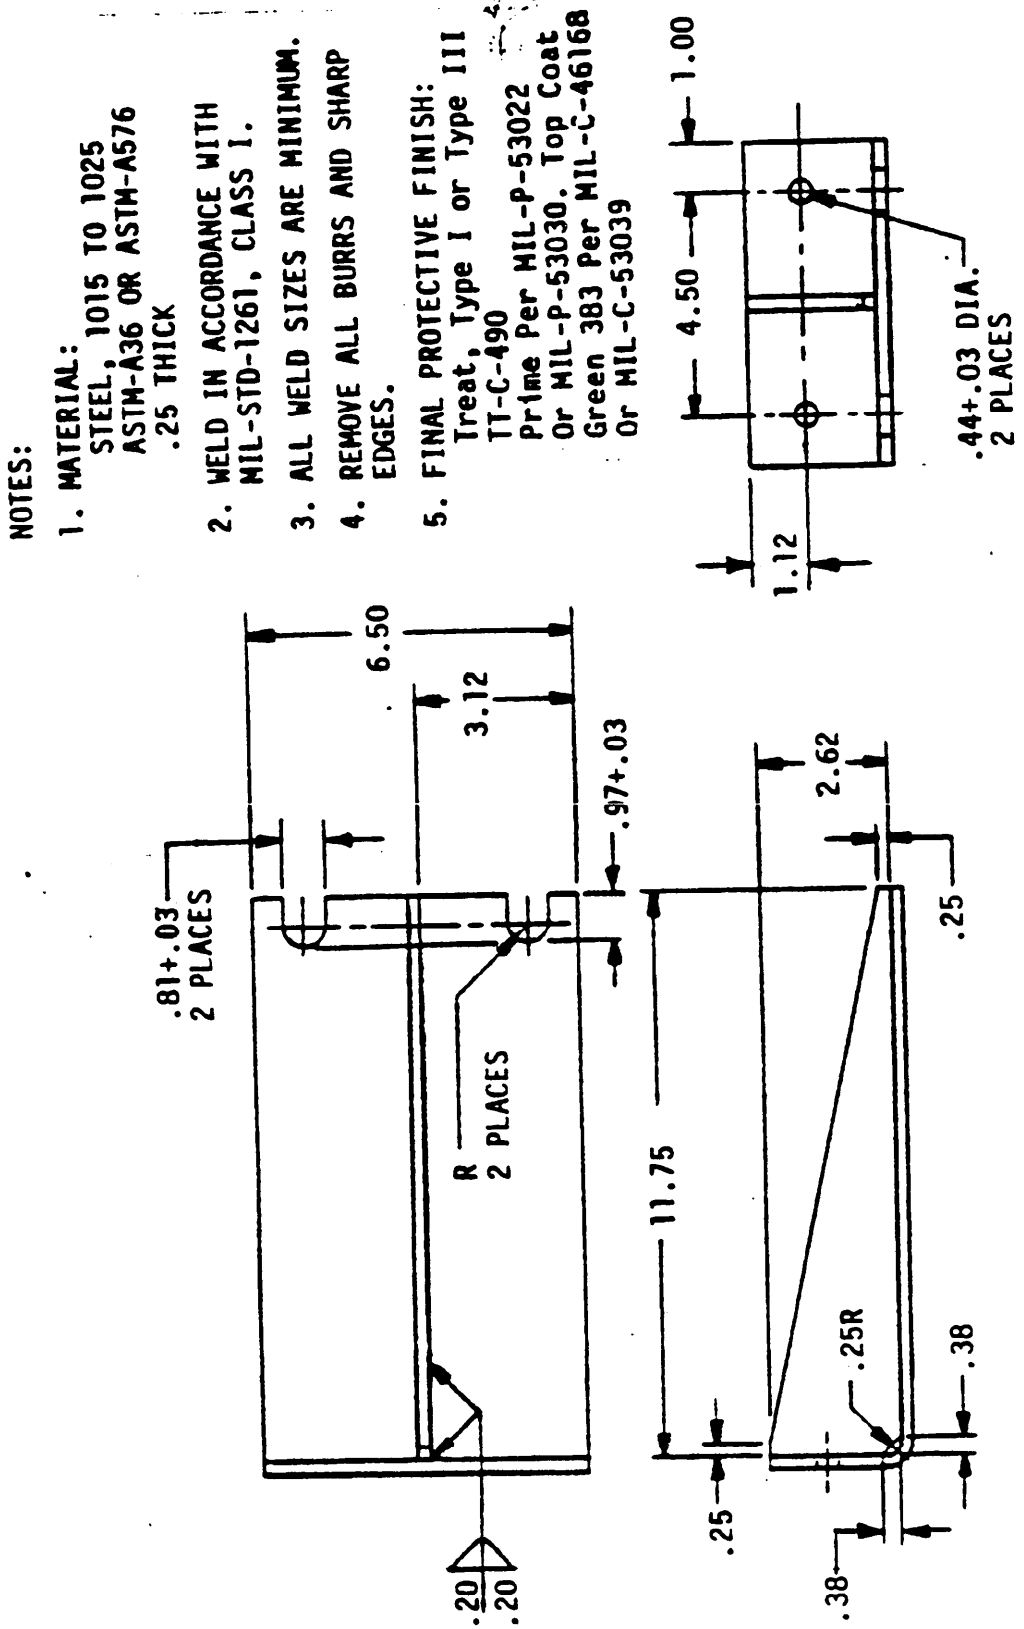


FIGURE D70. Bracket, (1 required for M1A1 & 2 required for M1 & Improved)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

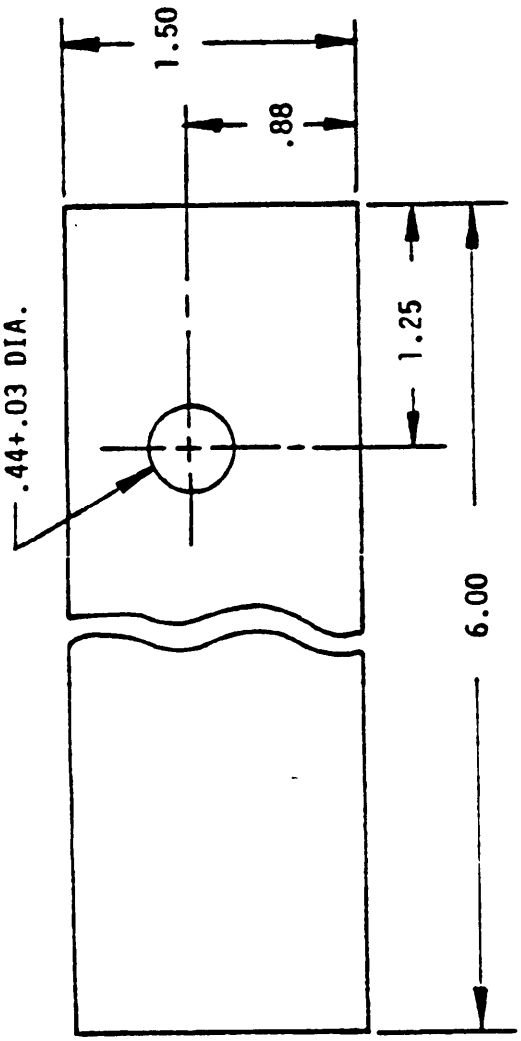


NOTES:

1. MATERIAL:
   ALUMINUM ALLOY 6061
   TEMPER T651, SPEC. QQ-A-250/11
   .25 THICK

2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE D71. Plate, splice. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

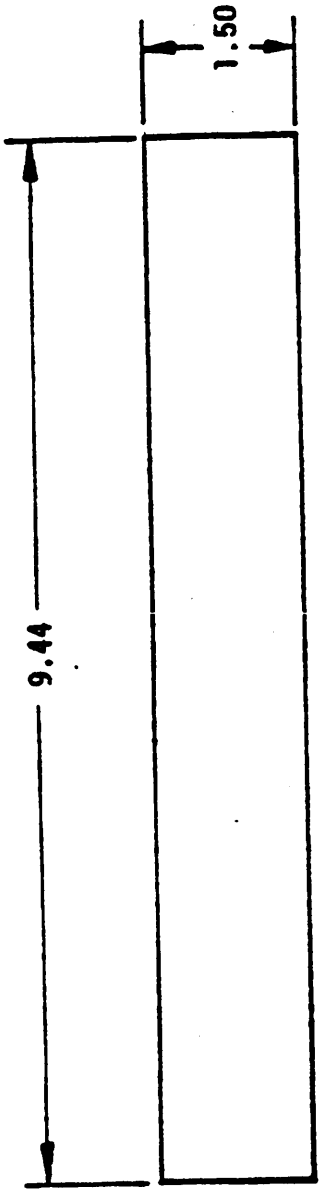

NOTES:


1. MATERIAL:
   ALUMINUM ALLOY 6061
   TEMPER T651, SPEC. QQ-A-250/8
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE D72. Plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL:
   STEEL, 1015 TO 1025
   ASTM-A36 OR ASTM-A576
   .25 THICK
2. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS I.
3. ALL WELD SIZES ARE MINIMUM.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

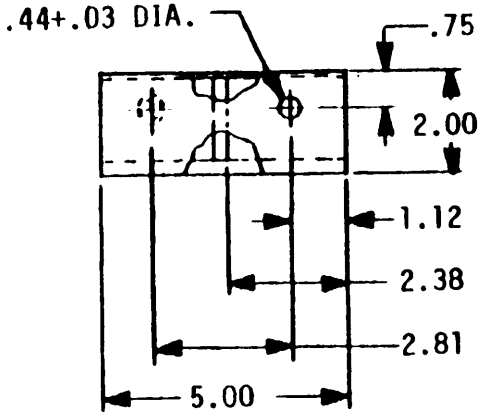

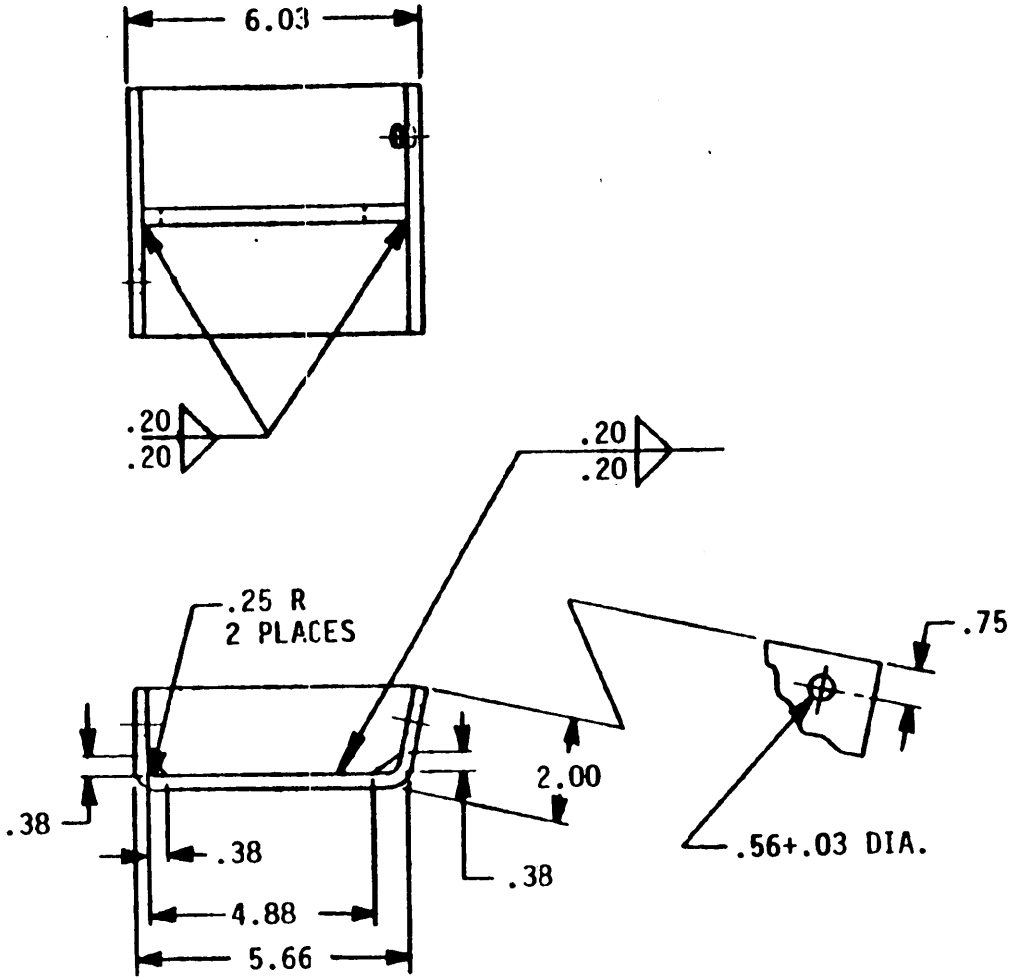


FIGURE D73. Bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

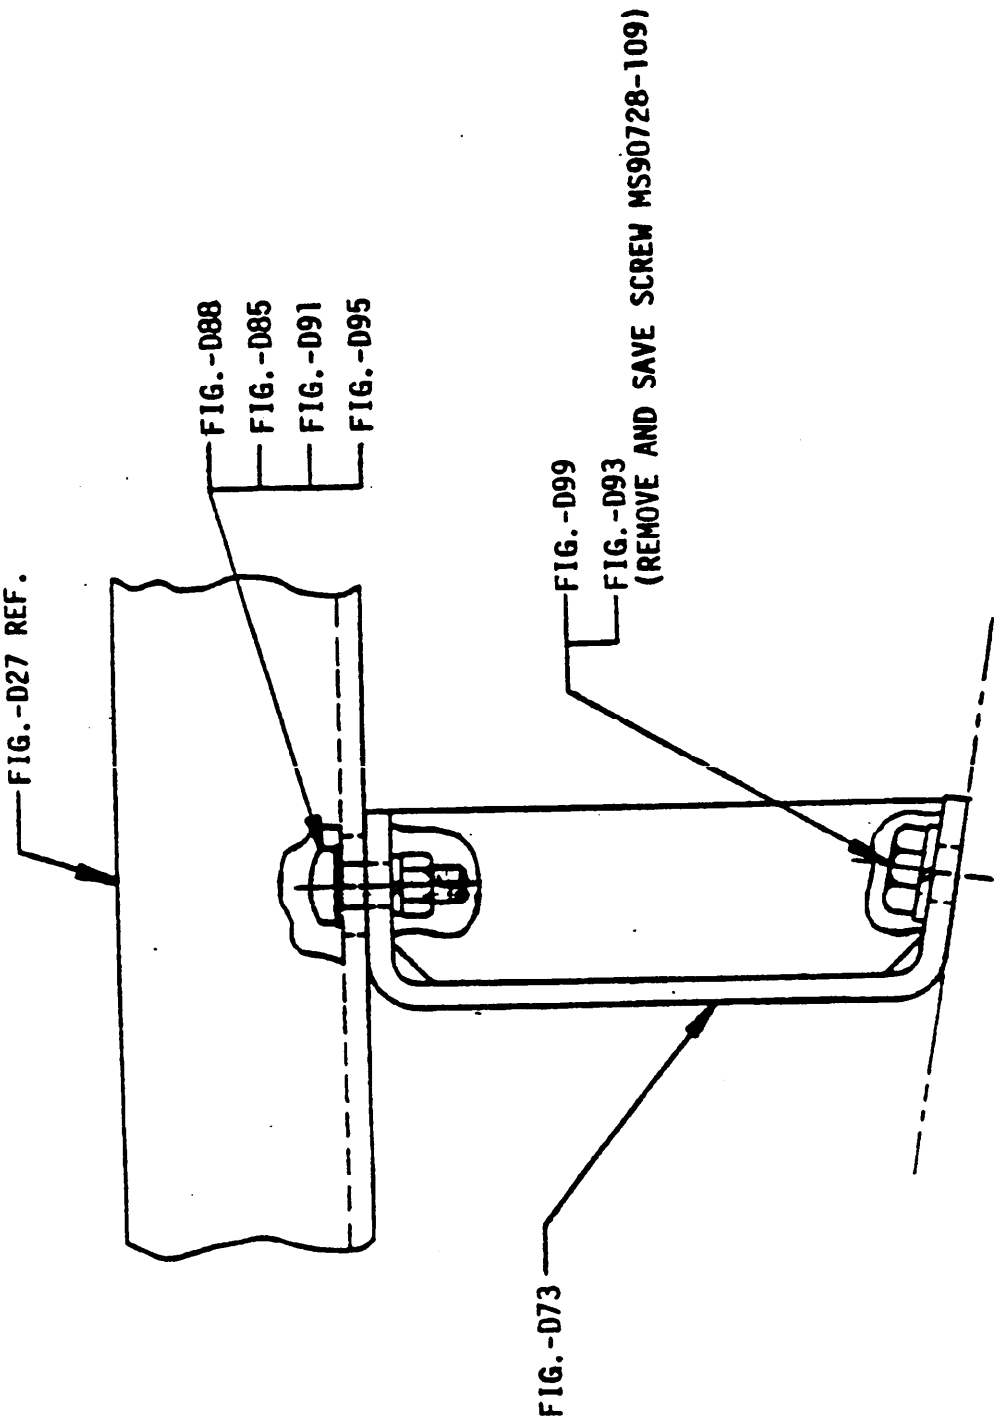


FIGURE D74. Frame to vehicle installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL:
   STEEL, CHANNEL, M1020, ASTN-A36 OR ASTM-A575
   2 X 5/8 X 1/4
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III TT-C-490
   Prime Per MIL-P-53022 Or MIL-P-53030. Top Coat Green 383 Per MIL-C-46168 Or MIL-C-53039.

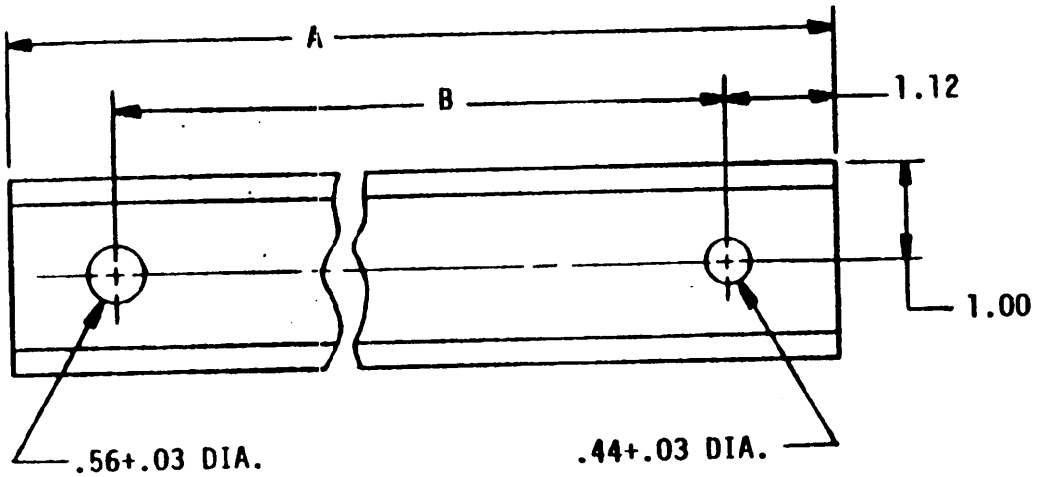


FIGURE NUMBER	REQUIRED	A	B
FIG.-D75	4	5.00	2.81
FIG.-D76	1	11.03	8.84
FIG.-D77	1	11.25	9.06

FIGURE D75, D76 AND D77. Channel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

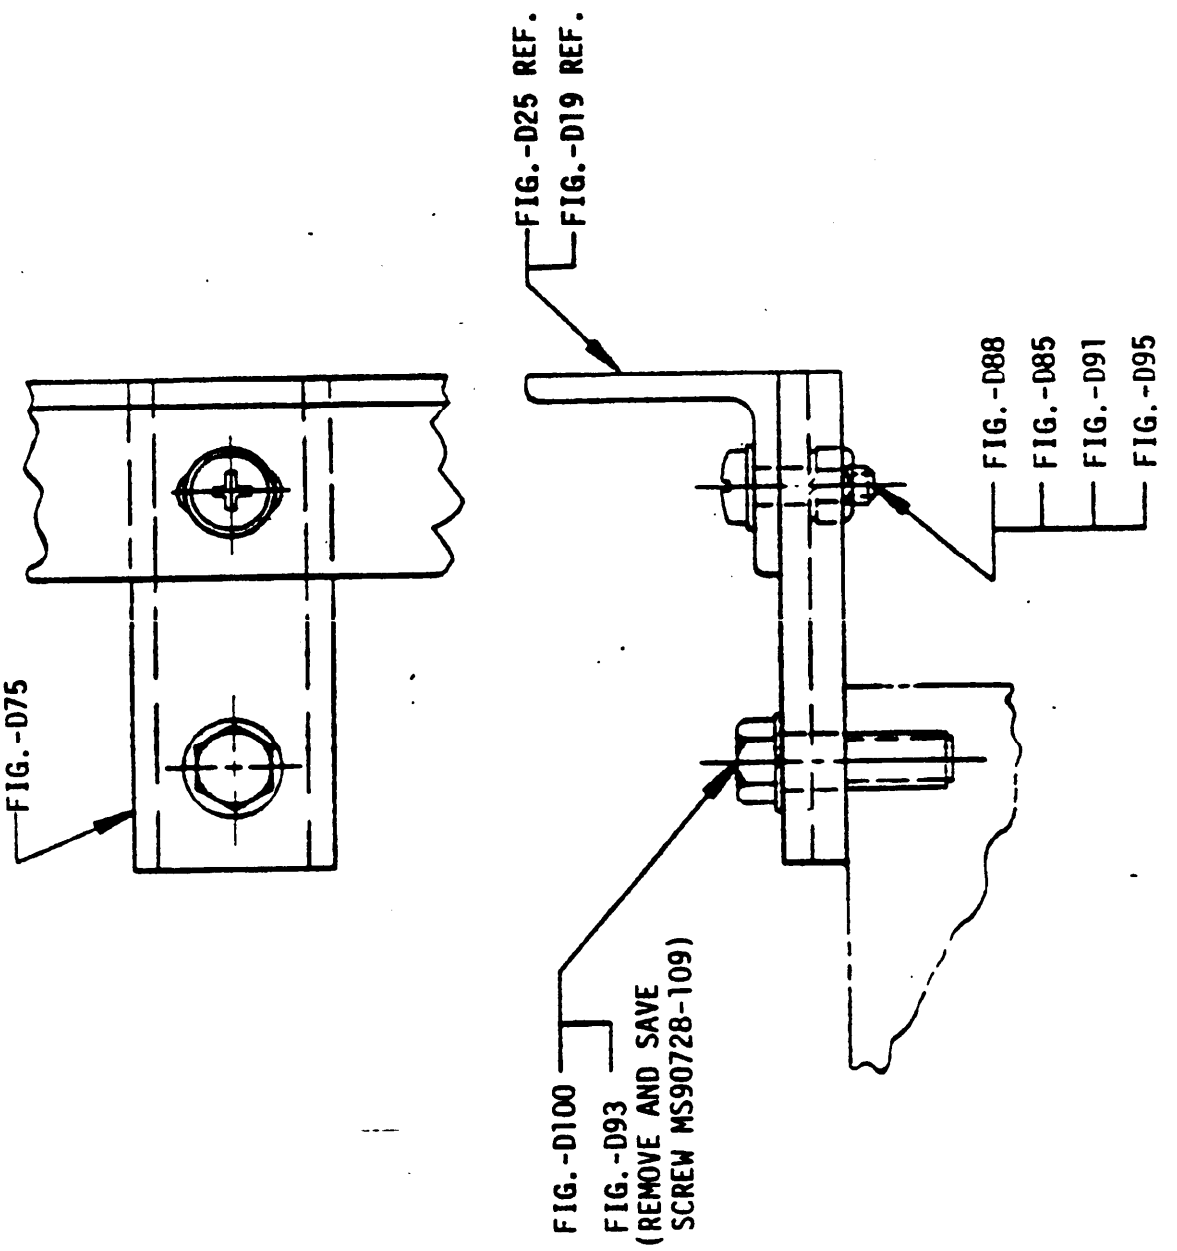


FIGURE D78. Frame to vehicle installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

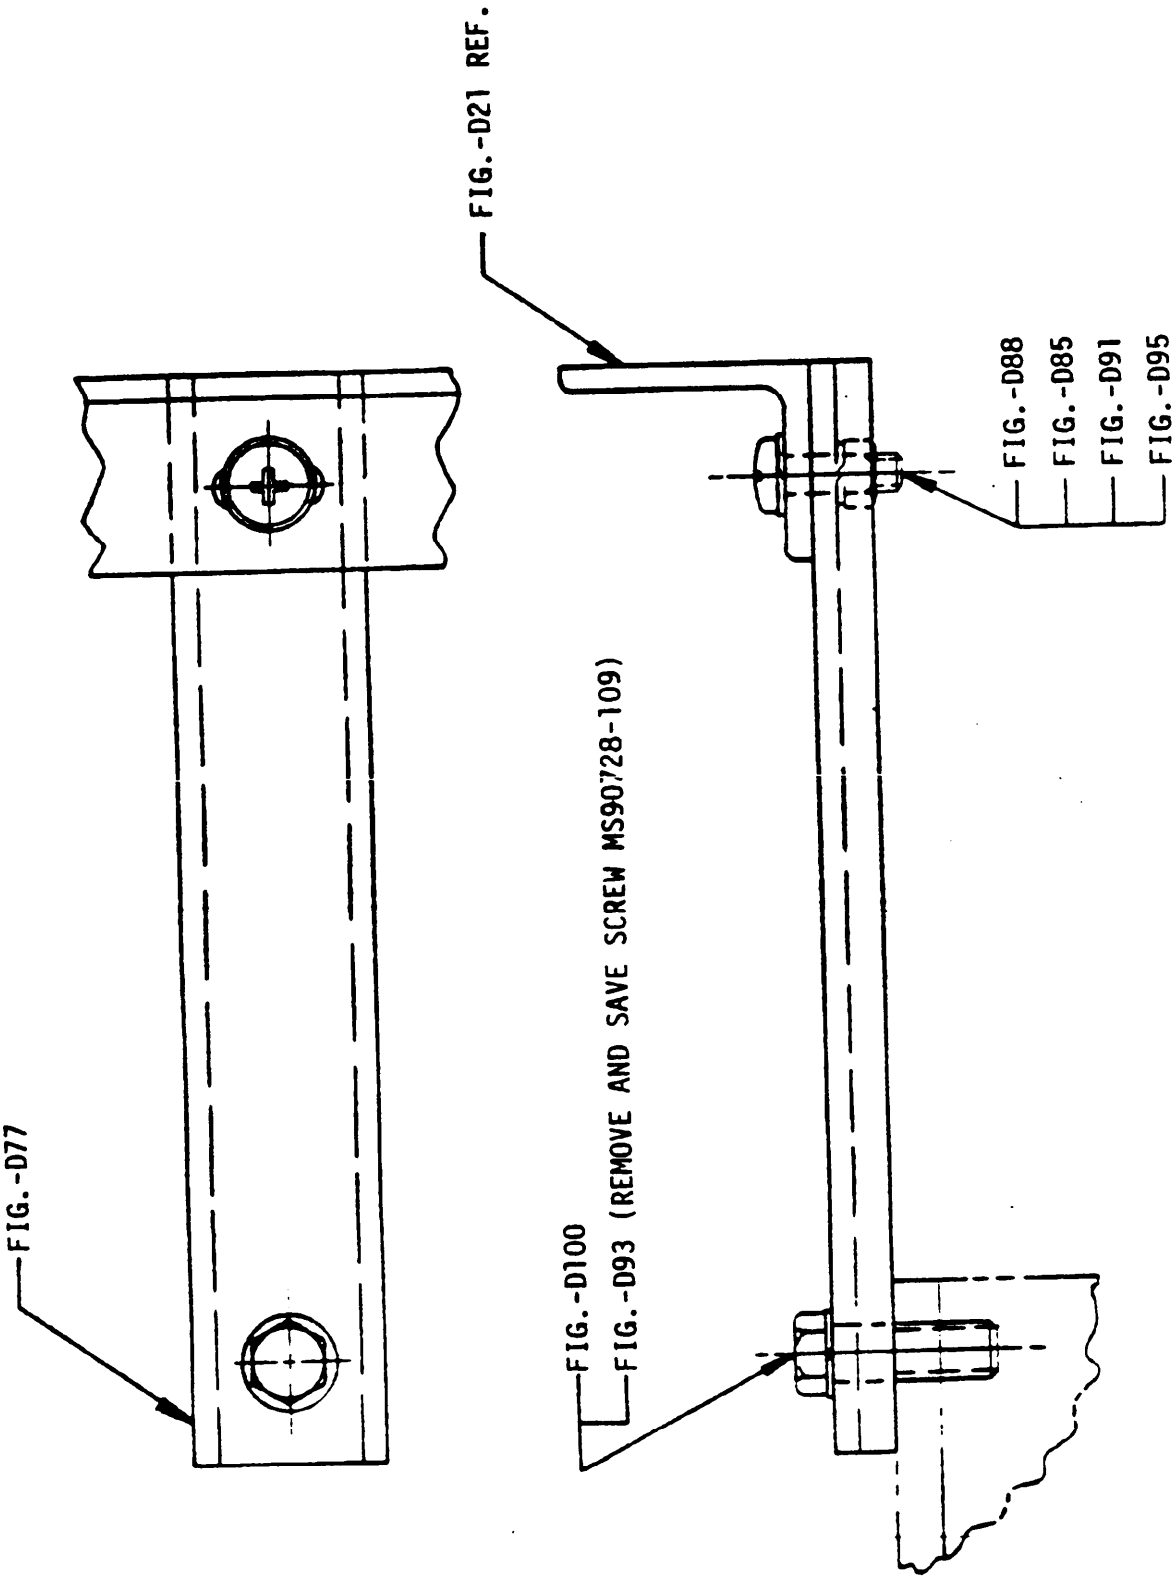


FIGURE D79. Frame to vehicle installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


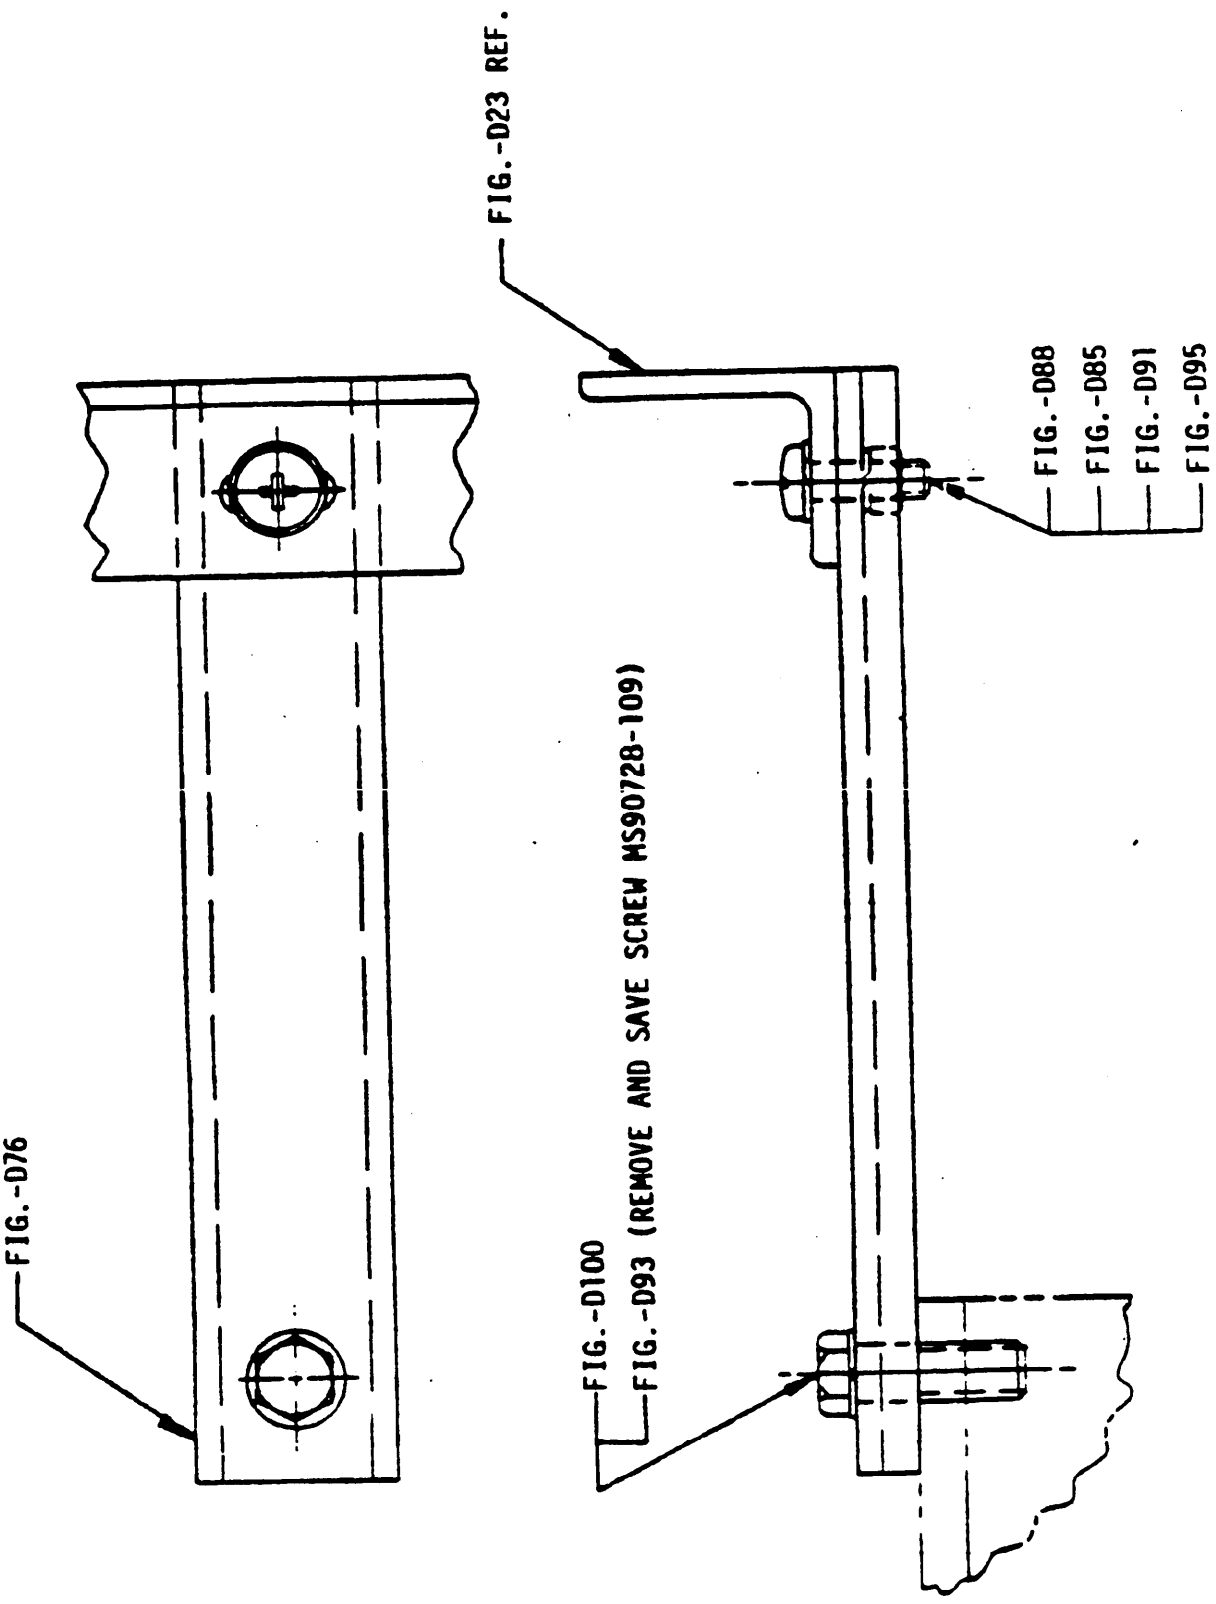


FIGURE D80. Frame to vehicle installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

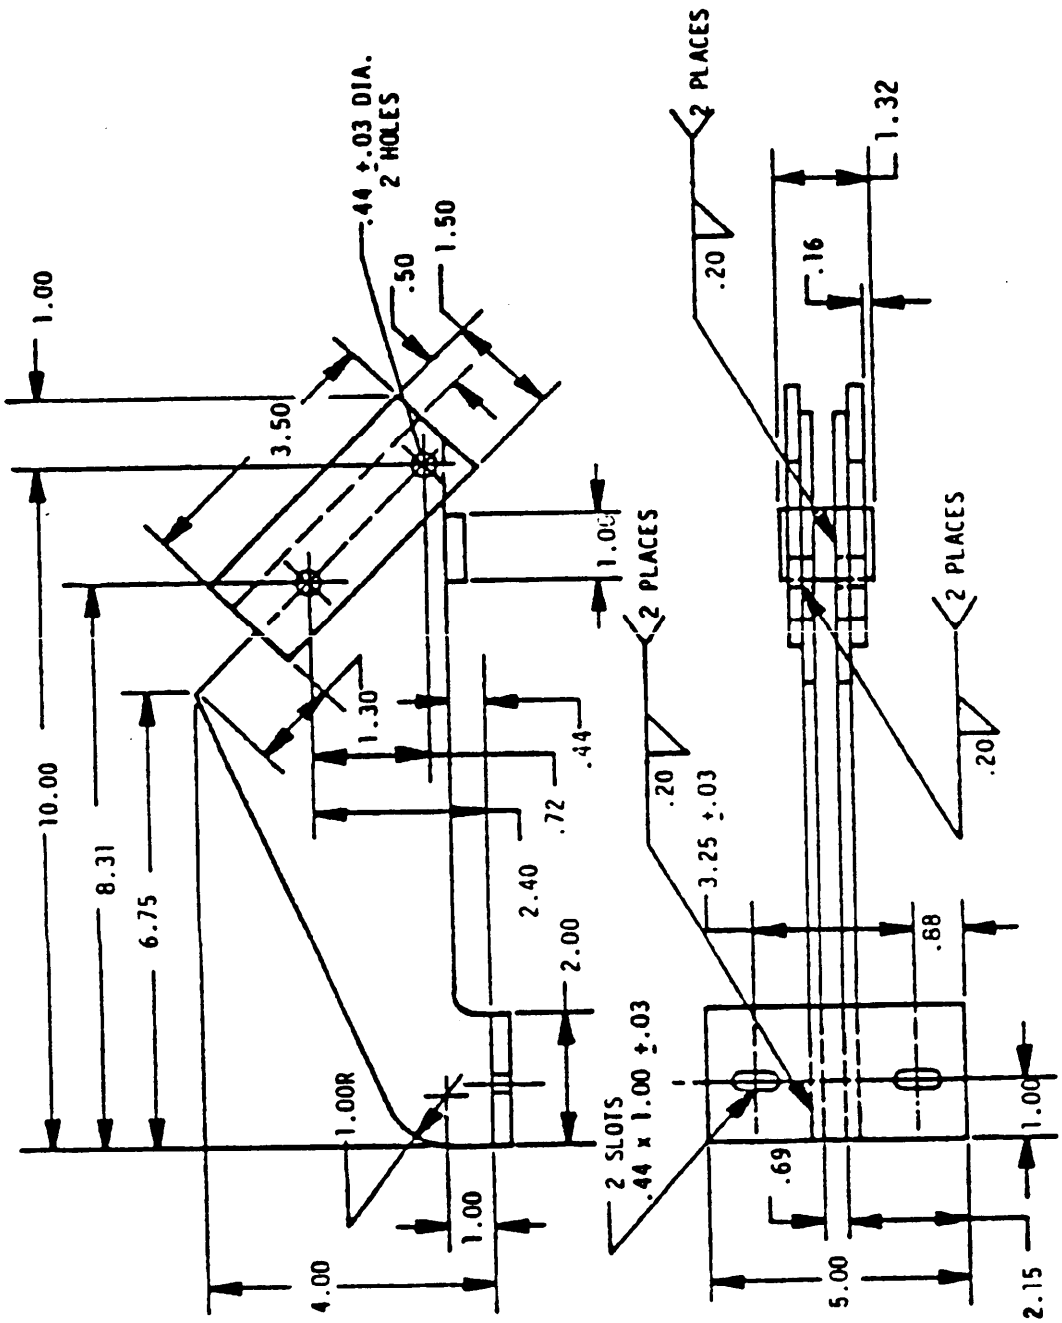

NOTES:

1. TREAT PER TYPE I OR III, TT-C-490. PRIME PER MIL-P-53022 OR MIL-P-53030. TOPCOAT GREEN 383 PER MIL-46168 OR MIL-53039.
2. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS 1.
3. MATERIAL: STEEL, CARBON, ASTM A36 OR 1010 TO 1020, ASTM A576 .125 THICK.
4. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE D81. Bracket (2 req'd).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


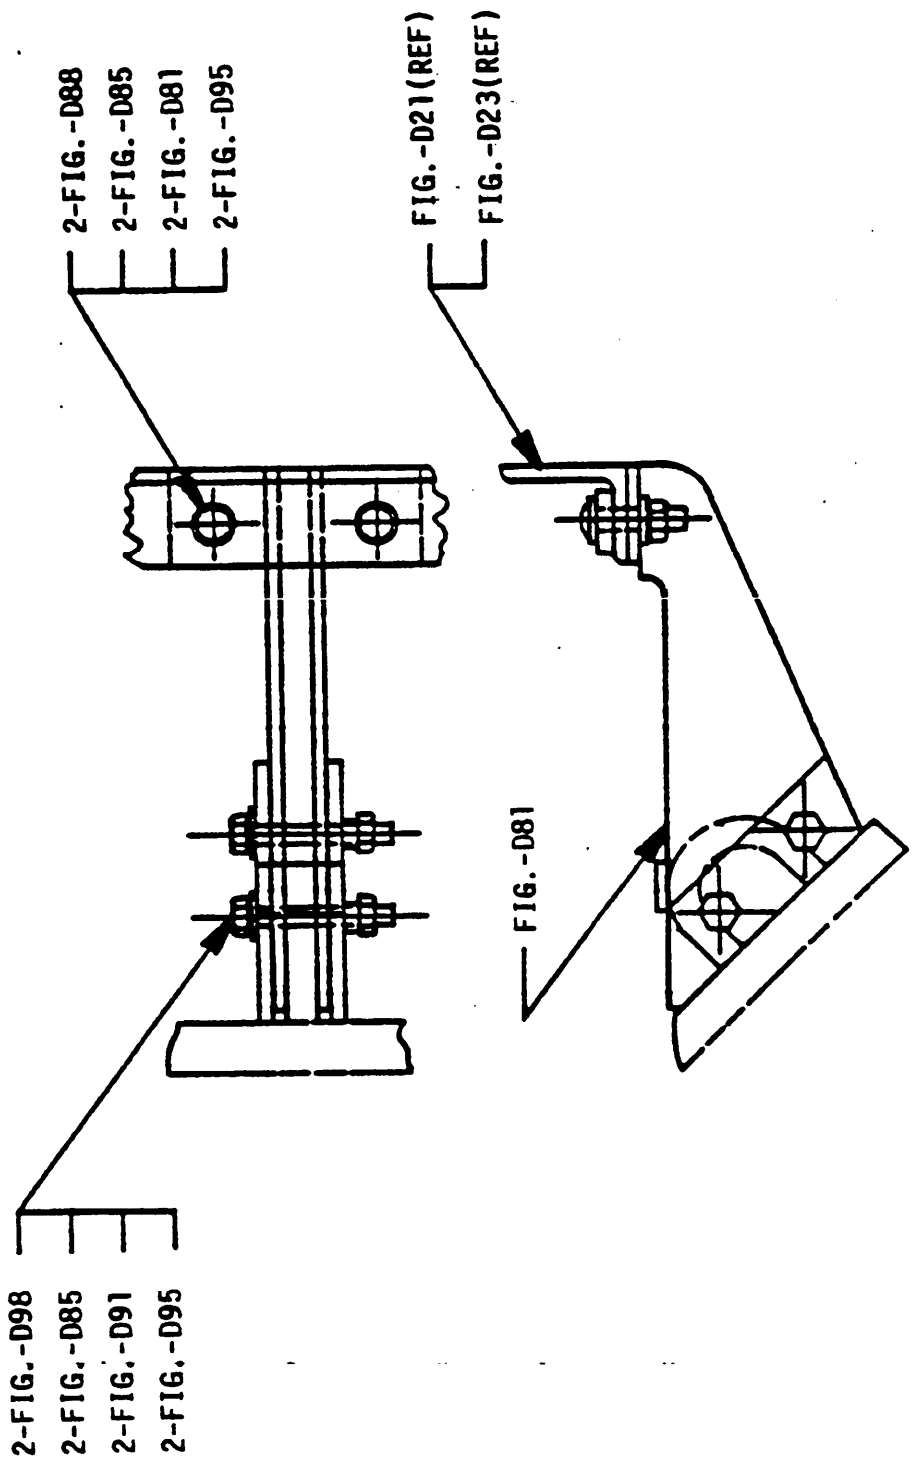


FIGURE 82. Frame to vehicle installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

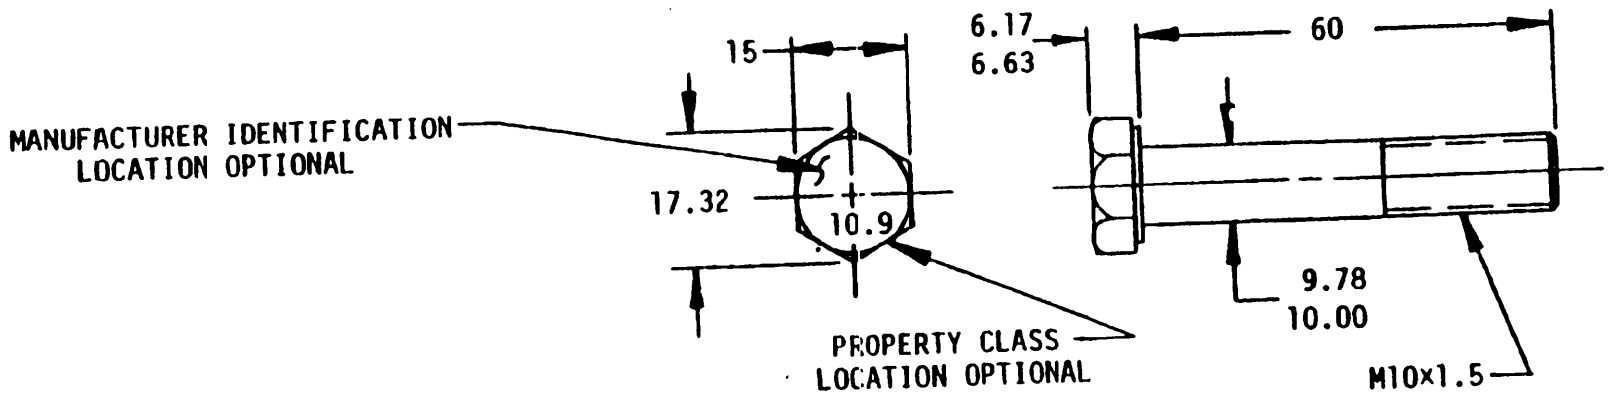

NOTES:

1. MATERIAL AND HEAT TREAT PER IFI 501, PROPERTY CLASS 10.9.
2. THREADS PER IFI 500, CLASS 6g.
3. FASTENER DIMENSIONS PER IFI 506.
4. MARK HEAD PER IFI 501.
5. FINAL PROTECTIVE FINISH: PLATING, CADMIUM PER QQ-P-416, CLASS 3, TYPE II, OR COATINGS, CADMIUM PER MIL-C-81562, CLASS 3, TYPE II.
6. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.

METRIC

FIGURE D83. Screw, Cap, hexagon head, alloy steel, cadmium plated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

FIG.	REQ'D	ORDNANCE	DESCRIPTION	MATERIAL
D85	95	MS27183-14	WASHER, PLAIN 13/32 I.D.	STEEL, CADMIUM PLATED
D86	4	MS27183-18	WASHER, PLAIN 17/32 I.D.	STEEL, CADMIUM PLATED
D87	4	MS27183-23	WASHER, PLAIN 13/16 I.D.	STEEL, DADMIUM PLATED
D88	85	MS35206-312	SCREW, PAN HD. 3/8 16UNC - x 1-1/4 LG	CARBON STEEL, CADMIUM PLATED
D89	36	MS35335-34	LK WASH 5/16 NOM SIZE	CARBON STEEL, CADMIUM PLATED
D90	36	MS35338-45	LK WASH 5/16 NOM SIZE	CARBON STEEL, CADMIUM PLATED
D91	89	MS35338-46	LK WASH 3/8 NOM SIZE	CARBON STEEL, CADMIUM PLATED
D92	2	MS35338-47	LK WASH 3/8 NOM SIZE	CARBON STEEL, CADMIUM PLATED
D93	12	MS35338-48	LK WASH 1/2 NOM SIZE	CARBON STEEL, CADMIUM PLATED
D94	36	MS35691-13	NUT, JAM HEX 5/16 - 24UNC - 2B	STEEL, CADMIUM PLATED
D95	81	MS51967-8	NUT, HEX 3/8 - 16UNC - 2B	STEEL, CADMIUM PLATED
D96	36	MS51968-5	NUT, HEX 5/16 - 24UNF - 2B	STEEL, CADMIUM PLATED
D97	36	MS90726-36	SCREW, HEX HD. 5/16 - 24UNF - 2A x 1-1/4 LG	STEEL, CADMIUM PLATED
D98	4	MS90728-67	SCREW, HEX HD. 3/8 - 16UNC - 2A x 2-1/4 LG	STEEL, GRADE 8 CADMIUM PLATED
D99	1	MS90728-112	SCREW, HEX HD. 1/2 - 13UNC - 2A x 1-3/8 LG	STEEL, GRADE 8 CADMIUM PLATED
D100	7	MS90728-114	SCREW, HEX HD. 1/2 - 13UNC - 2A x 1-3/4 LG	STEEL, GRADE 8 CADMIUM PLATED
D101	4	MS90728-190	SCREW, HED HD. 3/4 - 10UNC - 2A x 2-3/4 LG	STEEL, GRADE 8 CADMIUM PLATED

FIGURE D84. Hardware, base, frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

FIG. NO.	DESCRIPTION
D103	COVER ASSEMBLY
D104	PLAN VIEW, COVER
D105	COVER INSTALLED LEFT SIDE INSTALLATION
D106	SECTIONS AND VIEW FOR FIG'S - D105, D107 AND D108
D107	FRONT ELEVATION
D108	REAR ELEVATION
D109	SECTION VIEWS FOR FIG'S - D108 AND D109
D110	SIDE AND REAR ELEVATIONS
D111	SECTION AND VIEW FOR FIG - D110
D112	VENT, COVER
D113	VENT, REINFORCEMENT
D114	BINDING
D115	REINFORCEMENT
D116	REINFORCEMENT
D117	PULLEY ASSEMBLY
D118	PULLEY INSTALLATION, FRONT AND REAR
D119	SECTION AND VIEW FOR FIG'S D105, D107 AND D108
D120	ROD
D121	ROD
D122	ROD
D123	ROD, TIE DOWN
D124	ROD, TIE DOWN
D125	STRIP, TIE DOWN
D126	STRIP, TIE DOWN
D127	REINFORCEMENT, TIE DOWN
D128	REINFORCEMENT
D129	HARDWARE, CLOSURE ATTACHMENT
D132	PARTS, CLOSURE ATTACHMENT

FIGURE 102. Cover, Ventilator, And Attachment for Closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL:
   Coated Nylon Cloth, Type II, Class 3, Color Green, No. 34087 Of FED-STD-575, Spec. MIL-C-20696. Except Weight To Be 14 Oz. Per Sq. Yd. And Coating To Be Balanced.
2. STITCHING:
   Type 301 Per Spec. FED-STD-751, 8-10 Stitches Per Inch. Smallest Needle Size Feasible Should Be Used In Order To Assure Weather Proof Seams.
3. THREAD:
   Nylon, Type I, Class 1, Size F, Color OD, Shade S-1, Cable No. 66022, Spec. V-T-295.
4. Manufacturer Shall Be Responsible For Final Fit Of Cover. Seam Allowance May Vary To Suit Manufacturer. Seams Shall Be Either Vertical Or Horizontal. Material Width To Be Maximum Available Standard Size.

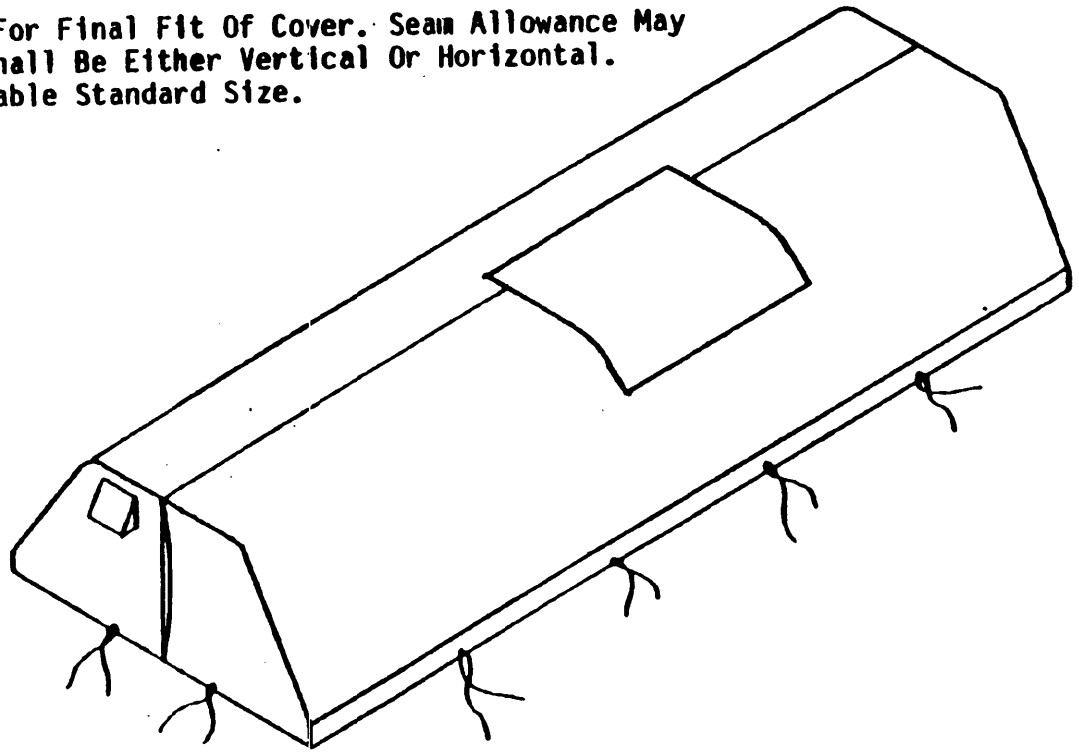


FIGURE D103. Cover assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


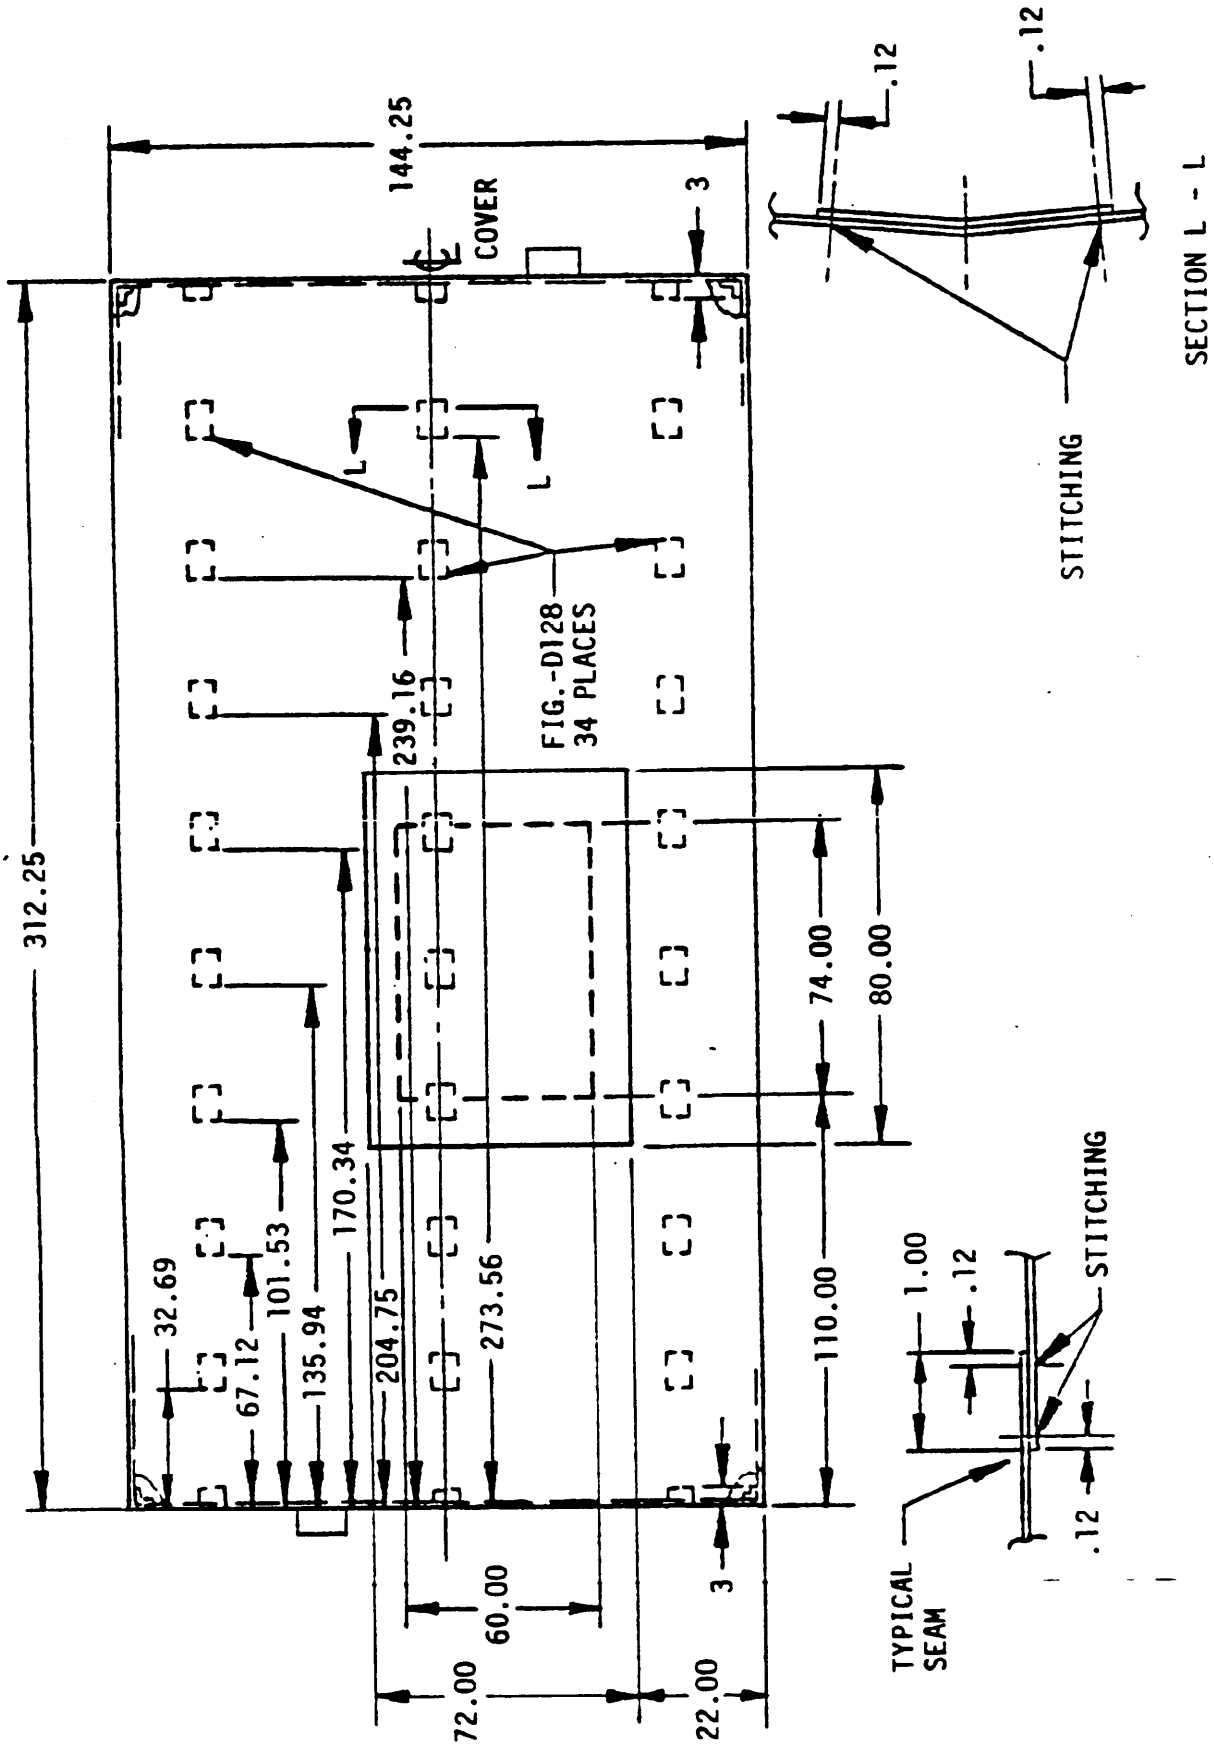


FIGURE D104. Plan view cover, installed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

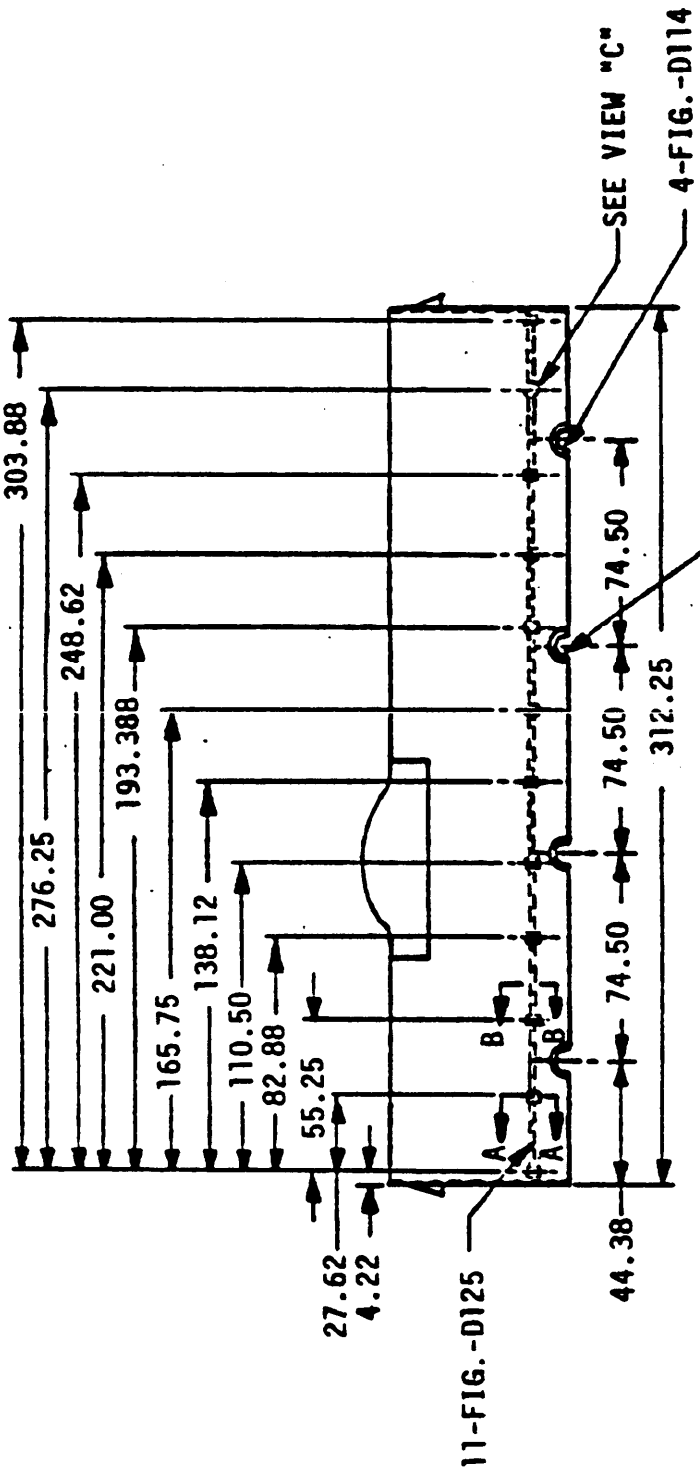

NOTES:

1. MANUFACTURER SHALL BE RESPONSIBLE FOR FINAL FIT OF COVER.
   MANUFACTURERS IDENTIFICATION MUST APPEAR ON INSIDE OF COVER.
   SEAM ALLOWANCE MAY VARY TO SUIT MANUFACTURER.
2. STITCHING TYPE 301 PER SPEC. FED-STD-751 8-10 STITCHES PER INCH SMALLEST NEEDLE SIZE FEASIBLE SHOULD BE USED IN ORDER TO ASSURE WEATHER PROOF SEAMS.
3. THREAD, NYLON TYPE I, CLASS I, SIZE F COLOR O.D. 5 SHADE S-1, CABLE NO.66022 SPEC. V-T-295.

QUANITY OF FIG.-D114 AND FIG.-D125 SYMMETRICAL FOR RIGHT SIDE SECTIONS AND VIEWS SEE FIG.-D106 AND FIG.-D119.

FIGURE D105. Cover installed, left side elevation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

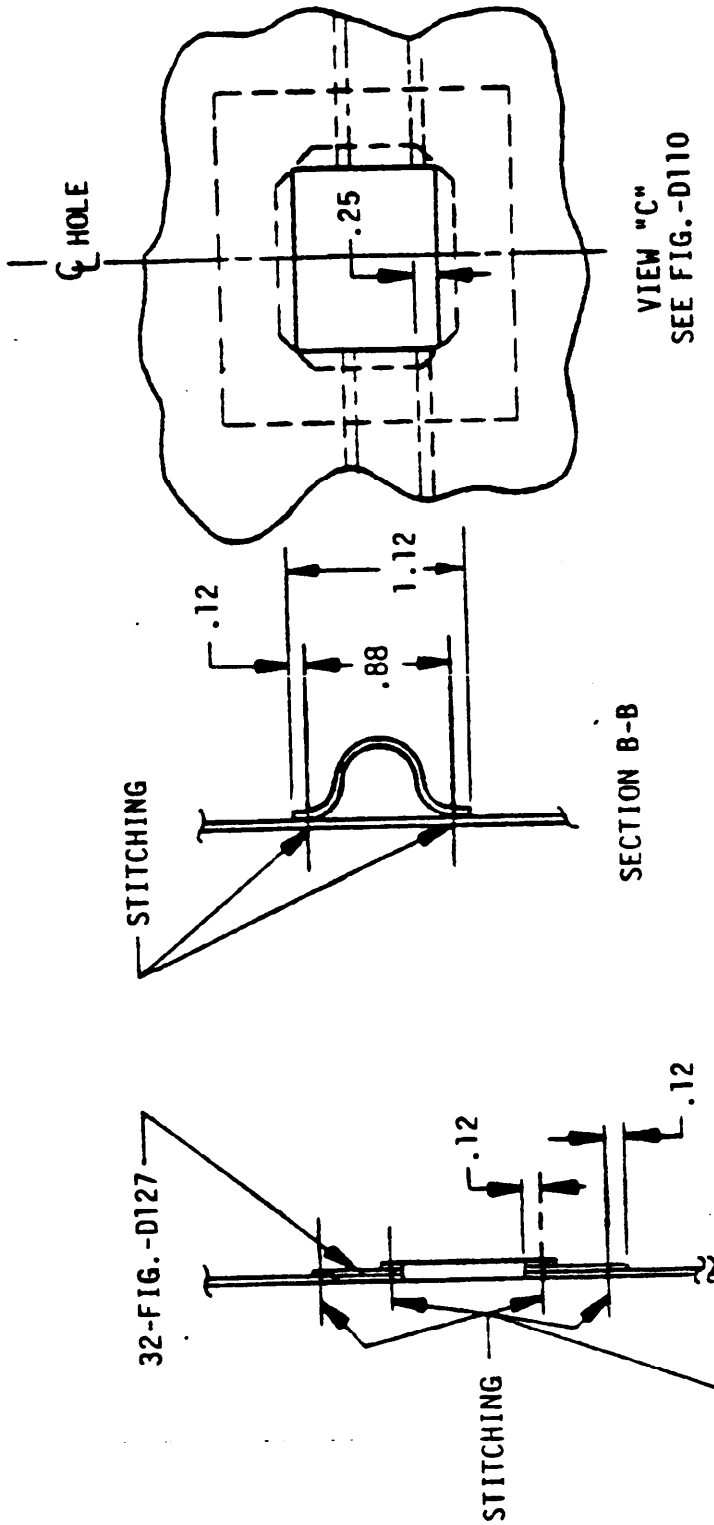


FIGURE D106. Sections and view for FIGURES D105, D107 and D108.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

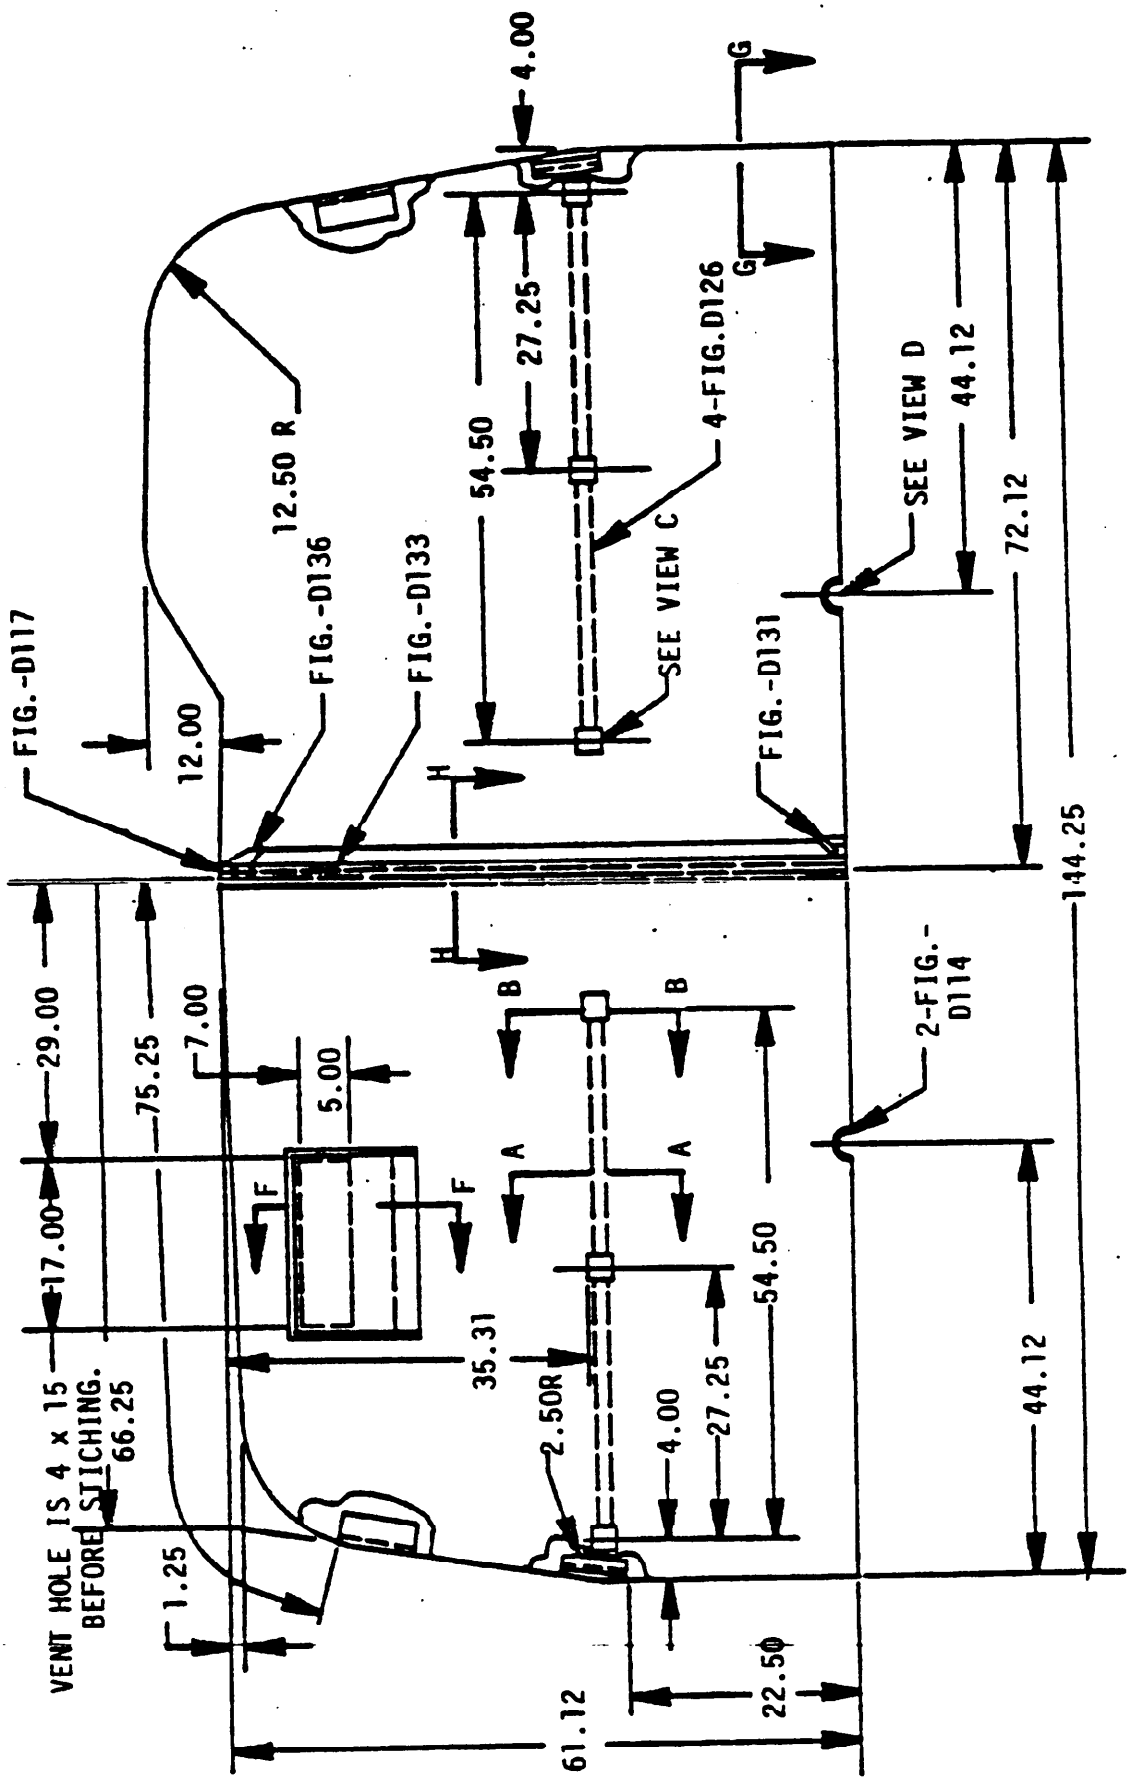


FIGURE 107. Front elevation cover installed (sections and views see fig's. D106, D109, D118 & D119).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

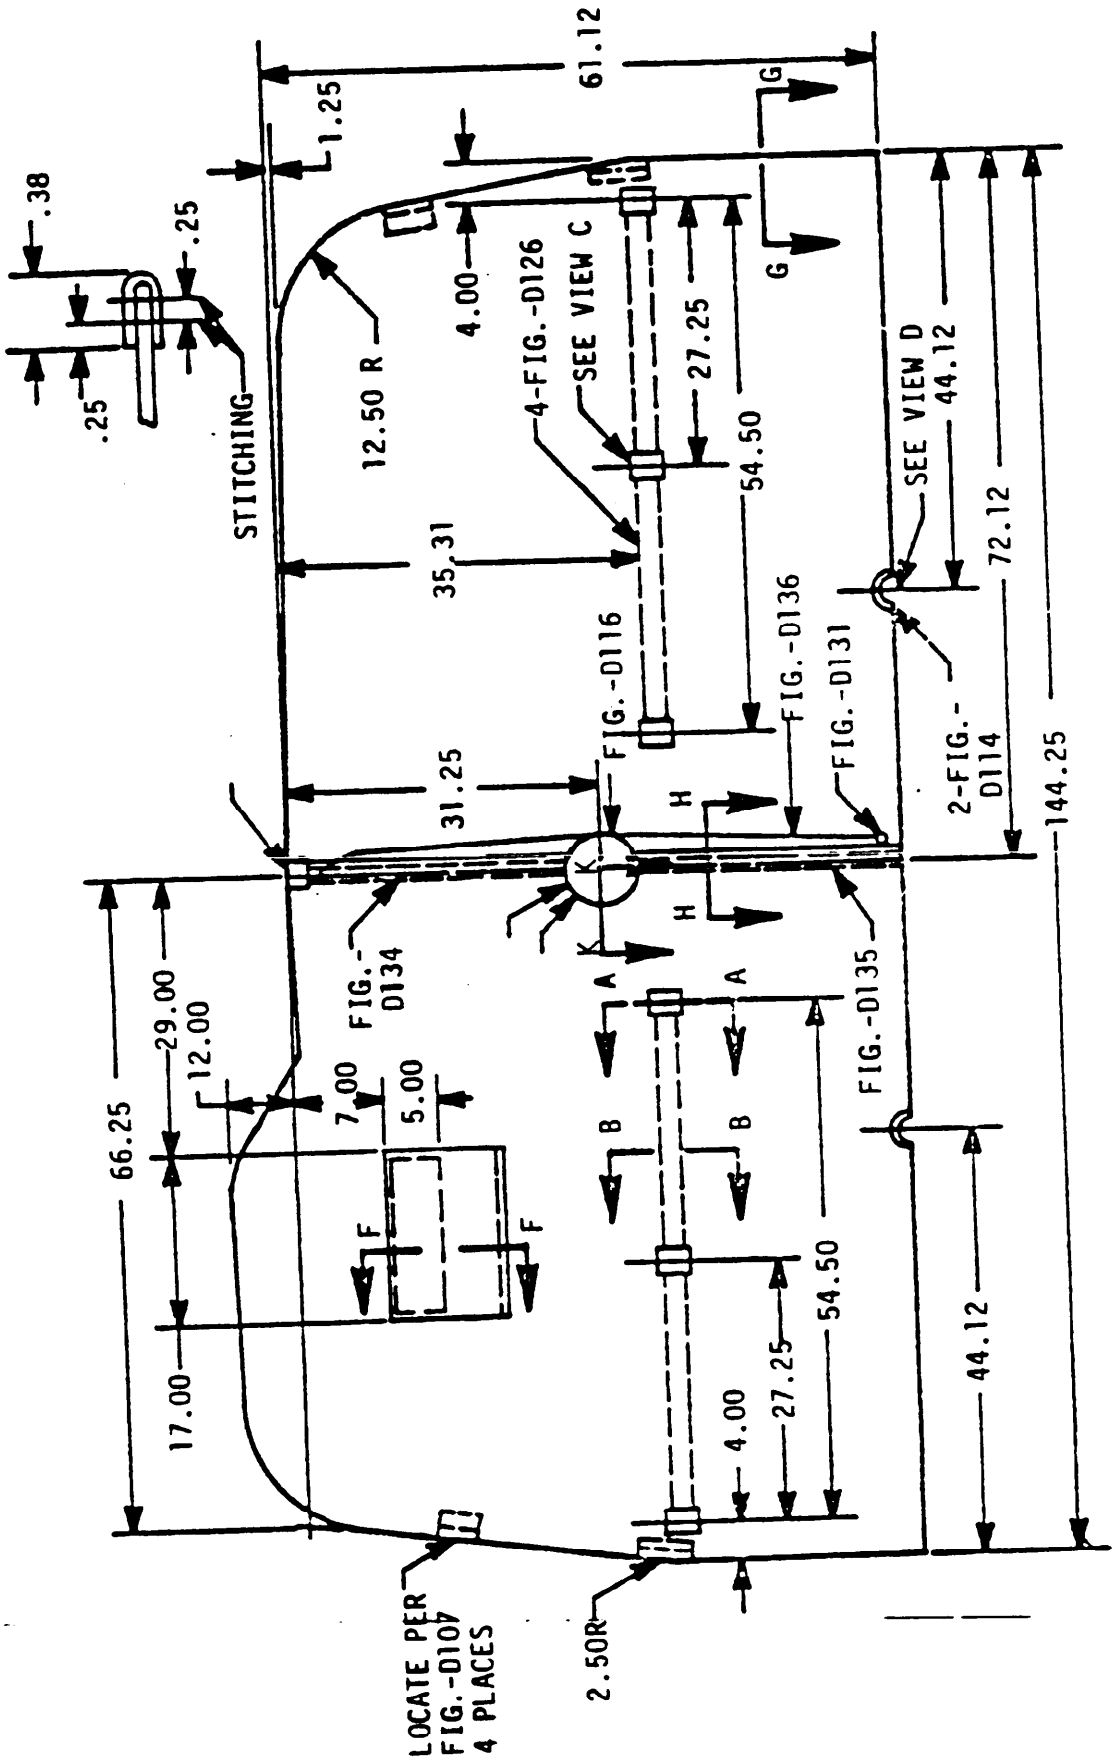


FIGURE 108. Rear elevation cover installed (sections and views see fig's. D106, D109, D118 & D119).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

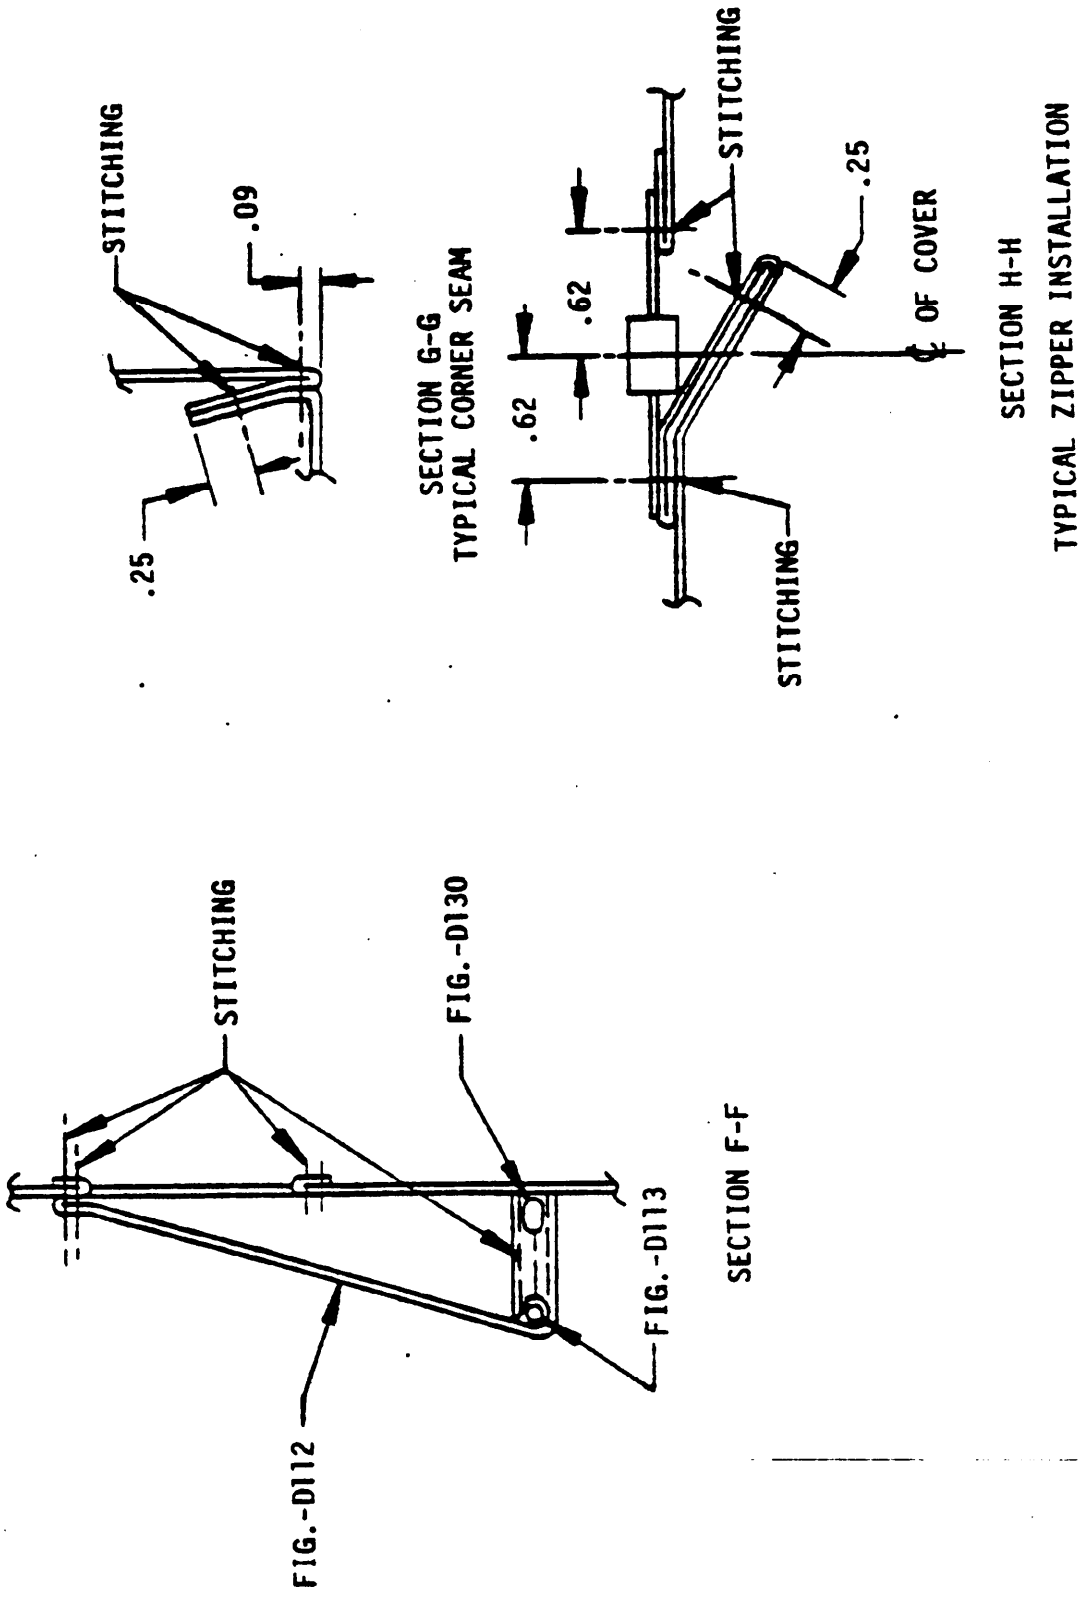


FIGURE D109. Section views, for FIGURES D107 and D108.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.



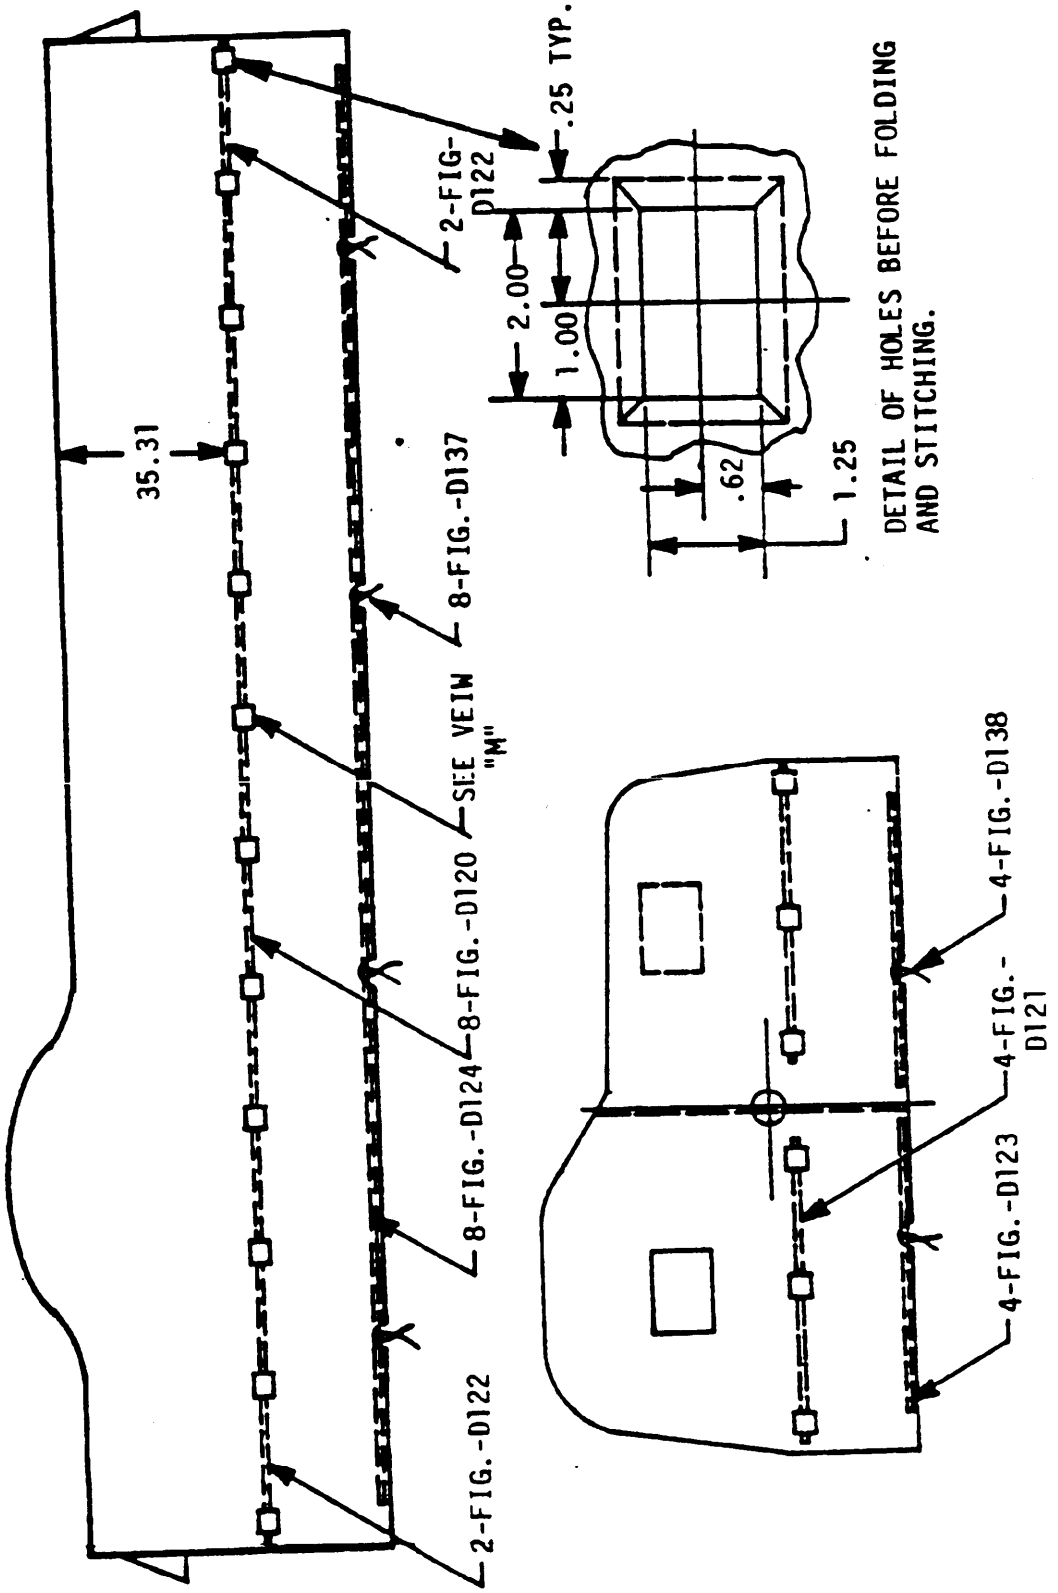


FIGURE D110. Side and rear elevations (section and view see fig.-111).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

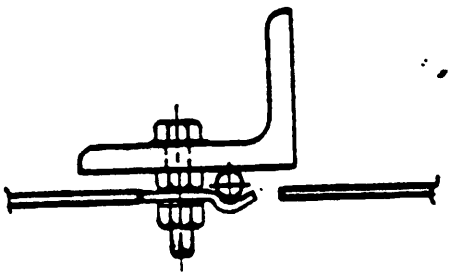

SECTION N-N
TYPICAL 36 PLACES

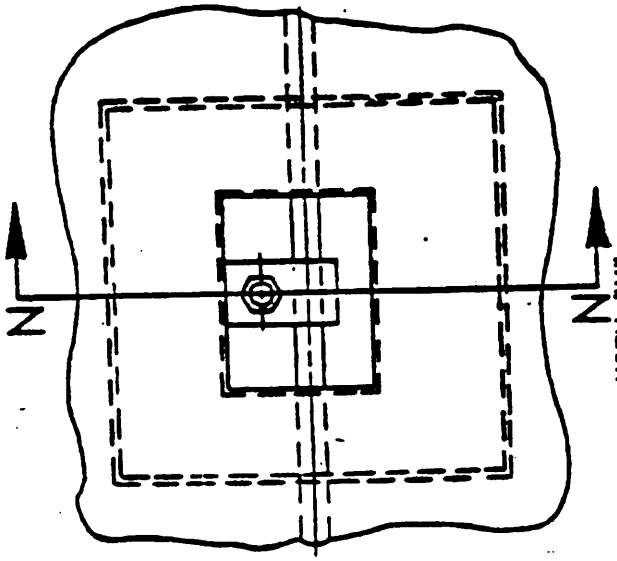

VIEW "N"
TYPICAL 36 PLACES

FIGURE D111. Section and view for Figure D110.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


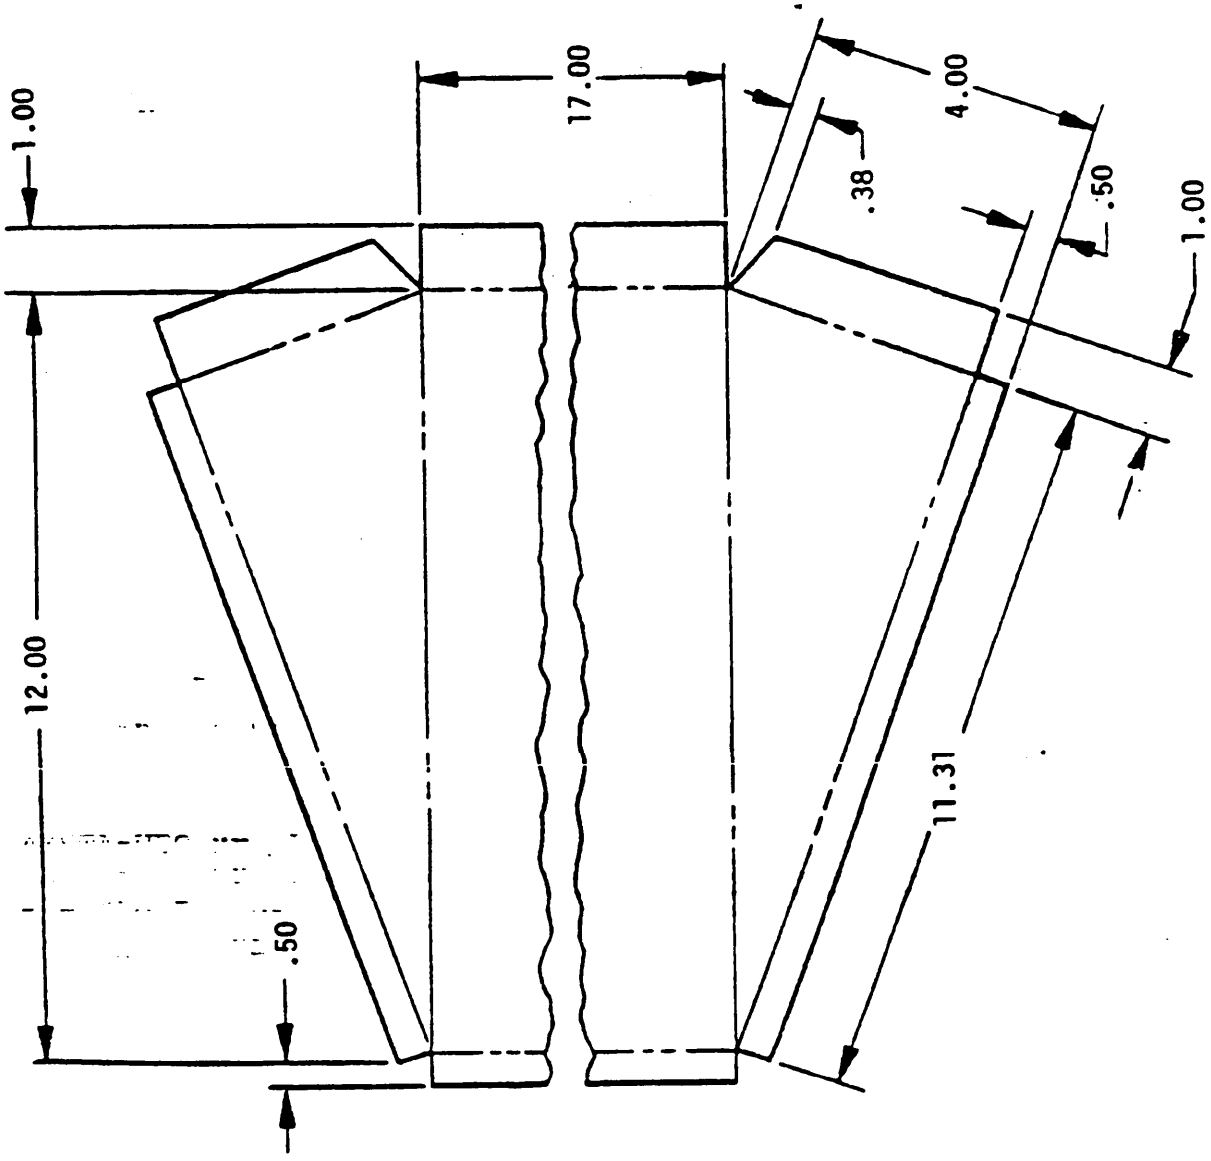


FIGURE D112. Vent cover (2 required)

NOTES:
1. MATERIAL:
COATED NYLON CLOTH,
TYPE II, CLASS 3,
COLOR GREEN, NO.34087
OF FED-STD-595,
SPEC. MIL-C-20696,
EXCEPT WEIGHT TO BE
18 OZ. PER SQ. YD. AND
COATING TO BE BALANCED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

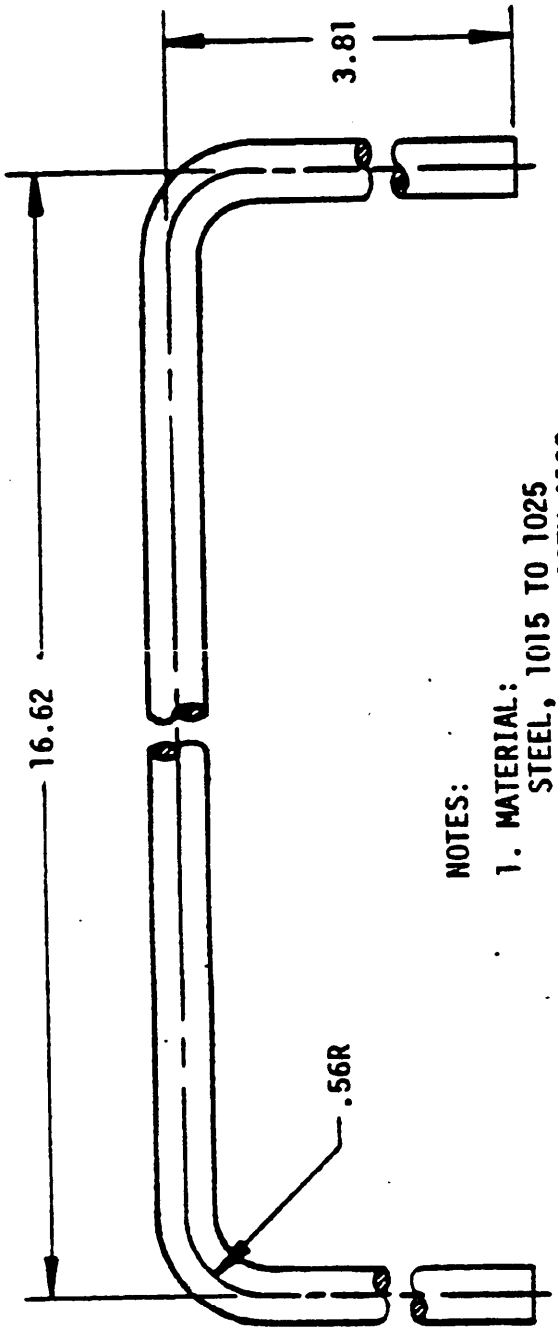


NOTES:

1. MATERIAL:
   STEEL, 1015 TO 1025
   ASTM-A576 OR ASTM-A108
   .38 DIA.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE D113. Vent, reinforcement. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

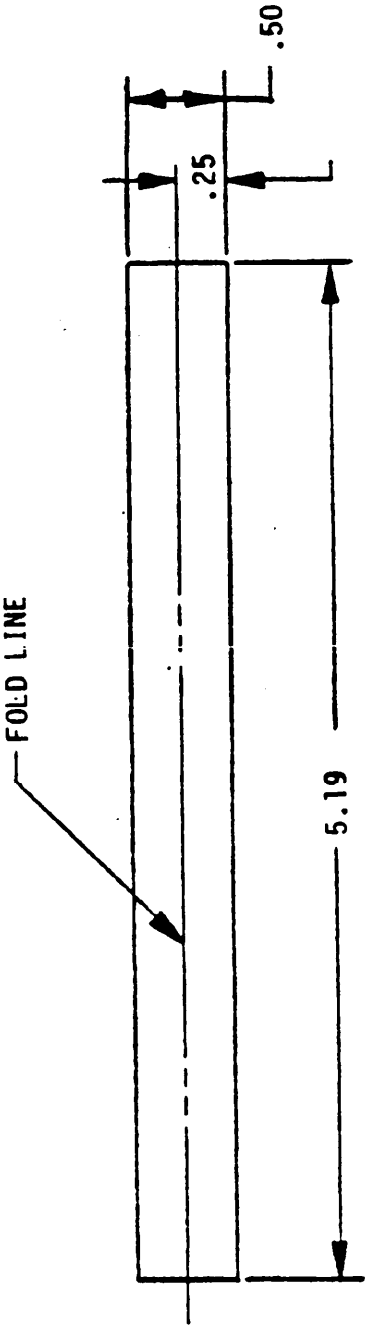

NOTES:

1. MATERIAL:
   COATED NYLON CLOTH,
   TYPE II, CLASS 3,
   COLOR GREEN, NO.34087
   OF FED-STD-595
   SPEC. MIL-C-20696, EXCEPT
   WEIGHT TO BE 14 OZ. PER
   SQ. YD. AND COATING TO
   BE BALANCED.

FIGURE D114. Binding. (12 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


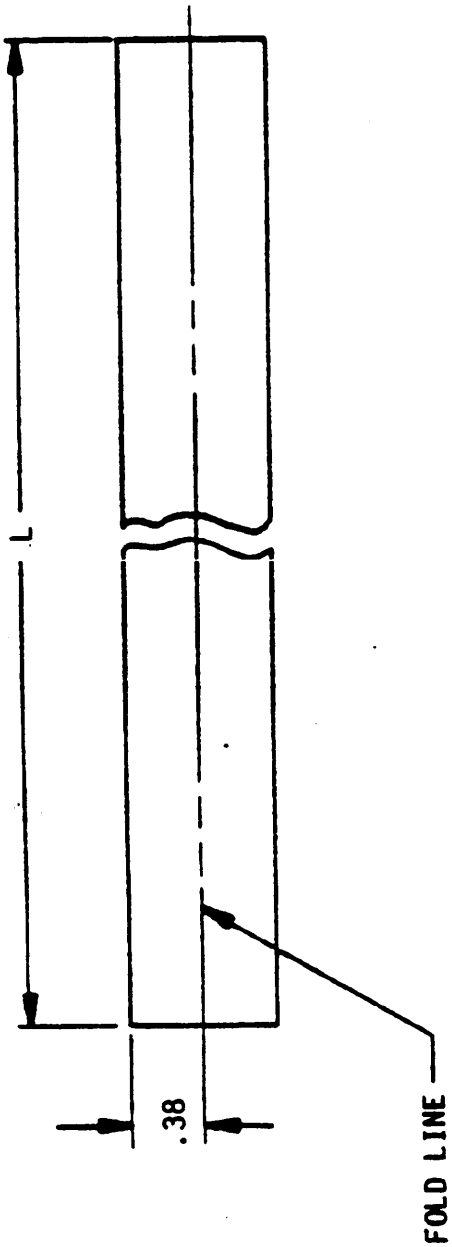


FIG. NO.	L	REQ'D.
FIG.-D115	14.00	1
FIG.-D116	9.50	1

NOTES:
1. MATERIAL:
WEBBING, COTTON,
TYPE II, CLASS 4,
COLOR OD-7, .75 WIDE
SPEC. MIL-W-530.

FIGURE D115 AND D116. Reinforcement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

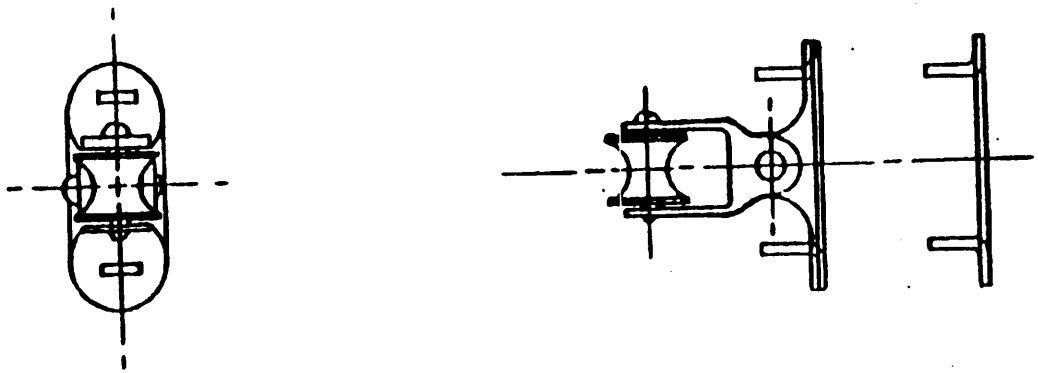

NOTE:

ASTRUP COMPANY
2941 W. 25th STREET
CLEVELAND, OHIO
PART NO.121 OR
APPROVED EQUAL.

FIGURE D117. Pulley assembly. (2 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.



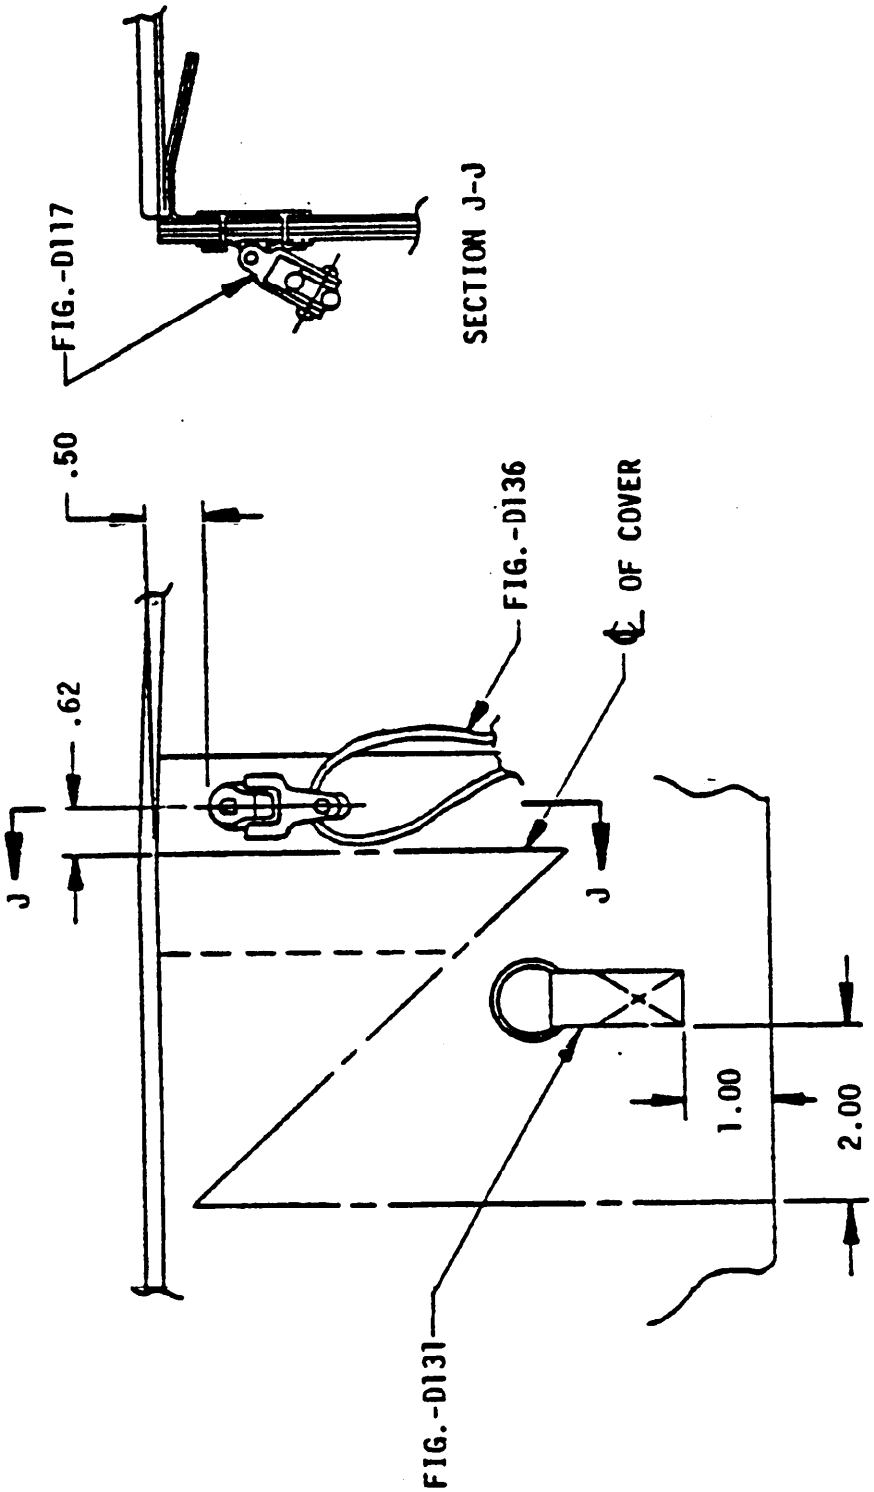


FIGURE D118. Pulley installation front and rear.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

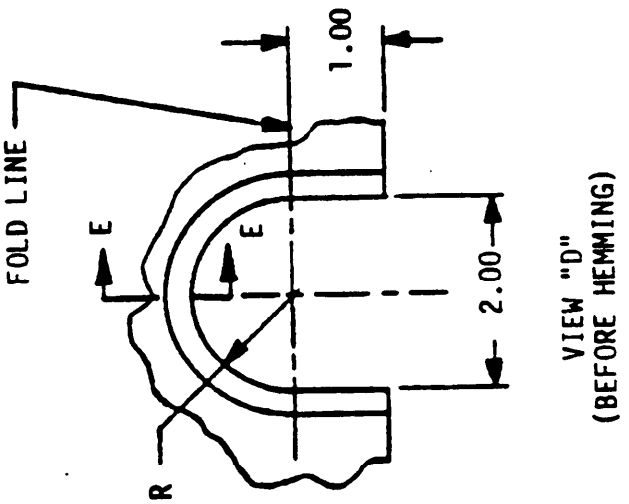


VIEW "D"
(BEFORE HEMMING)

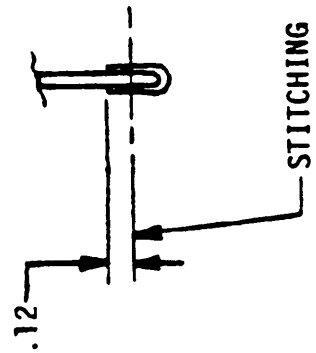

SECTION E-E
FULL SCALE

FIGURE D119. Section and view for FIGURE'S D105, D107 and D108.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

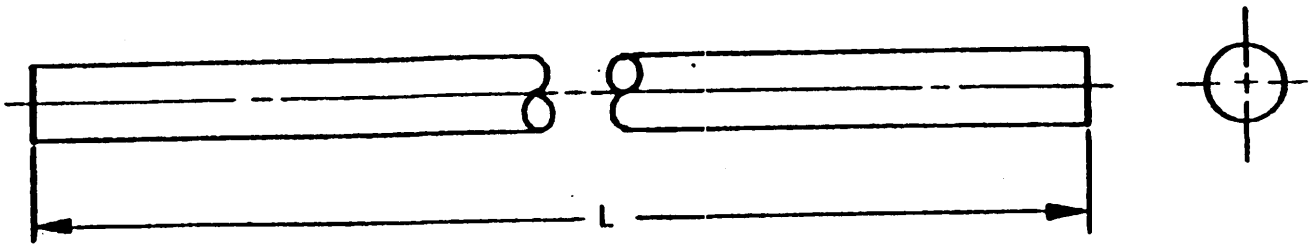

NOTES:

1. MATERIAL:
   STEEL, 1015 TO 1025,
   ASTM-A576 OR ASTM-A108
   .375 DIA.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039.

FIGURE NUMBER	REQUIRED	L
FIG.-D120	8	56.00
FIG.-D121	4	62.00
FIG.-D122	4	41.00

FIGURE D120, D121 and D122. Rod.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

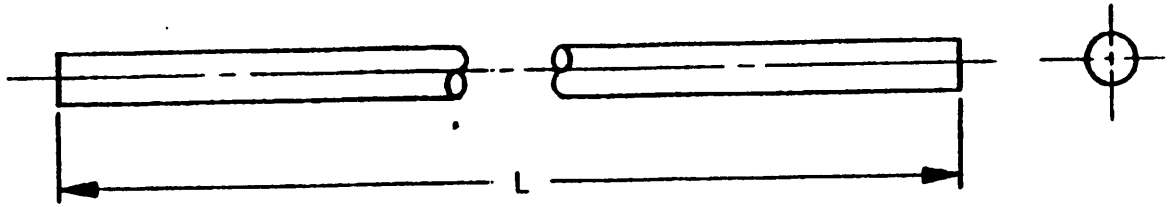



FIGURE NUMBER	REQUIRED	L
FIG.-D123	4	60.00
FIG.-D124	8	72.00

NOTES:

1. MATERIAL:
   STEEL, 1015 TO 1025,
   ASTM-A576 OR ASTM-A108
   .25 DIA.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   Treat, Type I or Type III
   TT-C-490
   Prime Per MIL-P-53022
   Or MIL-P-53030. Top Coat
   Green 383 Per MIL-C-46168
   Or MIL-C-53039

FIGURE D123 and D124. Rod, tie down.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

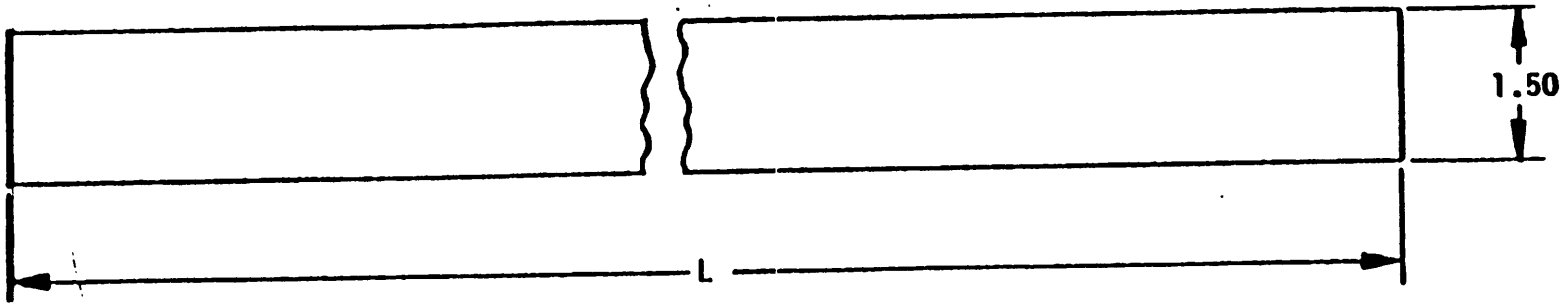


NOTES:

1. MATERIAL:
   COATED NYLON CLOTH, TYPE II, CLASS 3, COLOR GREEN, NO.34087 OF FED-STD-595 SPEC. MIL-C-20696, EXCEPT WEIGHT TO BE 14 OZ. PER SQ. YD. AND COATING TO BE BALANCED.

FIGURE NUMBER	REQUIRED	L
FIG.-D125	22	25.12
FIG.-D126	8	24.75

FIGURE D125 and D126. Strip, tie down.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

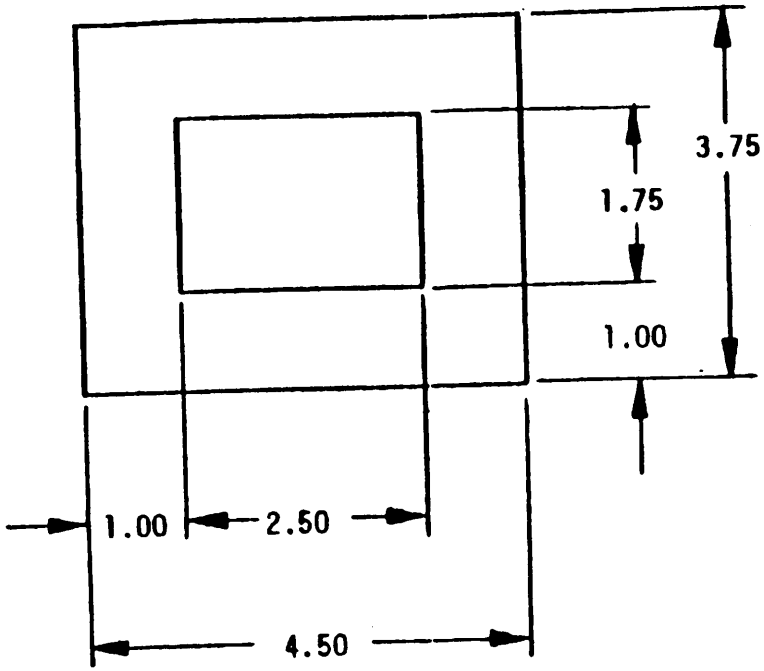


NOTES:

1. MATERIAL:
   COATED NYLON CLOTH,
   TYPE II, CLASS 3,
   COLOR GREEN, NO.34087
   OF FED-STD-595
   SPEC. MIL-C-20696
   EXCEPT WEIGHT TO BE
   14 OZ. PER SQ. YD. AND
   COATING TO BE BALANCED.

FIGURE D127. Reinforcement, tie down. (36 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

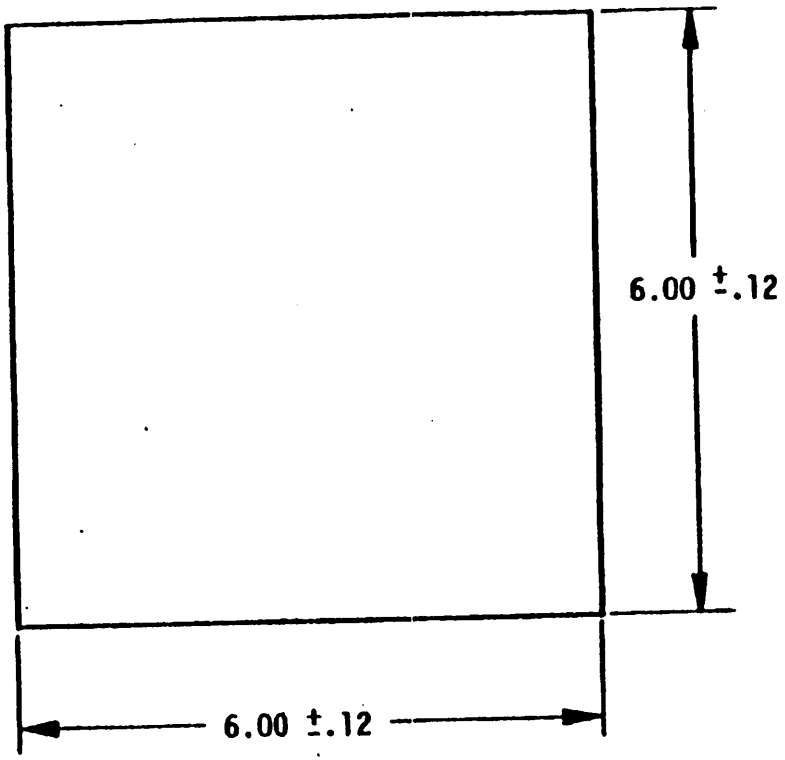

NOTES:

1. MATERIAL:
   COATED NYLON CLOTH,
   TYPE II, CLASS 3,
   COLOR GREEN, NO.34087
   OF FED-STD-595,
   SPEC. MIL-C-20696,
   EXCEPT WEIGHT TO BE
   14 OZ. PER SQ. YD. AND
   COATING TO BE BALANCED.

FIGURE D128. Reinforcement. (34 required)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

FIGURE NUMBER	REQD	PART NO.	DESCRIPTION
FIG. D130	4		TIP, RUBBER SIZE 15 SPEC ZZ-T-351
FIG. D131	2	547557	CHAPE, WEB, TYPE 3 WITH D RING

FIGURE D129. Hardware, closure attachment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

FIGURE NUMBER	REQD	DESCRIPTION	SPEC.
FIG. D133	1	DOUBLE FASTENER, SLIDE INTERLOCKING, NON-SEPARATING, HEAVY DUTY (SINGLE ACTION, OPEN TOPY, CLOSED BOTTOM WITH NON-LOCK DOUBLE PULL REVERSIBLE SLIDER) 58 IN. LONG.	V-F-106 STYLE 1 SIZE H
FIG. D134	1	FASTENER, SLIDE, INTERLOCKING, NON-SEPARATING HEAVY DUTY (SINGLE ACTION, OPEN TOP CLOSED BOTTON WITH NON-LOCK DOUBLE PULL REVERSIBLE SLIDER) 26 IN. LONG.	V-F-106 STYLE 1 SIZE H
FIG. D135	1	FASTENER, SLIDE, INTERLOCKING, SEPARATING, HEAVY DUTY (REGULAR, LEFT HAND, WITH NON-LOCK DOUBLE PULL REVERSIBLE SLIDER) 25 IN. LONG.	V-F-106 STYLE 1 SIZE H
FIG. D136	2	ROPE, JUTE, TYPE II, MILDEW RESISTANT, 1/4 DIA 145 IN. LONG.	T-R-650
FIG. D137	8	ROPE, JUTE, TYPE II, MILDEW RESISTANT, 1/4 DIA 120 IN. LONG.	T-R-650
FIG. D138	4	ROPE, JUTE, TYPE II, MILDEW RESISTANT, 1/4 DIA 72 IN. LONG.	T-R-650

FIGURE D132. Parts, closure attachment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

FIGURE NUMBER	DESCRIPTION
E2	INSTALLATION, SHIPPING 105MM GUN TUBE
E3	WIRE ROPE (SHOWN ON FIGURE E2 SH2)
E4	WIRE ROPE (SHOWN ON FIGURE E2 SH2)
E5	CLIP (SHOWN ON FIGURE E2 SH2)
E6	PLATE
E7	PLATE
E8	BRACKET
E9	BLOCK, REAR
E10	BRACKET
E11	BOLT (SHOWN ON FIGURE E2 SH3)
E12	LK WASH (SHOWN ON FIGURE E2 SH3)
E13	SCREW (SHOWN ON FIGURE E2 SH3)
E14	PLATE
E15	STEEL TUBING
E16	PLATE
E17	SUPPORT
E18	BRACKET
E19	BLOCK, FRONT
E20	BOLT, (SHOWN ON FIGURE E2 SH4)
E21	WASHER (SHOWN ON FIGURE E2 SH4)
E22	NUT (SHOWN ON FIGURE E2 SH4)
E23	SCREW (SHOWN ON FIGURE E2 SHT4)
E24	WASHER (SHOWN ON FIGURE E2 SHT4)
E25	PLUG
E26	PLUGGING OF MAIN GUN OPENING
E27	COVER
E28	WIRE (SHOWN ON FIGURE E29)
E29	INSTALLATION, GUN TUBE OPENING COVER IN CLOSURE COVER
E30	BOLT, LAG (SHOWN ON FIGURE E2 SH4)
E31	PAD

FIGURE E1. Gun tube shipping.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

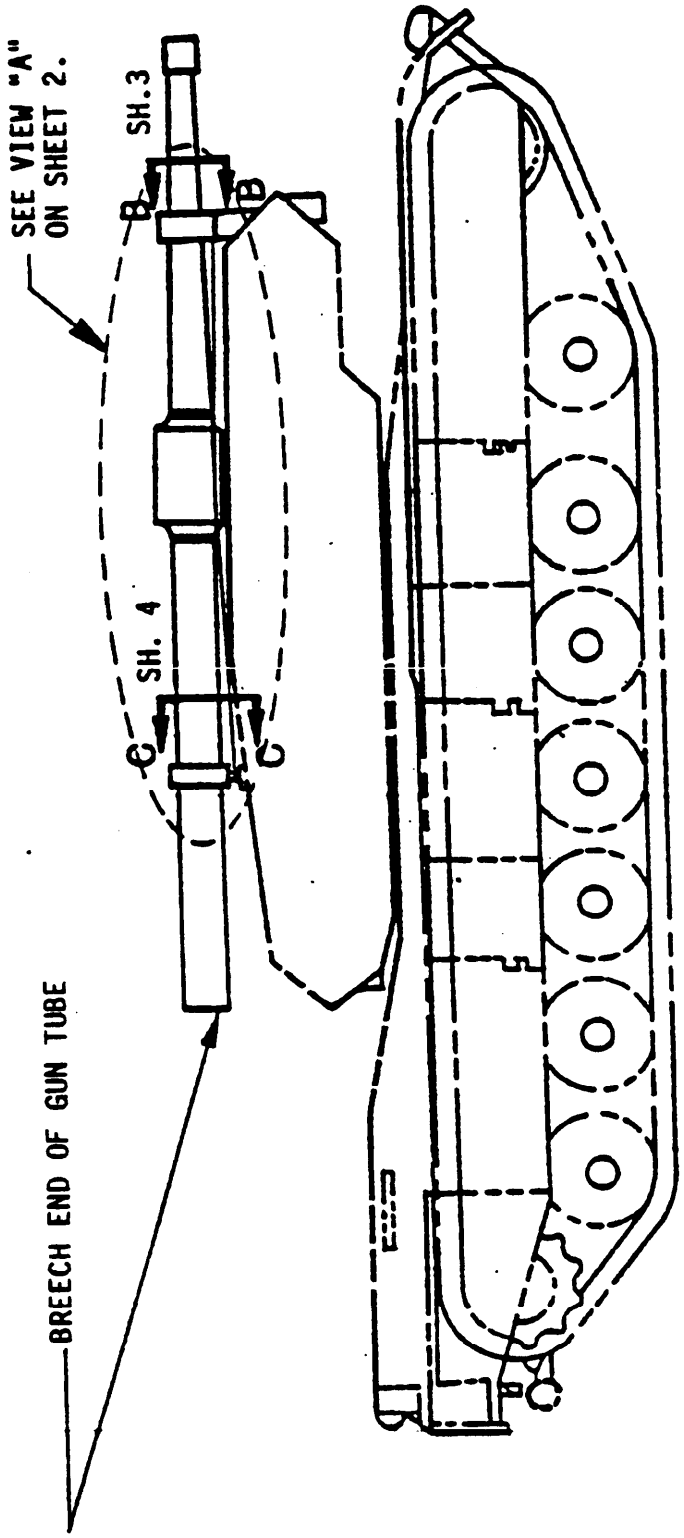


FIGURE E2. Installation, shipping 105 mm gun tube (sht. 1 of 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

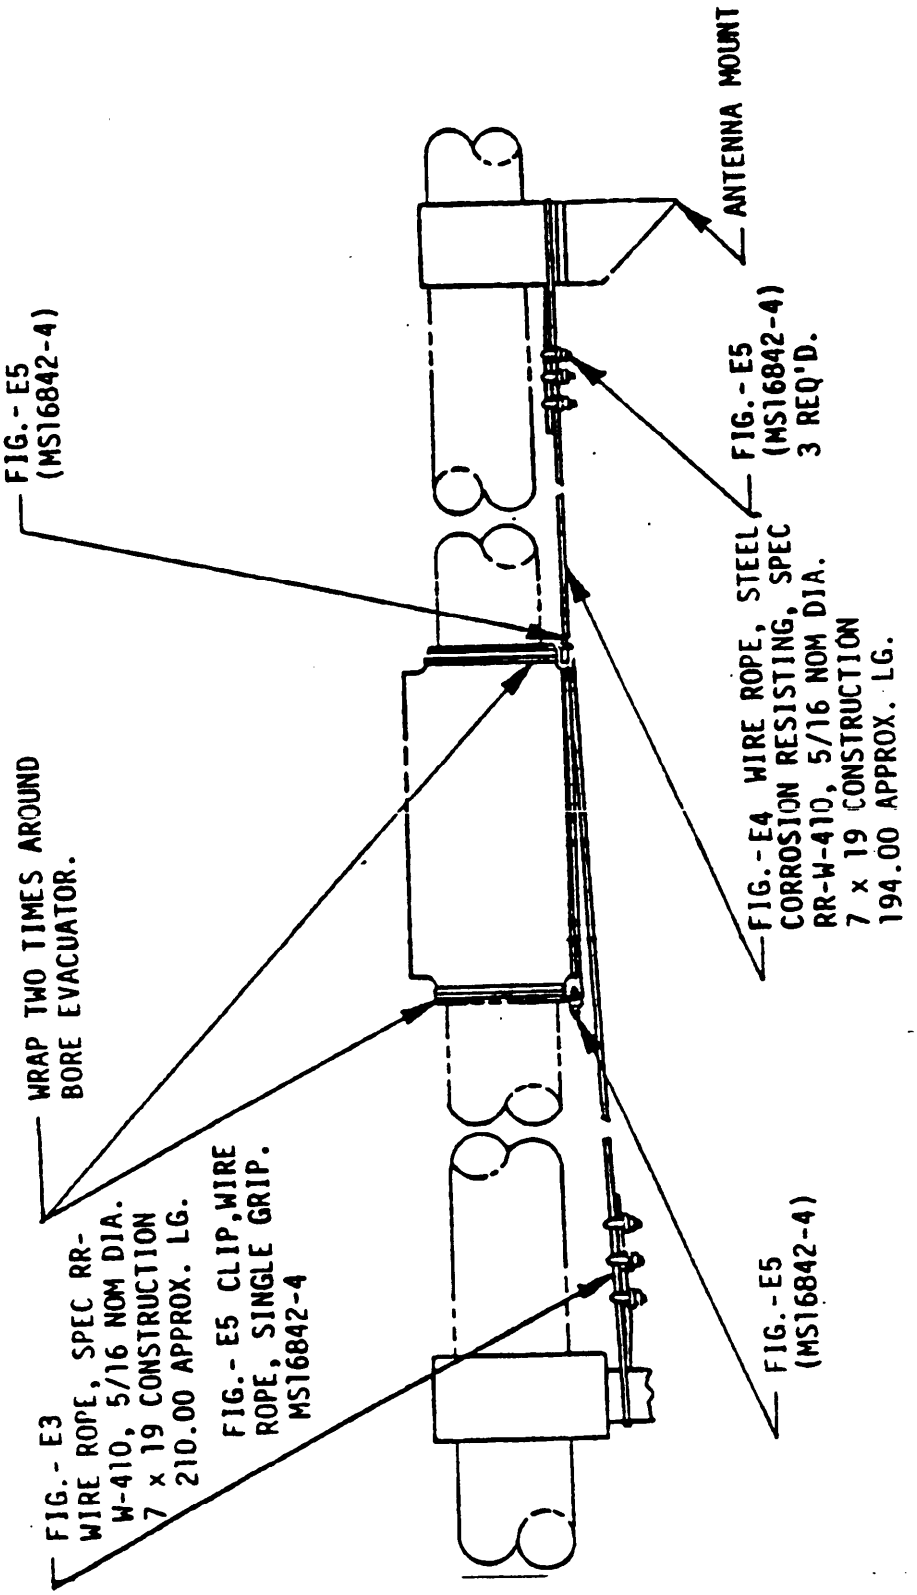


FIGURE E2. (Sht. 2 of 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

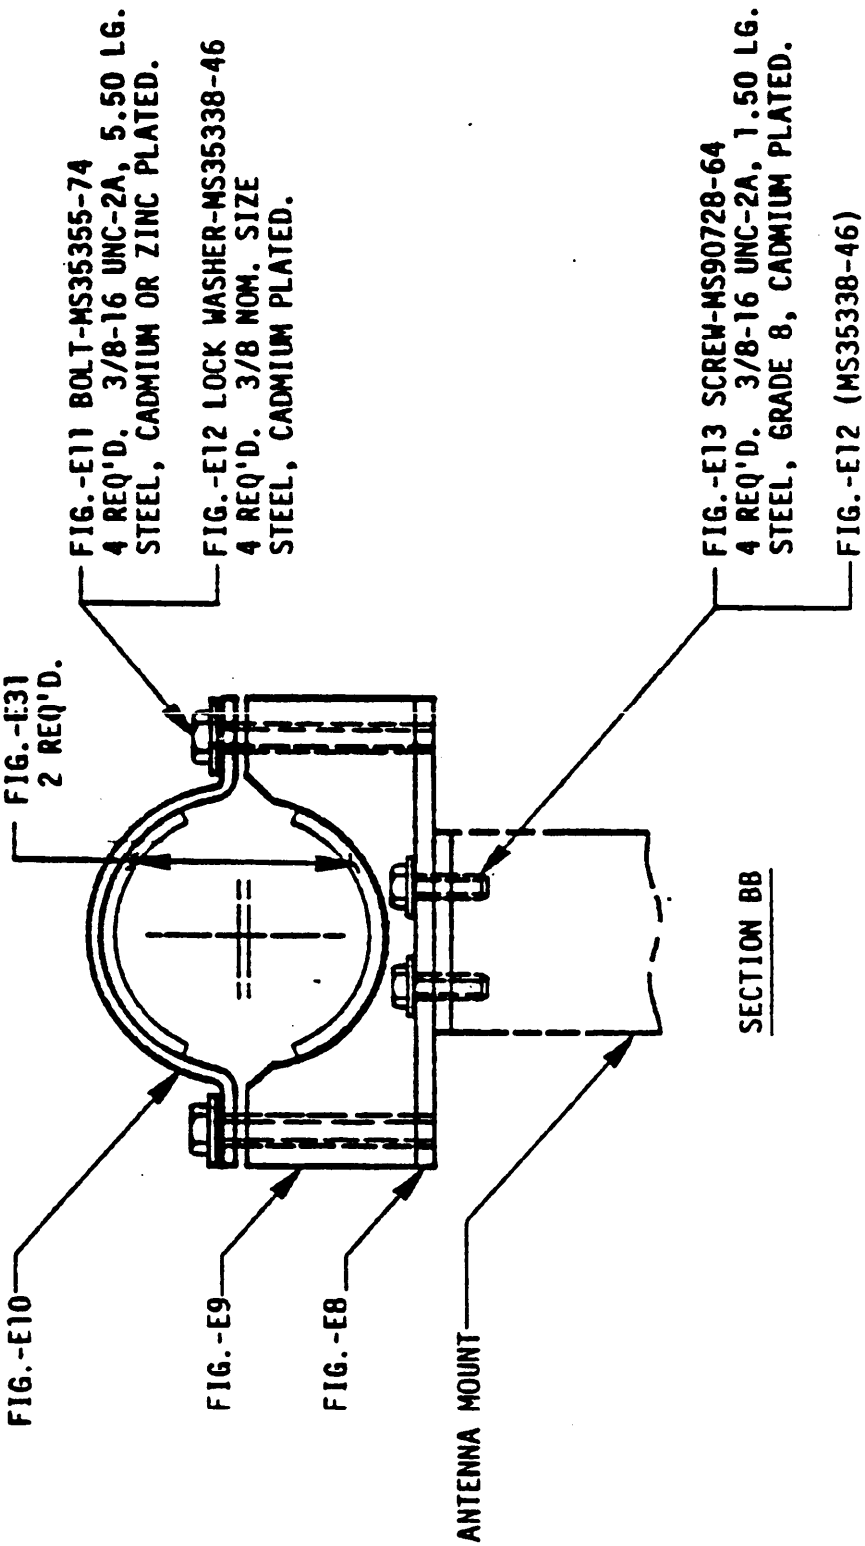


FIGURE E2. (Sht. 3 of 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


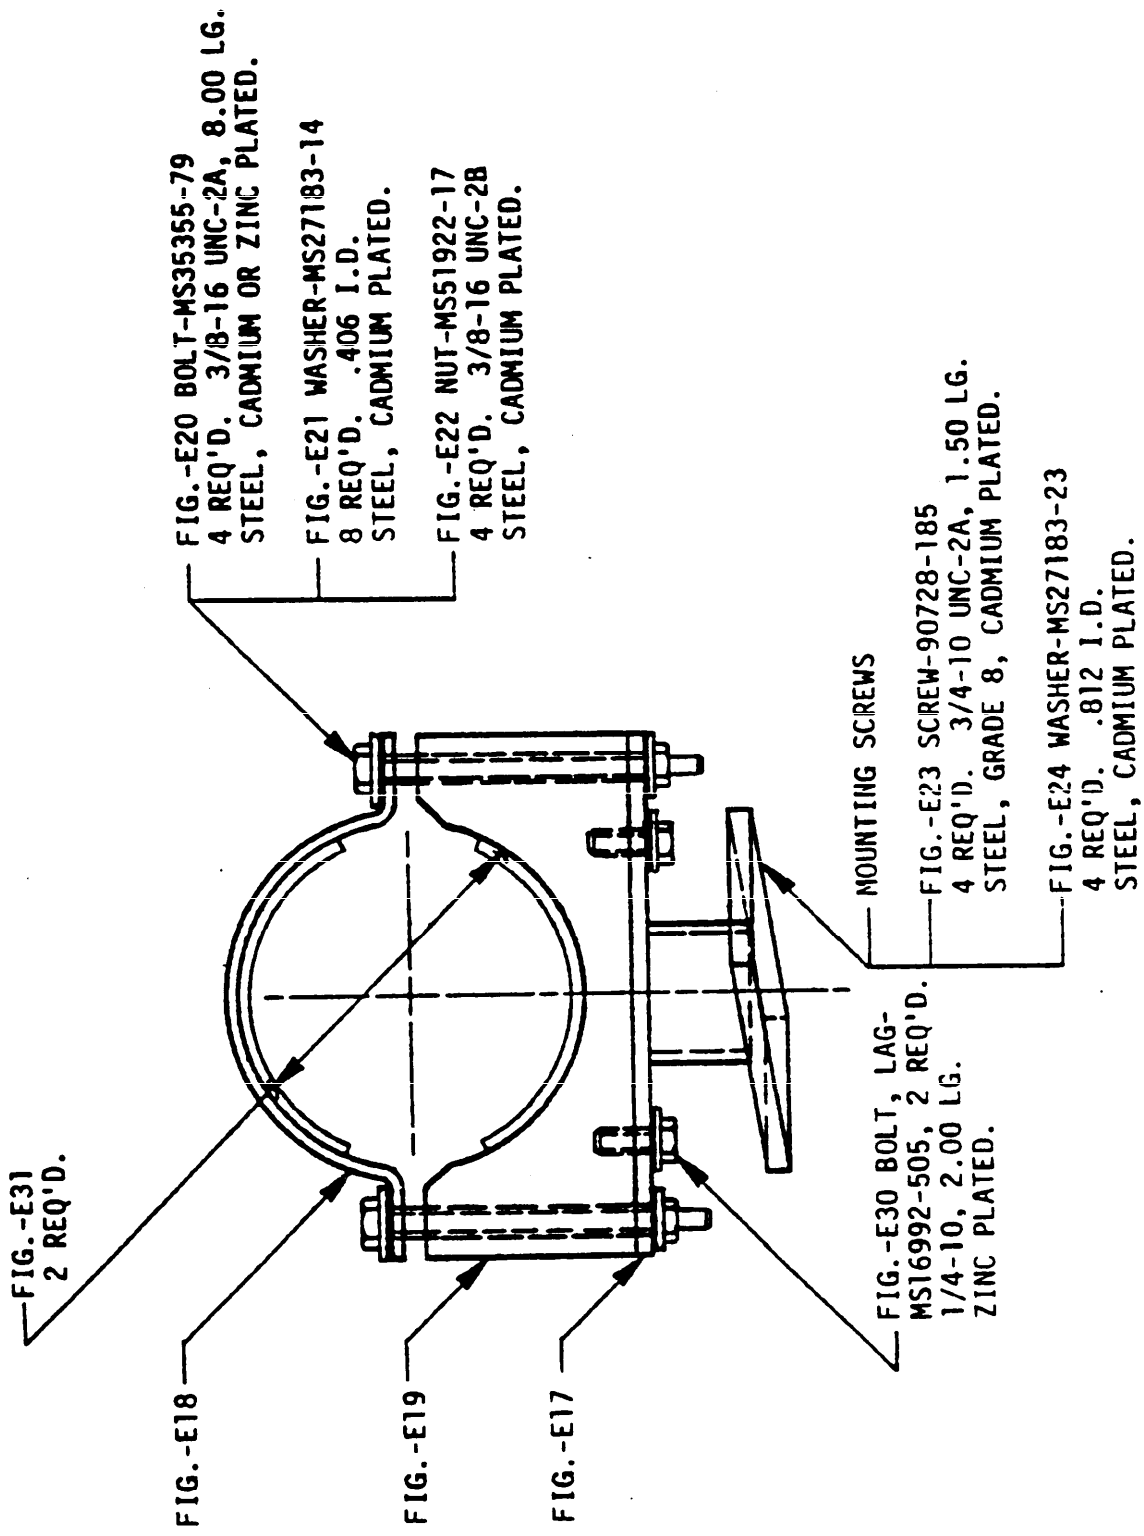


FIGURE E2. (Sh 4 of 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

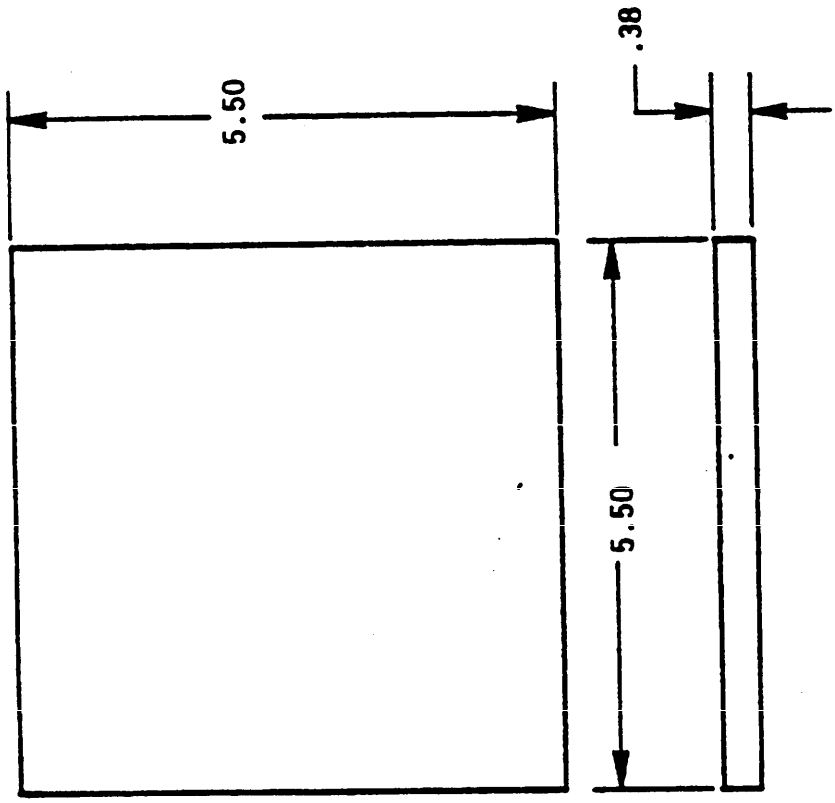


NOTES:

1. MATERIAL:
   STEEL, 1015 TO 1025, ASTM-A36 OR ASTM-A576.
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE E6. Plate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

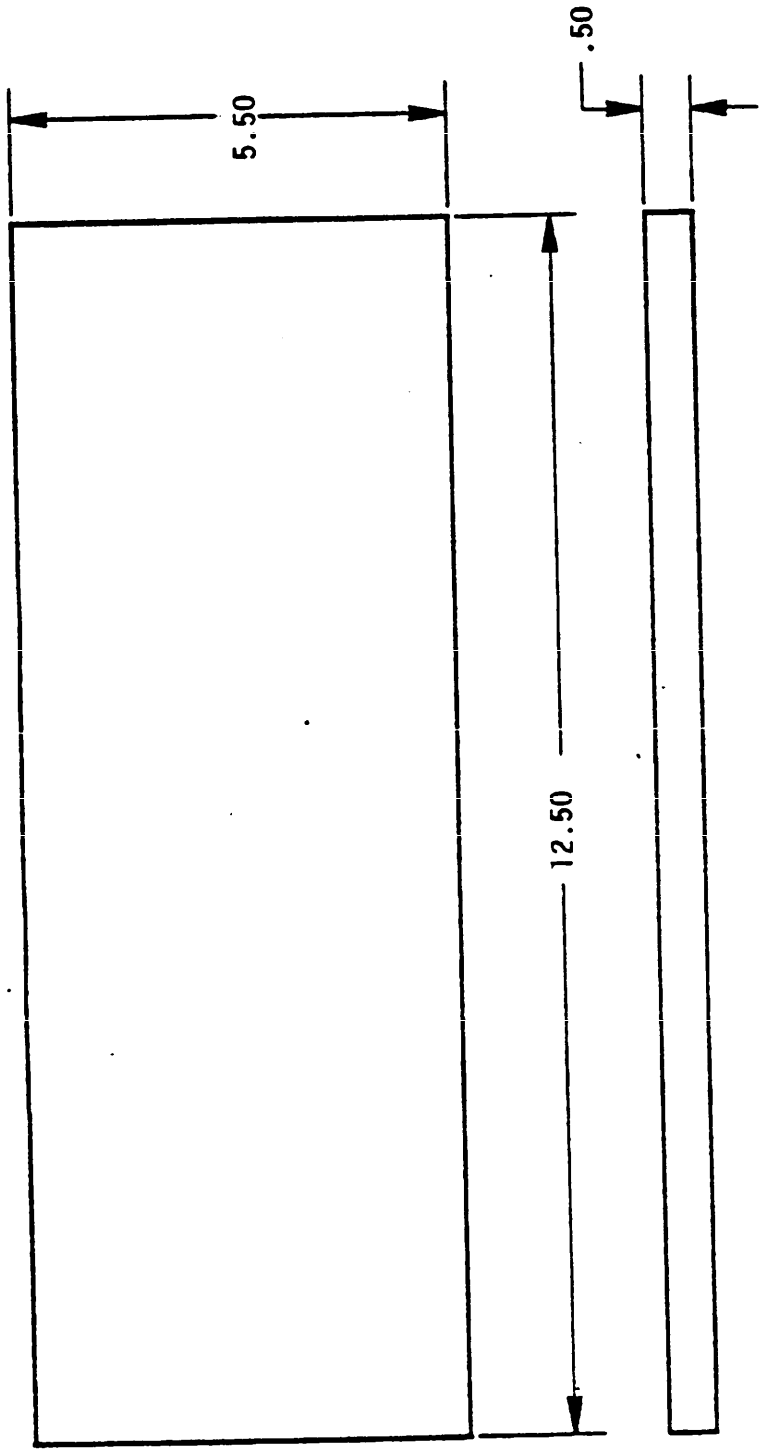


NOTES:

1. MATERIAL:
   STEEL. 1015 TO 1025, ASTM-A576.
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE E7. Plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

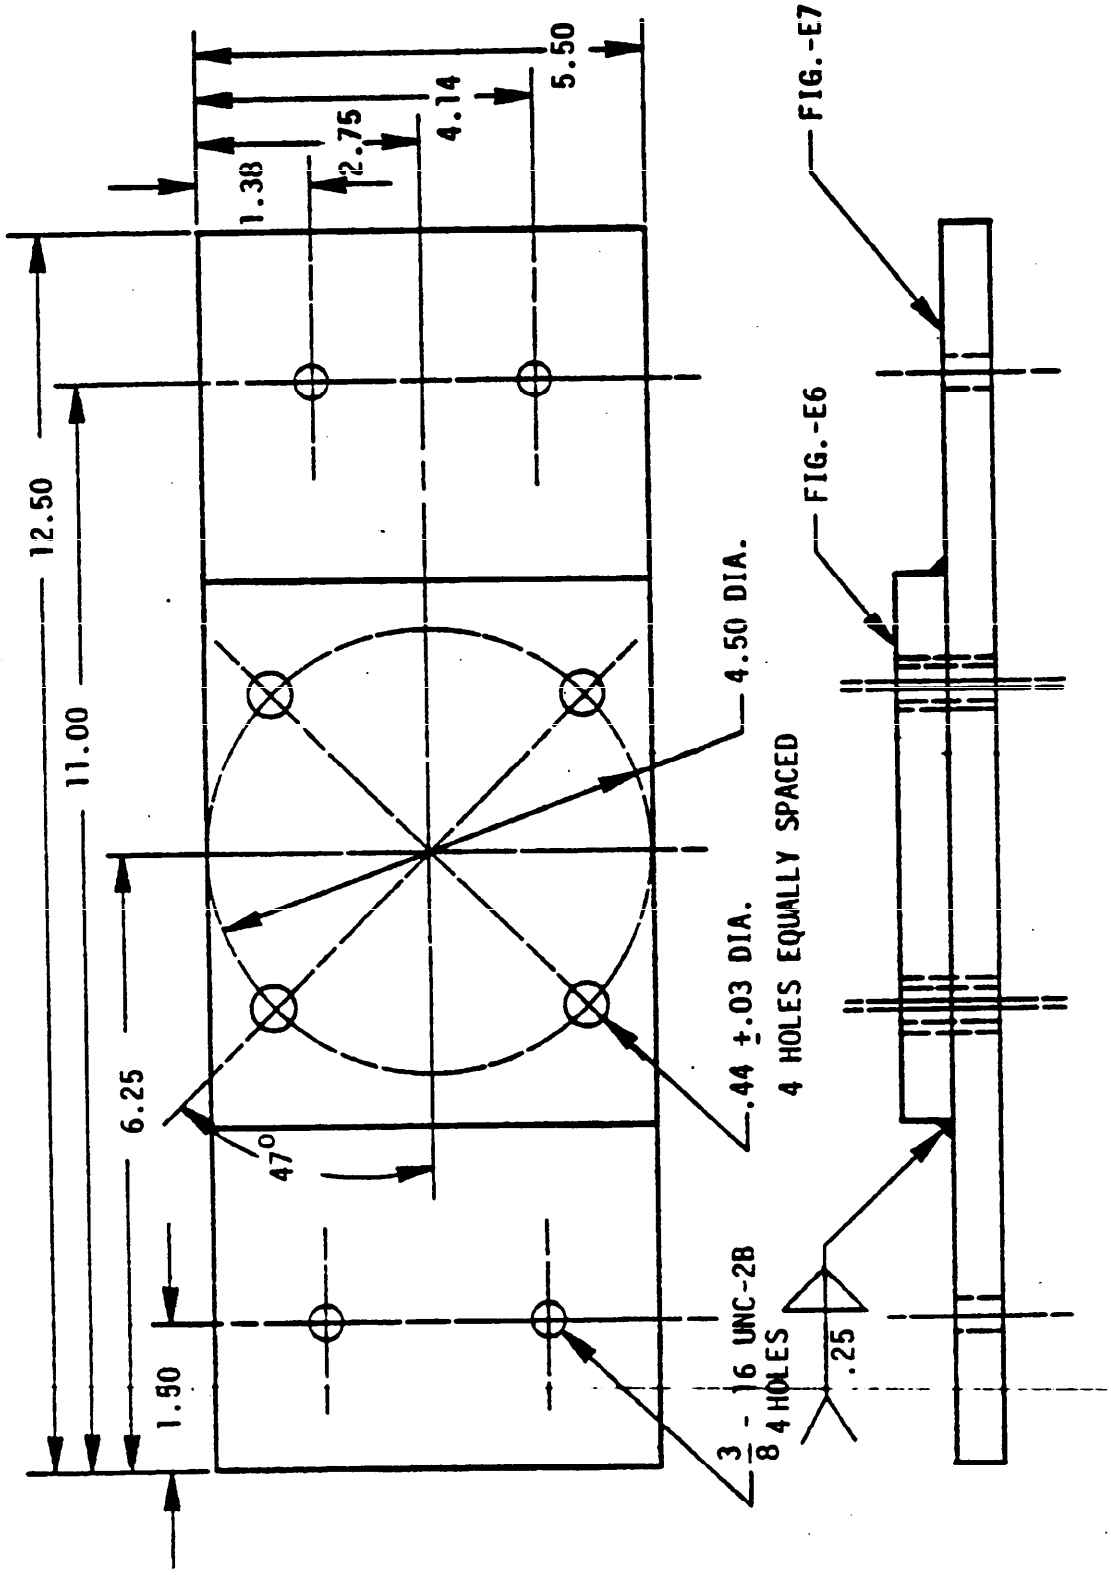


NOTES:

1. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS 1.
2. ALL WELD SIZES ARE MINIMUM.
3. FINAL PROTECTIVE FINISH:
   TREAT PER TYPE I OR TYPE III, TT-C-490. PRIME PER MIL-P-53022 OR MIL-P-53030.
   TOPCOAT GREEN 383 PER MIL-C-46168 OR MIL-C-53039.
4. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE E8. Bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

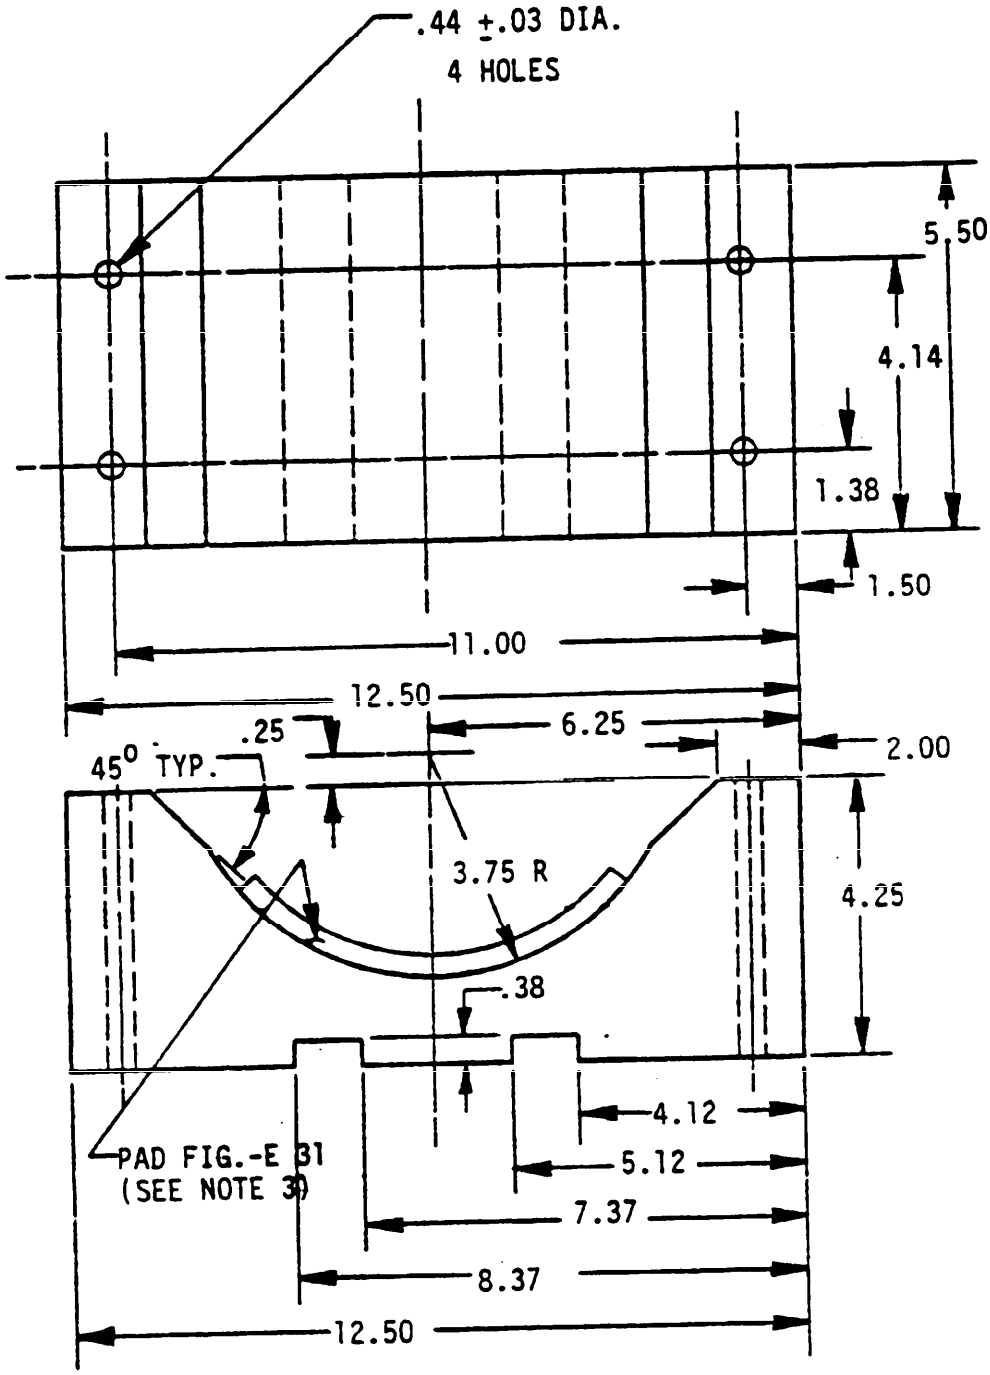


NOTES:

1. MATERIAL:
   WOOD, CLASS A, SPEC MIL-W-3912.
2. ~~REMOVE ALL BURRS AND SHARP EDGES.~~
3. BOND WITH MMM-A-1617 TYPE I ADHESIVE.
4. FINAL PROTECTIVE FINISH:
   PAINT PER MIL-C-46168 OR MIL-C-53039, GREEN 383; 1.8 TO 2.2 MILS THK. DRY COAT.

FIGURE E9. Block, rear.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

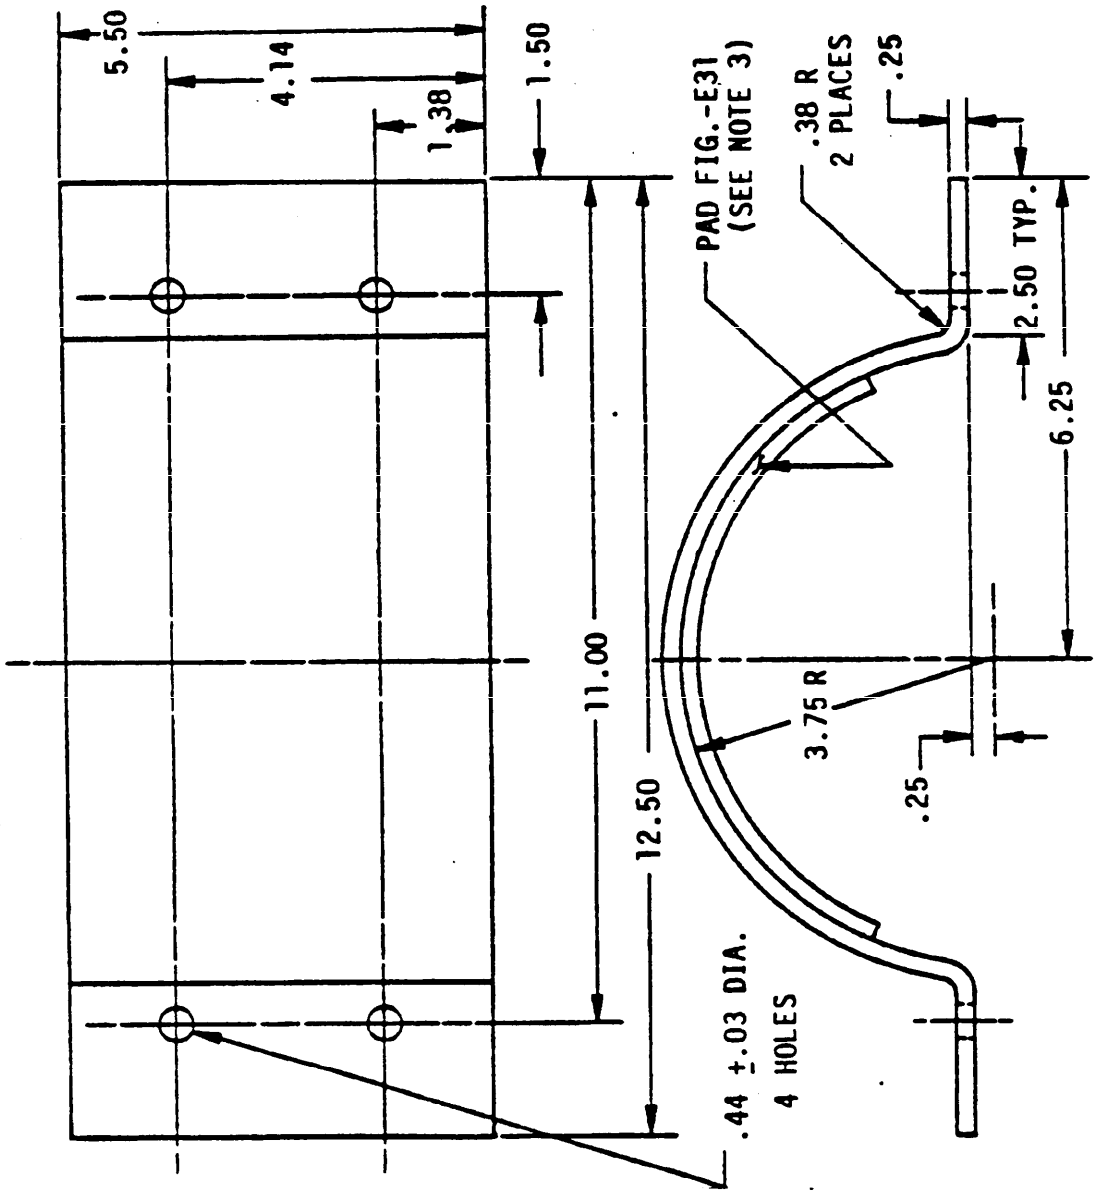


NOTES:

1. MATERIAL:
   STEEL, ASTM-A36 OR ASTM-576, 1015 TO 1025.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. BOND WITH MMM-A-1617, TYPE I ADHESIVE.
4. FINAL PROTECTIVE FINISH:
   TREAT PER TYPE I OR TYPE III, TT-C-490. PRIME PER MIL-P-53022 OR MIL-P-53030.
   TOPCOAT GREEN 383 PER MIL-C-46168 OR MIL-C-053039.

FIGURE E10. Bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

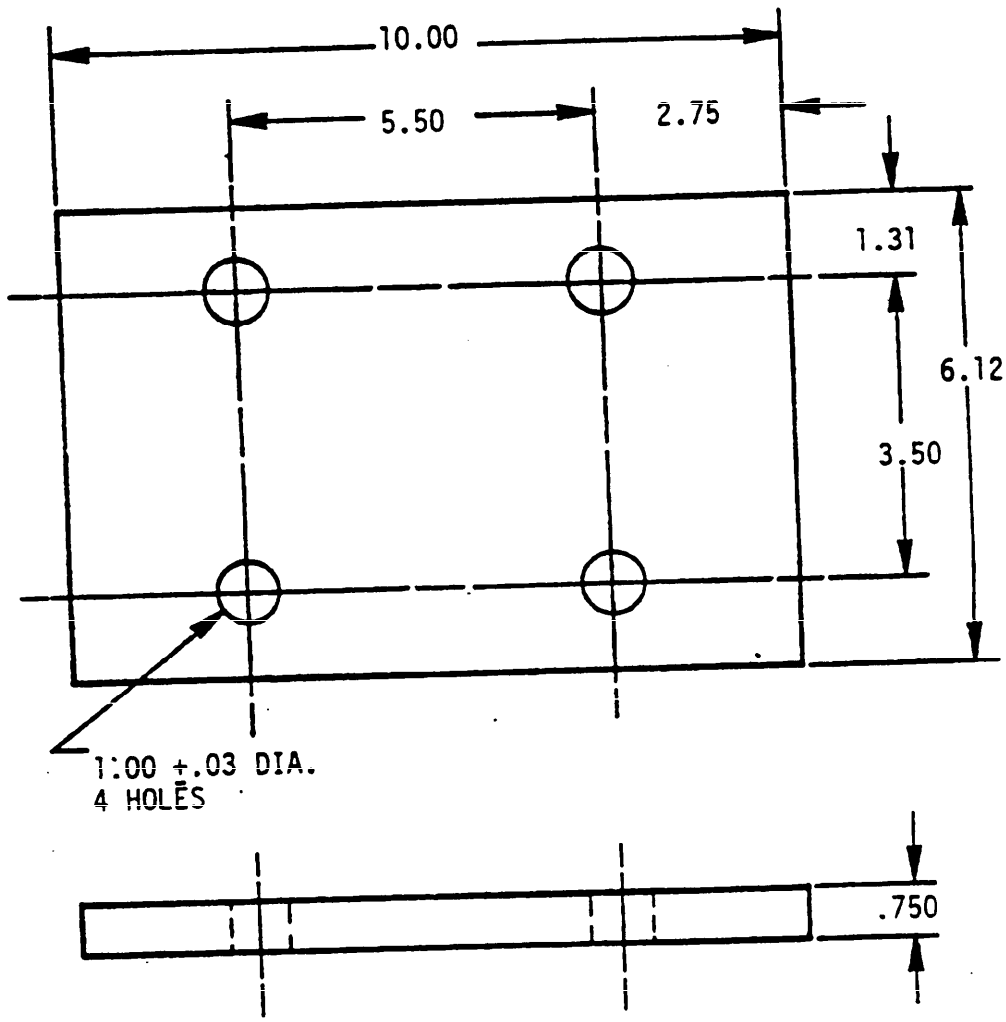


NOTES:

1. MATERIAL:
   STEEL 1010, 1020, ASTM - A576 OR ASTM A36.
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE E14. Plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

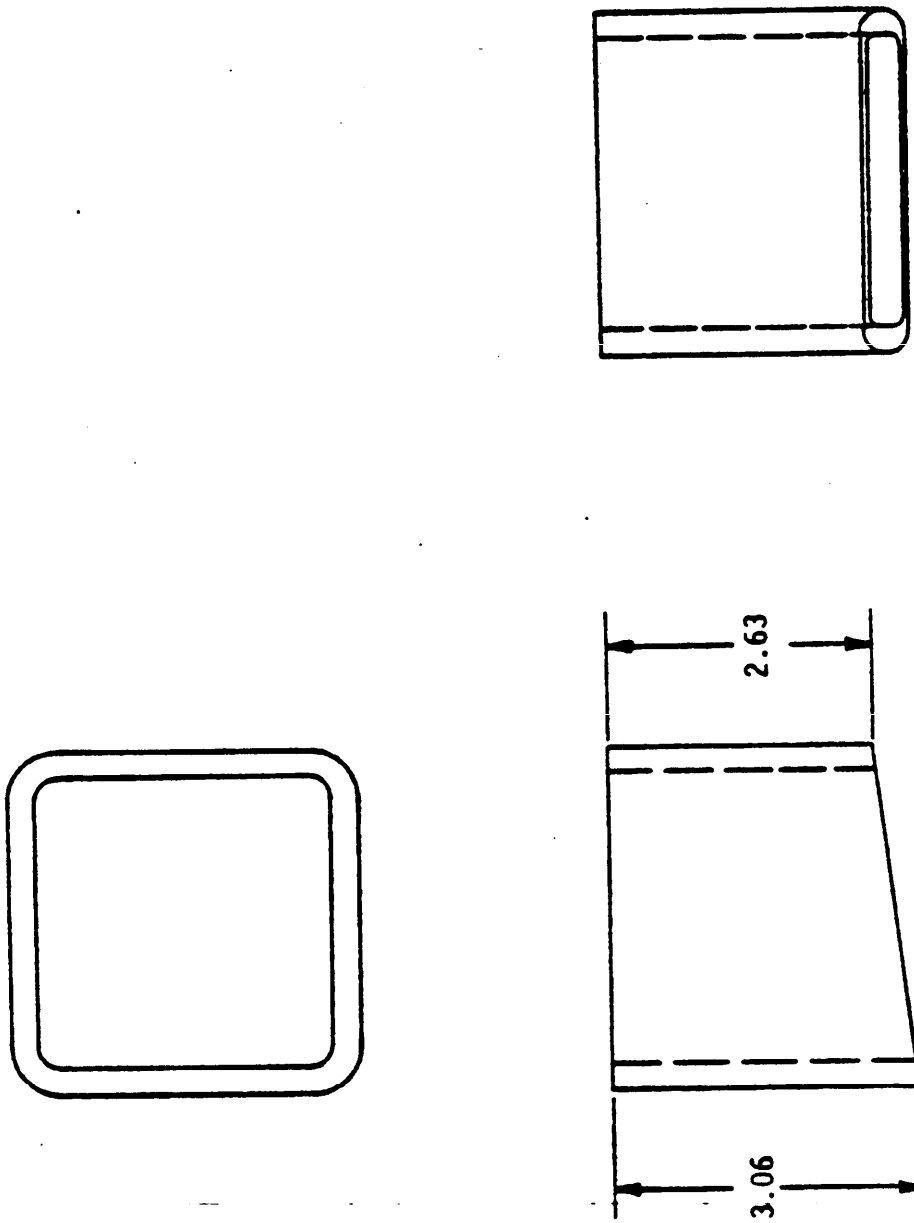


NOTES:

1. MATERIAL:
   STEEL, TUBE - ASTM A500 OR A501, GR.B 3.50 SQ. X .25 WALL.
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE E15. Steel tubing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

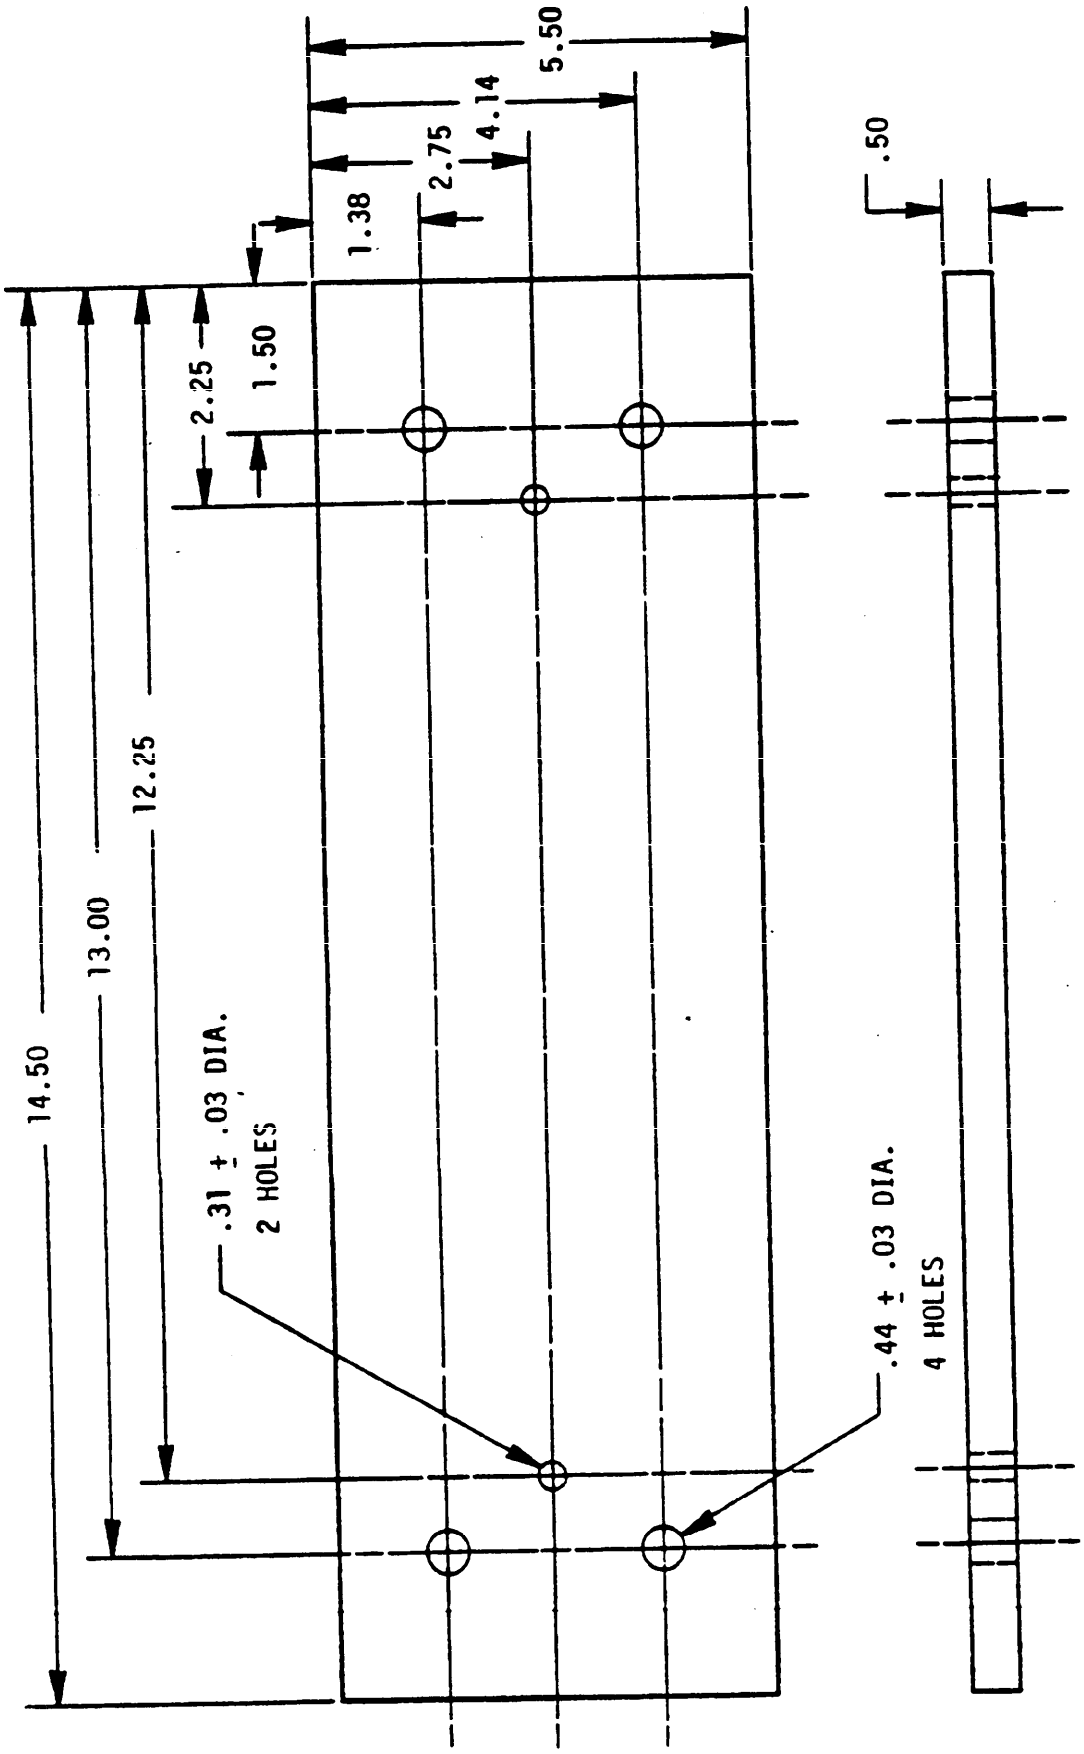


NOTES:

1. MATERIAL:
   STEEL, 1010 TO 1020, ASTM-A36 OR ASTM-A576.
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE E16. Plate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

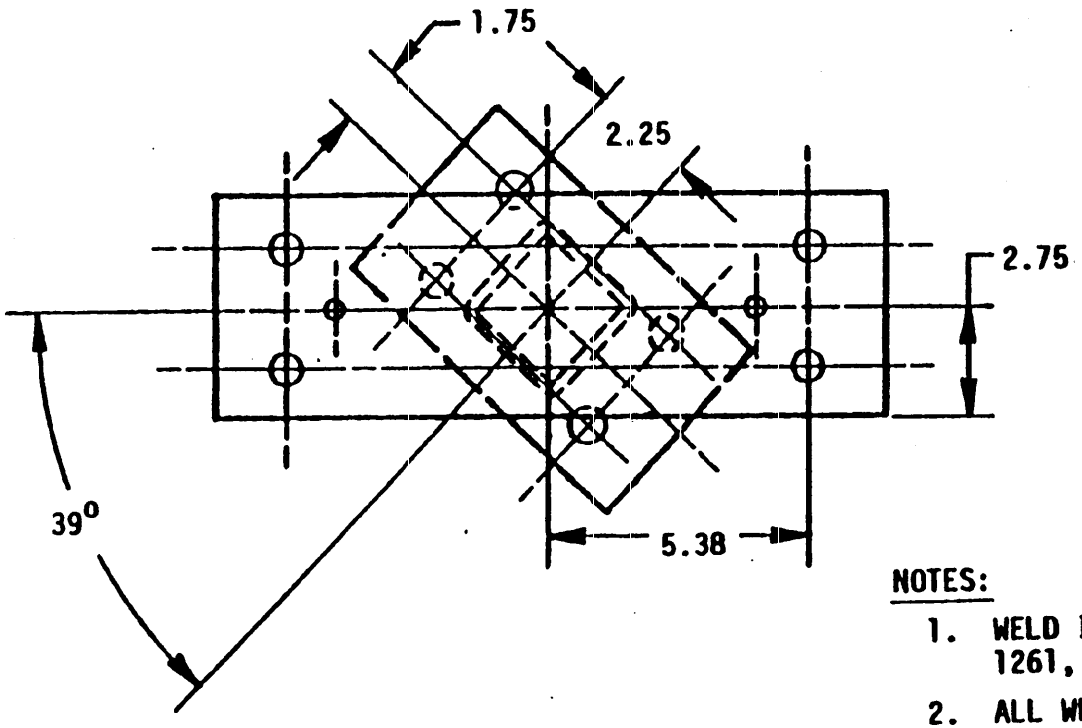

NOTES:

1. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS 1.
2. ALL WELD SIZES ARE MINIMAL.
3. FINAL PROTECTIVE FINISH:


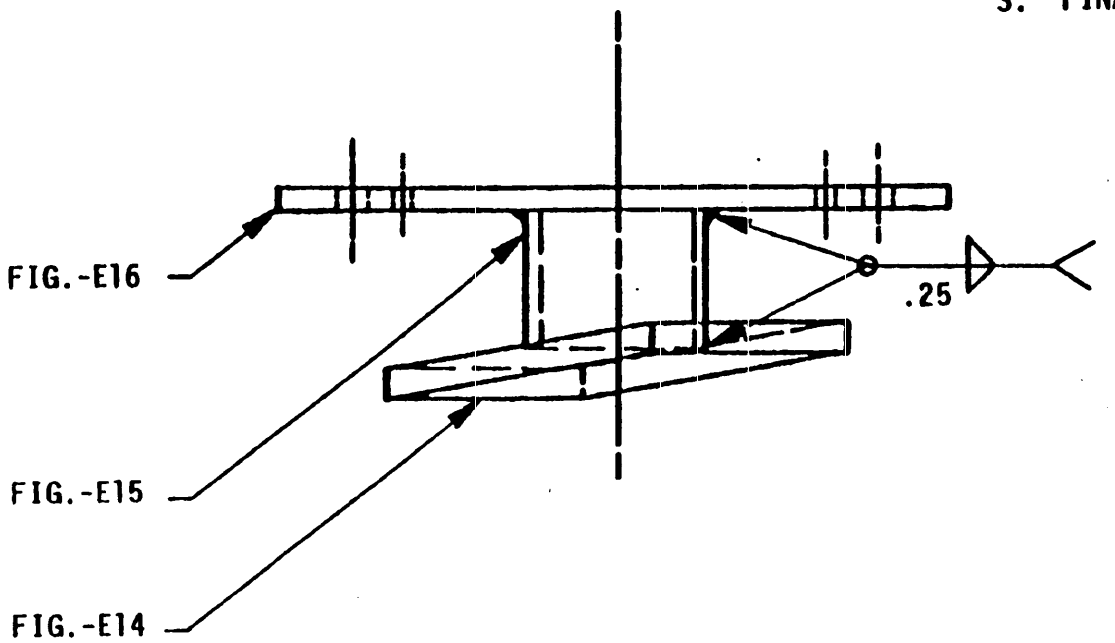


FIGURE E17. Support.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

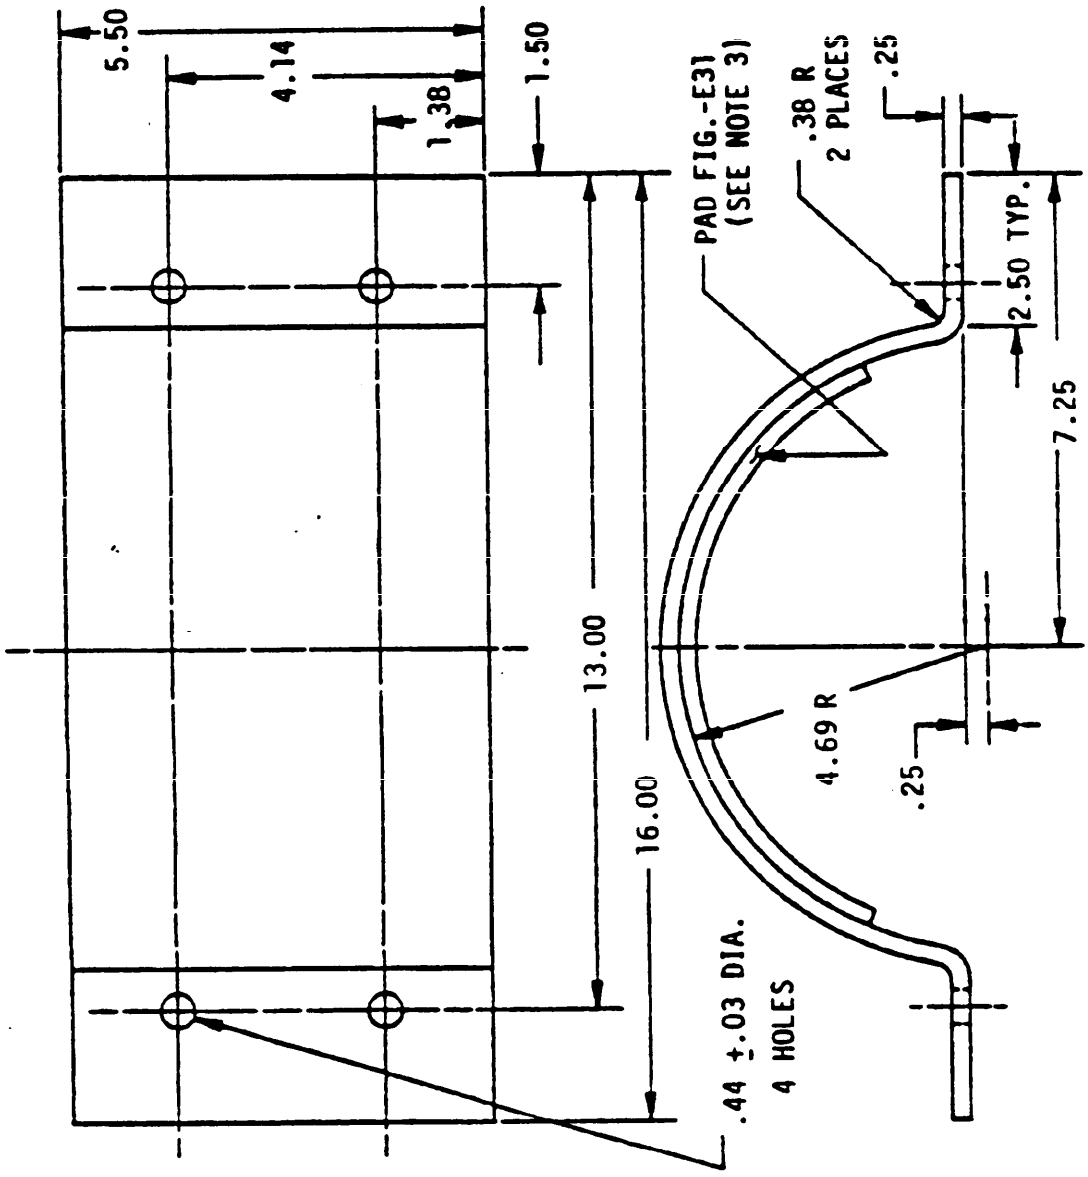


NOTES:

1. MATERIAL:
   STEEL, ASTM-A36 OR ASTM-576, 1015 TO 1025.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. BOND WITH MMM-A-1617, TYPE I ADHESIVE.
4. FINAL PROTECTIVE FINISH:
   TREAT PER CLASS 1A, MIL-C-554 APPLY PRIMER PER MIL-P-53022 OR

FIGURE E18. Bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

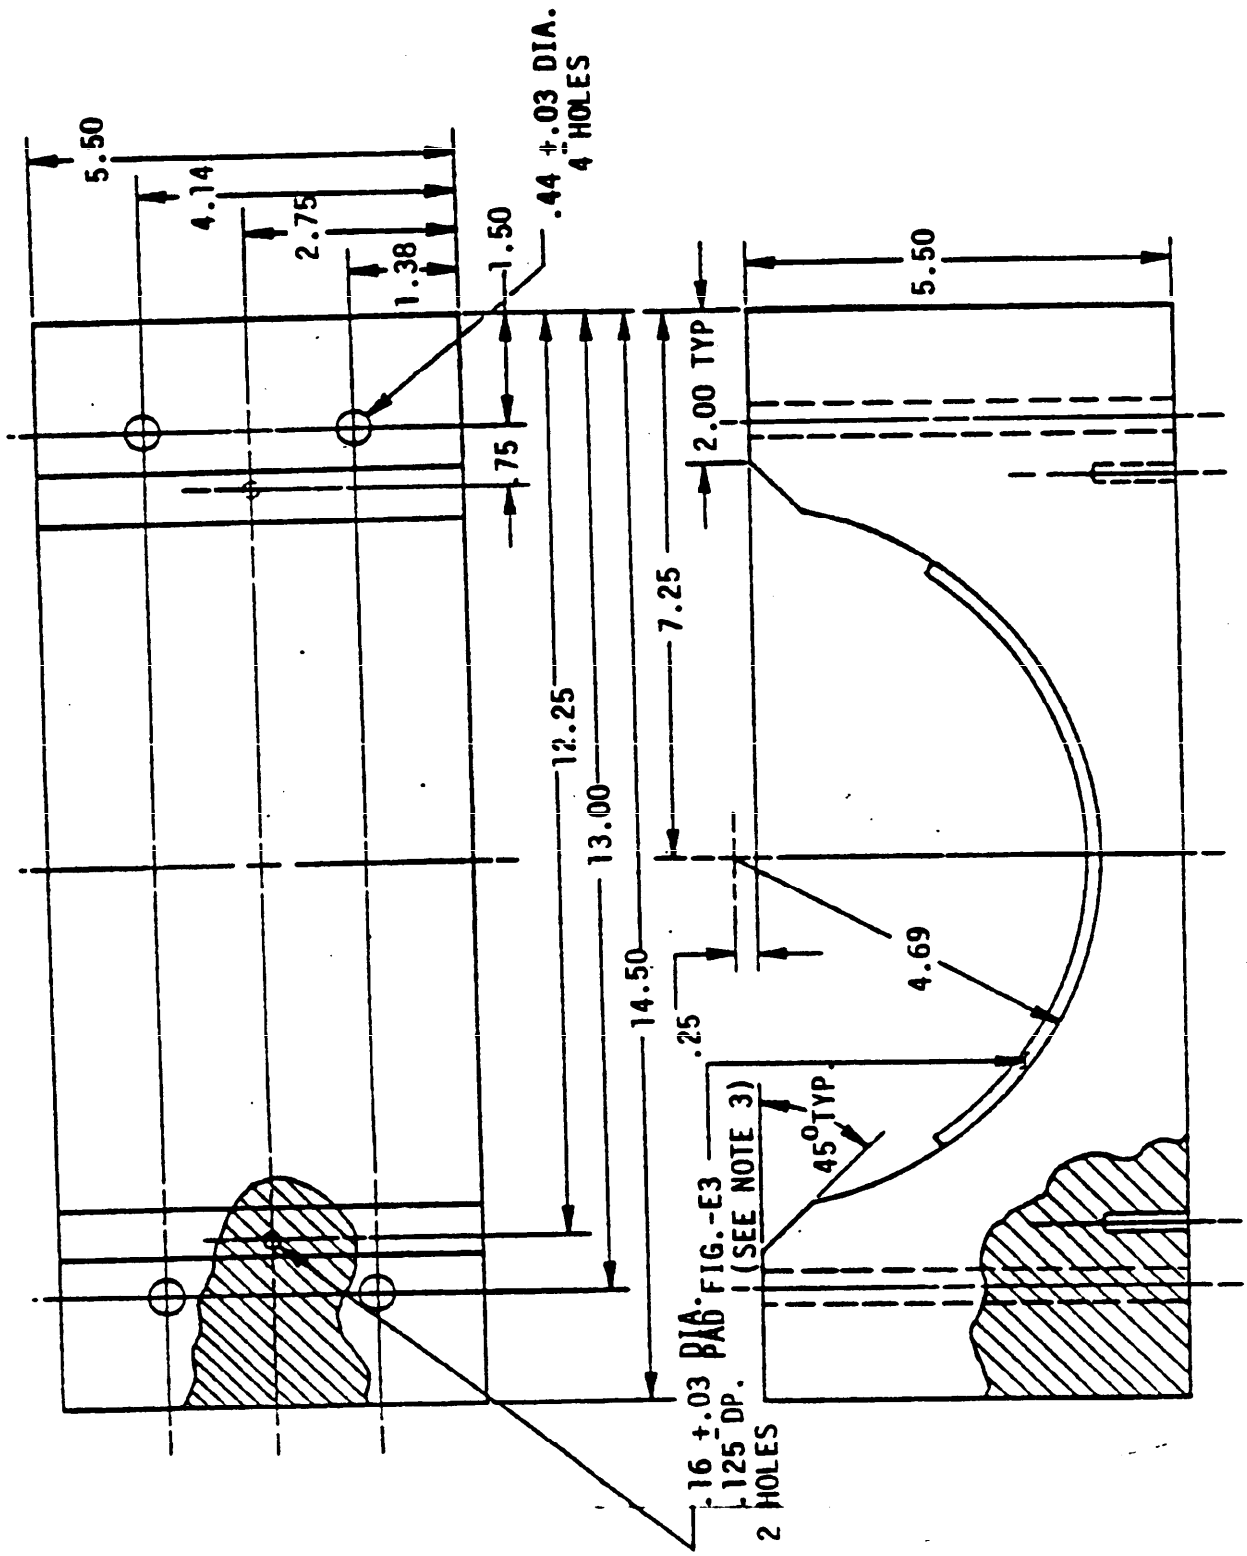


NOTES:

1. MATERIAL:
   WOOD, CLASS A, SPEC MIL-W-3912.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. BOND WITH MMM-A-1617 TYPE I ADHESIVE.
4. FINAL PROTECTIVE FINISH:
   TREAT PER CLASS 1A, MIL-C-5541. APPLY PRIMER PER MIL-P-53022 OR MIL-P-53030. TOPCOAT GREEN 383 PER MIL-C-46168 OR MIL-P-53039.

FIGURE E19. Block, front.

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T04:24Z
Check the source to verify that this is the current version before use.

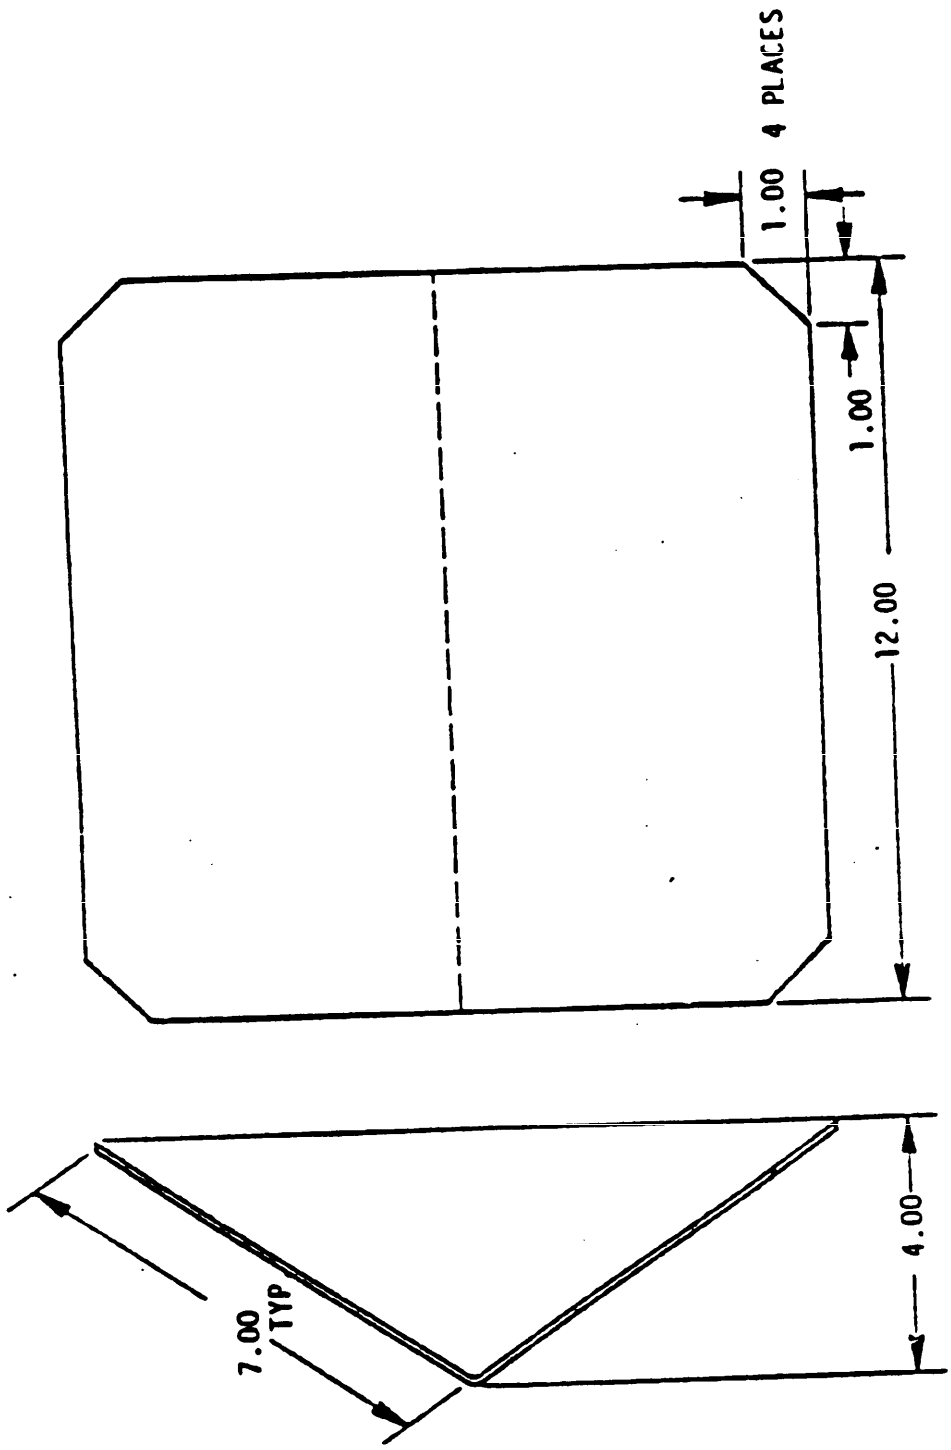

NOTES:

1. MATERIAL:
   STEEL, 1020 - 1030, ASTM A569 OR A 366. .059 (16 GA) THK.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   TREAT PER TYPE I OR III, TT-C-490. APPLY PRIMER PER MIL-P-53022
   OR MIL-P-53030. TOPCOAT GREEN 383 PER MIL-C-46168 OR MIL-C-53039.

FIGURE E25. Plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


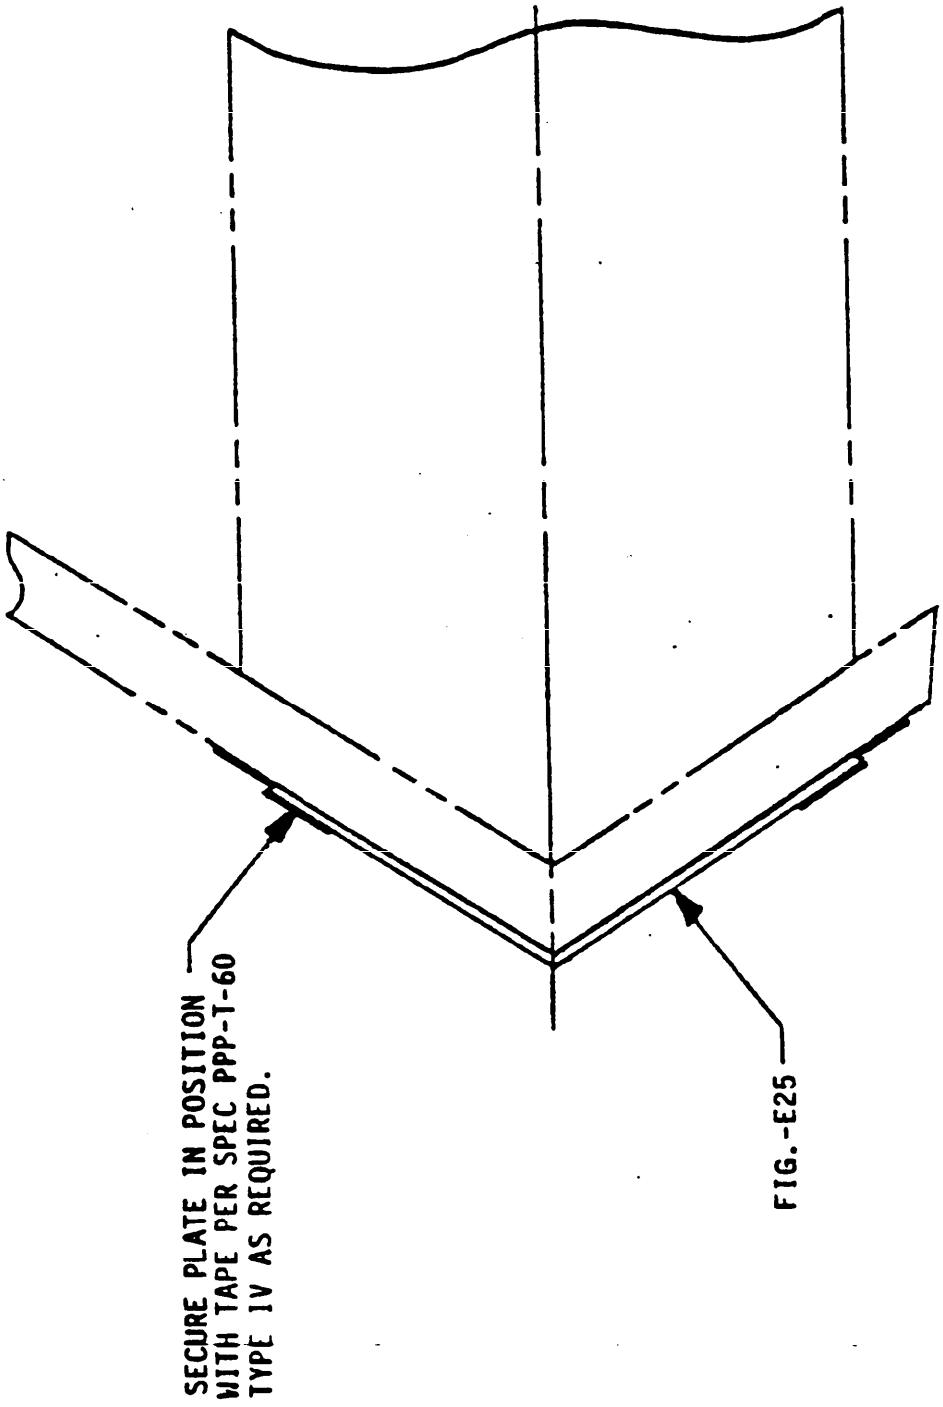


FIGURE E26. Plugging of main gun opening.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

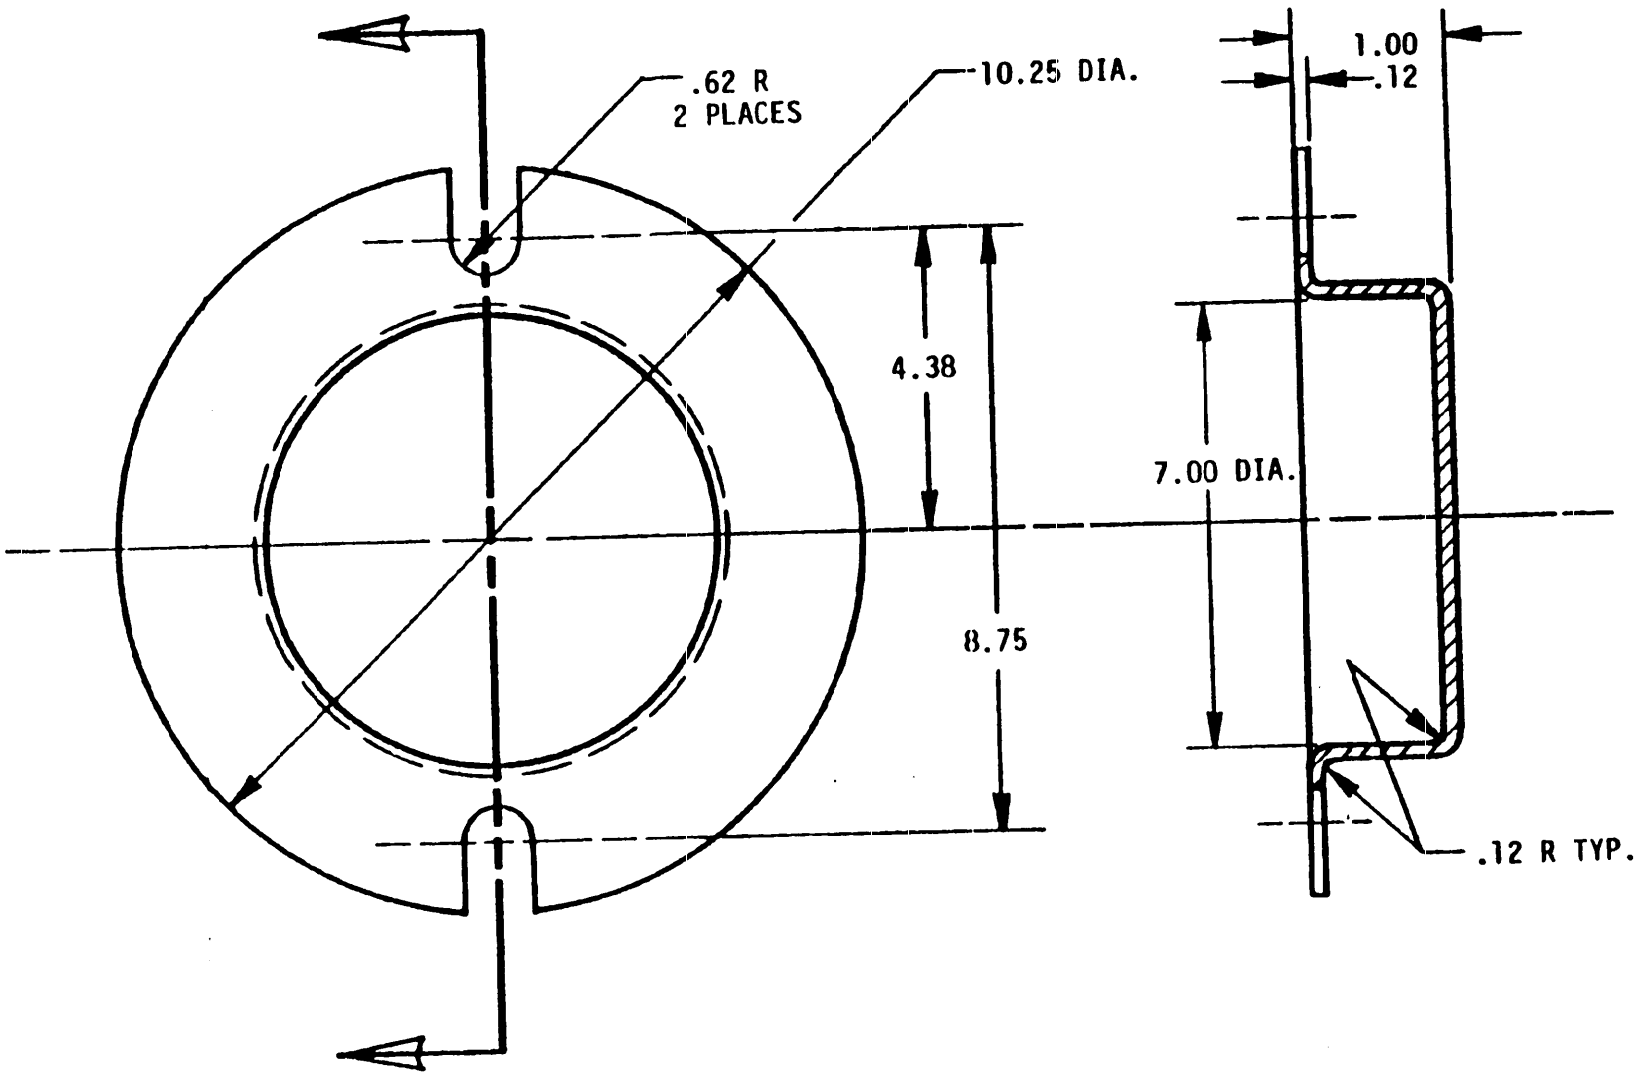

NOTES:

1. MATERIAL:
   COVER, NYLON. TYPE I, SPEC MIL-M-20693.

FIGURE E27. Cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


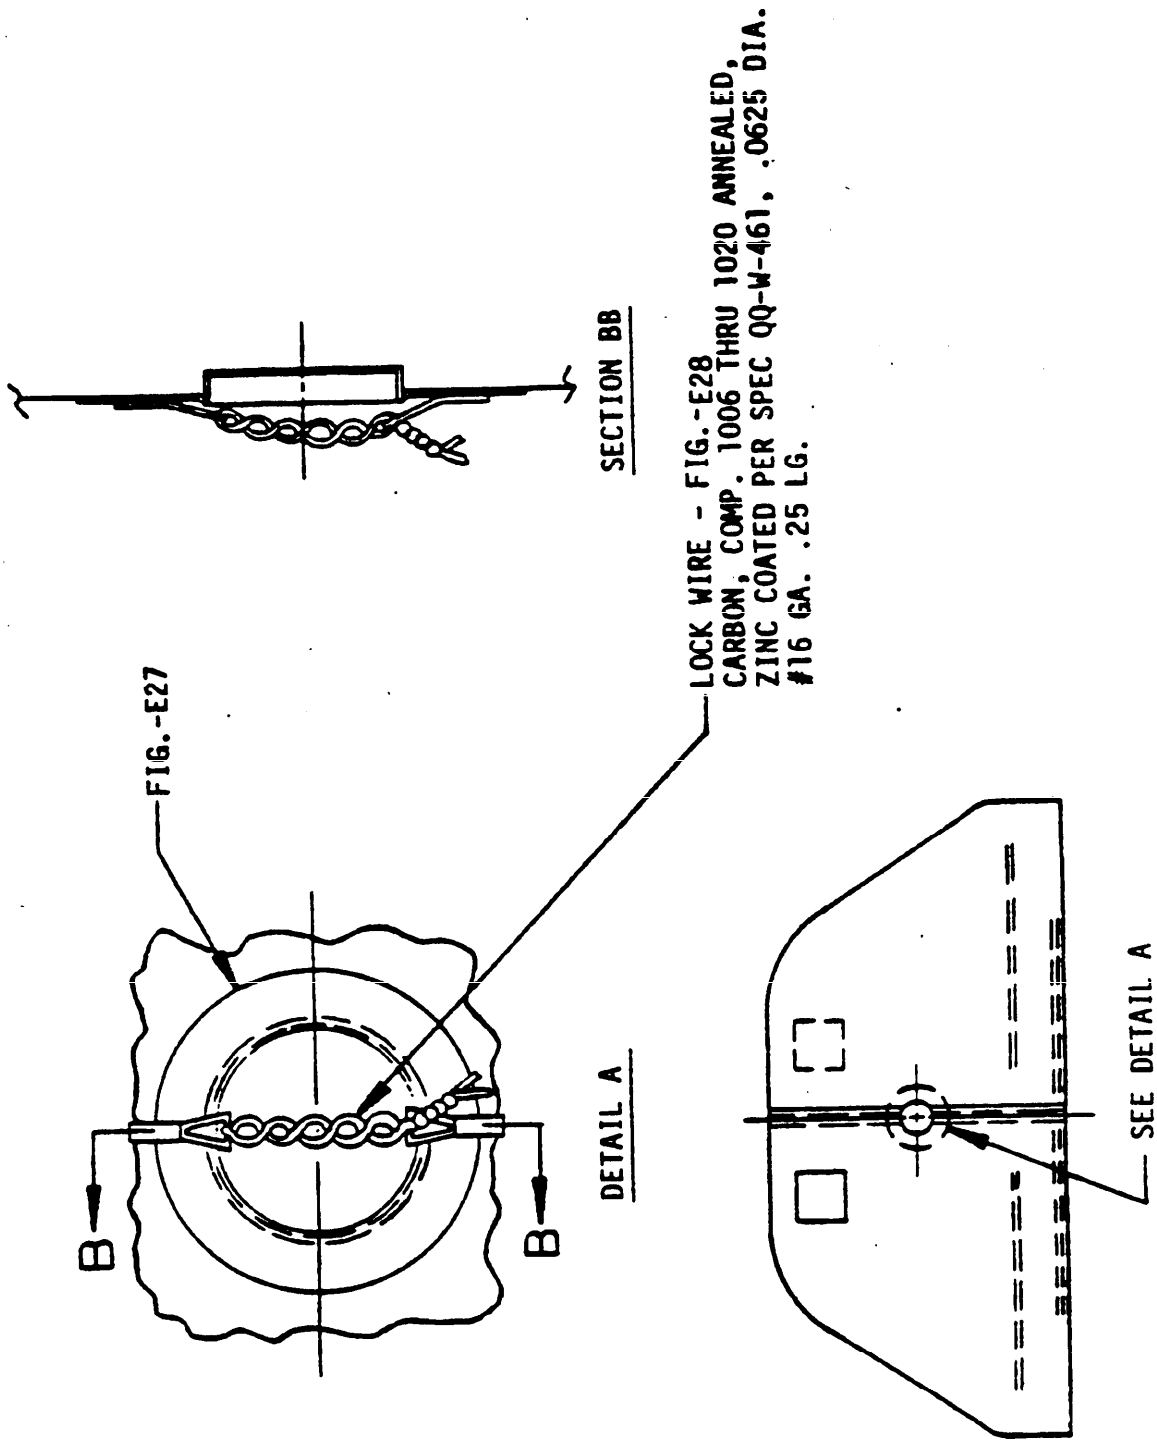


FIGURE E29. Installation, gun tube opening cover in closure cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

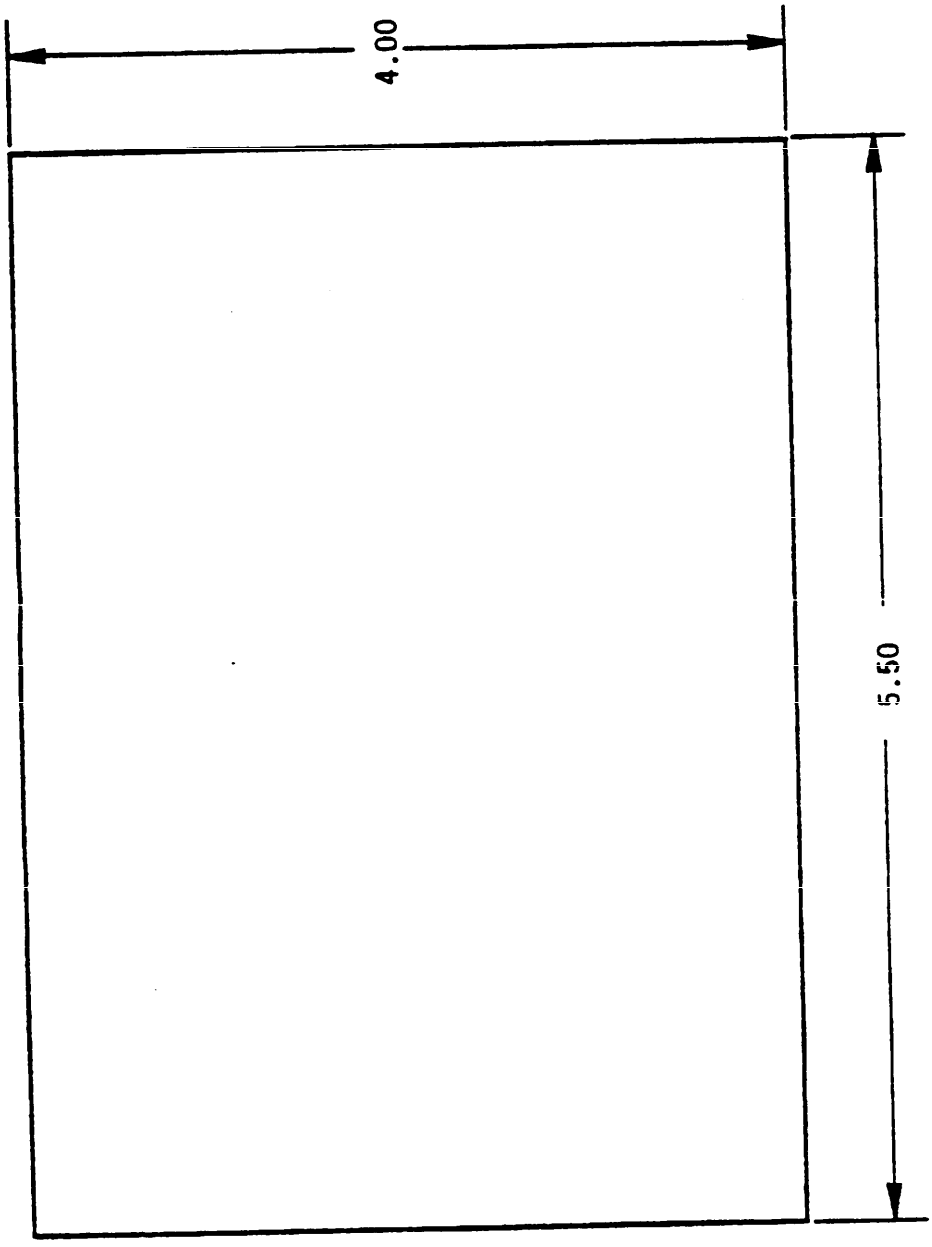

NOTES:

1. MATERIAL:
   RUBBER PER MIL-R-3065, GRADE SC 715 A, B.

FIGURE E31. Pad.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

FIGURE NUMBER	DESCRIPTION
F2	GUARD ASSEMBLY
F3	SKIRT SECURITY PIN INSTALLATION (SHT1 OF 3)
	SKIRT SECURITY PIN INSTALLATION (SHT2 OF 3)
	SKIRT SECURITY PIN INSTALLATION (SHT3 OF 3)
F4	PIN ASSEMBLY
F5	COLLAR

FIGURE F1. Security pin assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

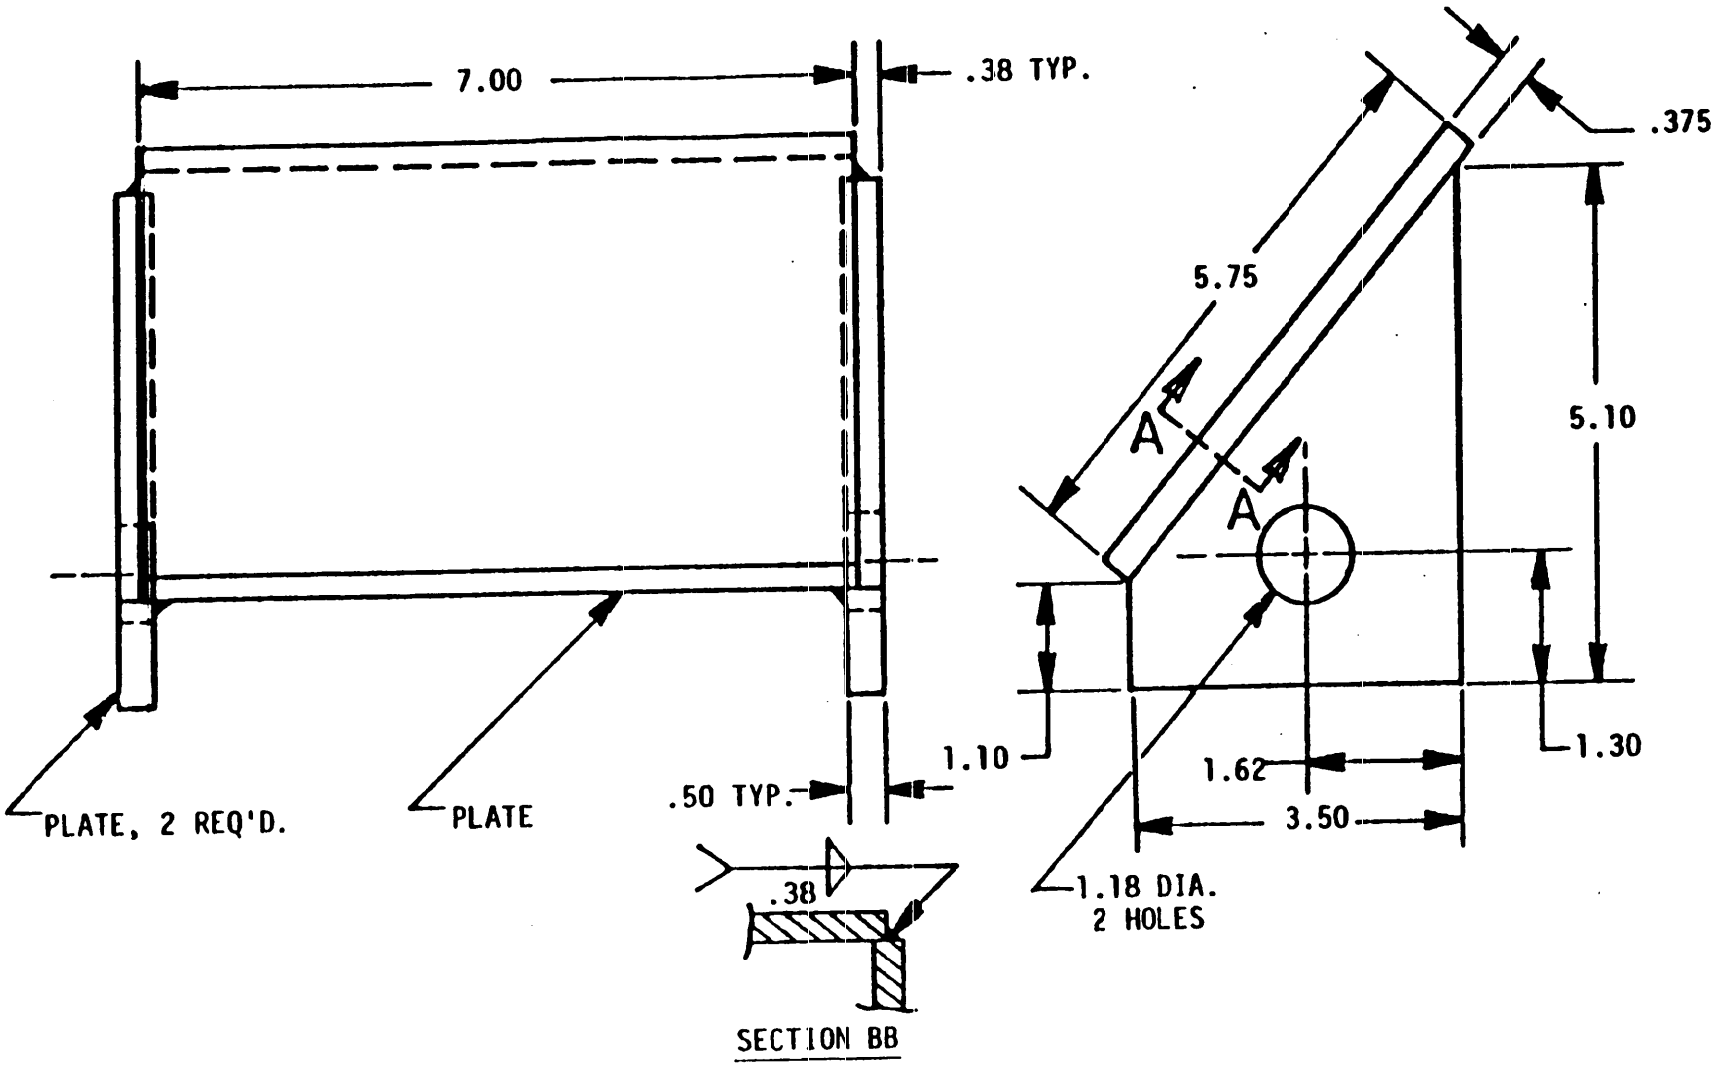


FIGURE F2. Guard assembly.

NOTES:

1. MATERIAL:
   ARMOR, WROUGHT, HOMOGENEOUS, CLASS 1, SPEC MIL-A-12560.
2. WELD IN ACCORDANCE WITH MIL-STD-1941. ELECTRODE MIL-E-22200/6 OR MIL-E-22200/1 (CLASS E100XX OR E110XX, OR MIL-E-23765/2, TYPE 1005-1, WAIVE BALLISTIC TESTS.
3. FINAL PROTECTIVE FINISH:
   TREAT PER TYPE I OR TYPE III, TT-C-490. PRIME PER MIL-P-53022 OR MIL-P-53030.
   TOPCOAT GREEN 383 PER PER MIL-C-46168 (MIL-C-53039.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

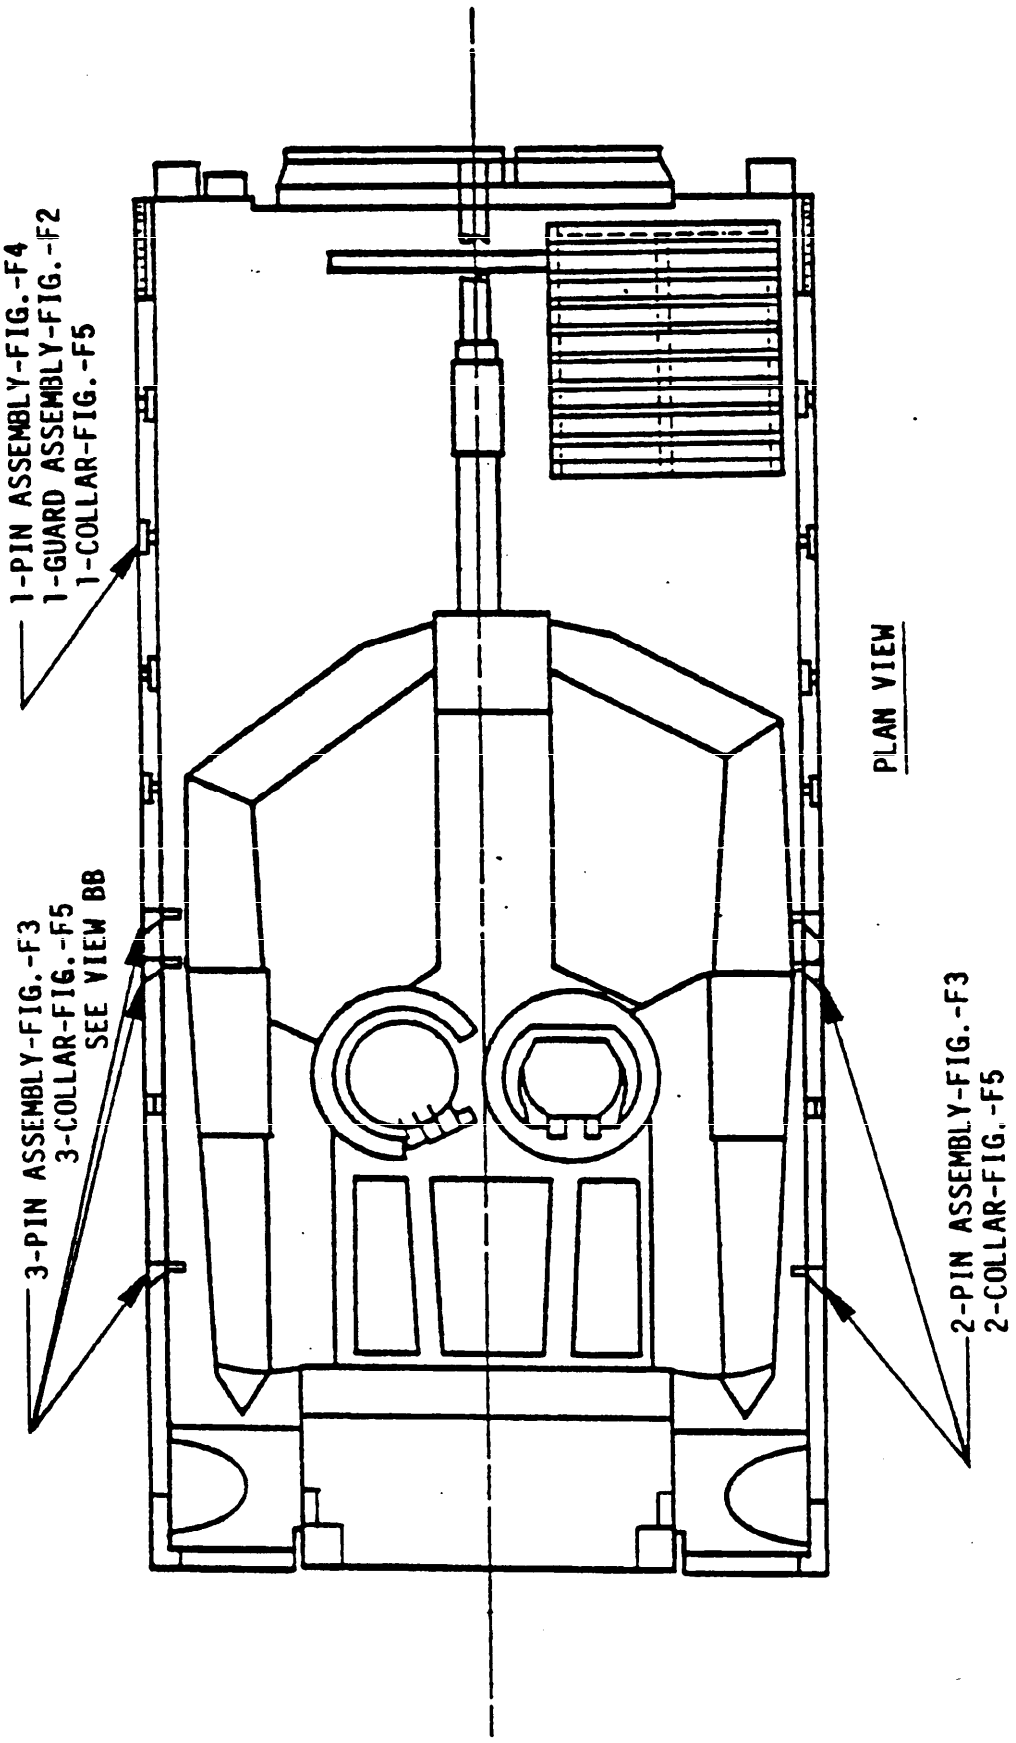


FIGURE F3. Skirt security pin installation (sht. 1 of 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


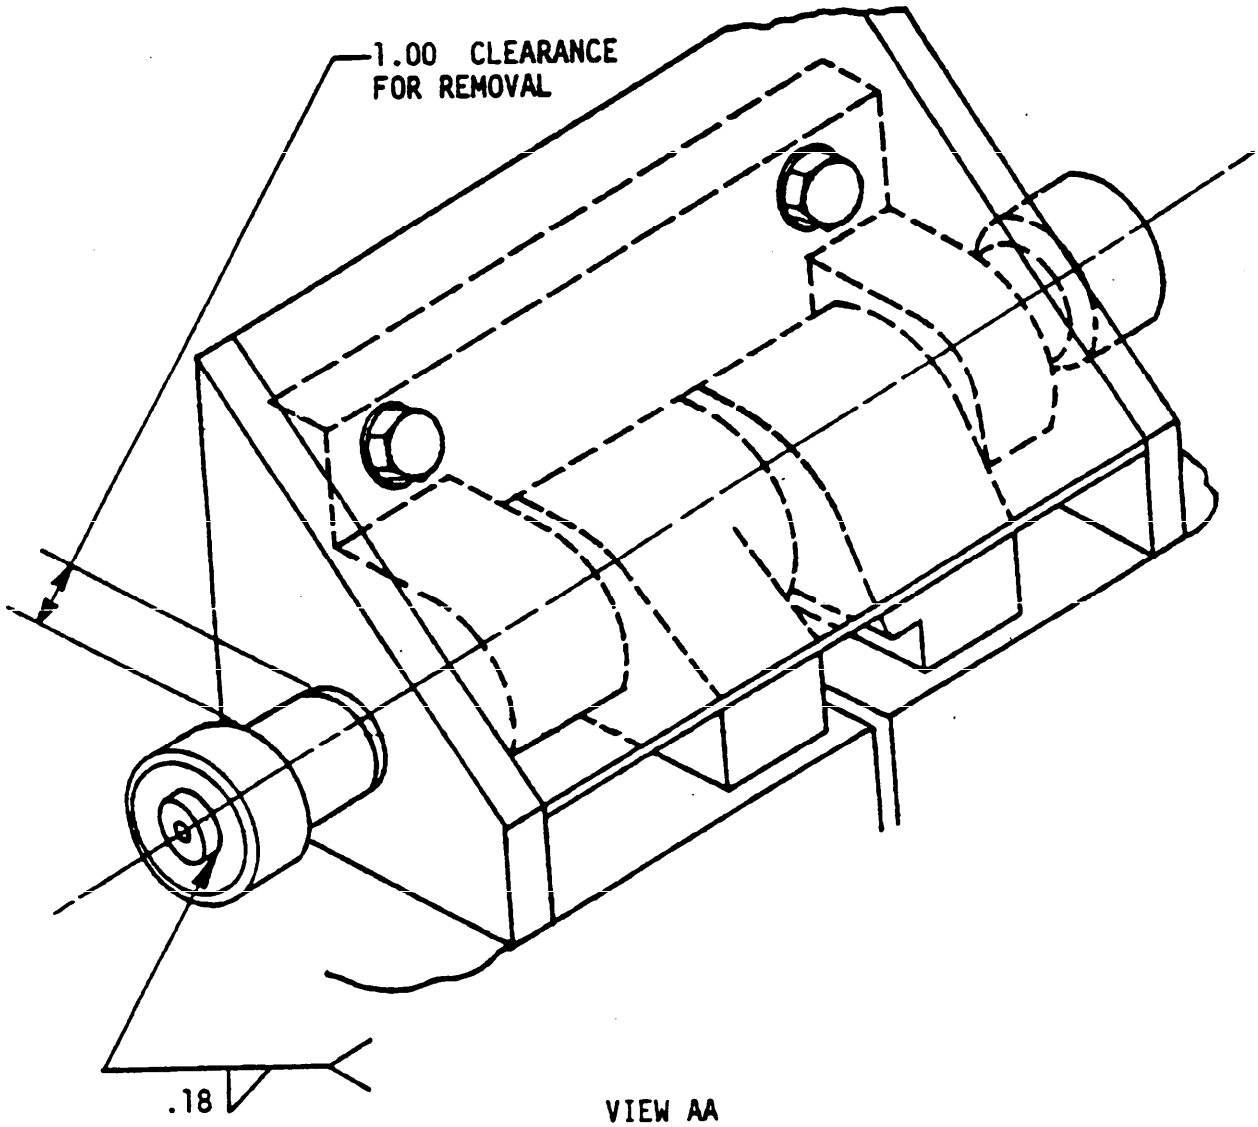


FIGURE F3. Skirt security pin installation (sht. 2 of 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

VIEW BB

TYPICAL 5 PLACES

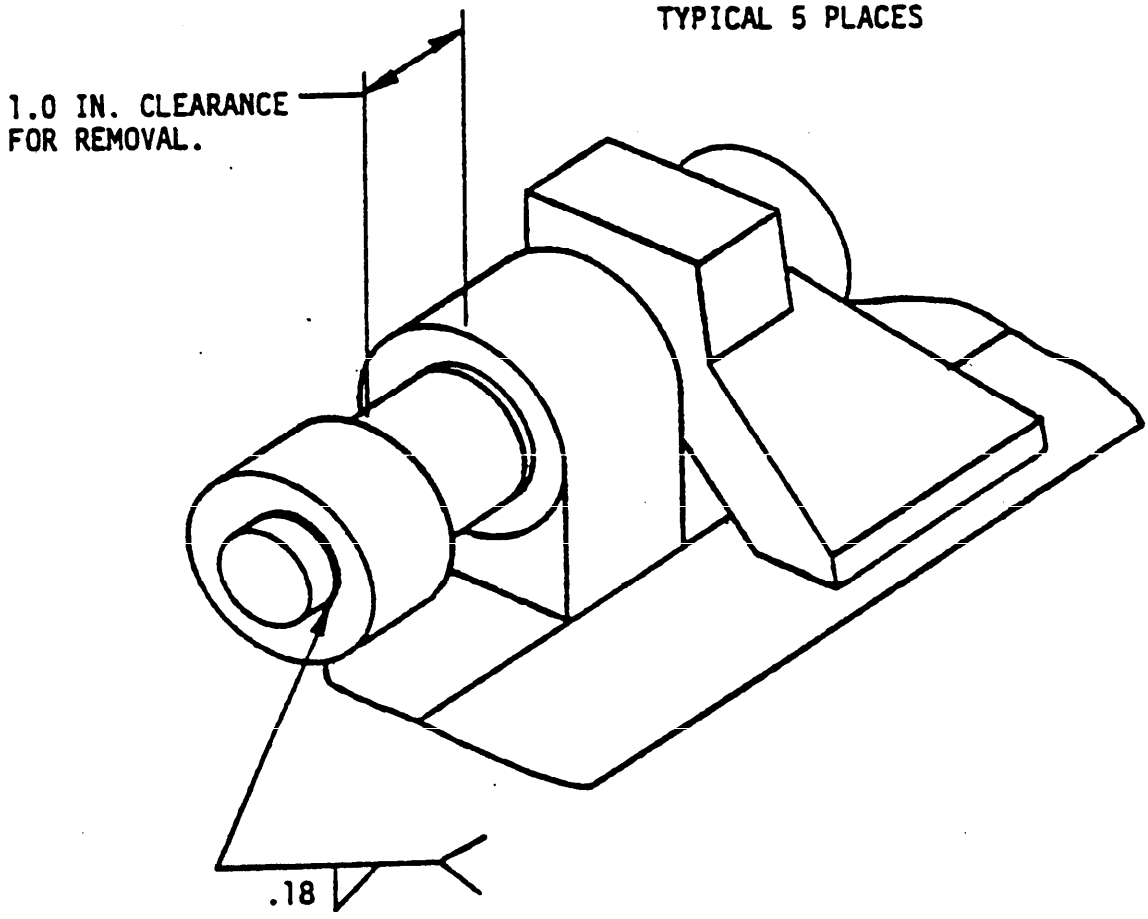


INSTALLATION NOTES:

1. INSTALLATION LOCATIONS ARE AS SHOWN ON FIGURE F-1, SHEET 1 OF 3.
2. REMOVE EXISTING SAFETY PINS AND SKIRT ATTACHING PINS -12287034 FROM SIX LOCATIONS. COAT THEM WITH PRESERVATIVE OIL PER MIL-L-3150. IDENTIFY, BAG, AND STOW ALL ATTACHING PINS AND SAFETY PINS WITHIN THE TURRET.
3. INSTALL PIN ASSEMBLY-FIG.-F3 AND WELD COLLAR-FIG.-F5 AS SHOWN IN VIEW BB, 5 PLACES. INSTALL PIN ASSEMBLY-FIG.-F4 AND WELD COLLAR-FIG.-F5 AS SHOWN IN VIEW AA, ONE PLACE. COAT WELDED AREA WITH PRESERVATIVE OIL.

FIGURE F3. Skirt security pin installation (sht. 3 of 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

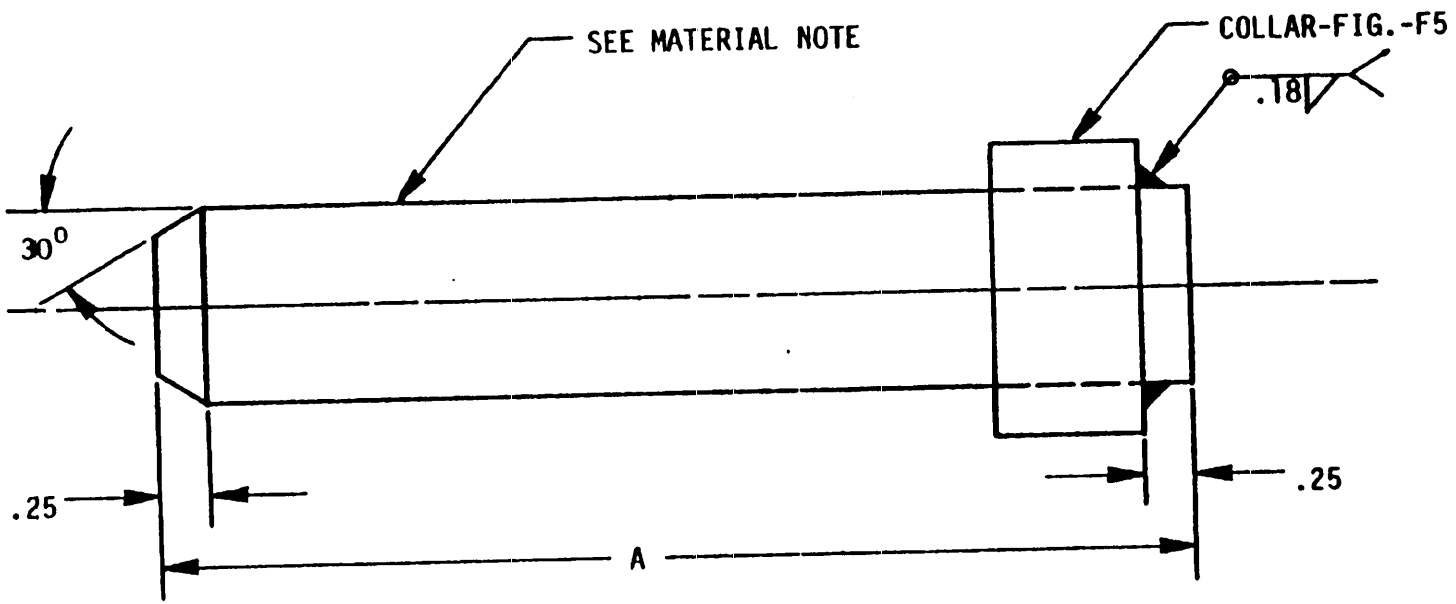


PART NO.	A
FIG. F3	5.30 IN.
FIG. F4	11.00 IN.

NOTES:

1. MATERIAL:
   1.00 DIA. STEEL ALLOY 4130 OR 8630, ASTM A322 OR A331.
   HEAT TREAT TO Rc 32 - 38.
2. WELD PER MIL-STD-1261, CLASS 1. ELECTRODE AWS A5.1-69, CLASS 70XX OR 60XX - LOW HYDROGEN.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. PROTECTIVE FINISH: PRESERVATIVE OIL, TYPE I OF MIL-L-21260 OR VV-L-800.

FIGURE F4. P4 assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

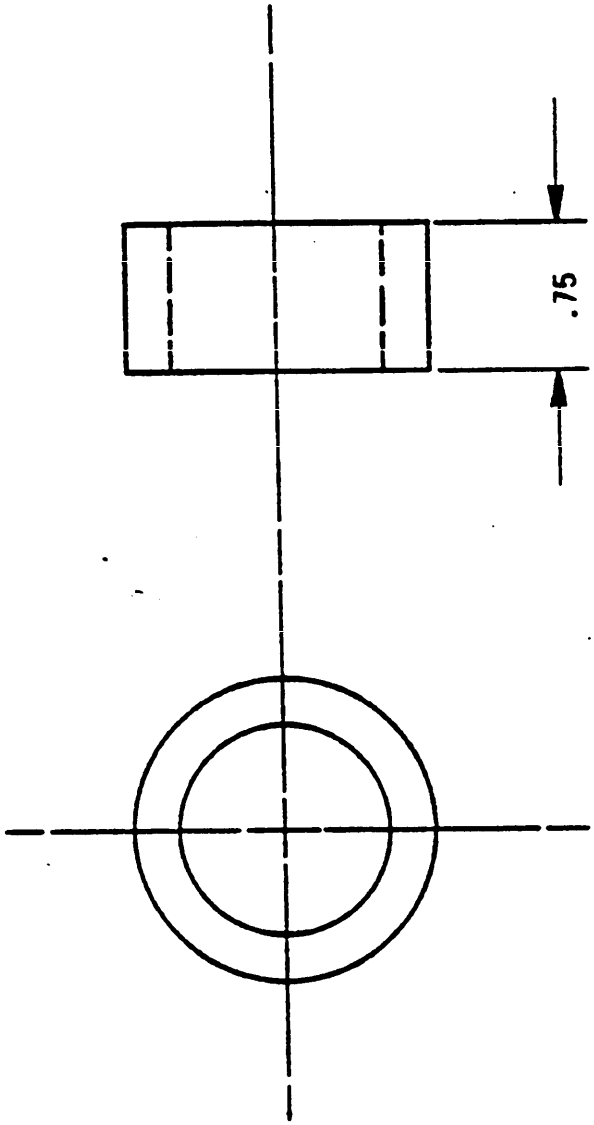

NOTES:

1. MATERIAL:
   1.50 IN. O.D. X .219 IN. WALL.
   MECHANICAL TUBING, MATERIAL OPTIONAL, ASTM A512.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. PROTECTIVE FINISH: PRESERVATIVE OIL, TYPE I OF MIL-L-21260 OR VV-L-800.

FIGURE F5. Collar.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the currentversion before use.

FIGURE NUMBER	DESCRIPTION
G2	INSTALLATION, SHIPPING 120MM GUN TUBE
G3	WIRE ROPE (SHOWN ON FIGURE G2 SH2)
G4	WIRE ROPE (SHOWN ON FIGURE G2 SH2)
G5	CLIP (SHOWN ON FIGURE G2 SH2)
G6	PLATE
G7	PLATE
G8	BRACKET
G9	BLOCK, REAR
G10	BRACKET
G11	BOLT (SHOWN ON FIGURE G2 SH3)
G12	LK WASH (SHOWN ON FIGURE G2 SH3)
G13	SCREW (SHOWN ON FIGURE G2 SH3)
G14	PLATE
G15	STEEL TUBING
G16	PLATE
G17	SUPPORT
G18	BRACKET
G19	BLOCK, FRONT
G20	BOLT (SHOWN ON FIGURE G2 SH4)
G21	WASHER (SHOWN ON FIGURE G2 SH4)
G22	NUT (SHOWN ON FIGURE G2 SH4)
G23	SCREW (SHOWN ON FIGURE G2 SH4)
G24	WASHER (SHOWN ON FIGURE G2 SH4)
G25	PLUG
G26	PLUGGING ON MAIN GUN OPENING
G27	COVER
G28	WIRE (SHOWN ON FIGURE G29)
G29	INSTALLATION, GUN TUBE OPENING COVER IN CLOSURE COVER
G30	BOLT, LAG (SHOWN ON FIGURE G2 SH4)
G31	PAD

FIGURE G1. Gun tube shipping.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

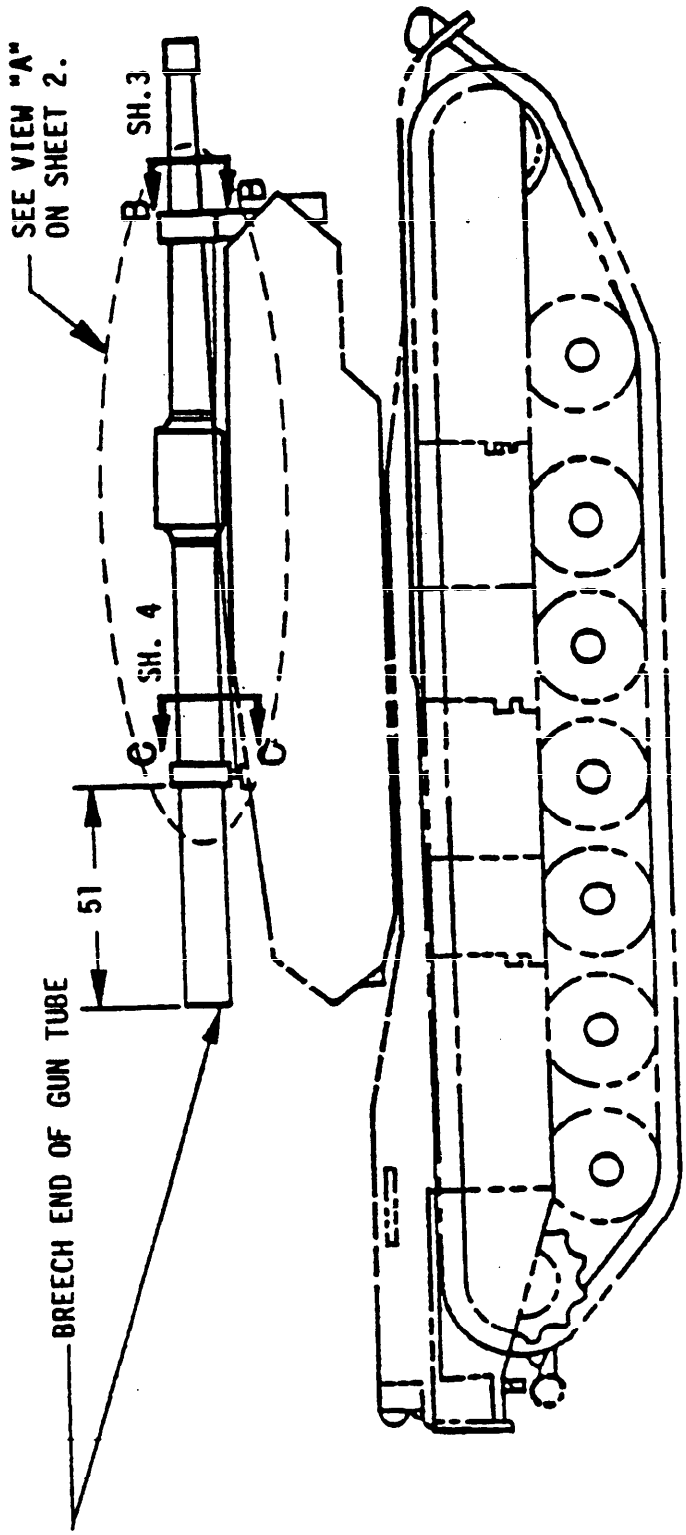


FIGURE G2. Installation, shipping 120 mm gun tube (sht. 1 of 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

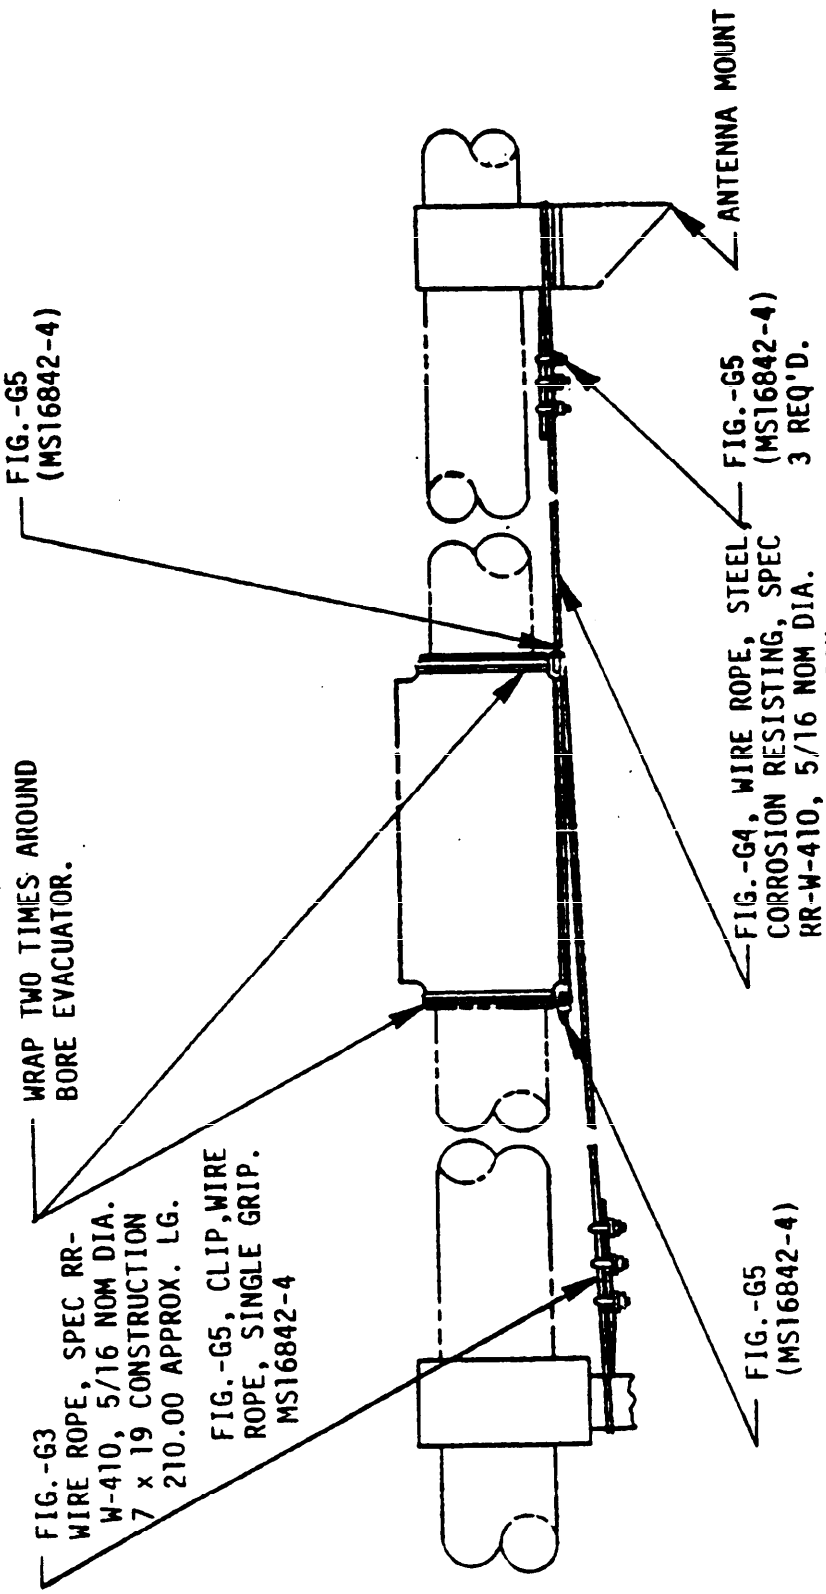


FIGURE G2. Installation, shipping 120 mm gun tube (sht. 2 of 4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

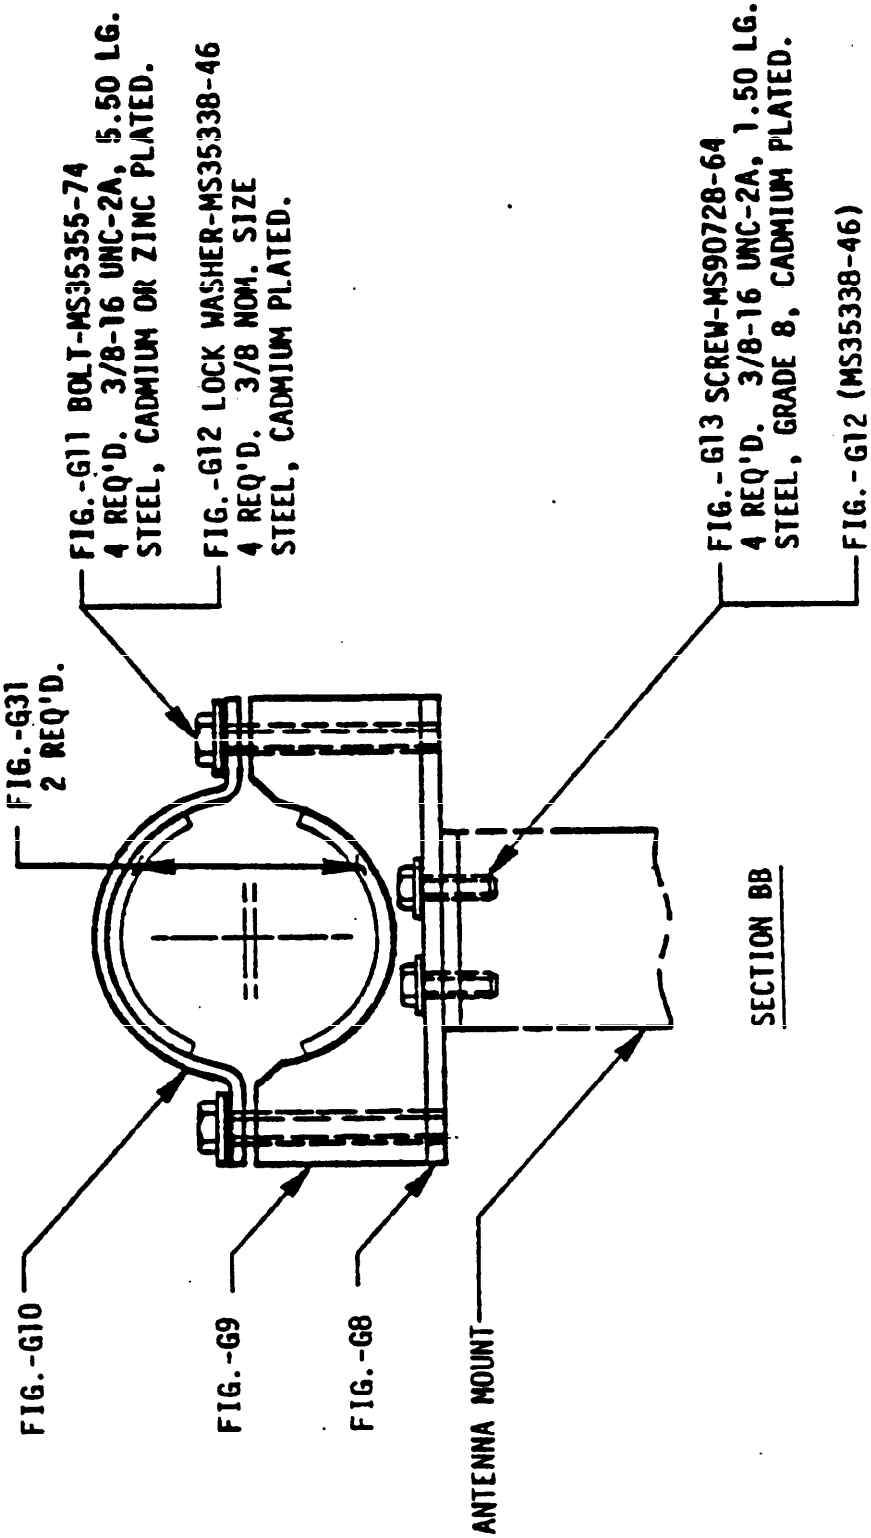


FIGURE G2. Installation, shipping 120 mm gun tube (sht. 3 of 4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.


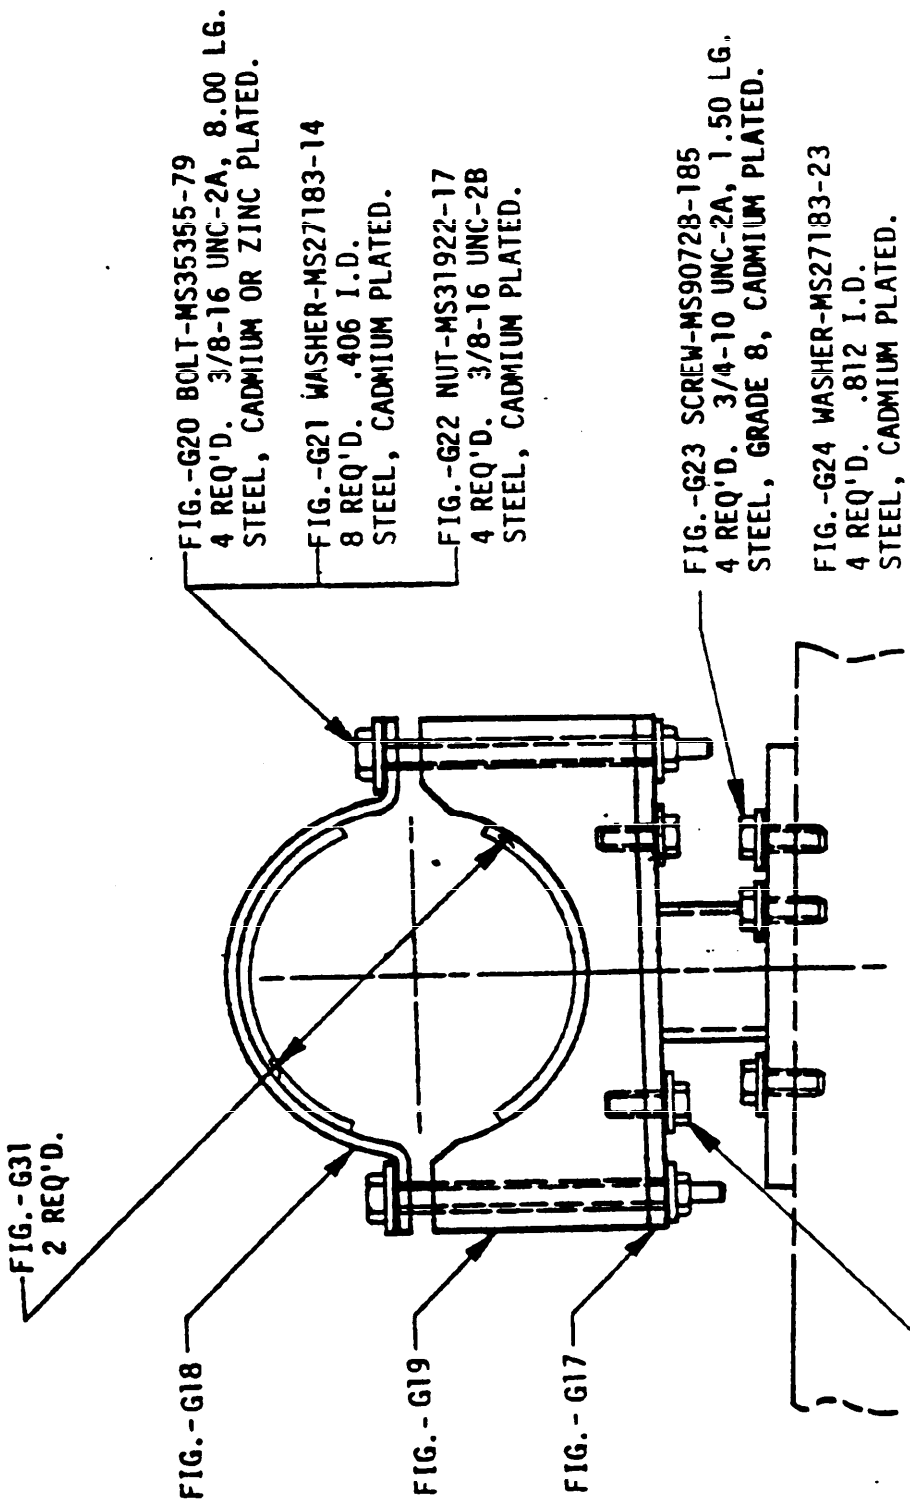


FIGURE G2. Installation, shipping 120 mm gun tube (sht. 4 of 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

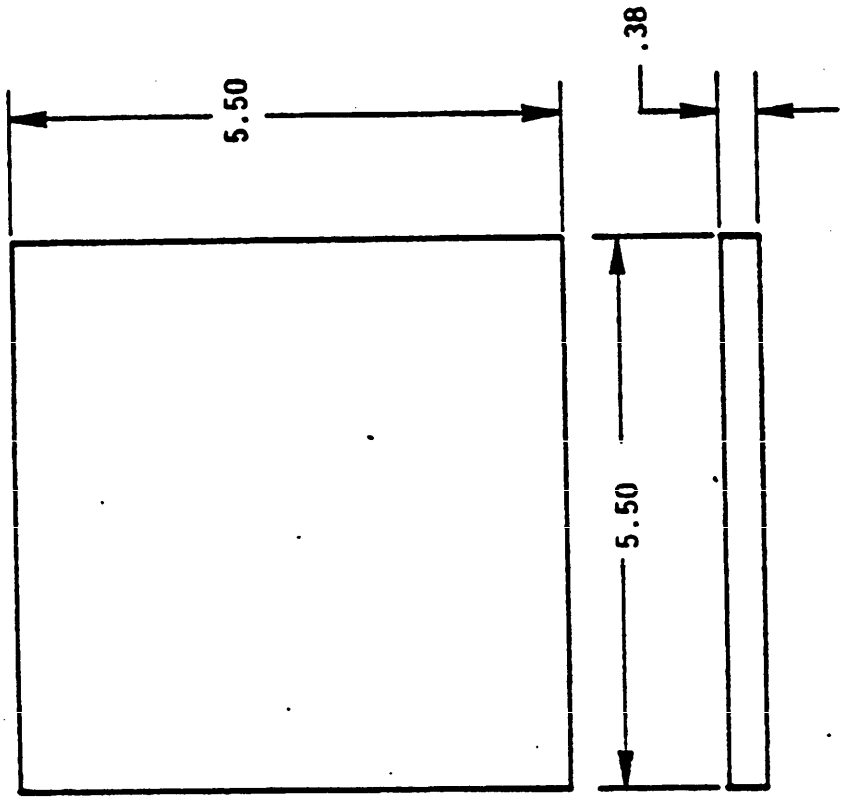


NOTES:

1. MATERIAL:
   STEEL, 1015 TO 1025, ASTM-A36 OR ASTM-A576.
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE G6. Plate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

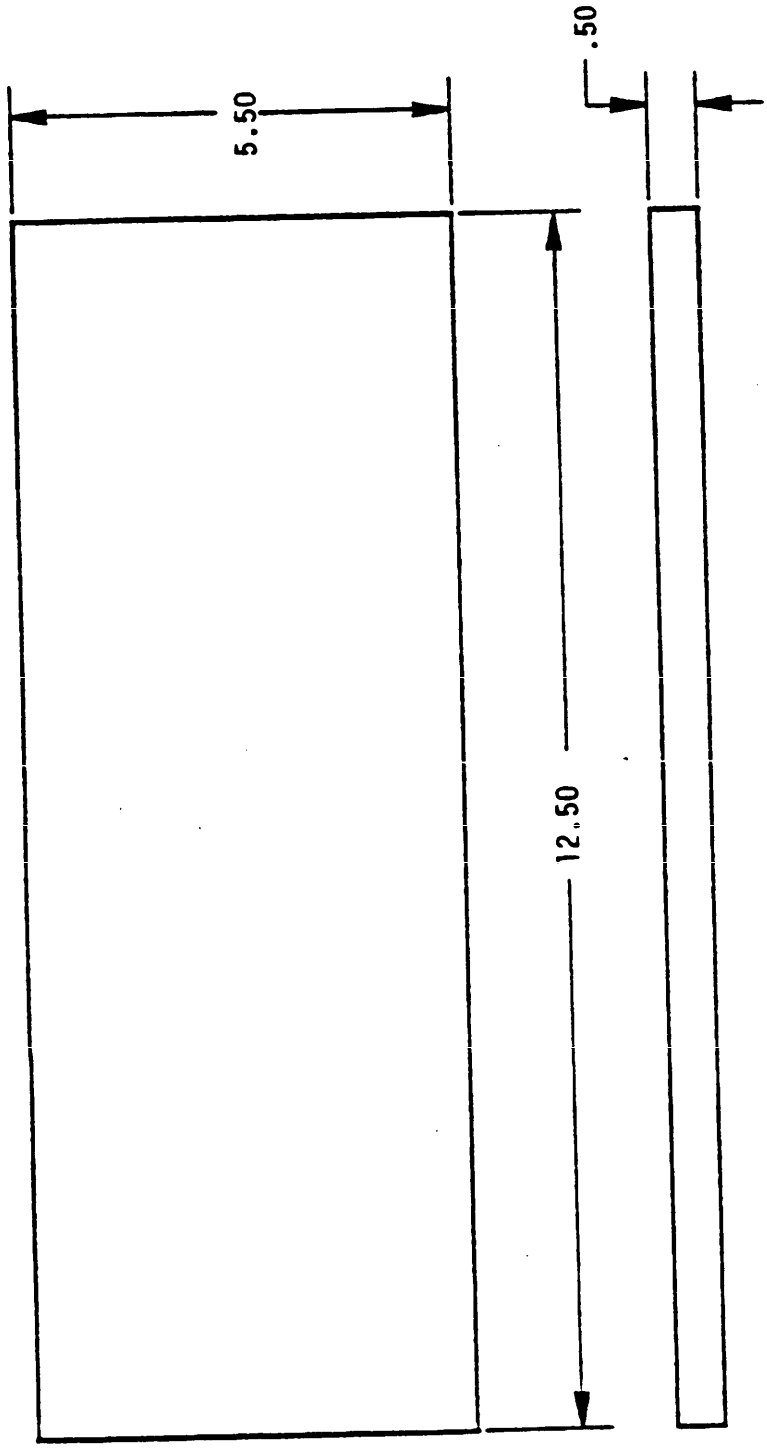


NOTES:

1. MATERIAL:
   STEEL. 1015 TO 1025, ASTM-A576.
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE G7. Plate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

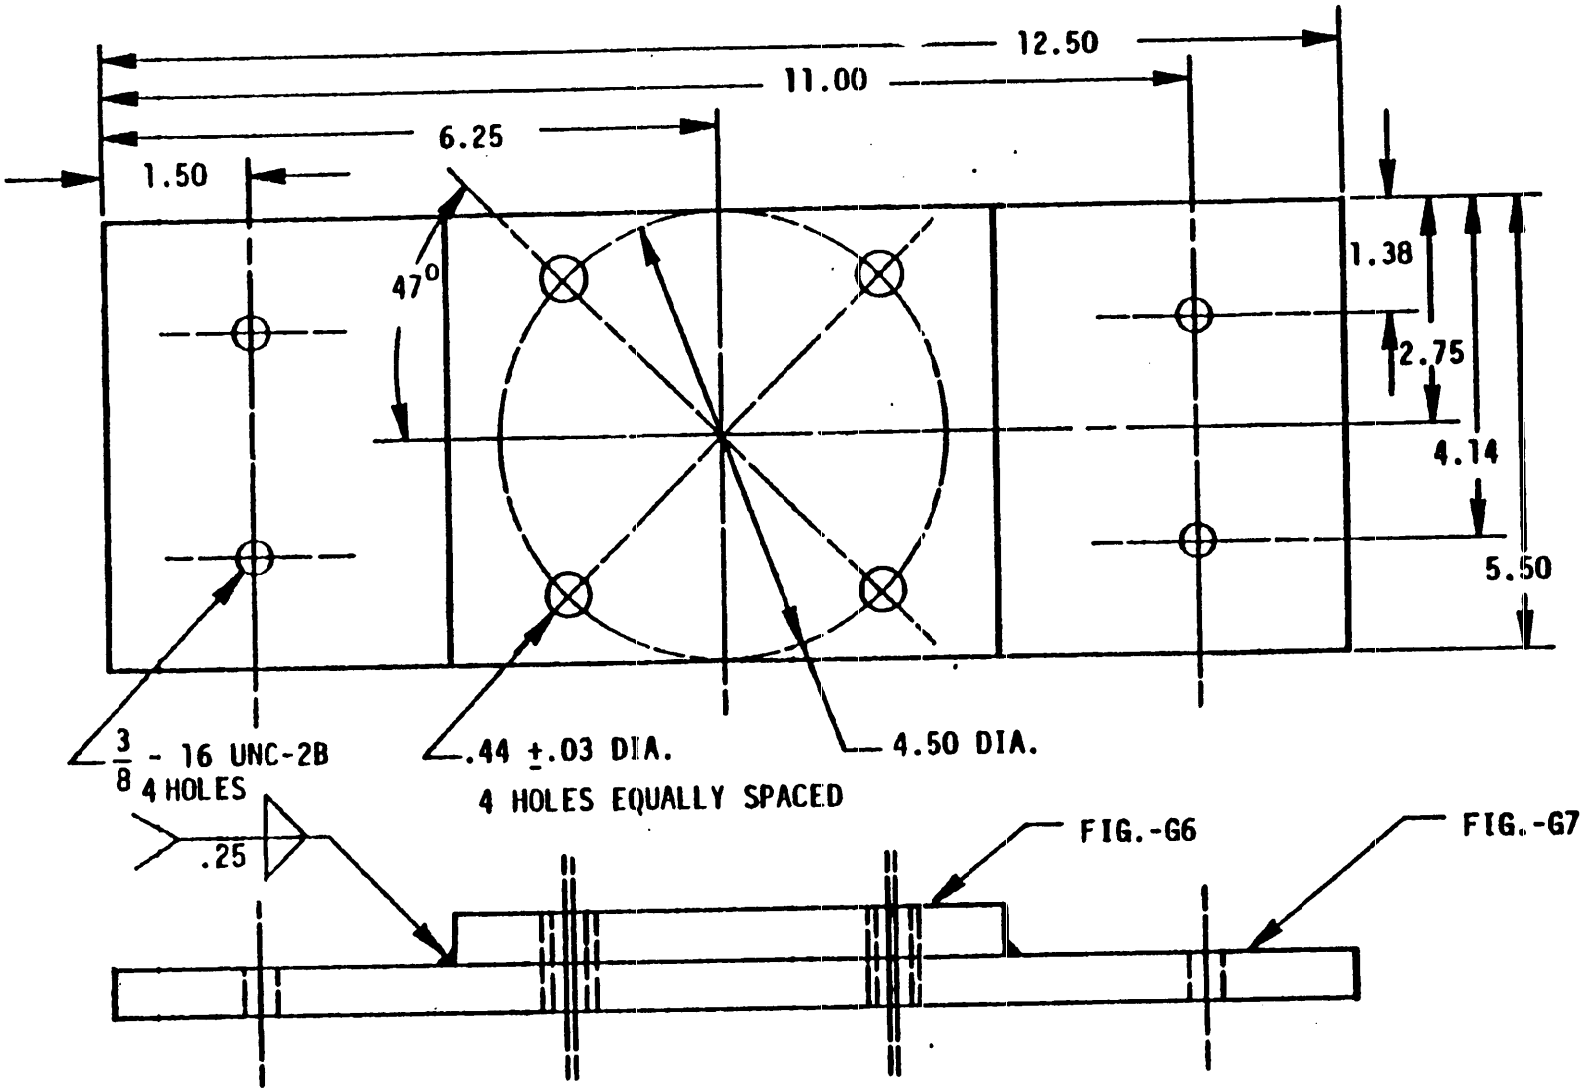


NOTES:

1. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS 1.
2. ALL WELD SIZES ARE MINIMUM.
3. FINAL PROTECTIVE FINISH:
   TREAT PER CLASS 1A, MIL-C-5541. APPLY PRIMER PER MIL-P-53022 OR MIL-P-53030. TOPCOAT GREEN 383 PER MIL-C-46168 OR MIL-C-53039.
4. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE G8. Bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

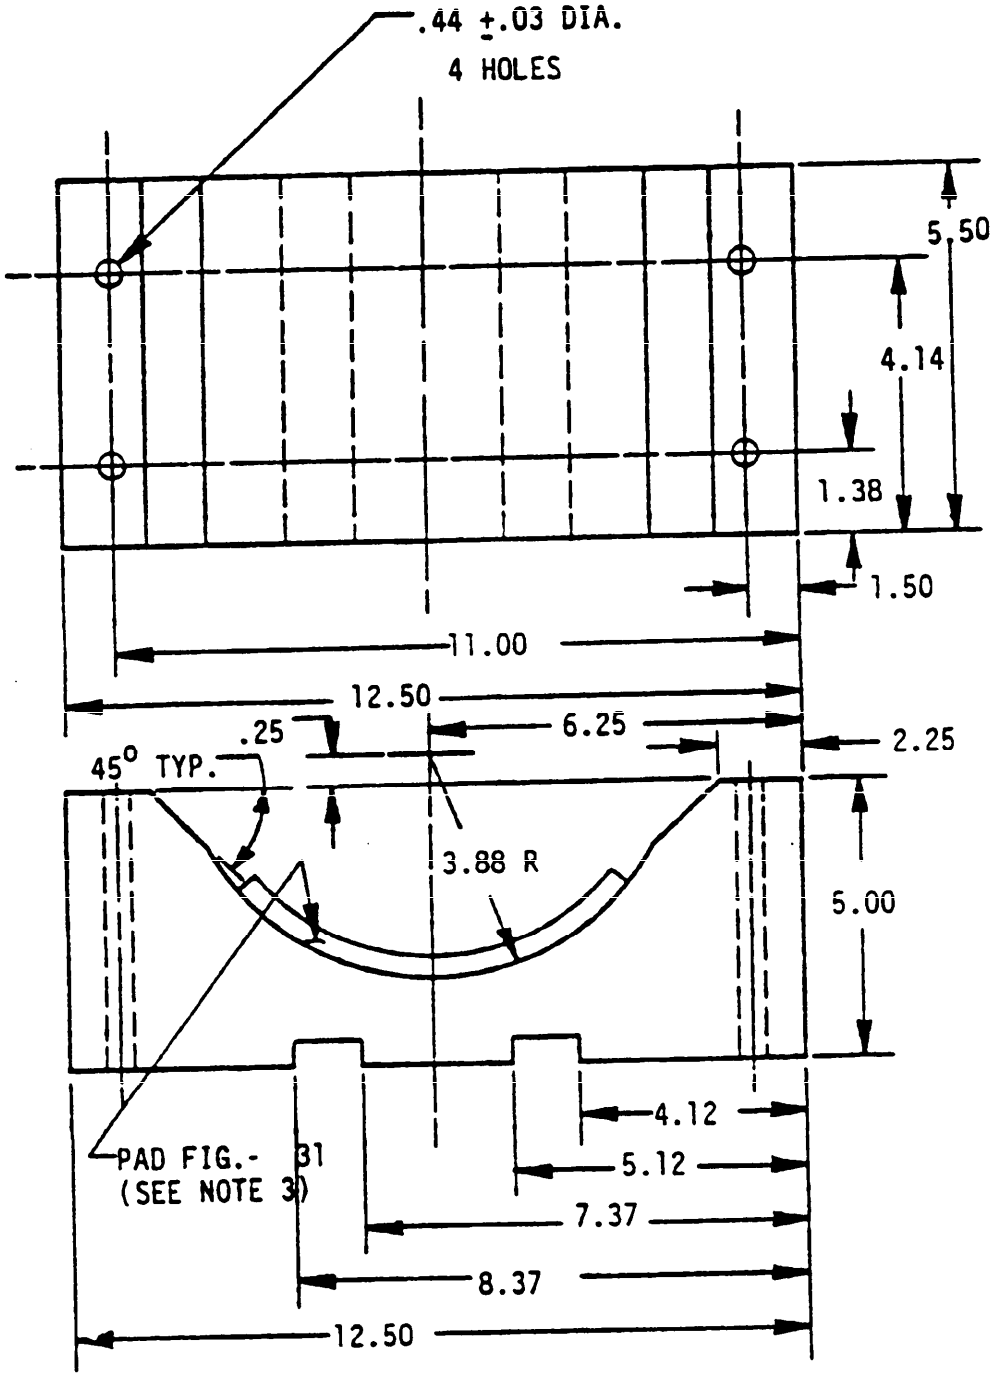


NOTES:

1. MATERIAL:
   WOOD, CLASS A, SPEC MIL-W-3912.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. BOND WITH MMM-A-1617 TYPE I ADHESIVE.
4. FINAL PROTECTIVE FINISH:
   TREAT PER CLASS 1A, MIL-C-5541. APPLY PRIMER PER MIL-P-53022 OR MIL-P-53030. TOPCOAT GREEN 383 PER MIL-C-46168 OR MIL-C-53039

FIGURE G9. Block, rear.

Source: https://assist.dla.mil -- Downloaded: 2026-01-26T04:24Z
Check the source to verify that this is the current version before use.

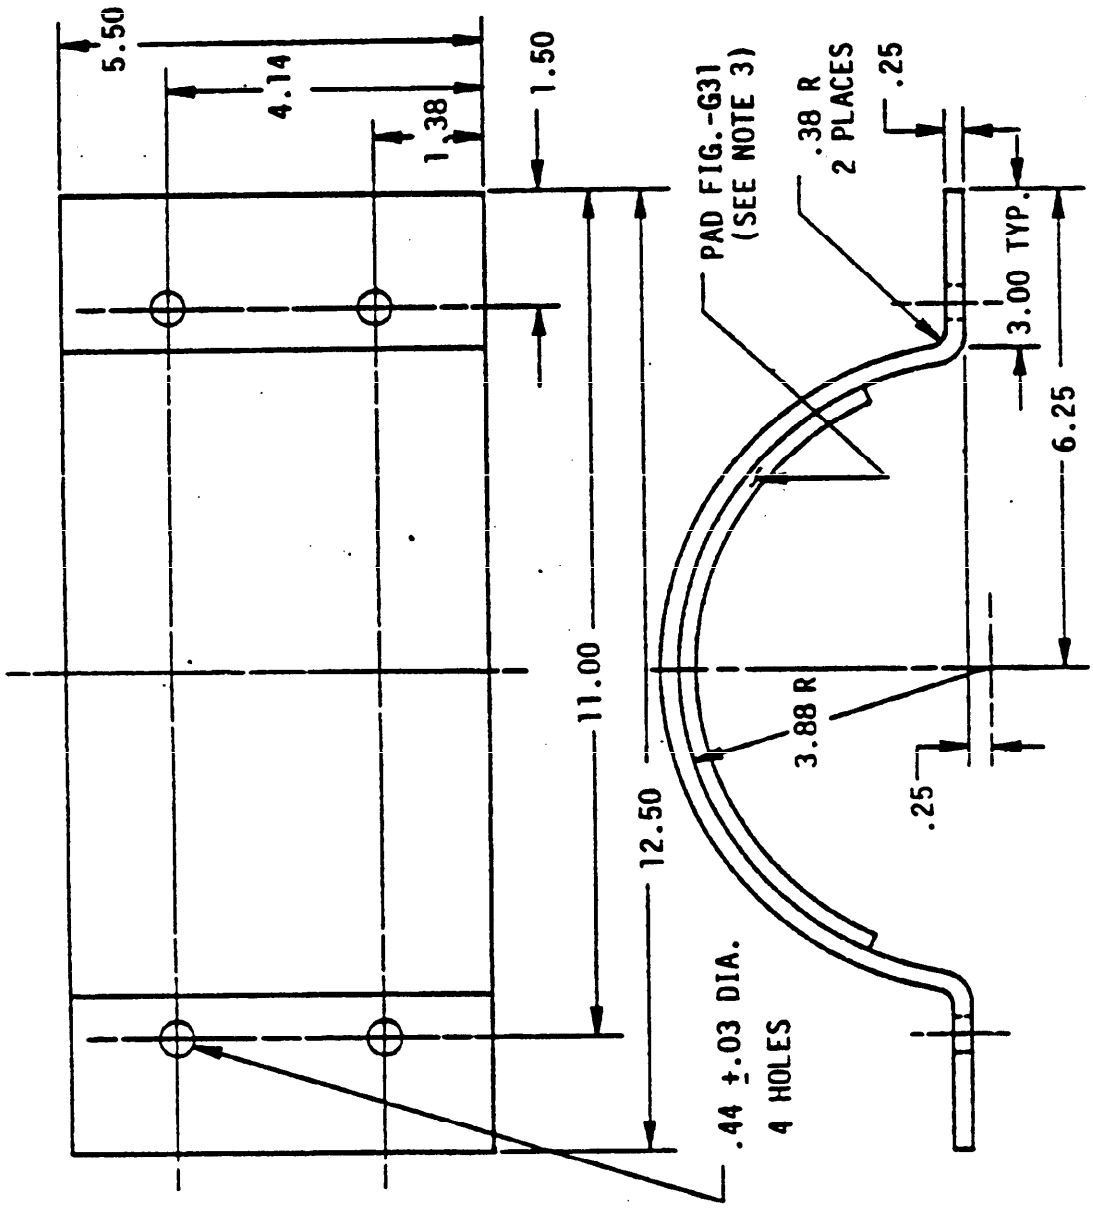


NOTES:

1. MATERIAL:
   STEEL, ASTM-A36 OR ASTM A576, 1015 TO 1025.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. BOND WITH MMM-A-1617, TYPE I ADHESIVE.
4. FINAL PROTECTIVE FINISH:
   TREAT PER CLASS 1A, MIL-C-5541, APPLY PRIMER PER MIL-P-53022 OR
   MIL-P-53030, TOPCOAT GREEN 383 PER MIL-C-46168 OR MIL-C-53039.

FIGURE G10. Bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

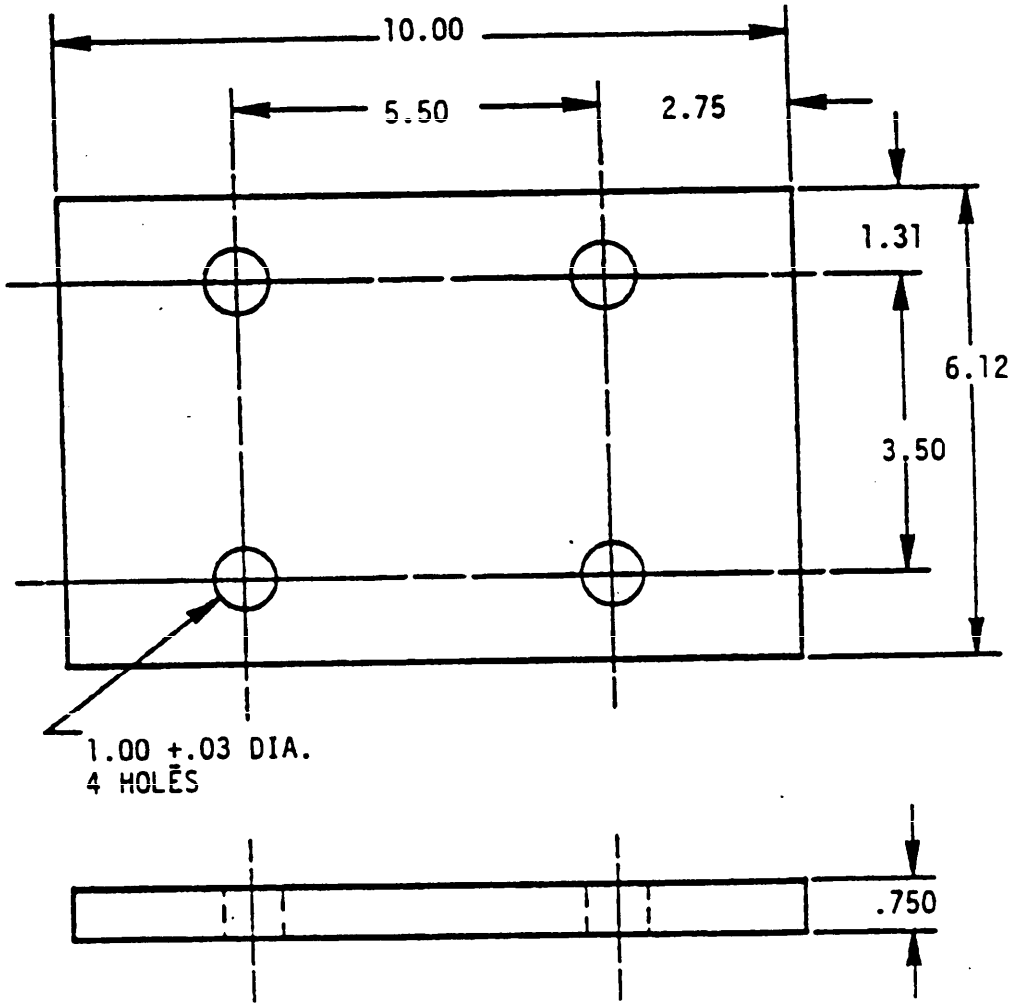


NOTES:

1. MATERIAL:
   STEEL 1010, 1020, ASTM - A576 OR ASTM A36.
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE G14. Plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

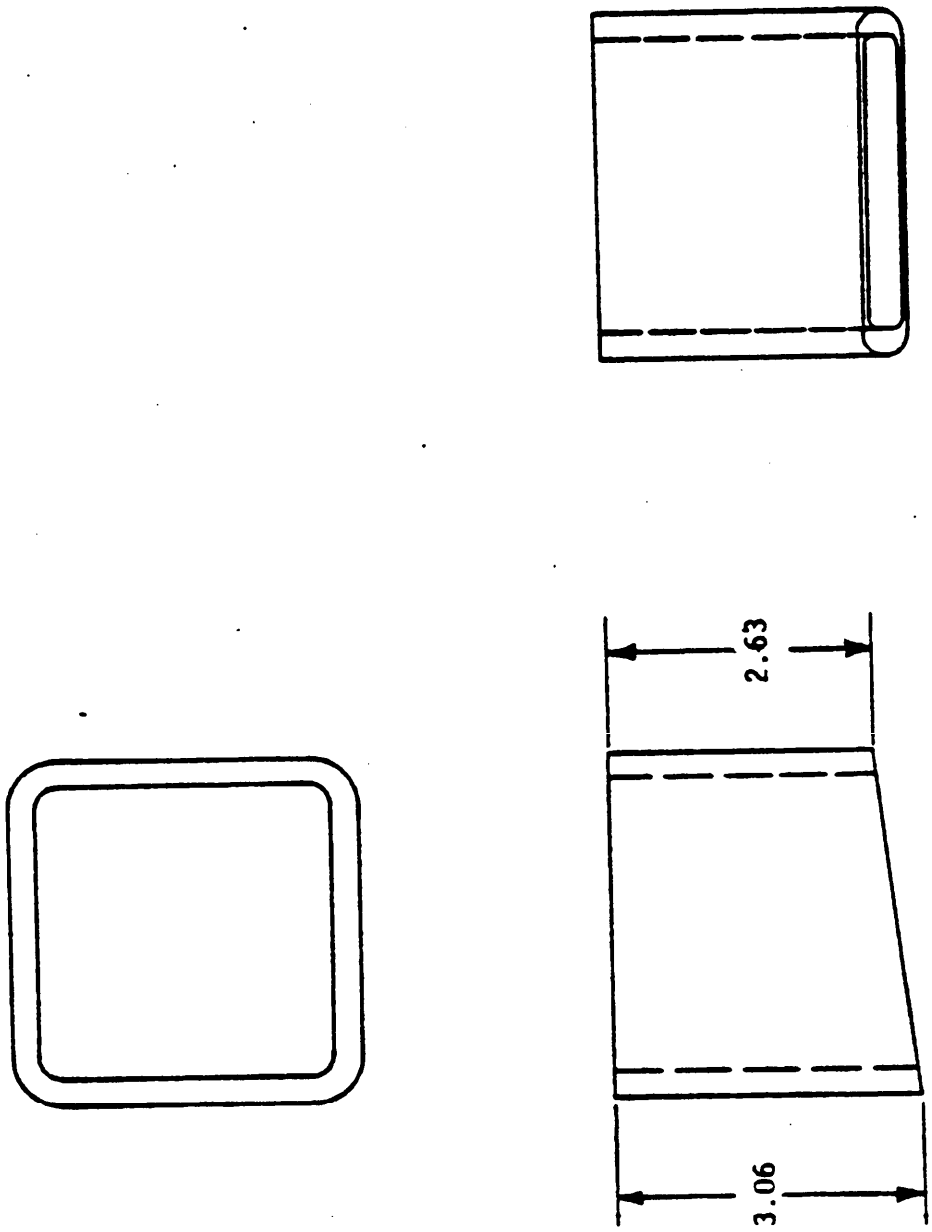


NOTES:

1. MATERIAL:
   STEEL, TUBE - ASTM A500 OR A501, GR.B 3.50 SQ. X .25 WALL.
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE G15. Steel tubing.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

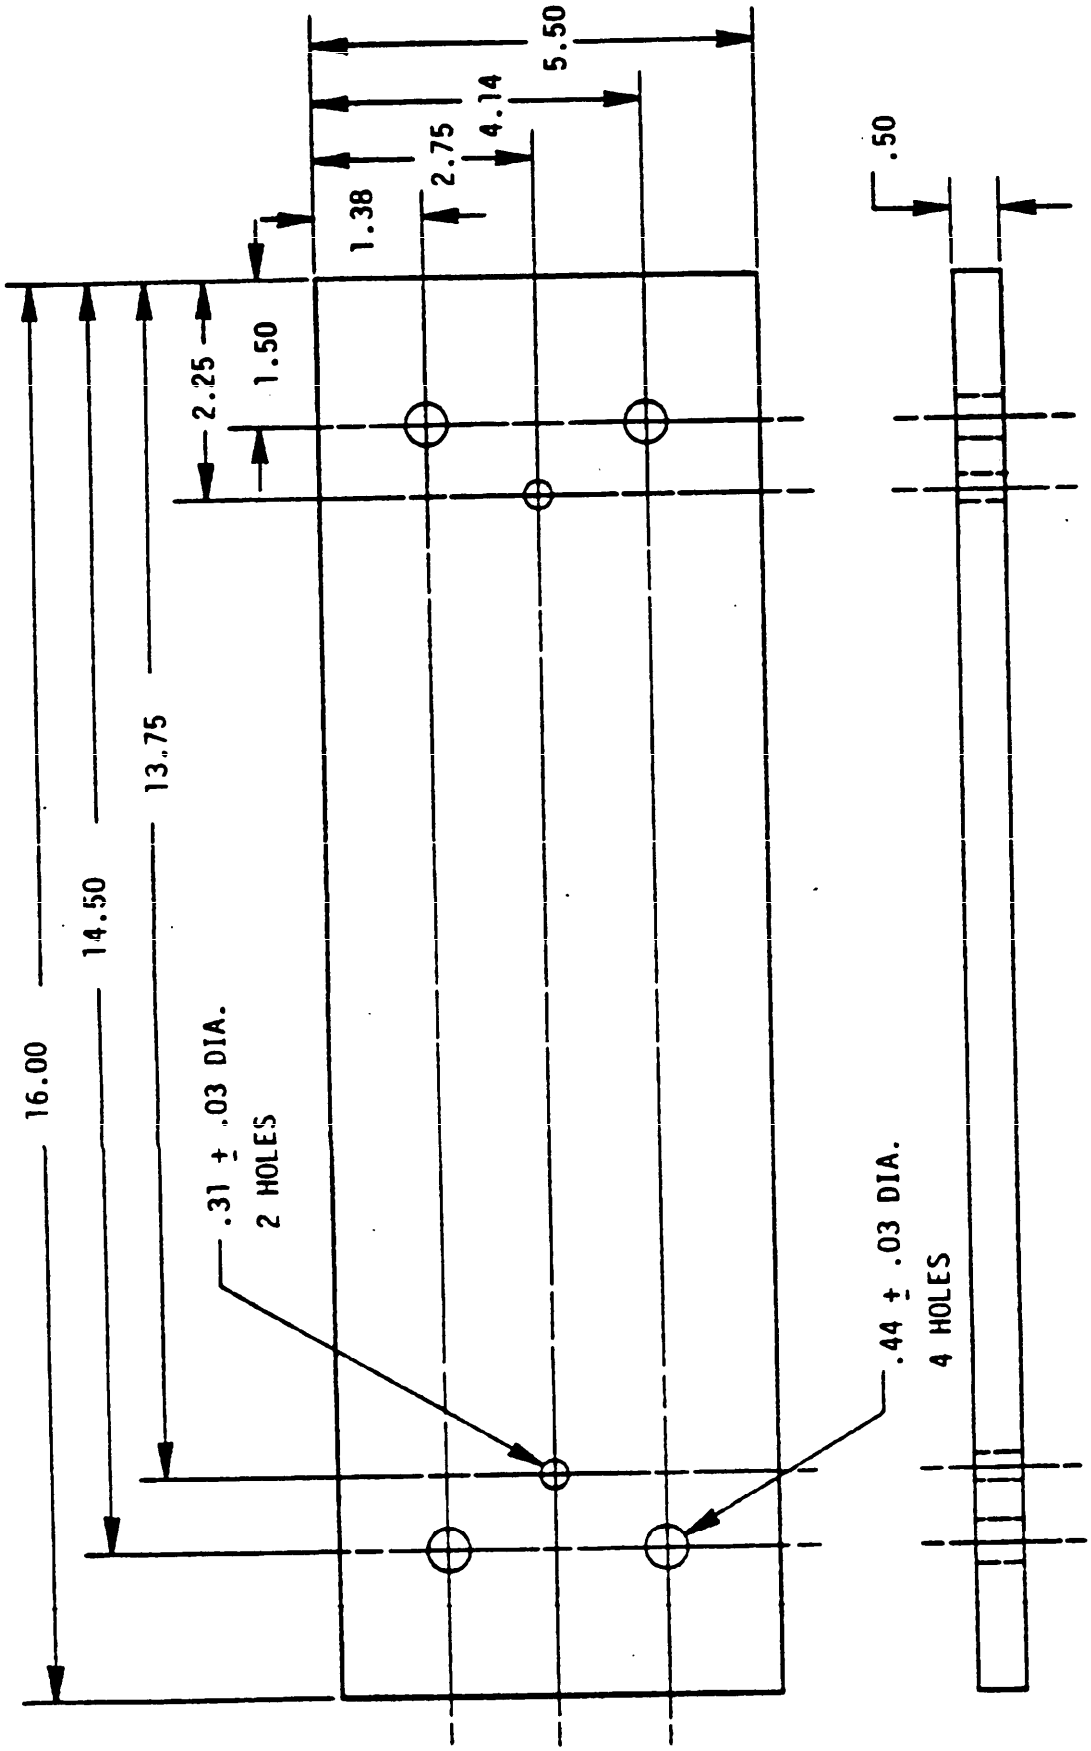


NOTES:

1. MATERIAL: STEEL, CARBON, ASTM A36 OR 1010 TO 1020 ASTM A576.
2. REMOVE ALL BURRS AND SHARP EDGES.

FIGURE G16. Plate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

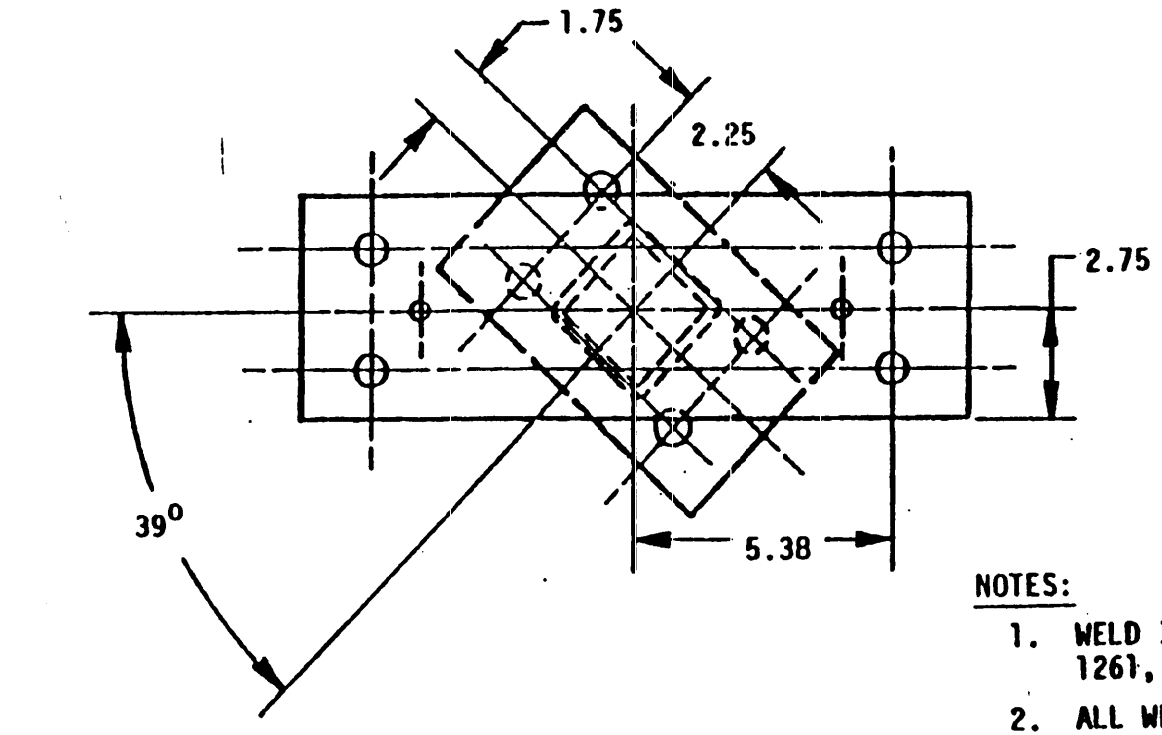

NOTES:

1. WELD IN ACCORDANCE WITH MIL-STD-1261, CLASS 1.
2. ALL WELD SIZES ARE MINIMAL.
3. FINAL PROTECTIVE FINISH:

   TREAT PER CLASS 1A, MIL-C-5541. APPLY PRIMER PER MIL-P-53022 OR MIL-P-53030. TOPCOAT GREEN 383 PER MIL-C-46168 OR MIL-C-53039.


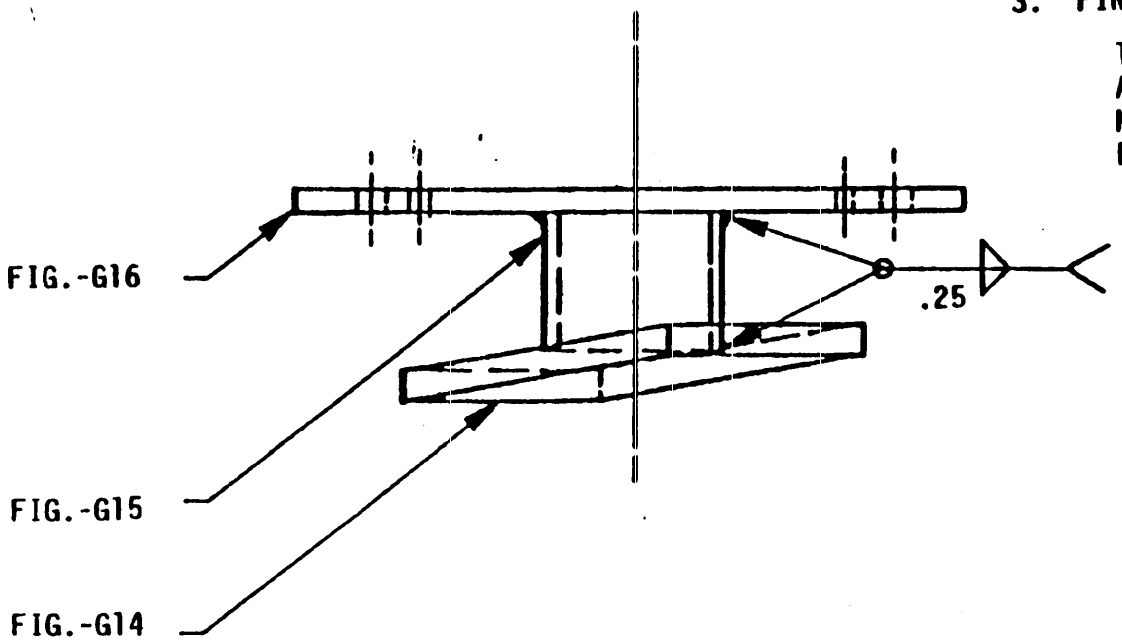


FIGURE G17. Support.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

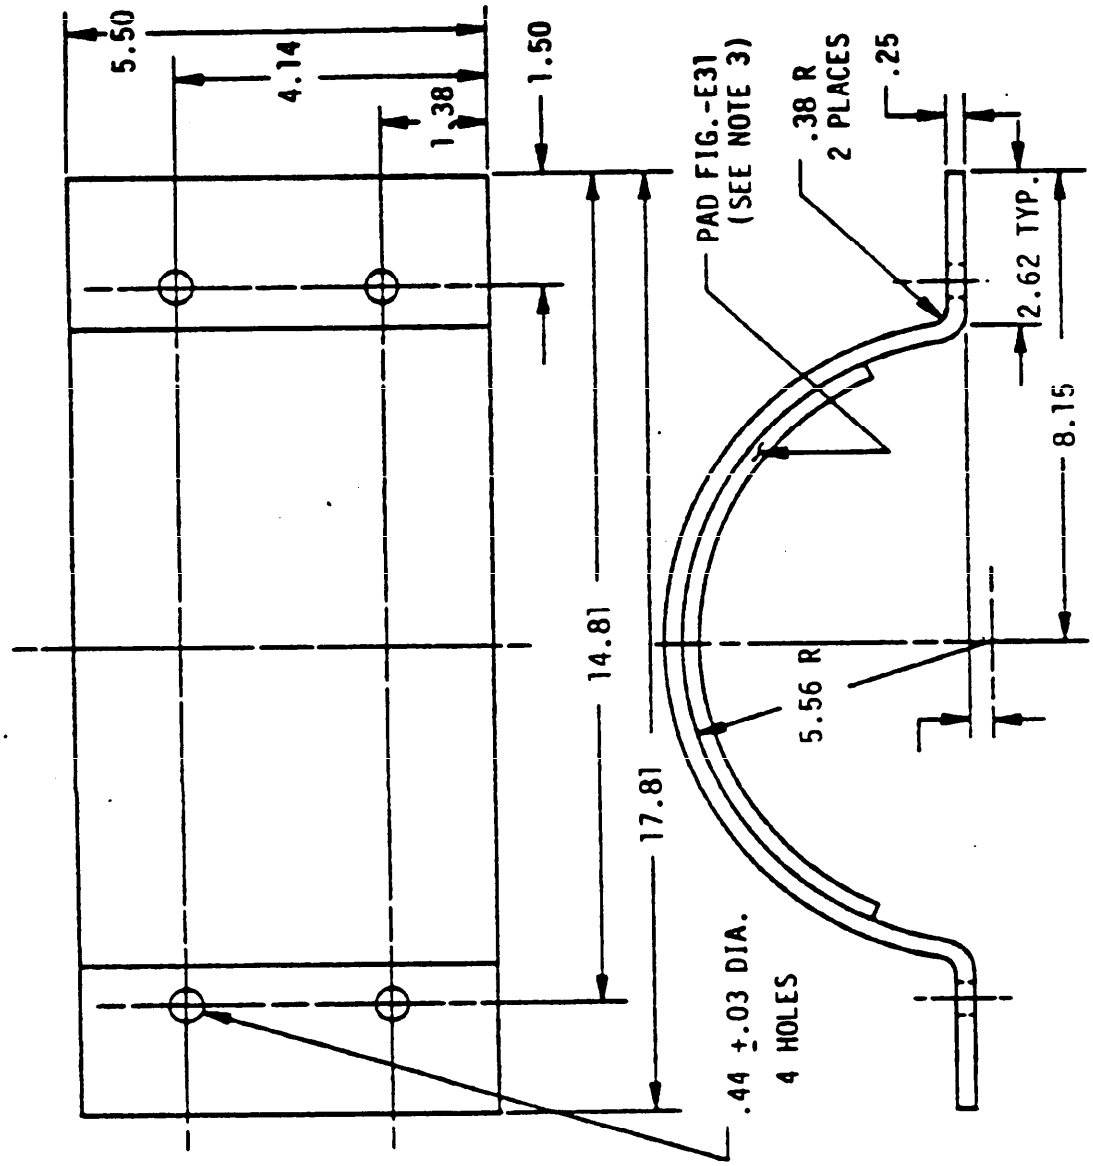


NOTES:

1. MATERIAL:
   STEEL, ASTM-A36 OR ASTM-576, 1015 TO 1025.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. BOND WITH MMM-A-1617, TYPE I ADHESIVE.
4. FINAL PROTECTIVE FINISH:
   TREAT PER CLASS 1A, MIL-C-55/
   MIL-P-53030 TOPCOAT GREEN
   APPLY PRIMER PER MIL-P-53022 OR
   PER MIL-C-46168 OR MIL-C-53039.

FIGURE G18. Bracket.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

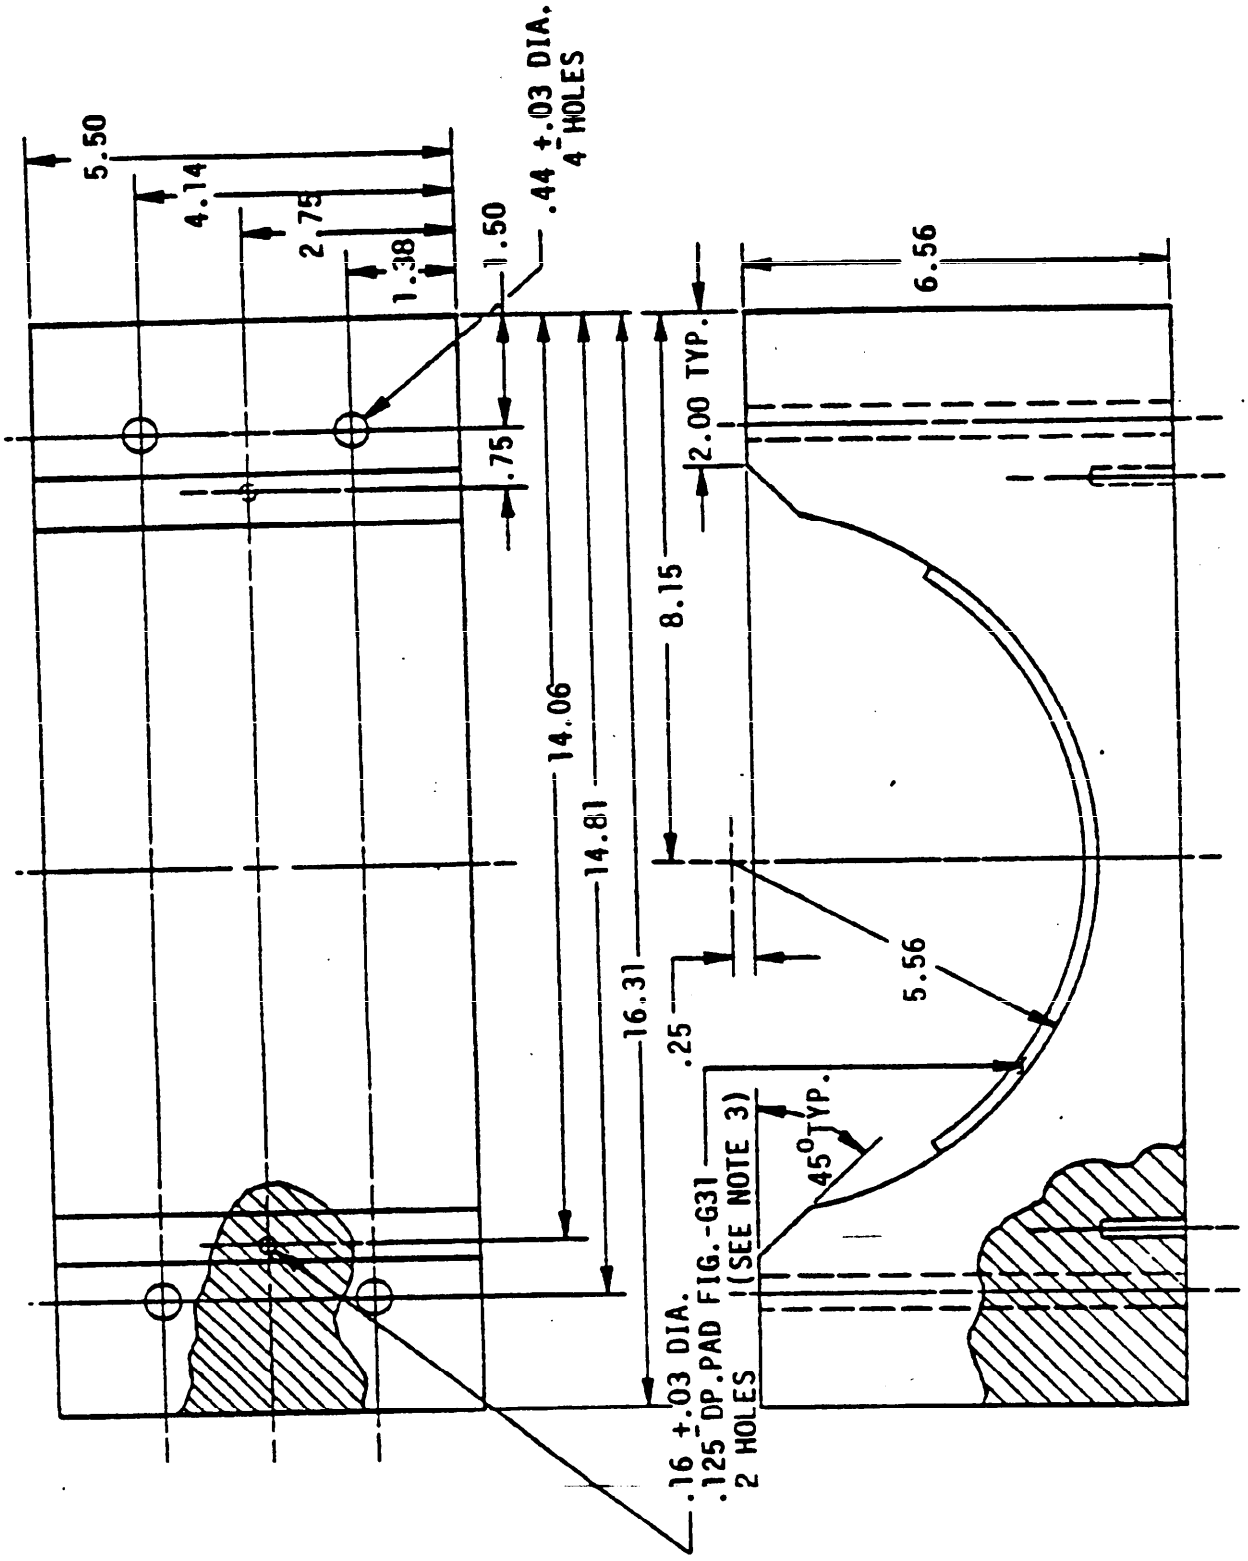


NOTES:

1. MATERIAL:
   WOOD, CLASS A, SPEC MIL-W-3912.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. BOND WITH MMM-A-1617 TYPE I ADHESIVE.
4. FINAL PROTECTIVE FINISH:
   TREAT PER CLASS 1A, MIL-C-5541. APPLY PRIMER
   PER MIL-P-53022 OR MIL-P-53030. TOPCOAT
   GREEN PER MIL-C-46168 OR MIL-C-53039.

FIGURE G19. Block, front.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

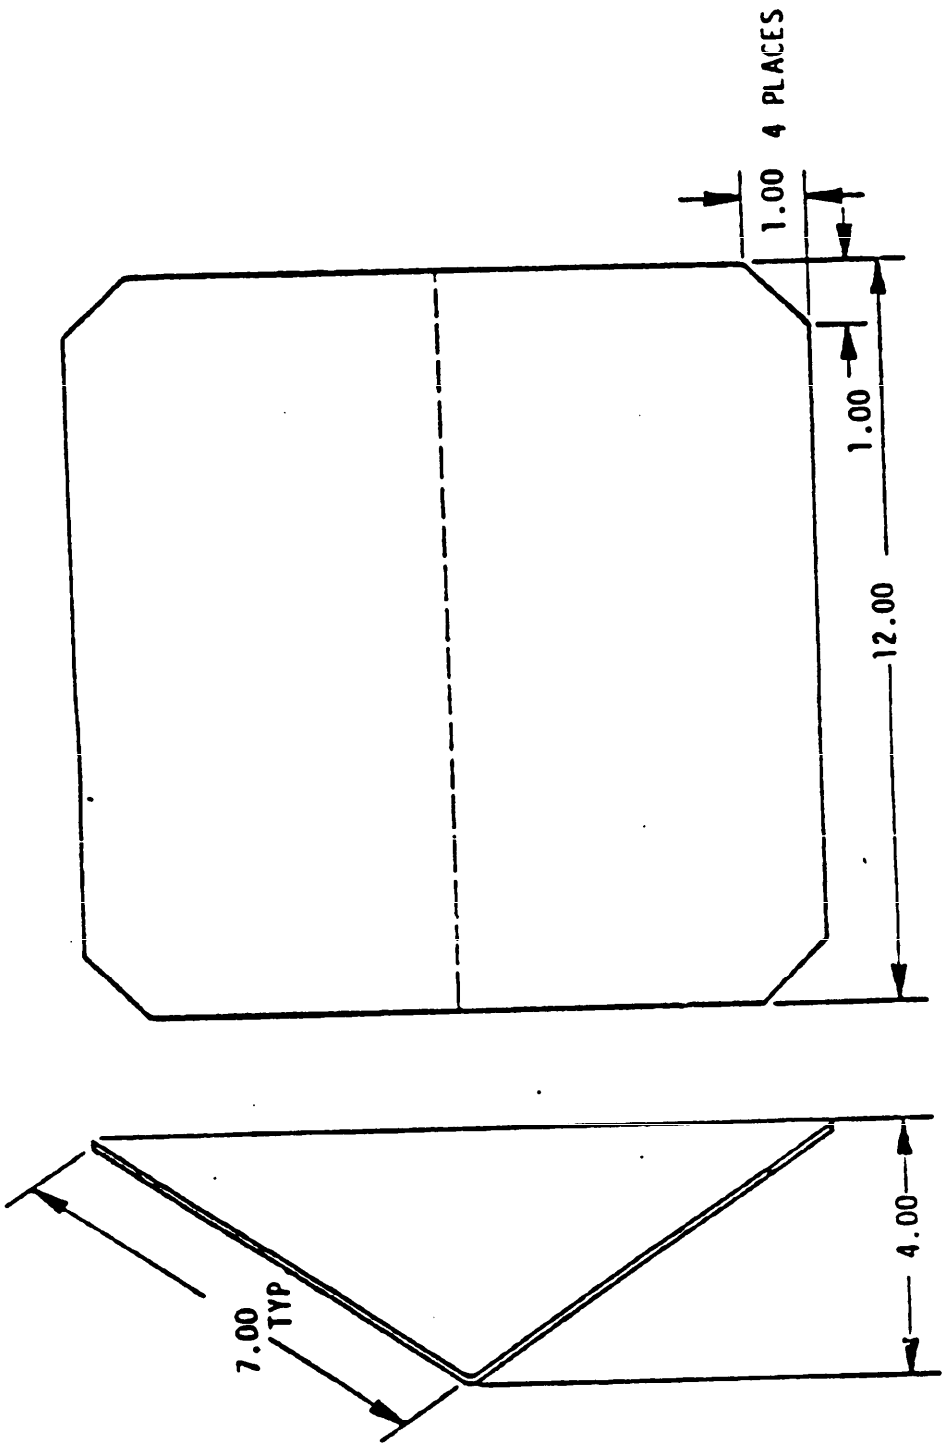

NOTES:

1. MATERIAL:
   STEEL, 1020 - 1030, ASTM A569 OR A 366. .059 (16 GA) THK.
2. REMOVE ALL BURRS AND SHARP EDGES.
3. FINAL PROTECTIVE FINISH:
   TREAT PER TYPE I OR III, TT-C-490. APPLY PRIMER PER MIL-P-53022 OR MIL-P-53030. TOPCOAT GREEN 383 PER MIL-C-46168 OR MIL-C-53039.

FIGURE G25. Plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


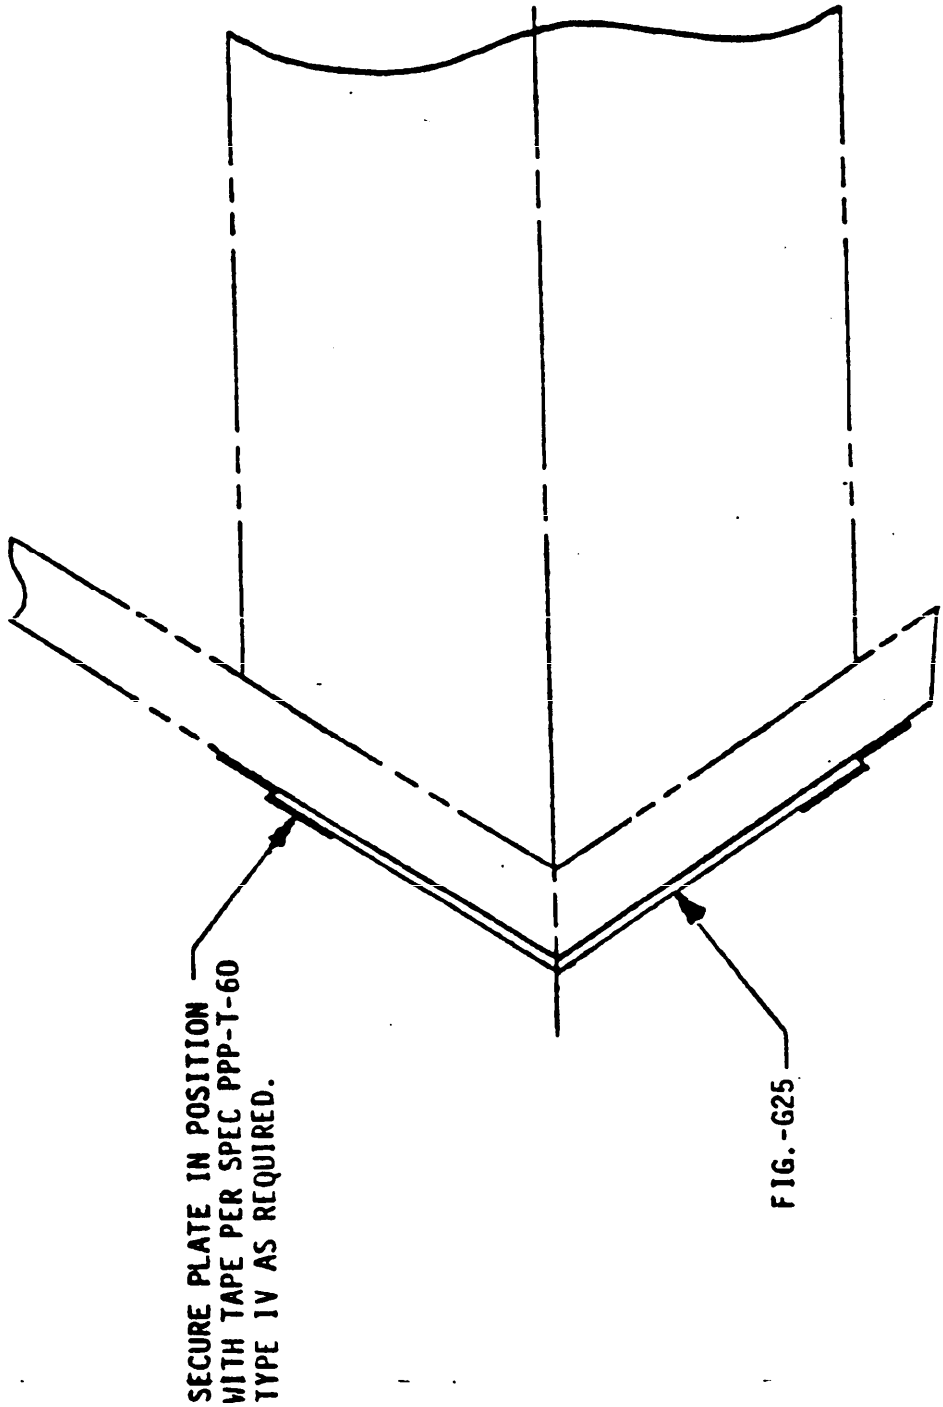


FIGURE G26. Plugging of main gun opening.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

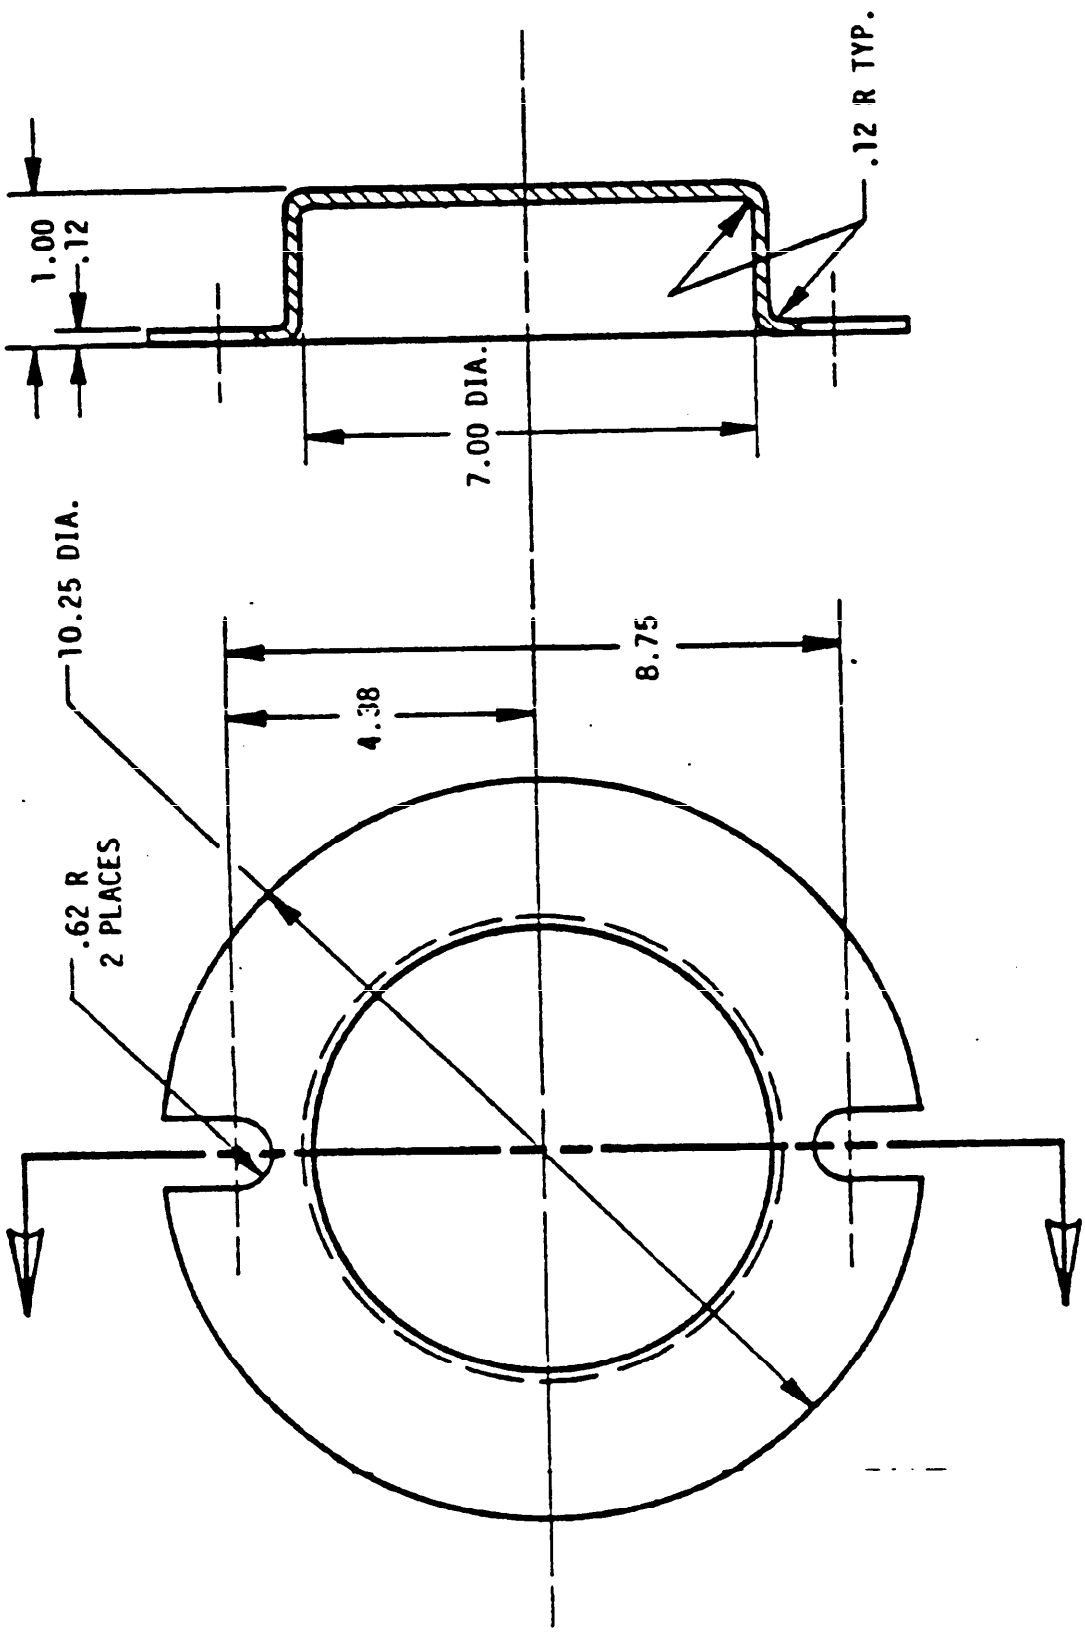

NOTES:

1. MATERIAL:
   COVER, NYLON. TYPE I, SPEC MIL-M-20693.

FIGURE G27. Cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.


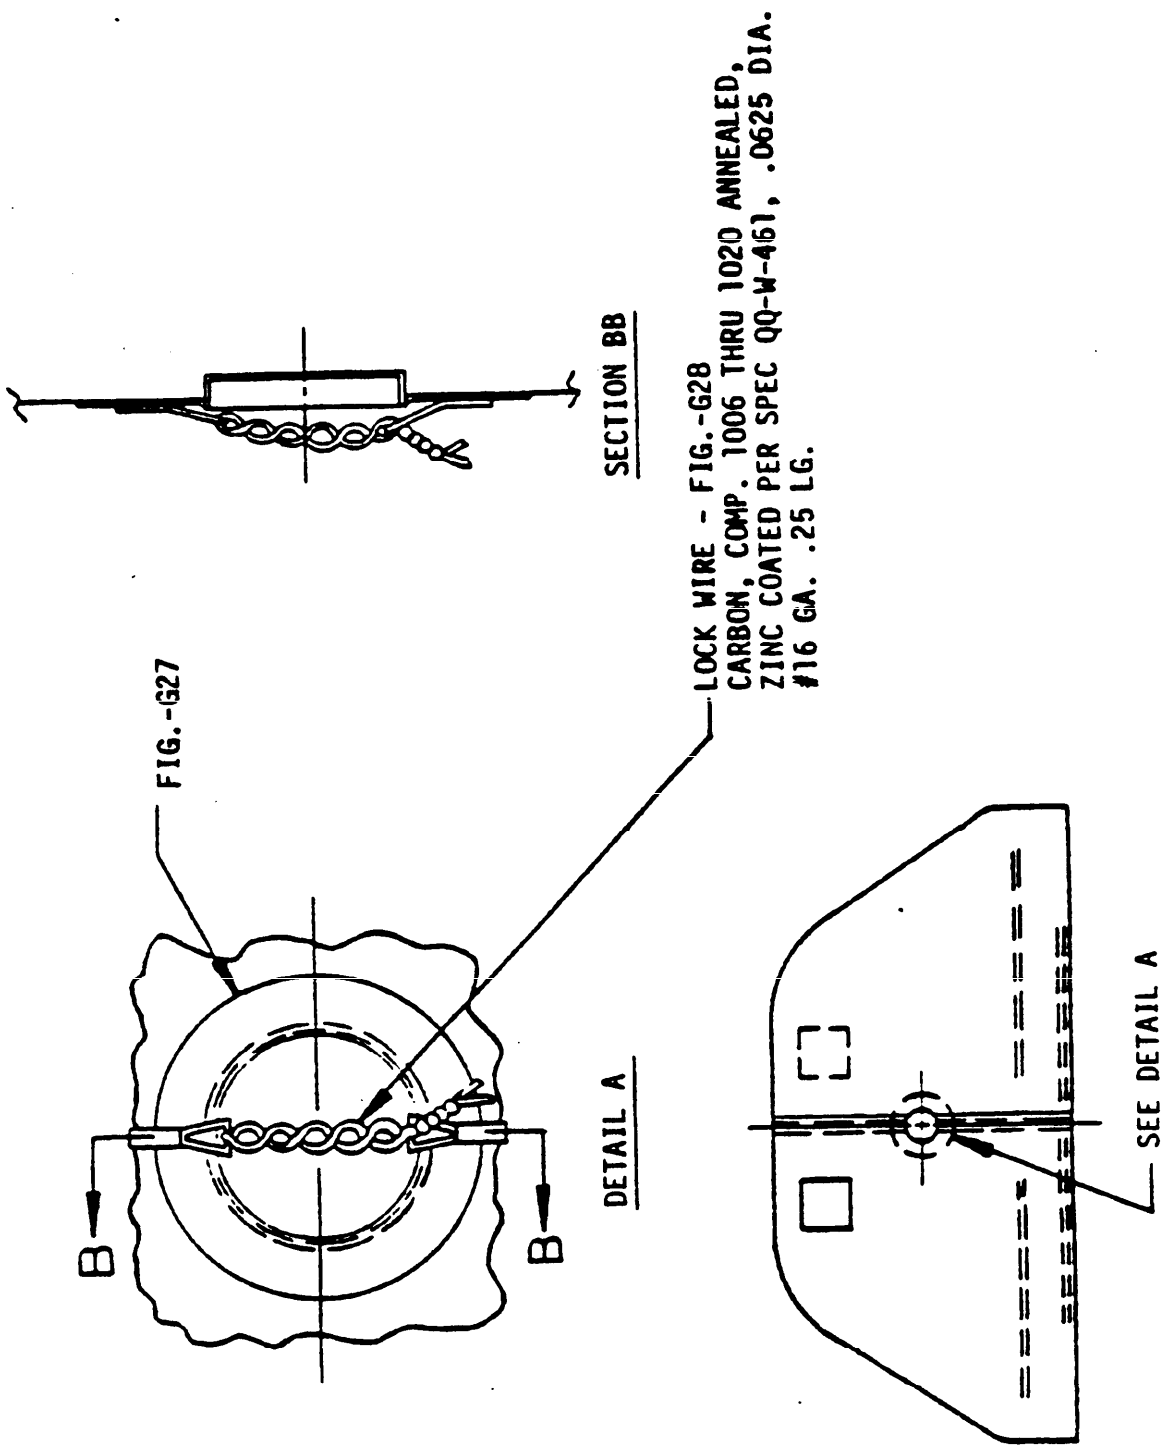


FIGURE G29. Installation, gun tube opening cover in closure cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

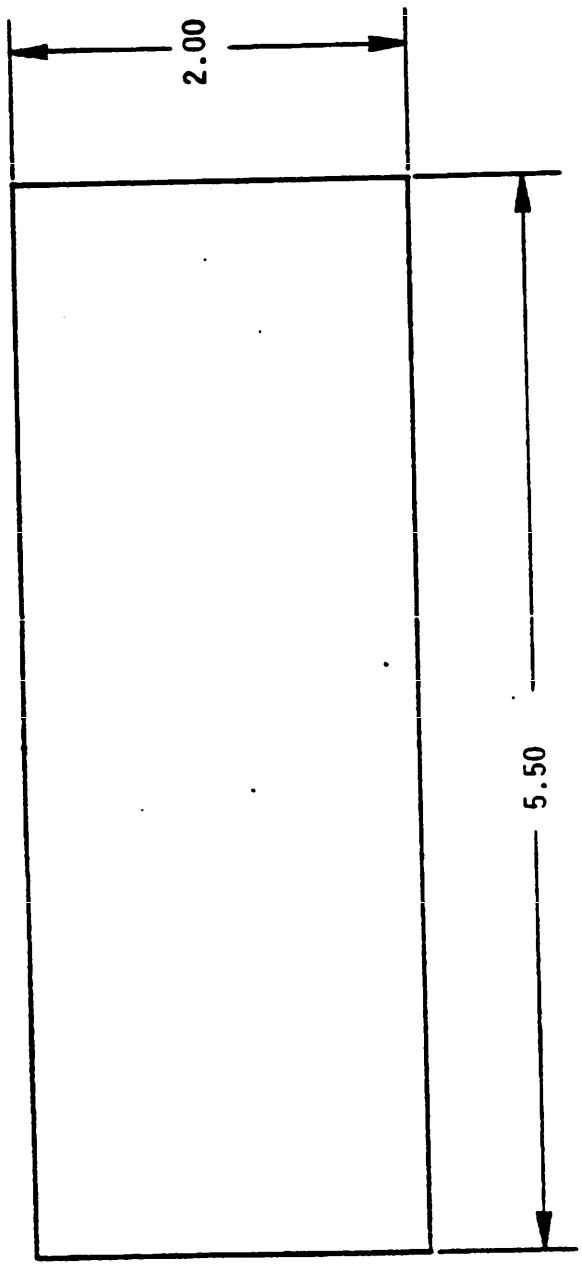

NOTES:

1. MATERIAL:
   RUBBER PER MIL-R-3065, GRADE SC 715 A, B.

FIGURE G31. Pad.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

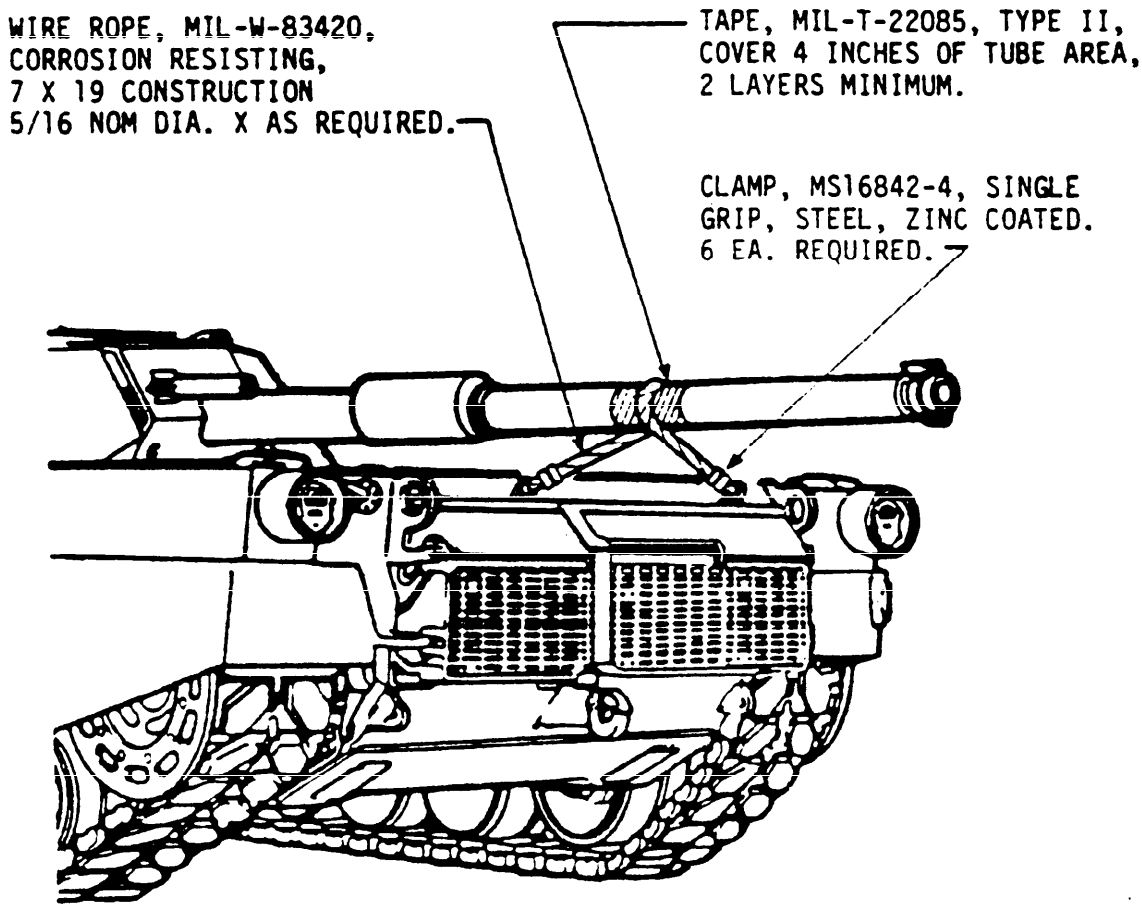


FIGURE H1. Securing of gun tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

Custodian:
Army - AT

Preparing activity:
Army - AT

(Project PACK-A329)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
AMSTA-GDS

Commander
US Army Tank-Automotive Command
ATTN: AMSTA-GDS
Warren, Michigan 48397-5000

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

AREA PACK

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-T-62340A(AT); Tank, Combat, Full-Tracked, M1, Series; Processing for Shipment and Storage

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:24Z
Check the source to verify that this is the current version before use.