INCH-POUND

MIL-DTL-24558/21A
w/AMENDMENT 1
17 February 2006
SUPERSEDING
MIL-DTL-24558/21A
9 December 2004

DETAIL SPECIFICATION SHEET

TERMINAL BOXES, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, SYMBOL 476.1, 24 LUGS FOR TWELVE 2-CONDUCTOR 23 MCM CABLES OR EIGHT 3-CONDUCTOR 23 MCM CABLES

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1 through 9.

1. Electrical rating. The terminal box shall have an electrical rating of 500 volts rms/DC. The maximum current shall be 100 amperes per terminal lug.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 9. All dimensions in figures 1 through 9 are expressed in inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/6, "Enclosure Submersible (15-Foot), Sizes 8 By 10 Through 14 By 26".

3. Tolerance. All tolerances, other than specified herein, shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 through 3 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Finish. The interior of enclosure may be unpainted or painted at contractor's option.

7. Weight. The weight of the connection box shall be 21.0 lbs. maximum.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

8. Lugs. The maximum number of lugs shall be 24 for twelve 2-conductor 23 MCM cables or eight 3-conductor MCM cables.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

GENERAL INFORMATION:

1. Drawing. The terminal box specified by MIL-DTL-24558/21A was formerly covered on NAVSHIPS Drawing No. 9000-S6202-74138.

2. Part or identification number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:


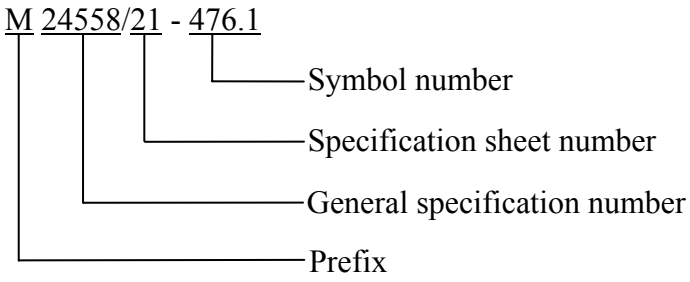


TABLE I. Parts list.


Item	Description	Qty.	Part no. or specification	Remarks
1	Enclosure assembly, with type A cover, brass	1	MIL-E-24142/6	M24142/6-001
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Terminal board base	1	Figure 4	Plastic
5	Mounting bracket	2	Figure 5	Brass
6	Barrier	5	Figure 6	Plastic
7	Terminal body	12	Figure 7	Cast copper ASTM B 176
8	Terminal pressure screw assembly	24	S6202-73055, Pc 21	Brass
9	Terminal lug assembly	12	Figure 8	
10	RH mach screw #12-24 X 7/8" long	4	COML	Brass
11	RH mach screw #6-32 X 5/8" long	10	COML	Bronze
12	RH mach screw #6-32 X 1/4" long	4	COML	Brass
13	RH mach screw #8-32 X 5/8" long	24	COML	Brass
14	Alternate terminal body	24	S6202-73055, Pc 2	Brass
15	Alternate terminal lug assembly	12	Figure 9	Brass

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

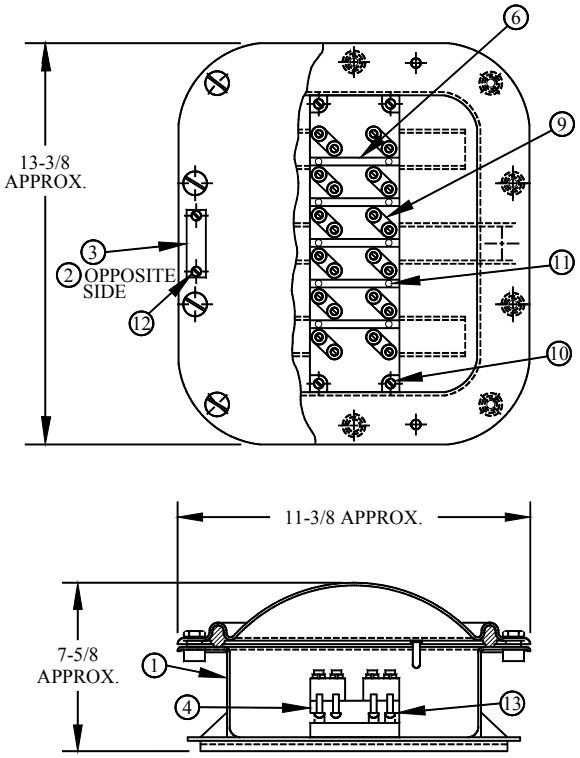

SH 11632


FIGURE 1. Connection box assembly.

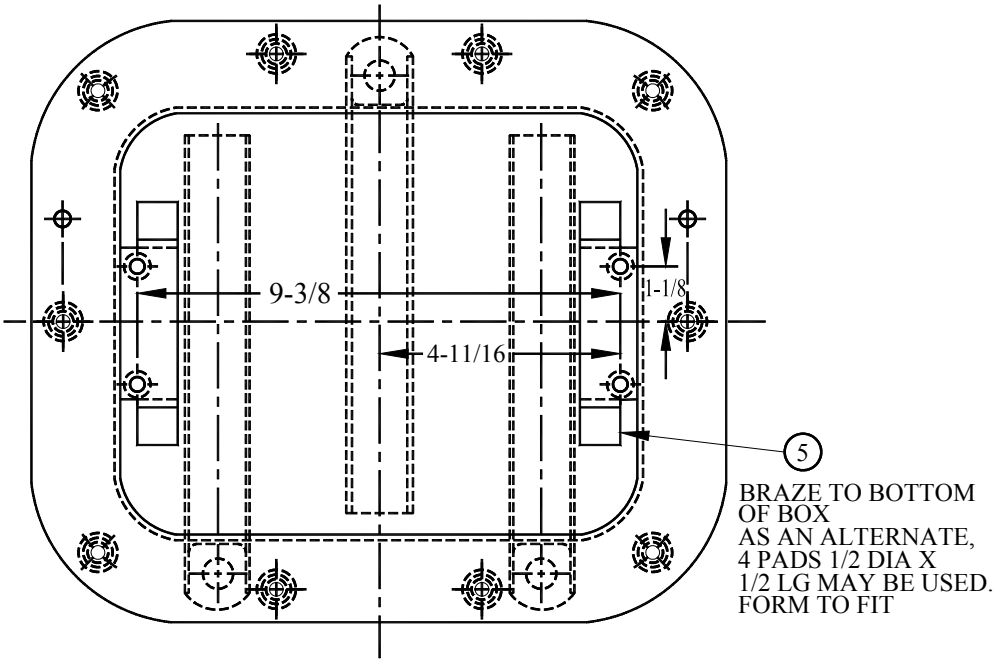

SH 11633

FIGURE 2. Location of terminal board mounting brackets.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

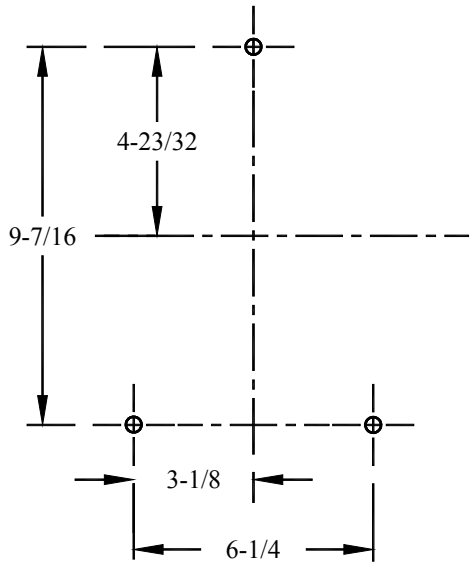

SH 11634

MOUNTING BOLTS TO BE 1/2-13, HEX HEAD

FIGURE 3. Mounting dimensions.

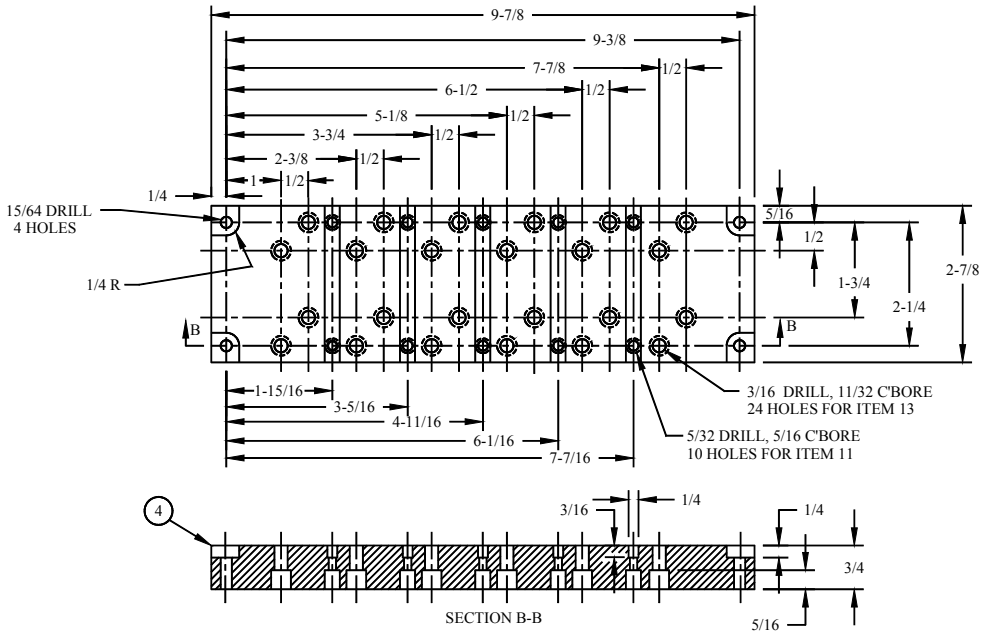


MATERIAL TYPE GME OF MIL-I-24768/1

SH 11635


FIGURE 4. Terminal board base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

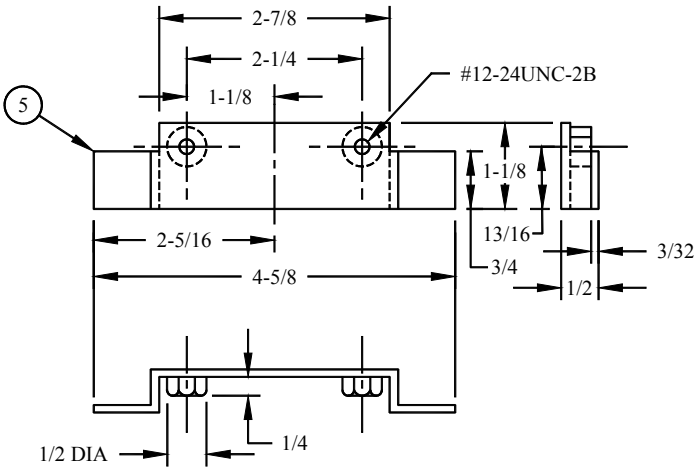

SH 11636


FIGURE 5. Mounting bracket.

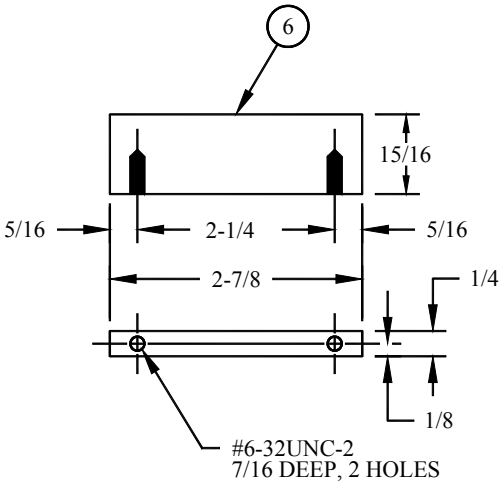

SH 11637

MATERIAL TYPE GME OF MIL-I-24768/1

FIGURE 6. Barrier.

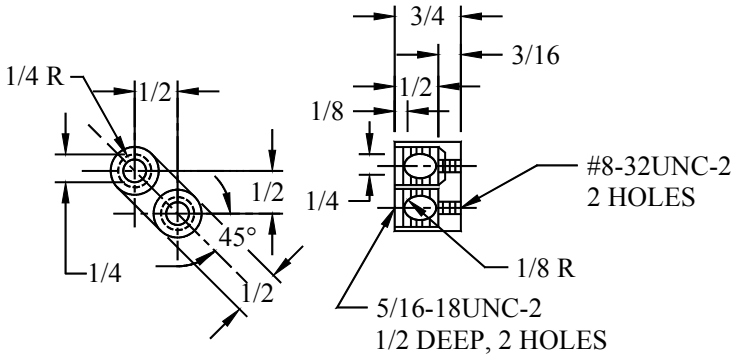

SH 11638

FIGURE 7. Terminal body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

SH 11639

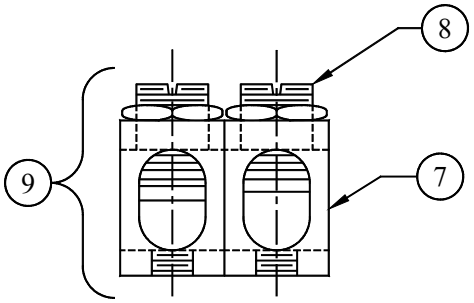


FIGURE 8. Terminal lug assembly.

SH 11640

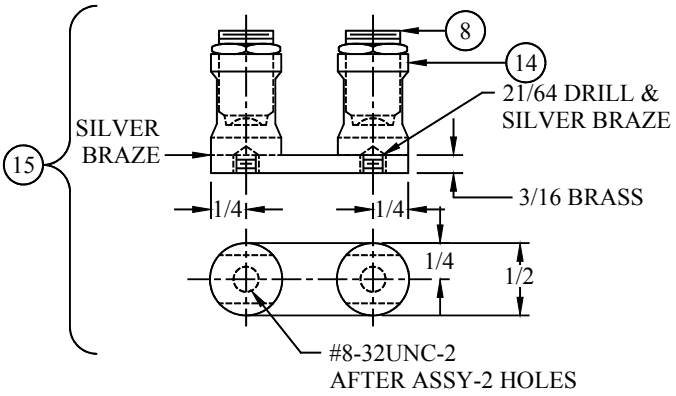


FIGURE 9. Alternate terminal lug assembly.

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodian:
Navy - SH

Preparing Activity:
DLA - GS2

(Project 5940-2005-020)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.