INCH-POUND

MIL-DTL-24558/21B
3 October 2011
SUPERSEDING
MIL-DTL-24558/21A
w/AMENDMENT 1
17 February 2006

DETAIL SPECIFICATION SHEET

TERMINAL BOX, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, SYMBOL NO. 476.1, 24 LUGS FOR TWELVE 2-CONDUCTOR 23 MCM CABLES OR EIGHT 3-CONDUCTOR 23 MCM CABLES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1 through 9.

1. Electrical rating. The terminal box shall have an electrical rating of 500 volts root mean square, and 500 volts direct current. The maximum current shall not exceed 100 amperes per terminal lug.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 9. All dimensions in figures figures 1 through 9 are expressed in decimal inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/6, "Enclosure, Submersible (15-Foot), Sizes 8 by 10 Through 14 by 26".

3. Tolerance. All tolerances not specified herein shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1, 2, 4, 5, 6, 8, and 9 are the same as those shown in the "Item" column of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Finish. The interior of the enclosure may be painted or left unpainted at the contractor's option.

7. Weight. The weight of the connection box shall not exceed 21.0 pounds.


8. Lugs. The number of lugs shall not exceed 24 for twelve 2-conductor 23 thousand circular mils (MCM) cables or eight 3-conductor 23 MCM cables.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

NOTES:

1. Drawing. The terminal box specified by this specification sheet was formerly covered on NAVSHIPS drawing no. 9000-S6202-74138.

2. Part or identifying number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:

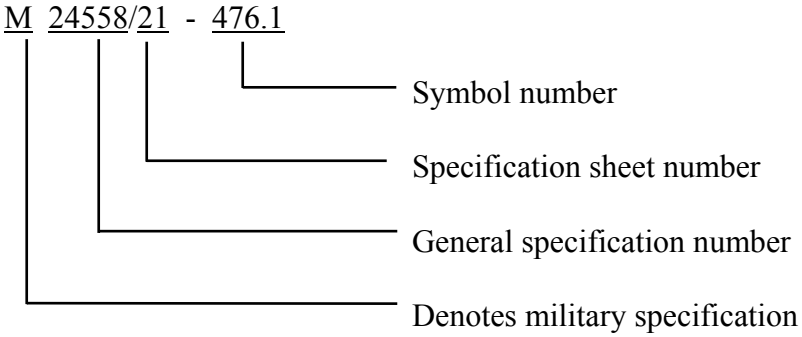

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item	Description	Qty	Part number or specification	Remarks
1	Enclosure assembly, brass with type A cover	1	MIL-E-24142/6	M24142/6-001
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Terminal board base	1	Figure 4	MIL-I-24768/1 type GME
5	Mounting bracket	2	Figure 5	Brass
6	Barrier	5	Figure 6	MIL-I-24768/1 type GME
7	Terminal body	24	Figure 7	Copper ASTM B176
8	Terminal pressure screw assembly	24	9000-S6202-73055, pc 21	Brass
9	Terminal lug assembly	12	Figure 8	
10	RDH machine screw 12-24 X 0.875	4	Commercial	Brass
11	RDH machine screw 6-32 X 0.625	10	Commercial	Brass
12	RDH machine screw 6-32 X 0.250	4	Commercial	Brass
13	RDH machine screw 8-32 X 0.625	24	Commercial	Brass
14	Alternate terminal body	24	9000-S6202-73055, pc 2	Brass
15	Alternate pressure screw assembly	24	9000-S6202-73055, pc 22	Brass
16	Alternate terminal lug assembly	12	Figure 9	Brass

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

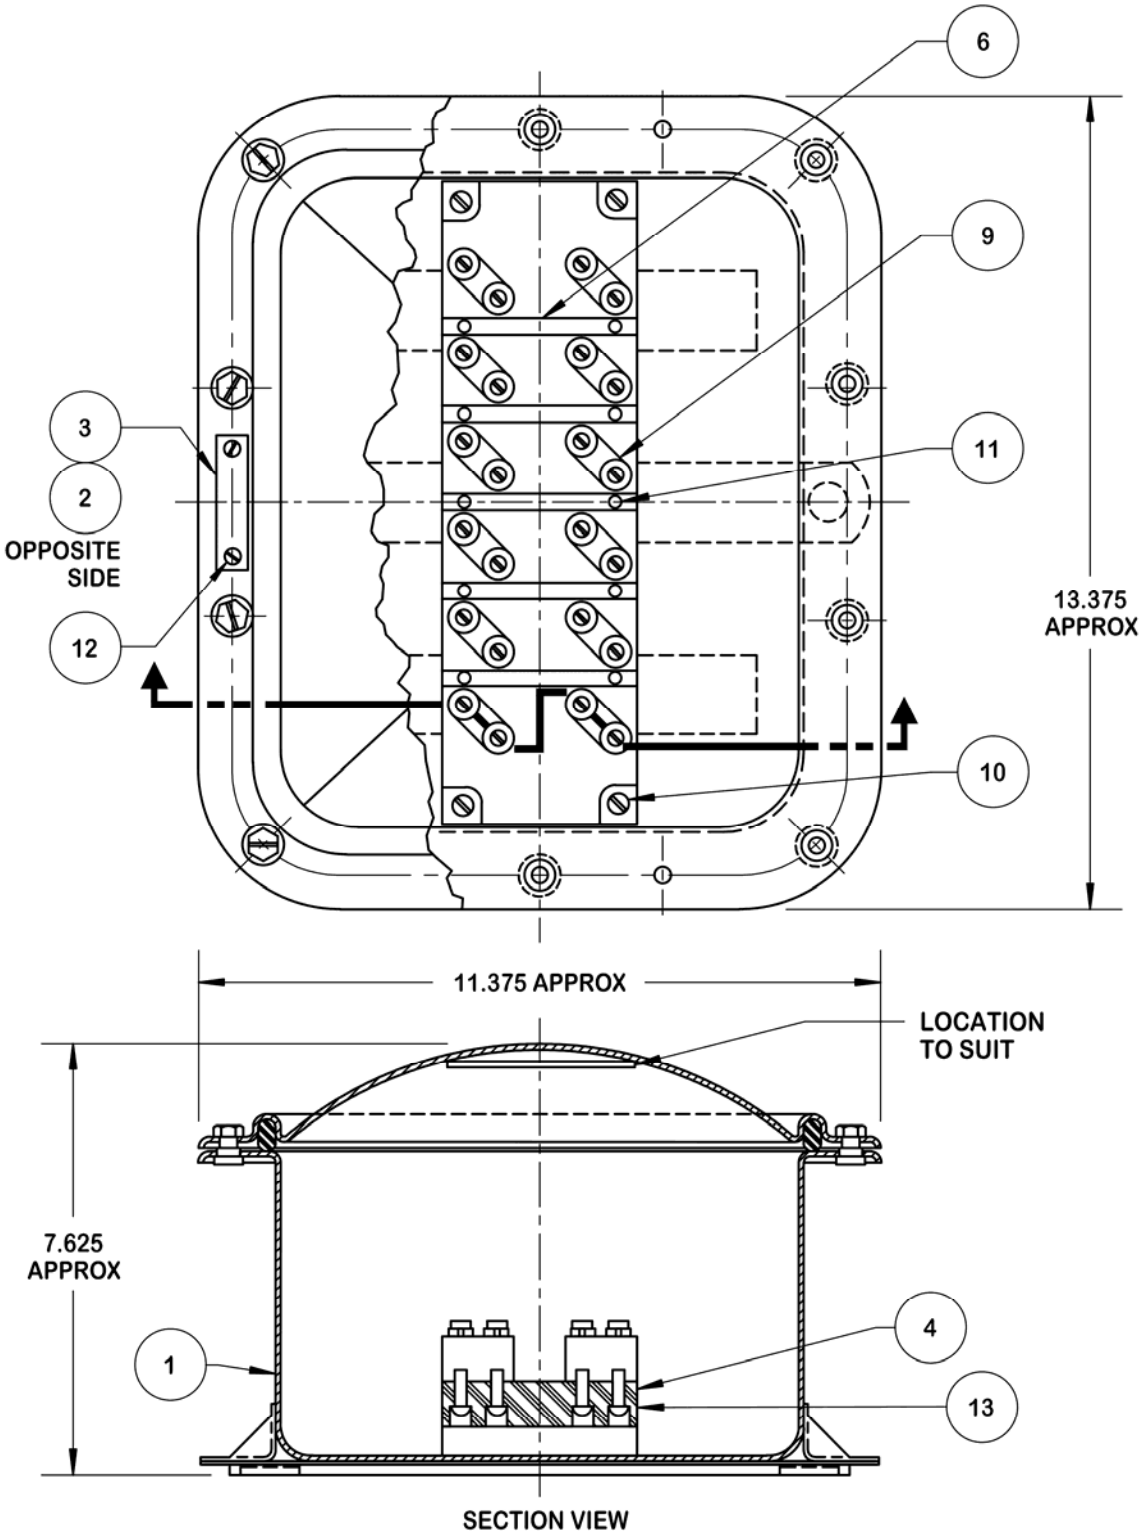


FIGURE 1. Connection box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

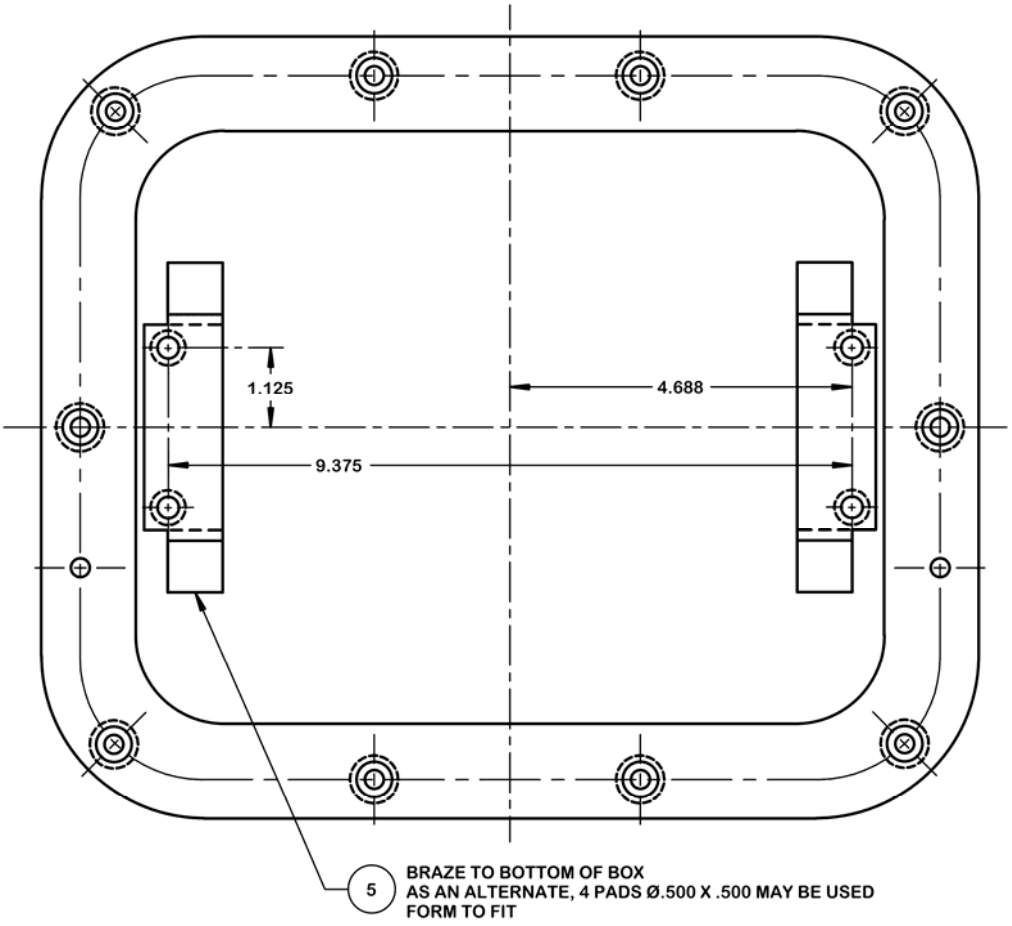


FIGURE 2. Location of terminal board mounting brackets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

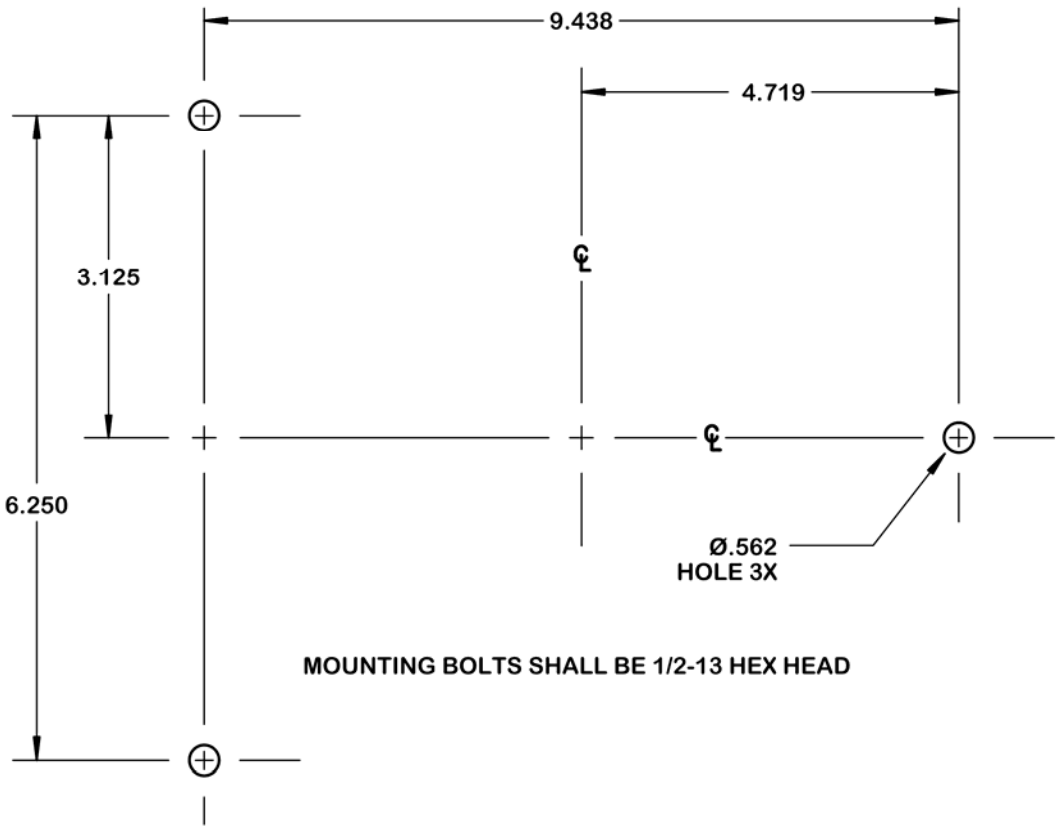


FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

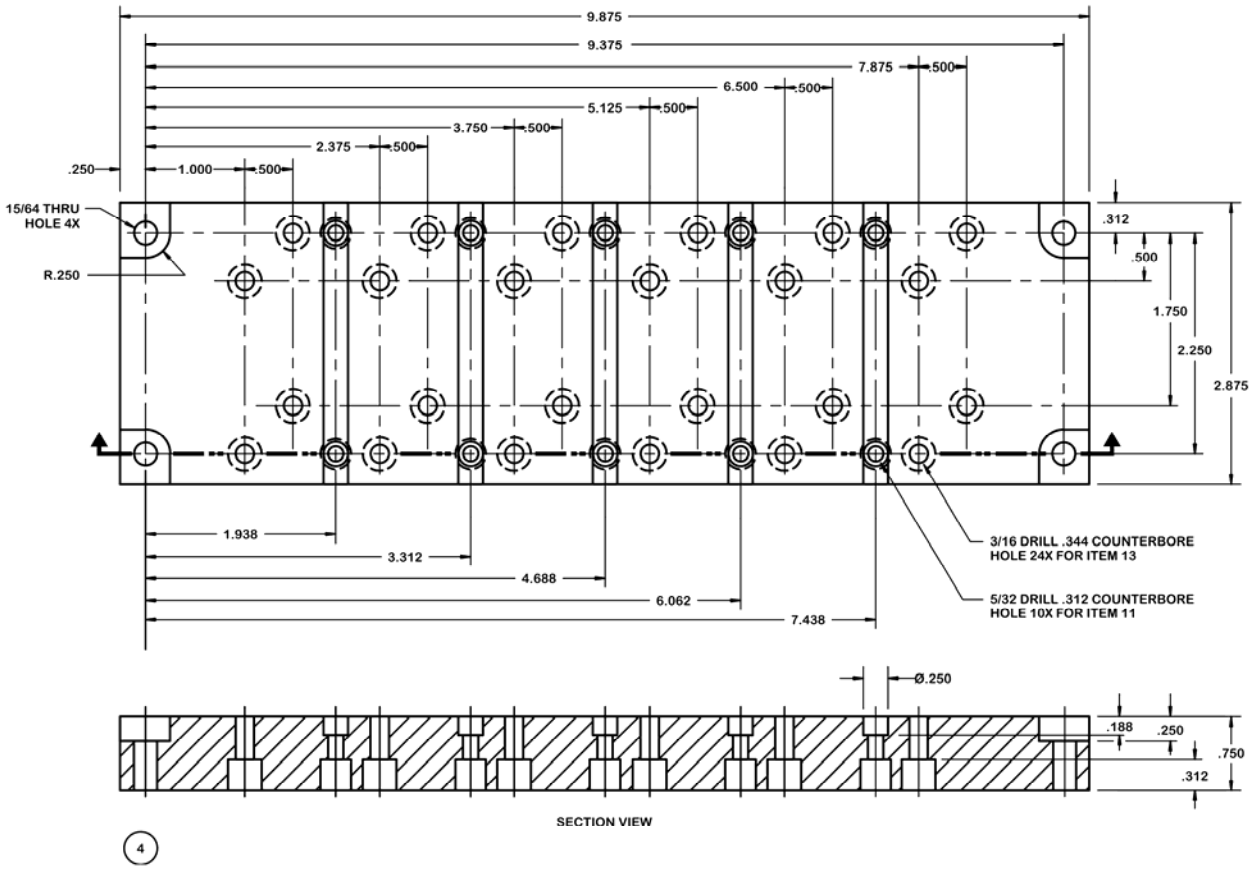


FIGURE 4. Terminal board base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

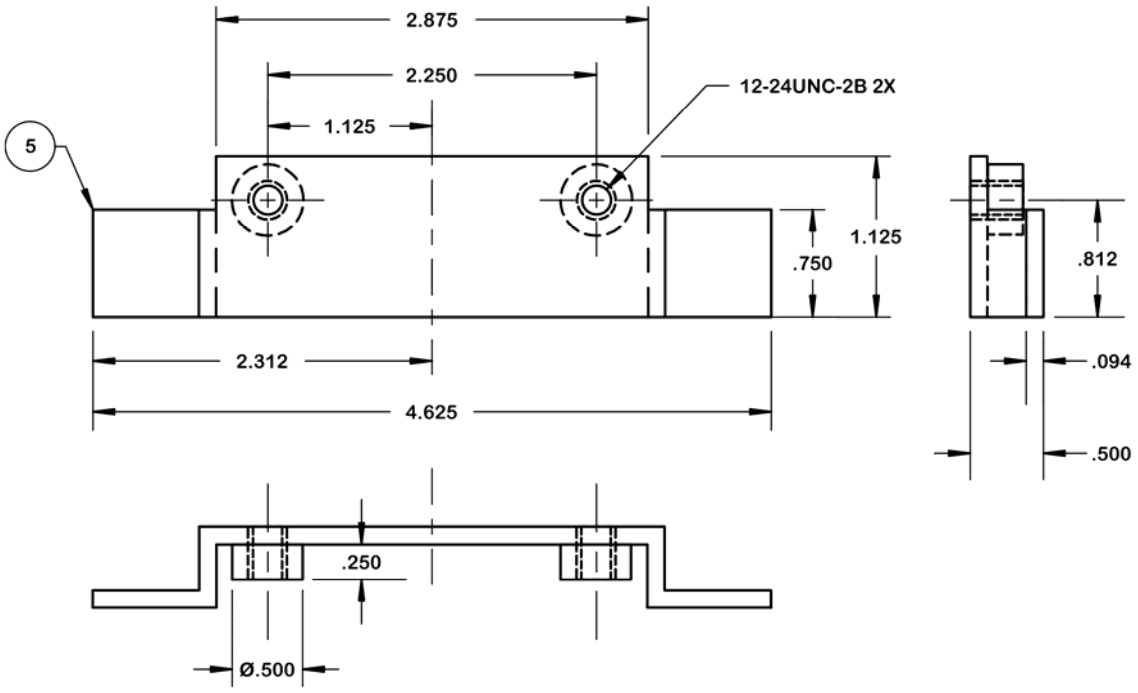


FIGURE 5. Mounting bracket.

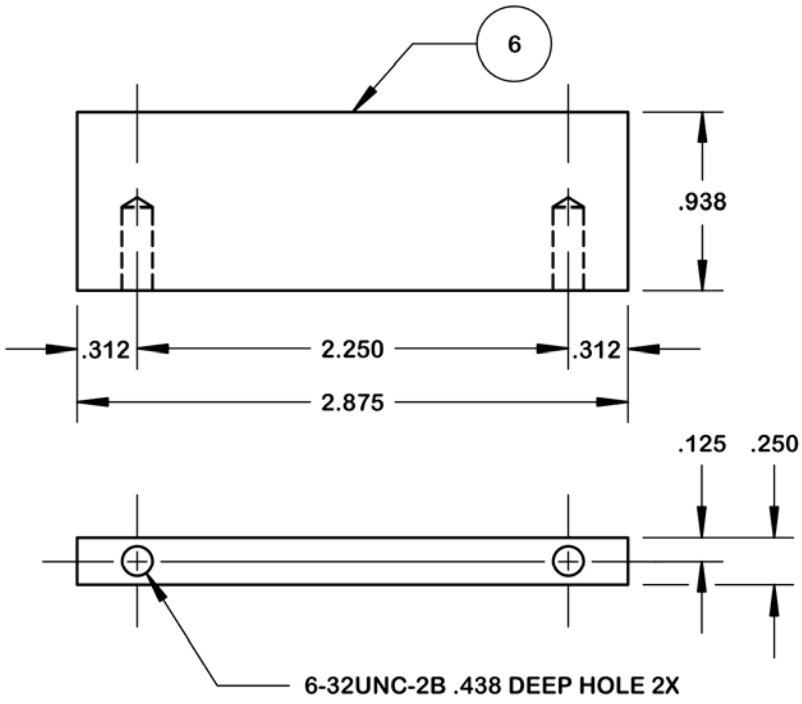


FIGURE 6. Barrier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

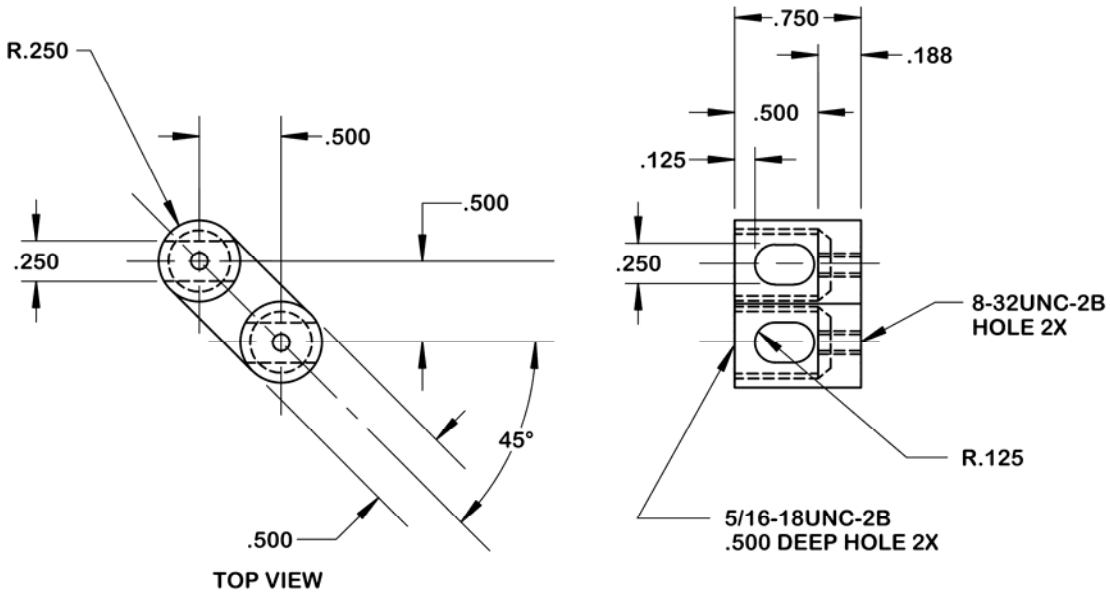


FIGURE 7. Terminal body.

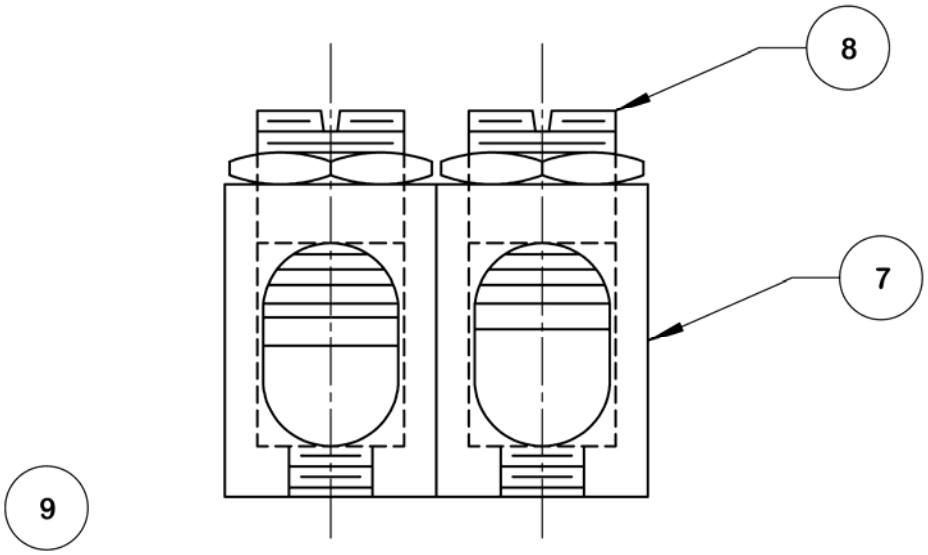


FIGURE 8. Terminal lug assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

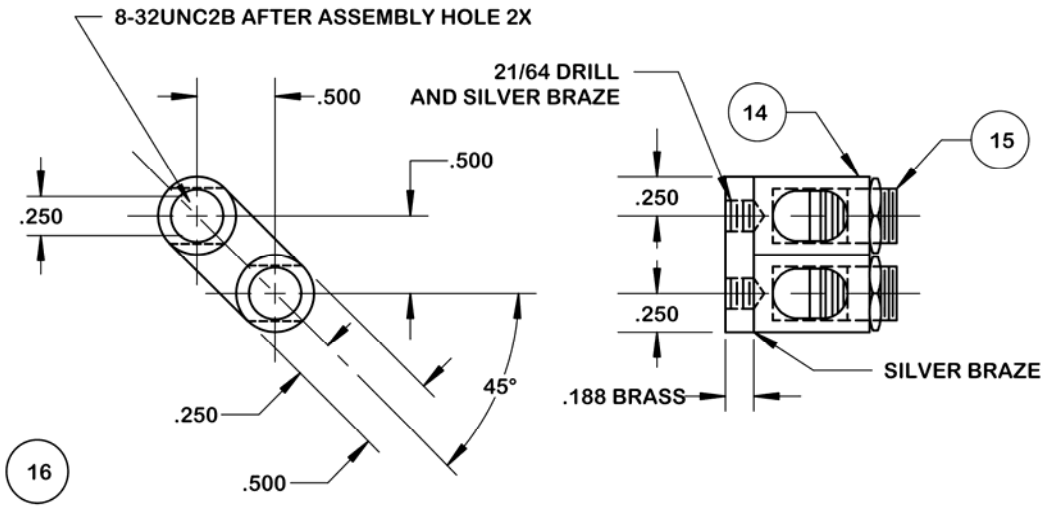


FIGURE 9. Alternate terminal lug assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Navy - SH
DLA - GS

Preparing Activity:
DLA - GS4

(Project 5940-2011-048)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:45Z
Check the source to verify that this is the current version before use.