MIL-T-24558/25(SH)
8 May 1981
SUPERSEDING NAVSHIPS
DRAWING NO. 9000-S6202-74193
REV. B 2 FEBRUARY 1957

MILITARY SPECIFICATION SHEET

TERMINAL BOXES, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, THREE-PHASE

SYMBOL 418.1, SIX BUS LUGS FOR TWO 3-CONDUCTOR 250 MCM CABLE;

SYMBOL 418.2, SIX BUS LUGS FOR TWO 3-CONDUCTOR 300 MCM CABLE;

SYMBOL 418.3, SIX BUS LUGS FOR TWO 3-CONDUCTOR 400 MCM CABLE

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquisition of the terminal boxes described herein shall consist of this document and the latest issue of MIL-T-24558(SH).


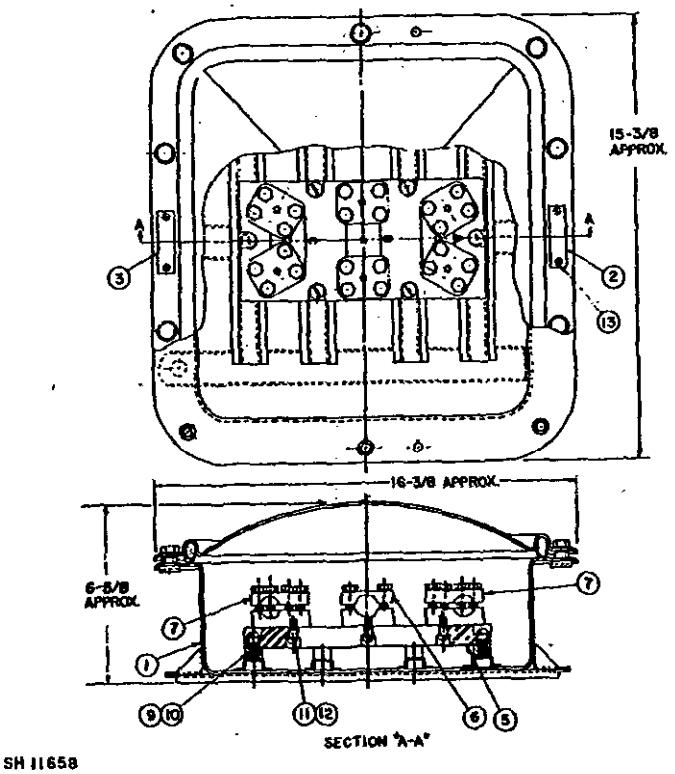


FIGURE 1. Connection box assembly.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.8 of MIL-T-24558.


FSC 5940

Source: https://assist.dla.mil -- Downloaded: 202640-19T22:48Z
Check the source to verify that this is the current version before use.

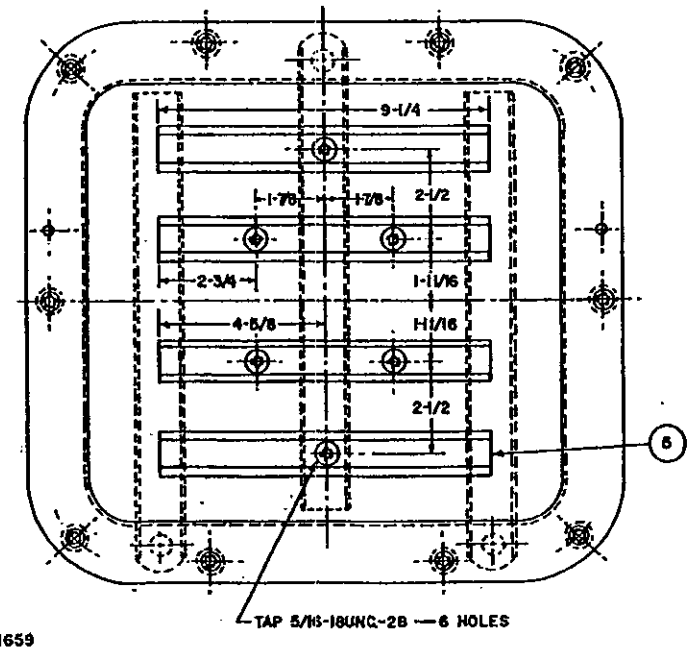

SH11659


FIGURE 2. Location of terminal board mounting pads.

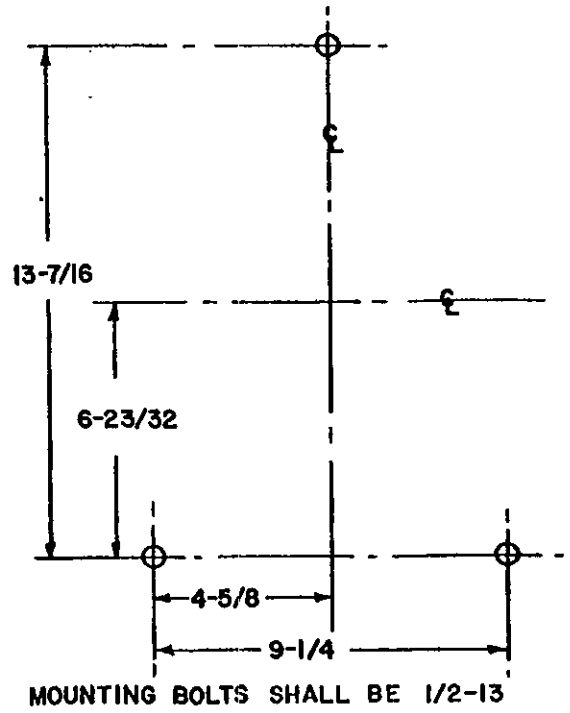

SH 11660

FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:48Z
Check the source to verify that this is the current version before use.

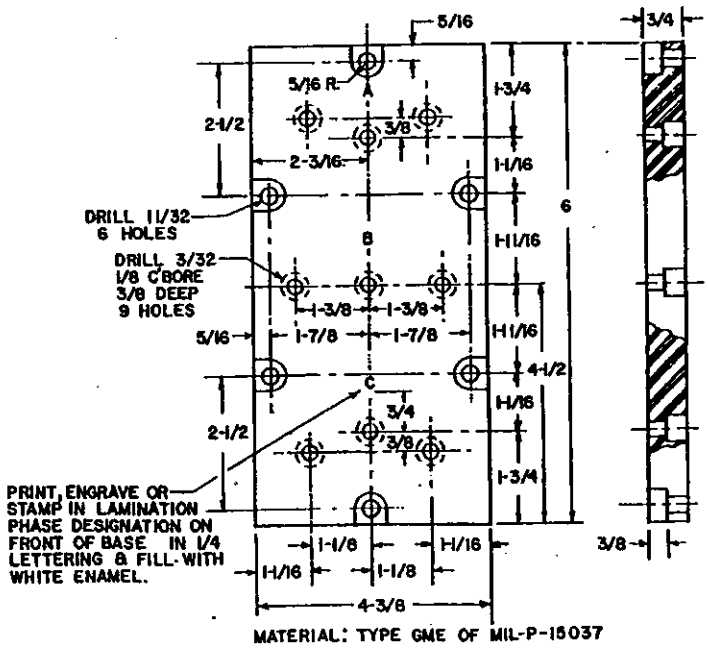


SH 11661

(4) FIGURE 4. Terminal board base.

TABLE FOR DRILLING TERMINAL CAP & PAD


FOR MILITARY PART NO. M24558/25	SIZE CABLE MCM	X DRILL INCH	Y INCH
418.1	250,	5/8	3/16
418.2	300,	11/16	3/16
418.3	400,	13/16	3/16

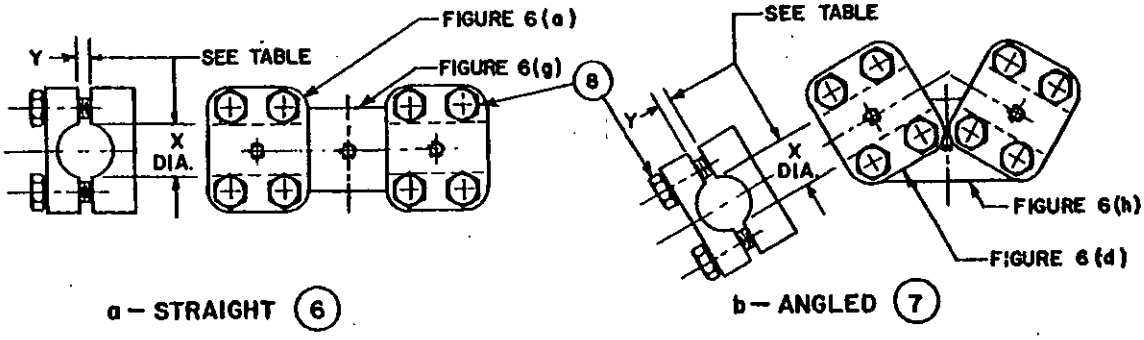


SH 11662

FIGURE 5. Terminal lug assembly.


Source: https://assist.dla.mil -- Downloaded: 20261019T22:48Z
Check the source to verify that this is the current version before use.

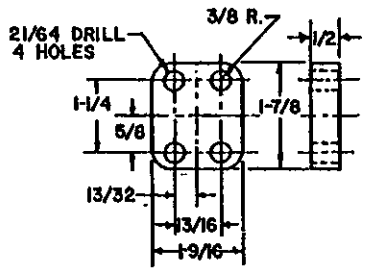


a — TERMINAL CAP



b — TERMINAL PAD - STRAIGHT

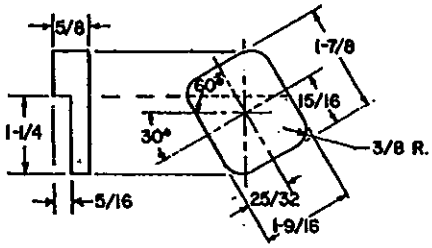


c — TERMINAL PAD - LEFT HAND




SAME AS "c" EXCEPT AS SHOWN


d — TERMINAL PAD - RIGHT HAND

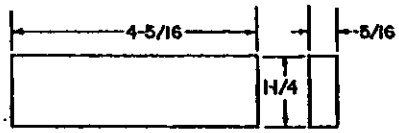


e — TERMINAL PLATE

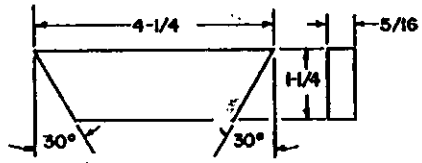

f — TERMINAL PLATE

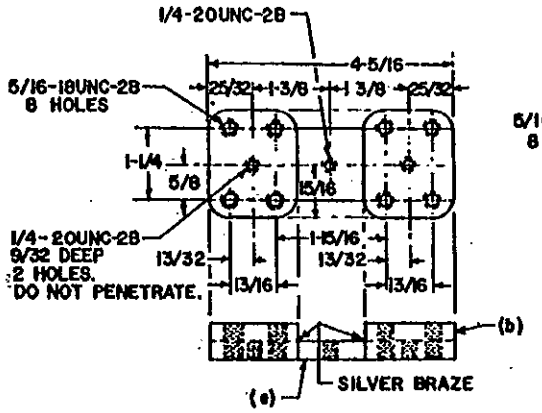

g — TERMINAL BODY ASSEMBLY STRAIGHT

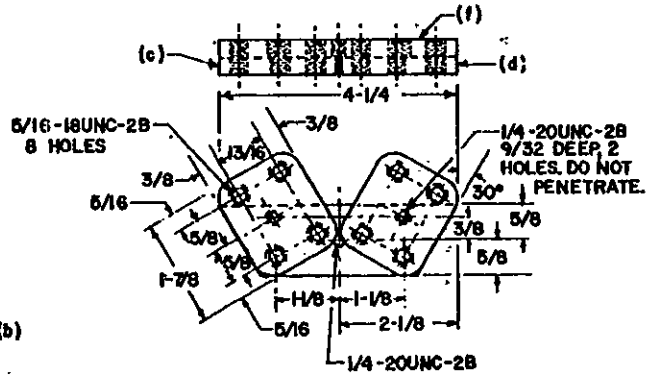

h — TERMINAL BODY ASSEMBLY ANGLED

(MATERIAL: COPPER OR CAST BRASS)

SH 11663

FIGURE 6. Terminal parts.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:

Electrical rating: 500-volts rms/DC. The maximum current shall be 550 amperes per terminal lug.

Dimensions and configuration: See figures 1 through 6.

Standard parts: The standard parts shown in table I shall be used in the construction of the connection box specified herein. Numbers in circles shown on the figures are the same as those shown in "Item" column of table I.

Finish: The interior of enclosure may be unpainted or painted at contractor's option.

Enclosure: 15-foot submersible.

QUALITY ASSURANCE: First article inspection and Quality conformance inspection shall be as specified in MIL-T-24558.

GENERAL INFORMATION: Assignment of Military part numbers and general information is as shown in table II.

TABLE I. Parts list.

Item	Description	Qty	Part No. or Spec	Remarks
1	Enclosure assembly, brass with Type "A" cover	1	MIL-E-24142/6	M24142/6-008
2	Identification plate	1	MIL-T-24558	Figure 6
3	Information plate	1	MIL-T-24558	Figure 6
4	Terminal board base	1	Figure 4	
5	Mounting bracket	4	MIL-T-24558	Figure 2
6	Terminal lug-straight	1	Figure 5(a)	
7	Terminal lug-angled	2	Figure 5(b)	
8	Hex Hd Cap screw 5/16-18x 1-1/8" long	24	COML	Brass
9	RH mach screw 5/16-18x7/8" long	6	COML	Brass
10	Washer for 5/16 screw	6	COML	Bronze
11	Washer for #10 screw	9	COML	Bronze
12	RH mach screw #10-20x5/8" long	9	COML	Brass
13	RH mach screw #6-32x3/16" long	4	COML	Brass

TABLE II. Military part numbers and general information.

Military Part No. M24558/25-	For Cable Size MCM	Remarks
418.1	250	1/ 2/ 3/ 4/
418.2	300	1/ 2/ 3/
418.3	400	1/ 2/ 3/

See footnotes on top of the following page.

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:48Z
Check the source to verify that this is the current version before use.

1/ Formerly covered on NAVSHIPS Drawing No. 9000-S6202-74193.

2/ Overall terminal box dimensions are approximate. Exact dimensions are shown on Military Specification for item 1, table I.

3/ The weight of the connection box shall be 33.0 lbs. maximum.

4/ Only this connection box will be stocked in the supply system. For other Military Part Numbers, installing activity should drill terminal lugs for "X" and "Y" dimensions shown on figure 5.

Preparing activity:
Navy - SH
(Project 5940-N856-25)

☆U.S. GOVERNMENT PRINTNG OFFICE: 1981 — 703-023/2916

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:48Z
Check the source to verify that this is the current version before use.