INCH-POUND

MIL-DTL-24558/25A
w/AMENDMENT 1
17 February 2006
SUPERSEDING
MIL-DTL-24558/25A
28 December 2004

DETAIL SPECIFICATION SHEET

TERMINAL BOXES, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, THREE-PHASE SYMBOL 418.1, SIX BUS LUGS FOR TWO 3-CONDUCTOR 250 MCM CABLE; SYMBOL 418.2, SIX BUS LUGS FOR TWO 3-CONDUCTOR 300 MCM CABLE; SYMBOL 418.3, SIX BUS LUGS FOR TWO 3-CONDUCTOR 400 MCM CABLE

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with tables I and II and figures 1 through 6.

1. Electrical rating. The terminal box shall have an electrical rating of 500 volts rms/DC. The maximum current shall be 550 amperes per terminal lug.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 6. All dimensions in figures 1 through 6 are expressed in inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/6, "Enclosure, Submersible (15-Foot), Sizes 8 By 10 Through 14 By 26".

3. Tolerance. All tolerances, other than specified herein, shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 through 6 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Finish. The interior of enclosure may be unpainted or painted at contractor's option.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

7. Weight. The weight of the connection box shall be 34.5 lbs. maximum.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

GENERAL INFORMATION:

1. Drawing. The terminal box specified by MIL-DTL-24558/25A was formerly covered on NAVSHIPS Drawing No. 9000-S6202-74193.

2. Part or identification number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:

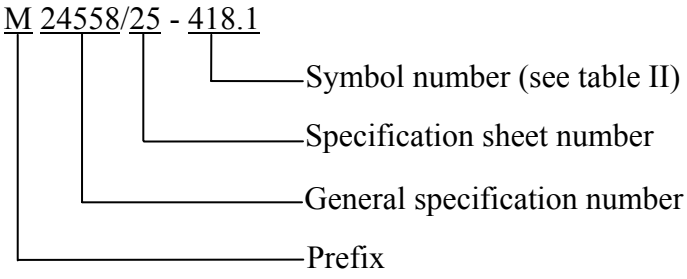


TABLE I. Parts list.


Item	Description	Qty.	Part no. or specification	Remarks
1	Enclosure assembly, brass with type "A" cover	1	MIL-E-24142/6	M24142/6-008
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Terminal board base	1	Figure 4	
5	Mounting bracket	4	MIL-DTL-24558	Figure 2
6	Terminal lug - straight	1	Figure 5 (a)	
7	Terminal lug - angled	2	Figure 5 (b)	
8	Hex head cap screw 5/16-18 X 1-1/8" long	24	COML	Brass
9	RH mach screw 5/16-18 X 7/8" long	6	COML	Brass
10	Washer for 5/16 screw	6	COML	Bronze
11	Washer for #10 screw	9	COML	Bronze
12	RH mach screw #10-20 X 5/8" long	9	COML	Brass
13	RH mach screw #6-32 X 3/16" long	4	COML	Brass

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

TABLE II. Symbol numbers and general information.

Symbol number	For cable size MCM
418.1[1]	250
418.2	300
418.3	400


[1]Only this connection box will be stocked in the supply system. For other symbol numbers, installing activity should drill terminal lugs for "X" and "Y" dimensions shown on figure 5.

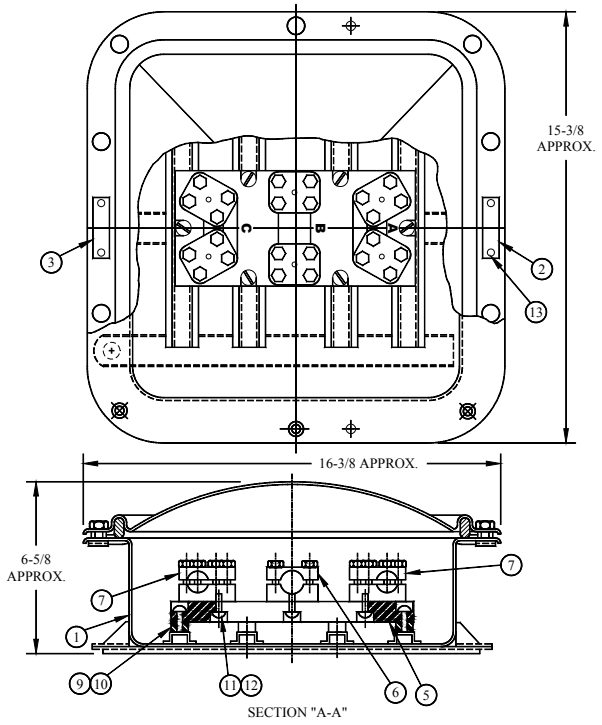

SH 11658


FIGURE 1. Connection box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

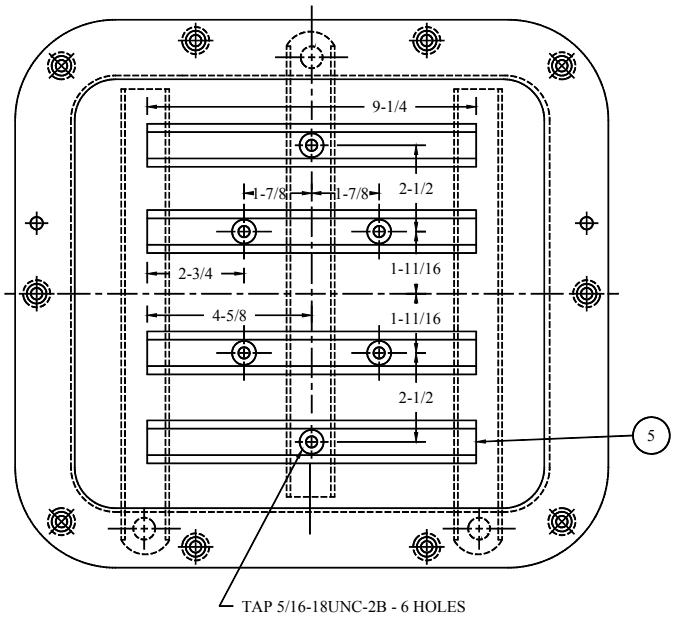

SH 11659


FIGURE 2. Location of terminal board mounting pads.

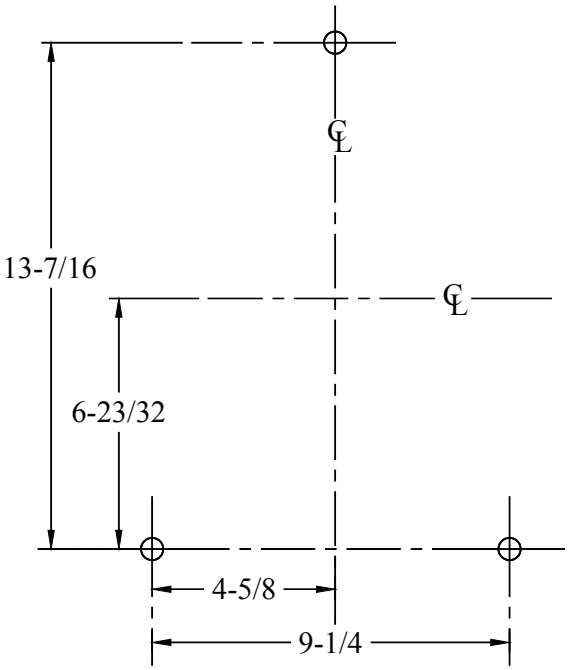

SH 11660

FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

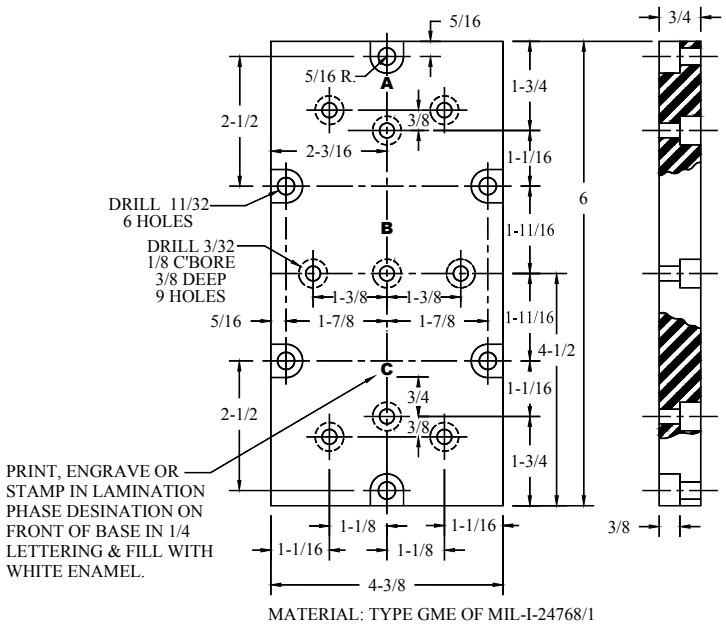


SH 11661

FIGURE 4. Terminal board base.

TABLE FOR DRILLING TERMINAL CAP & PAD


FOR MILITARY PART NO. M24558/25	SIZE CABLE MCM	5/8 DRILL INCH	Y INCH
418.1	250,	5/8	3/16
418.2	300,	11/16	3/16
418.3	400,	13/16	3/16

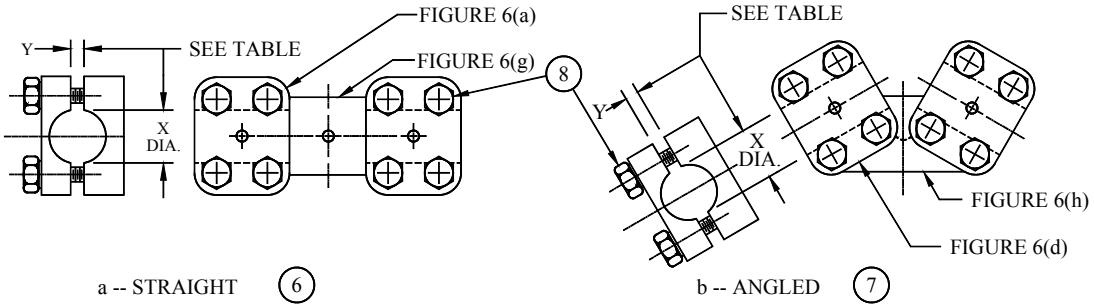


SH 11662

FIGURE 5. Terminal lug assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

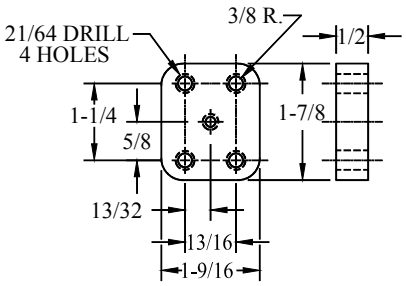


a -- TERMINAL CAP



b -- TERMINAL PAD - STRAIGHT

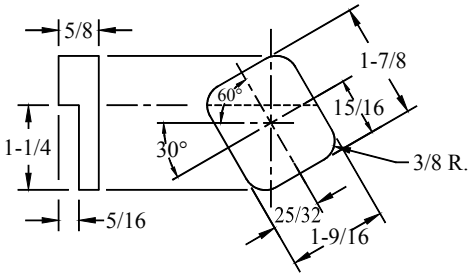


c -- TERMINAL PAD - LEFT HAND




SAME AS "c" EXCEPT AS SHOWN


d -- TERMINAL PAD - RIGHT HAND

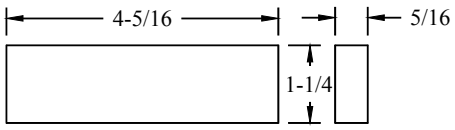


e -- TERMINAL PLATE

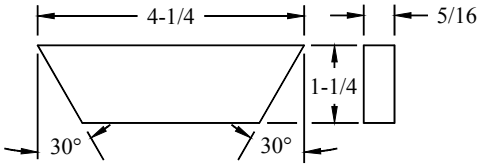

f -- TERMINAL PLATE

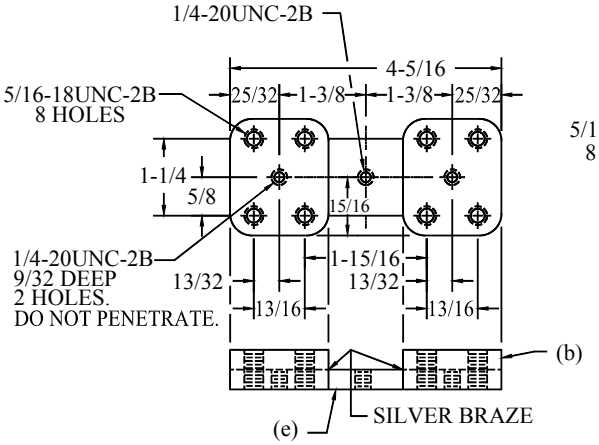

g -- TERMINAL BODY ASSEMBLY
STRAIGHT

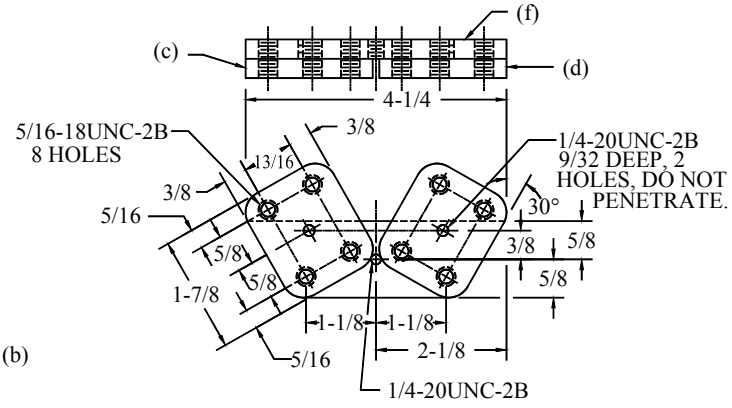

h -- TERMINAL BODY ASSEMBLY
ANGLED

(MATERIAL: COPPER OR CAST BRASS)

SH 11663

FIGURE 6. Terminal parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodian:
Navy - SH

Preparing Activity:
DLA - GS2

(Project 5940-2005-024)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.