INCH-POUND

MIL-DTL-24558/25B
3 October 2011
SUPERSEDING
MIL-DTL-24558/25A
w/AMENDMENT 1
17 February 2006

DETAIL SPECIFICATION SHEET

TERMINAL BOXES, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, THREE-PHASE, SYMBOL NO. 418.1 - SIX BUS LUGS FOR TWO 3-CONDUCTOR 250 MCM CABLES, SYMBOL NO. 418.2 - SIX BUS LUGS FOR TWO 3-CONDUCTOR 300 MCM CABLES, SYMBOL NO. 418.3 - SIX BUS LUGS FOR TWO 3-CONDUCTOR 400 MCM CABLES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal boxes shall be as specified herein and in accordance with tables I and II, and figures 1 through 6.

1. Electrical rating. The terminal boxes shall have an electrical rating of 500 volts root mean square, and 500 volts direct current. The maximum current shall not exceed 550 amperes per terminal lug.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 6. All dimensions in figures 1 through 6 are expressed in decimal inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/6, "Enclosure, Submersible (15-Foot), Sizes 8 by 10 Through 14 by 26".

3. Tolerance. All tolerances not specified herein shall be in accordance with MIL-DTL-24558.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection boxes specified herein. The numbers in circles shown on figures 1, 2, 4, and 5 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosures shall be a 15-foot submersible type.

6. Finish. The interior of the enclosures may be painted or left unpainted at the contractor's option.


7. Weight. The weight of the connection boxes shall not exceed 34.5 pounds.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

NOTES:

1. Drawing. The terminal boxes specified by this specification sheet were formerly covered on NAVSHIPS drawing no. 9000-S6202-74193.

2. Part or identifying number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:

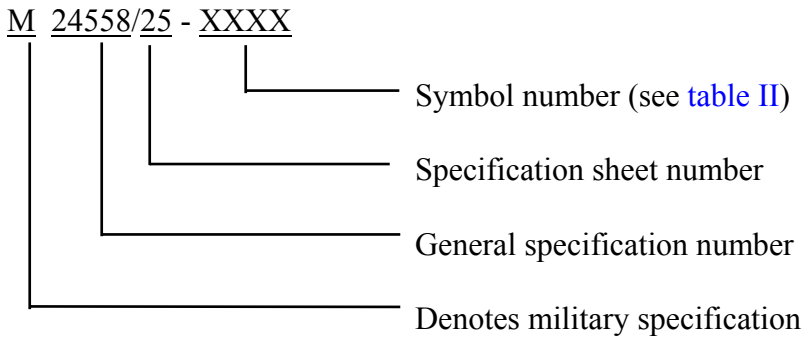

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item	Description	Qty	Part number or specification	Remarks
1	Enclosure assembly, brass with type A cover	1	MIL-E-24142/6	M24142/6-008
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Terminal board base	1	Figure 4	MIL-I-24768/1 type GME
5	Mounting bracket	4	MIL-DTL-24558	Figure 2
6	Terminal lug assembly, straight	1	Figure 5, A	
7	Terminal lug assembly, angled	2	Figure 5, B	
8	Hex head cap screw 5/16-18 X 1.125	24	Commercial	Brass
9	RDH machine screw 5/16-18 X 0.875	6	Commercial	Brass
10	Washer, 5/16 internal tooth	6	Commercial	Bronze
11	Washer, #10 internal tooth	9	Commercial	Bronze
12	RDH machine screw 1/4-20 X 0.625	9	Commercial	Brass
13	RDH machine screw 6-32 X 0.188	4	Commercial	Brass

TABLE II. Symbol numbers and general information.

Symbol number	For cable size MCM [1]
418.1 [2]	250
418.2	300
418.3	400

[1] MCM is defined as thousand circular mils.
[2] Only this connection box will be stocked in the supply system. For other symbol numbers, installing activity should drill terminal lugs for "ØX" and "Y" dimensions shown on figure 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

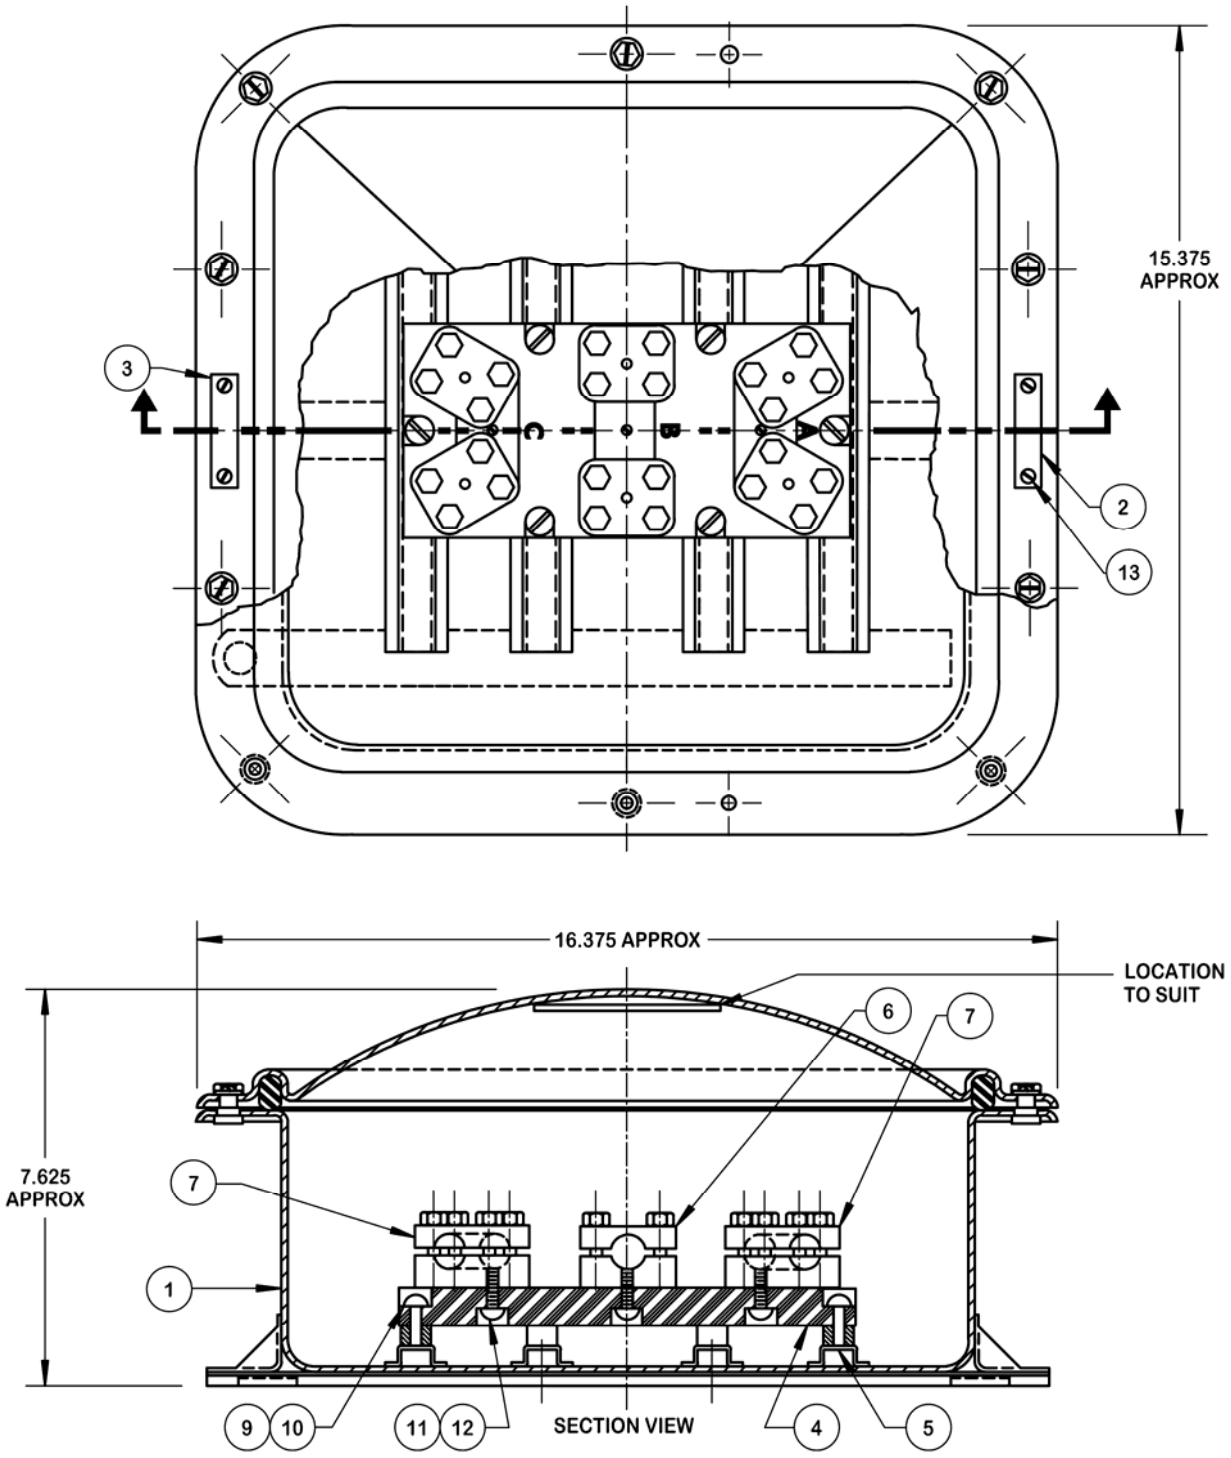


FIGURE 1. Connection box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

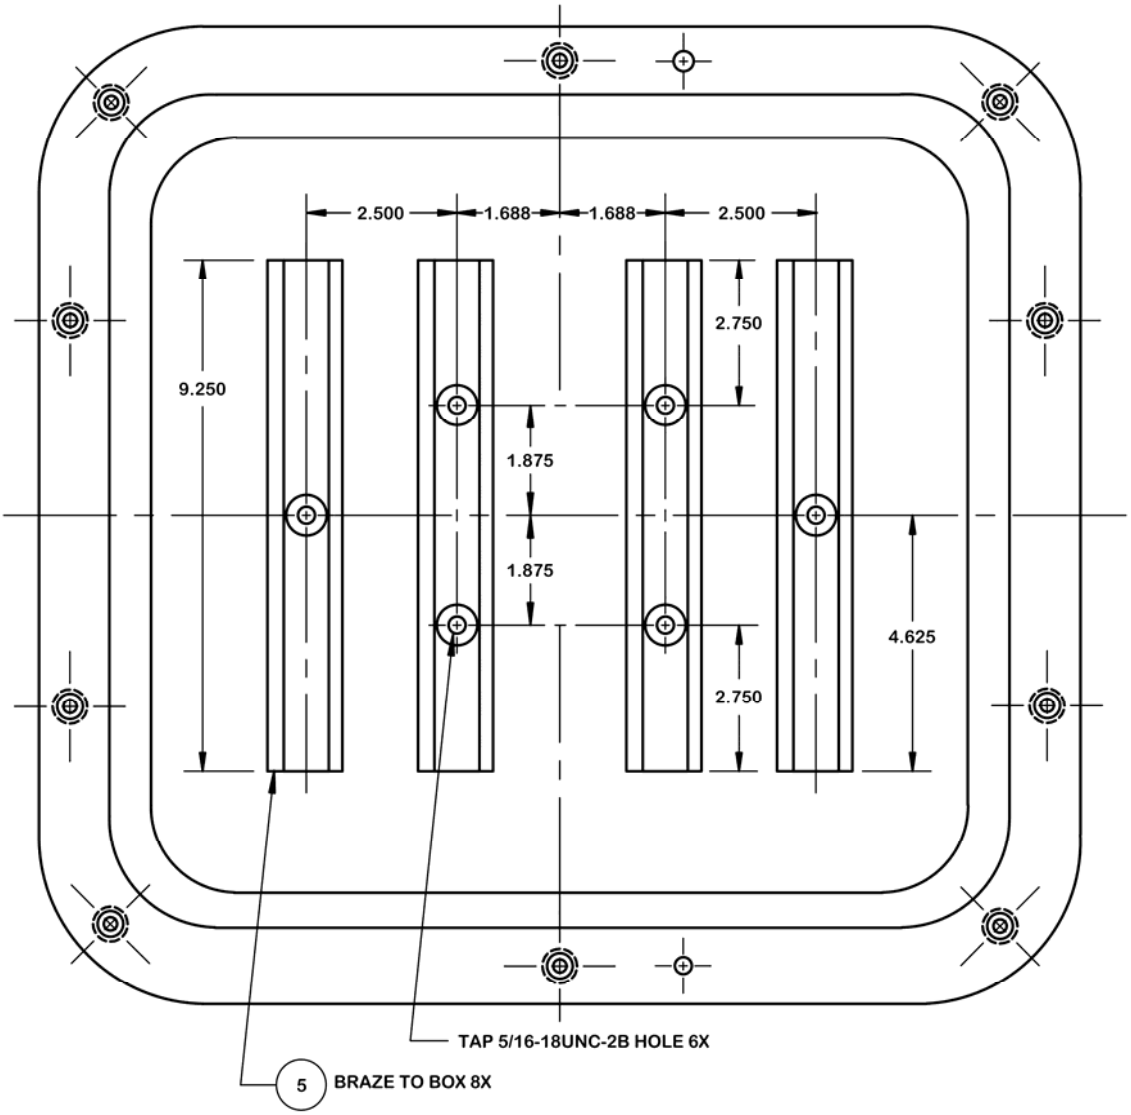


FIGURE 2. Location of terminal board mounting pads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

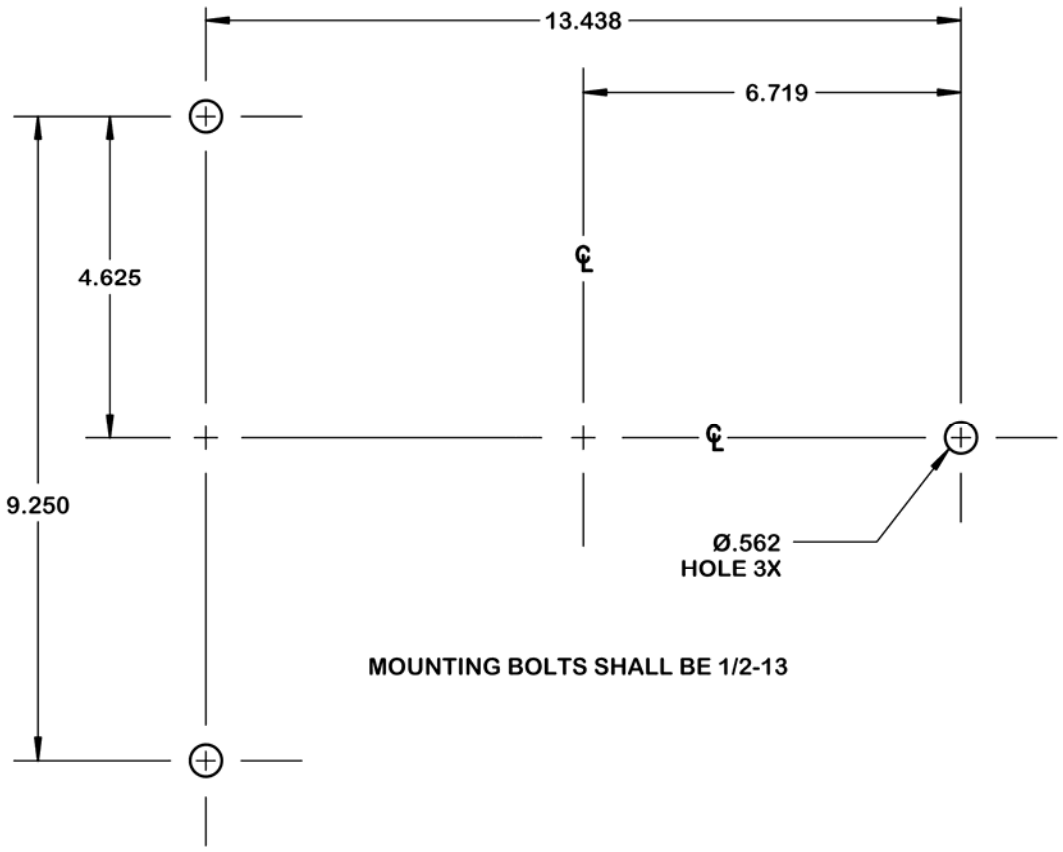


FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

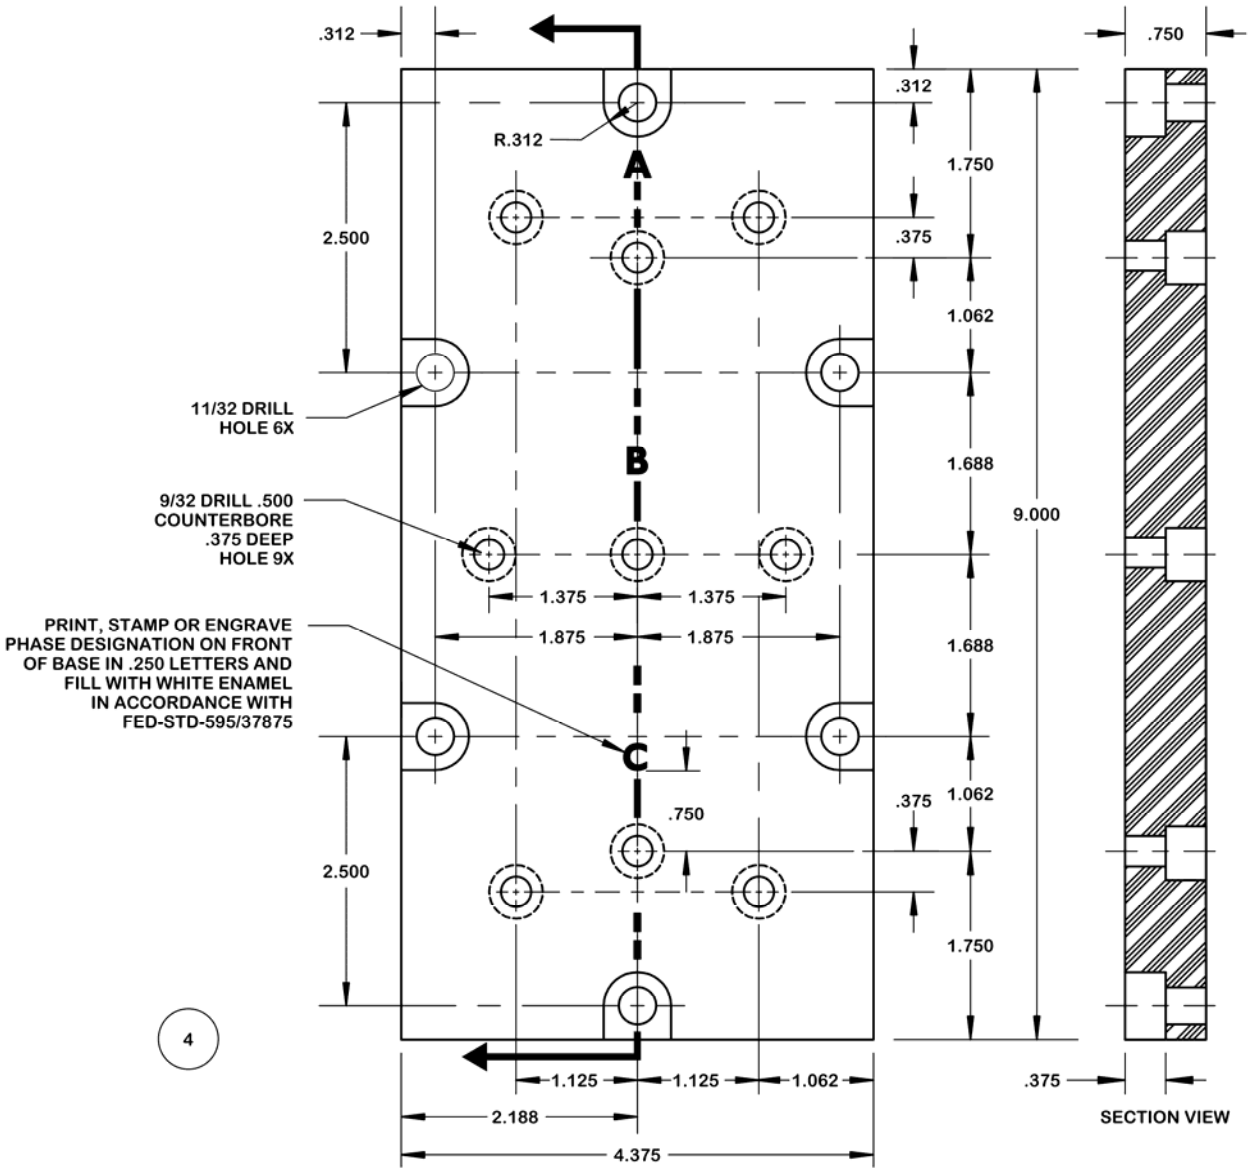


FIGURE 4. Terminal board base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

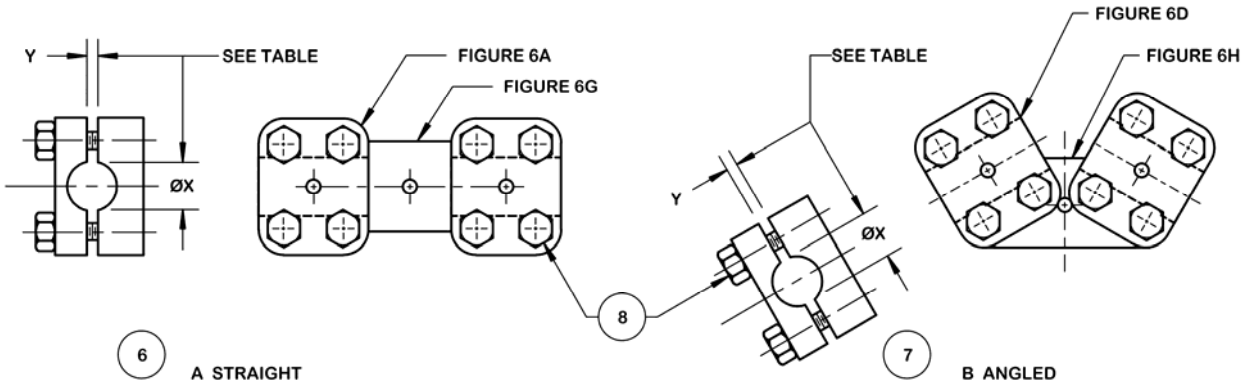


TABLE FOR DRILLING TERMINAL CAP AND PAD

Symbol numbers	Cable size MCM	ØX drill	Y
418.1	250	5/8	.188
418.2	300	11/16	.188
418.3	400	13/16	.188

FIGURE 5. Terminal lug assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

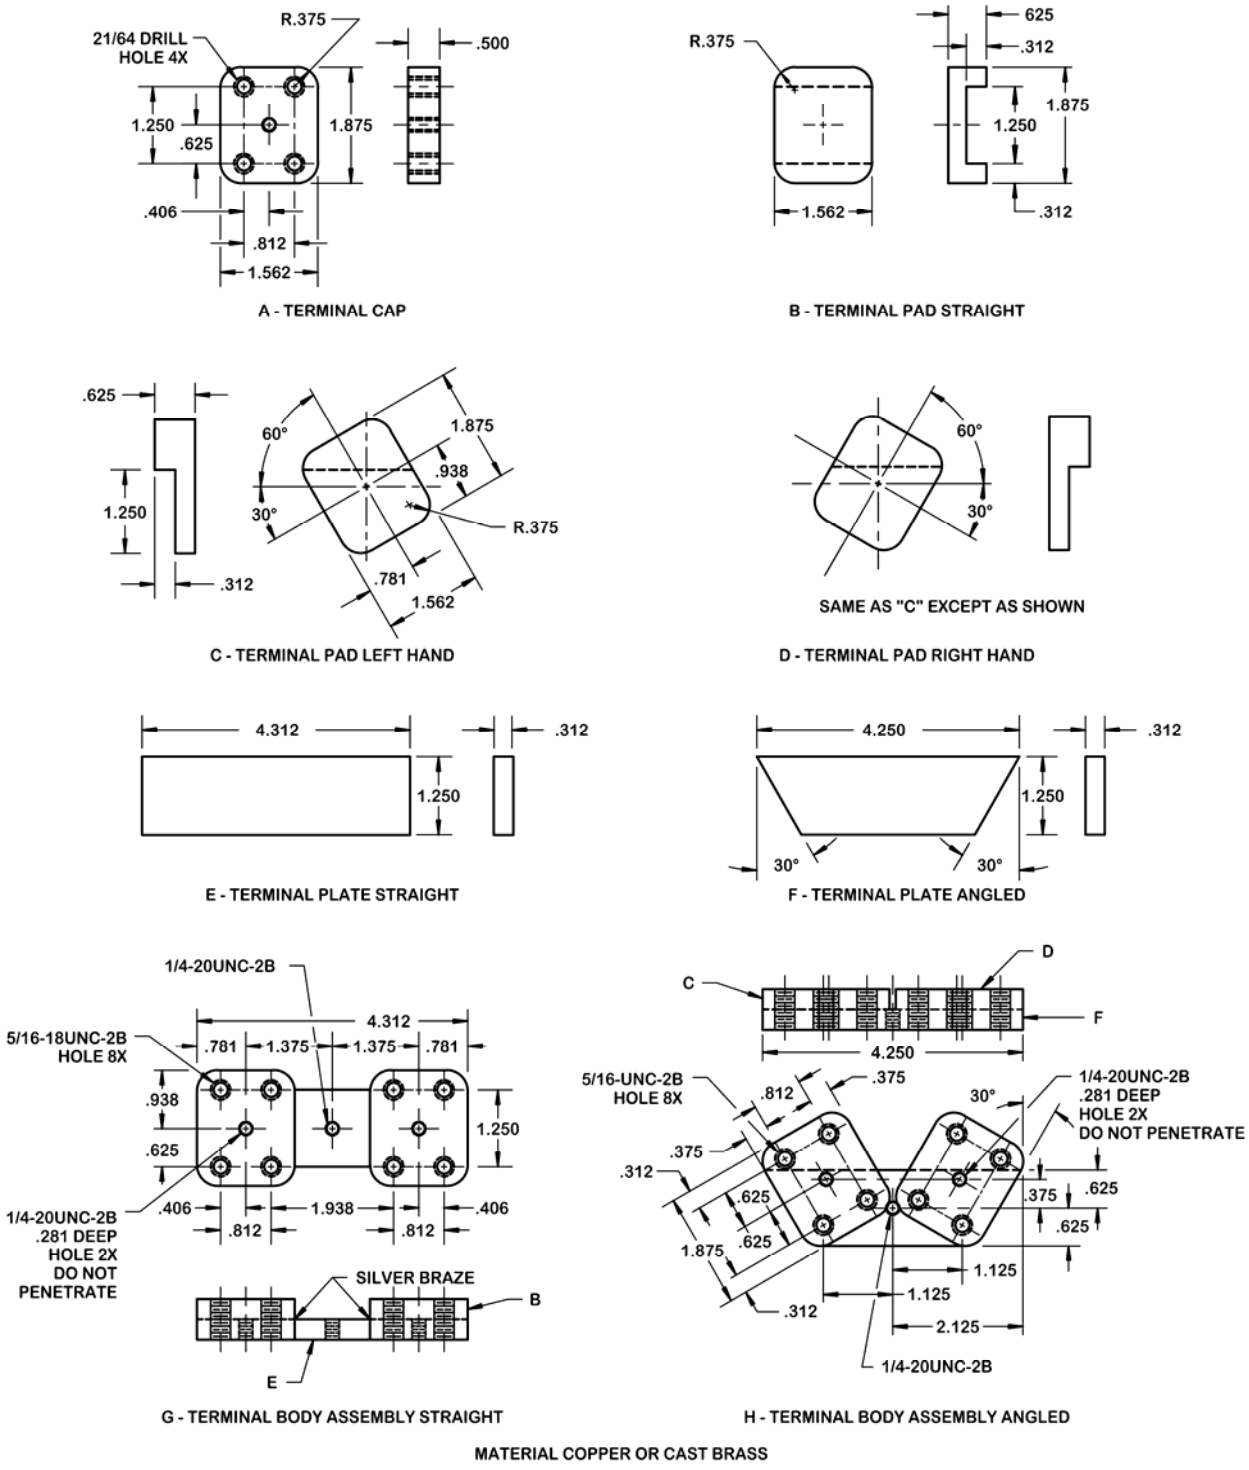


FIGURE 6. Terminal parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Navy - SH
DLA - GS

Preparing Activity:
DLA - GS4

(Project 5940-2011-052)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:48Z
Check the source to verify that this is the current version before use.