INCH-POUND

MIL-DTL-24558/26A
28 December 2004
SUPERSEDING
MIL-T-24558/26
8 May 1981

DETAIL SPECIFICATION SHEET

TERMINAL BOX, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, THREE-PHASE SYMBOL 572.1, SIX BRANCH LUGS FOR TWO 3-CONDUCTOR 40 MCM CABLES, SIX BUS LUGS FOR TWO 3-CONDUCTOR 75 MCM CABLES

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1 through 12.

1. Electrical rating. The terminal box shall have an electrical rating of 500 volts rms/DC. Bus terminals are designed for 75 MCM cable. Branch terminals are designed for 40 MCM cable.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 12. All dimensions in figures 1 through 12 are expressed in inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/6, "Enclosure, Submersible (15-Foot), Sizes 8 By 10 Through 14 By 26".

3. Tolerance. All tolerances, other than specified herein, shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 through 12 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Finish. The interior of enclosure may be unpainted or painted at contractor's option.

7. Weight. The weight of the connection box shall be 29.9 lbs. maximum.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:49Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

GENERAL INFORMATION:

1. Drawing. The terminal box specified by MIL-DTL-24558/26A was formerly covered on NAVSHIPS Drawing No. 9000-S6202-74175.

2. Part or identification number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:

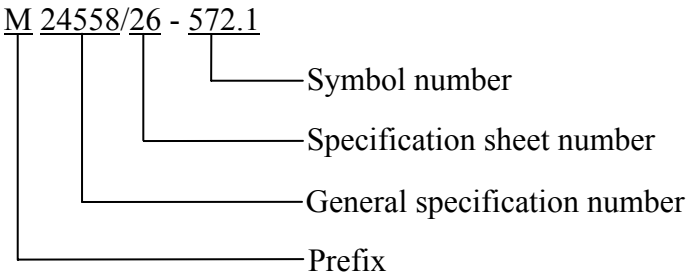



TABLE I. Parts list.

Item	Description	Qty.	Part no. or specification	Remarks
1	Enclosure assembly, brass with type "A" cover	1	MIL-E-24142/6	M24142/6-004
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Terminal board base	1	Figure 4	MIL-I-24768/1 type GME
5	Mounting bracket	2	MIL-DTL-24558	Figure 2
6	Terminal bus cover	1	Figure 5	MIL-I-24768/1 type GME
7	Terminal bus assembly - phase "A" and "C"	2	Figure 6	Brass
8	Terminal bus assembly - phase "B"	1	Figure 7	Brass
9	Terminal bus body	6	S6202-73055-2	Brass
10	Terminal bus pressure screw assembly	6	S6202-73055-22	Brass
11	Branch terminal body	6	S6202-73246-3	Brass
12	Branch terminal pressure screw assembly	6	S6202-73246-23	Brass
13	Terminal board spacer	6	Figure 8	Brass
14	Barrier	4	Figure 9	MIL-I-24768/1 type GME

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:49Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list - Continued.


Item	Description	Qty.	Part no. or specification	Remarks
15	Insert	4	Figure 10	Steel
16	Barrier	2	Figure 11	MIL-I-24768/1 type GME
17	Spacer	2	Figure 12	Brass
18	RH mach screw .138-32 X 3/16" long	4	COML	Brass
19	FH mach screw .138-32 X 1/2" long	8	COML	Steel
20	RH mach screw .190-24 X 9/16" long	9	COML	Brass
21	Washer for .190 screw	9	COML	Steel
22	FH mach screw .190-24 X 1-1/4" long	4	COML	Steel
23	RH mach screw 1/4-20 X 3/4" long	4	COML	Steel
24	Washer for 1/4" screw	4	COML	Steel

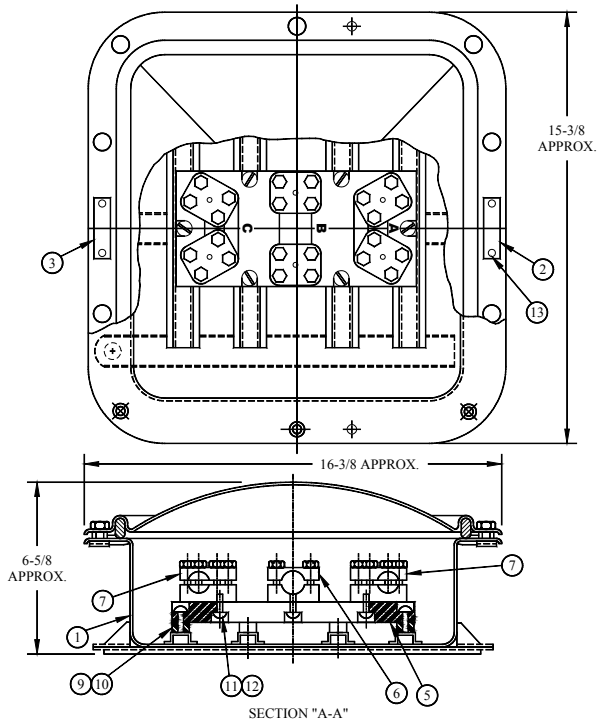

SH 11664

FIGURE 1. Connection box assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:49Z
Check the source to verify that this is the current version before use.

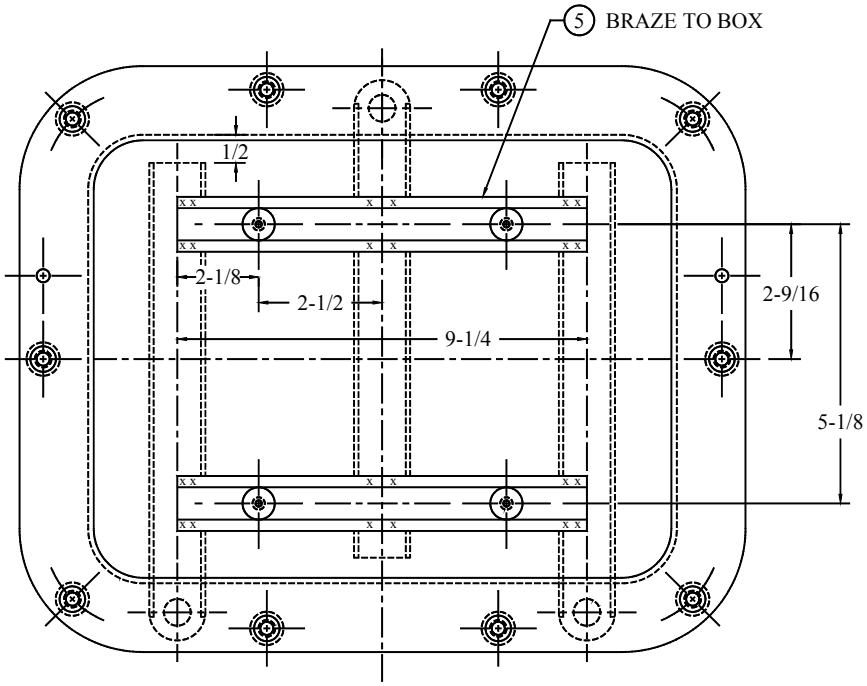

SH 11665

5


FIGURE 2. Location of terminal board mounting brackets.

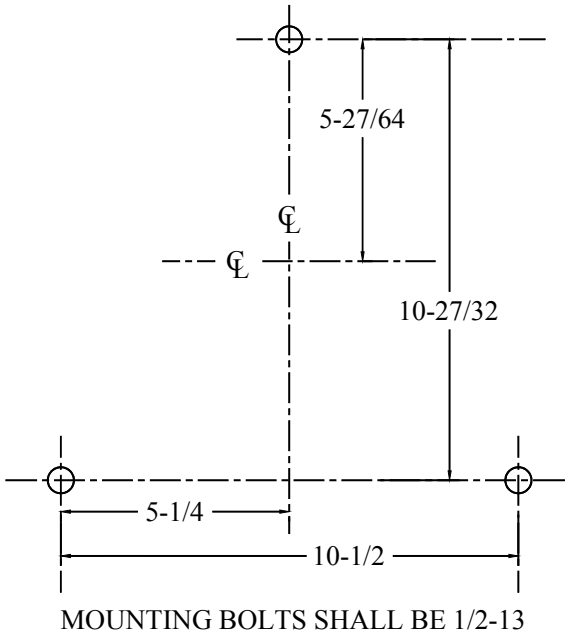

SH 11666

FIGURE 3. Mounting dimensions.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:49Z
Check the source to verify that this is the current version before use.

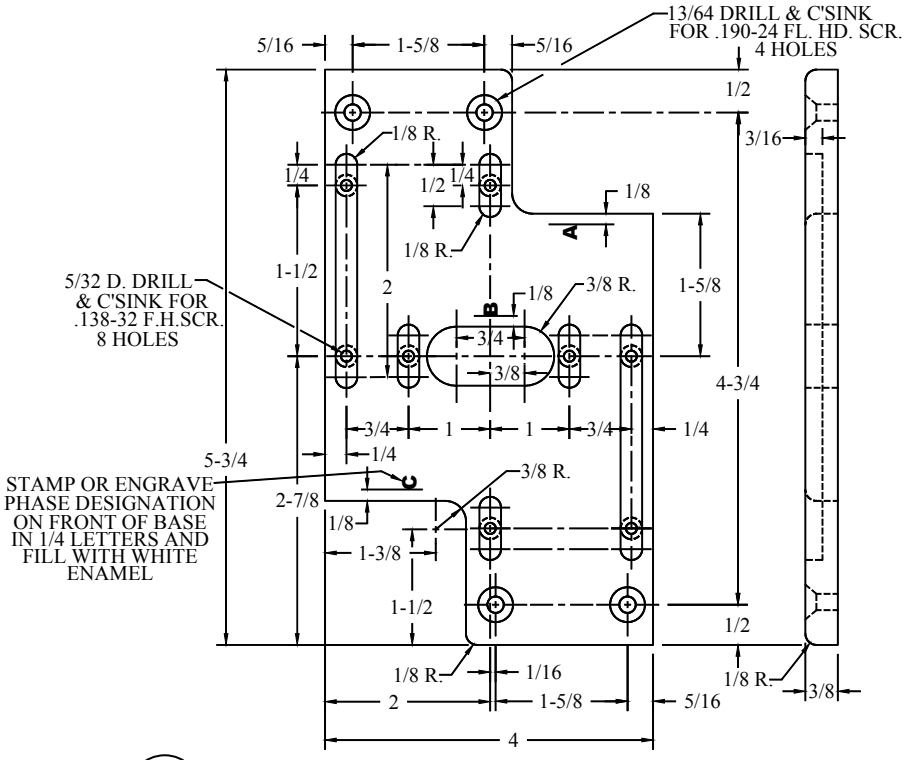

SH 11667

4

FIGURE 4. Terminal board base.

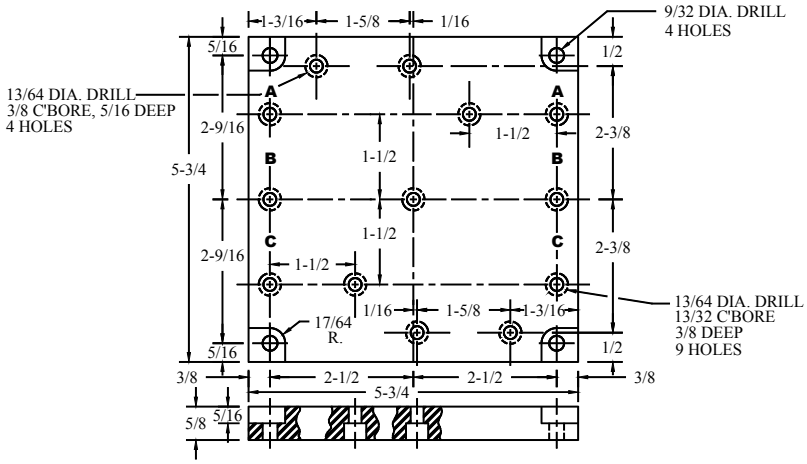


SH 11668

6

FIGURE 5. Terminal bus cover.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:49Z
Check the source to verify that this is the current version before use.

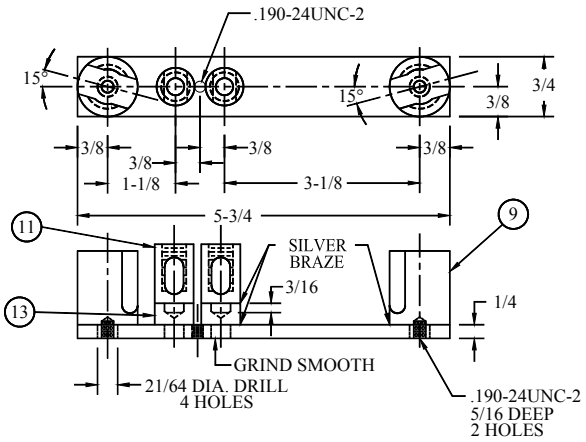

SH 11669

7


FIGURE 6. Terminal bus assembly - Phase "A" and "C".

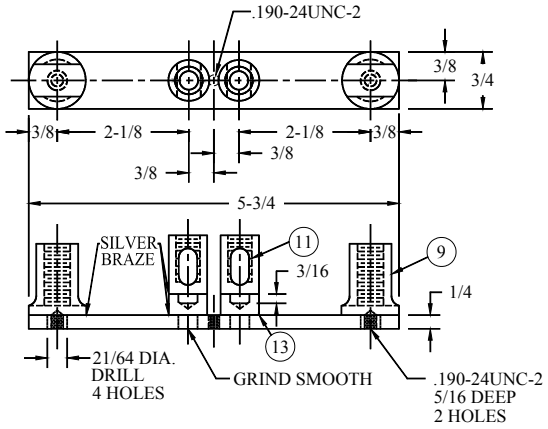

SH 11670

8

FIGURE 7. Terminal bus assembly - Phase "B".

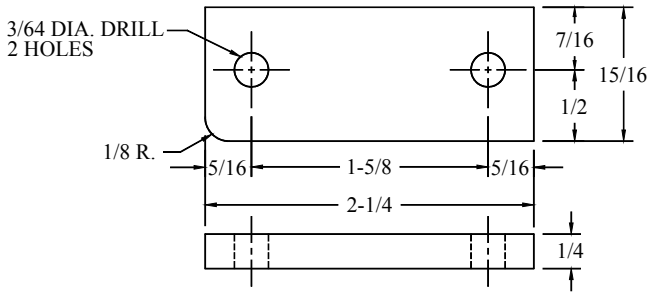


SH 11671

13

FIGURE 8. Terminal board spacer.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:49Z
Check the source to verify that this is the current version before use.



SH 11672

14


FIGURE 9. Barrier.

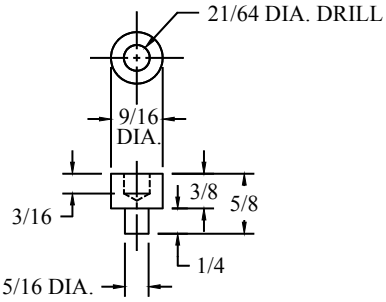

SH 11673

15


FIGURE 10. Insert.

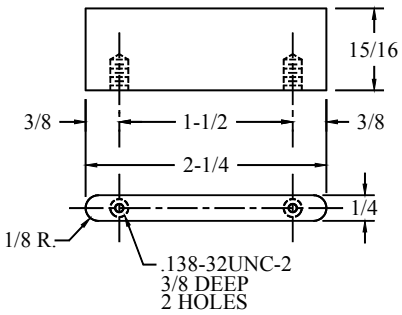

SH 11674

16

FIGURE 11. Barrier.

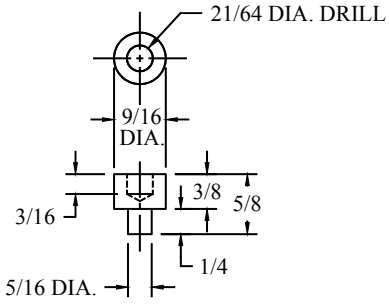

SH 11675

17

FIGURE 12. Spacer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:49Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy - SH

Preparing Activity:
DLA - GS2

(Project 5940-1515)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:49Z
Check the source to verify that this is the current version before use.