MILITARY SPECIFICATION SHEET

TERMINAL BOX, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, THREE-PHASE, SYMBOL 573.1, TWELVE BRANCH TERMINALS FOR FOUR 3-CONDUCTOR 40 MCM CABLES; SIX MAIN BUS TERMINALS FOR TWO 3-CONDUCTOR 75 MCM CABLES

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

(A) The complete requirements for acquiring the terminal box described herein shall consist of this specification and the latest issue of MIL-T-24558.

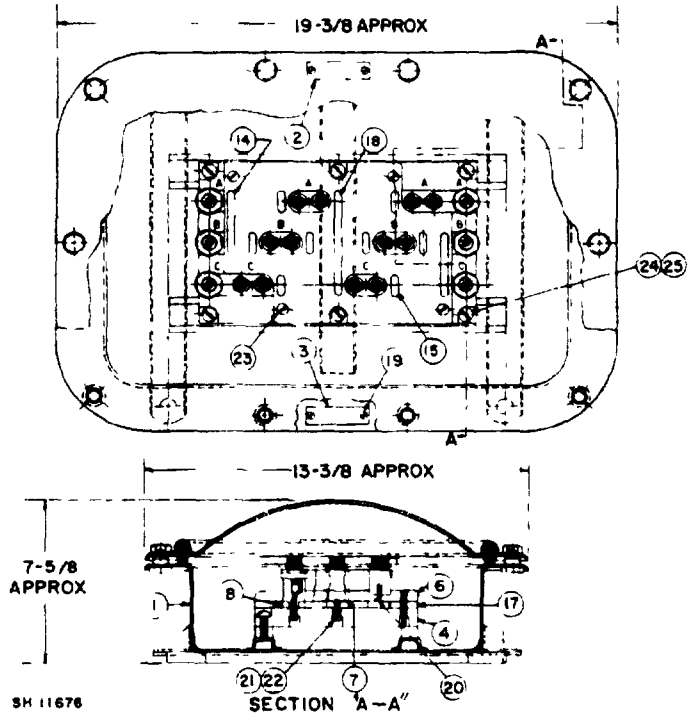



FIGURE 1. Connection box assembly.

(A) NOTES:
1. All dimensions in inches.
2. For tolerances, other than specified herein, see paragraph 3.4.8 of MIL-T-24558.

(A) Revised to correct page and part of table I inadvertently omitted during printing.


FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

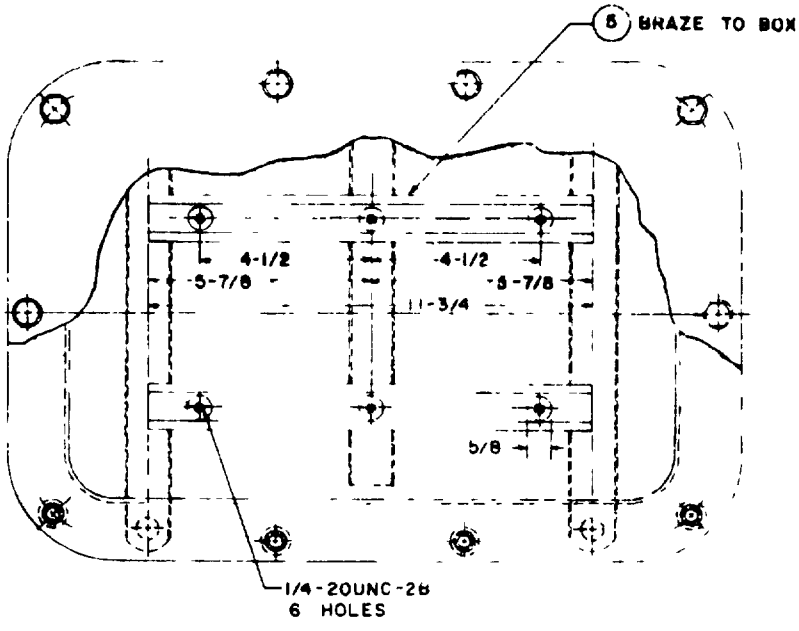

SH 11677

FIGURE 2. Location of terminal board mounting brackets.

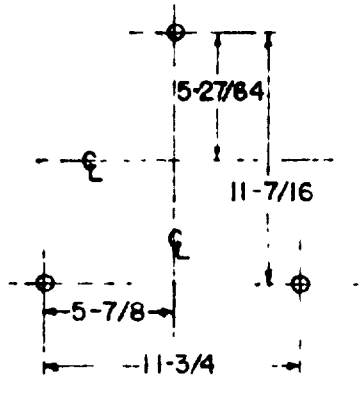


MOUNTING BOLTS SHALL BE 1/2-13

SH 11678


FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

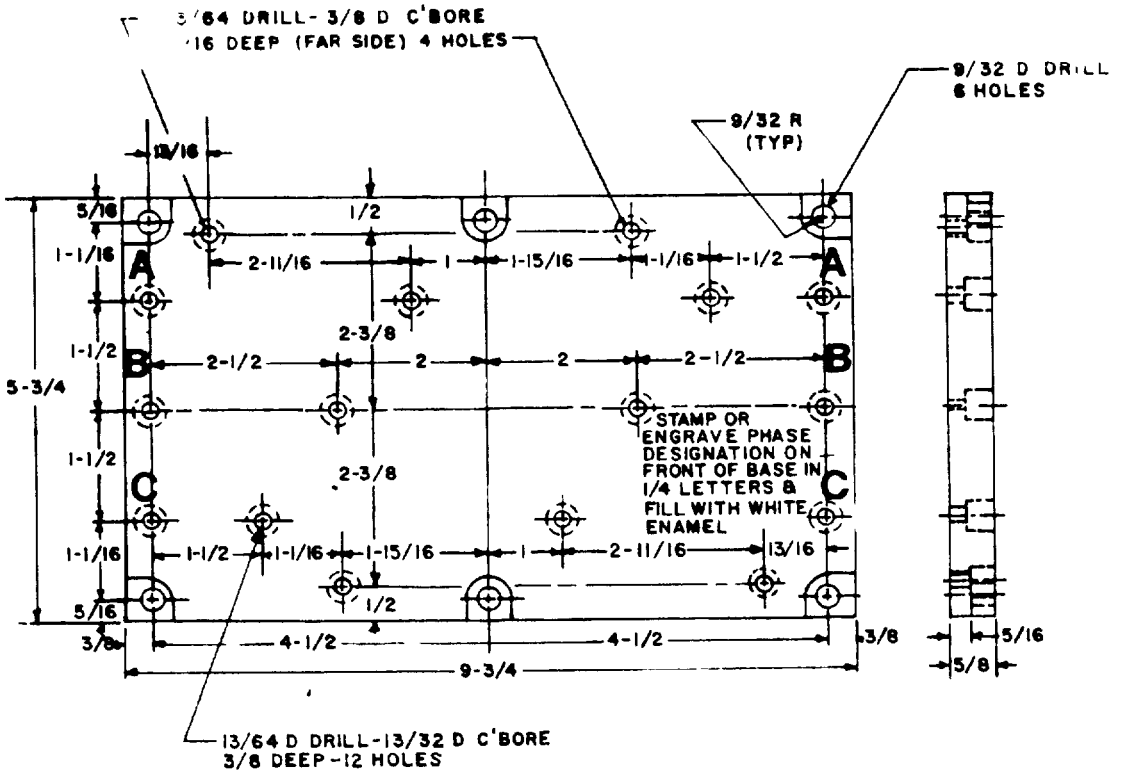

SH 11679


(4) FIGURE 4. Terminal board base.

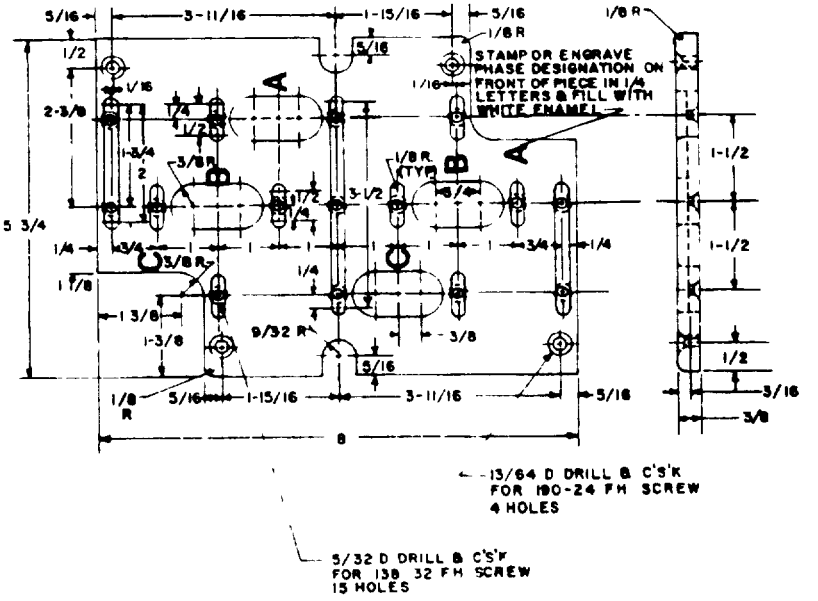

SH 11680


(6) FIGURE 5. Terminal board bus cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

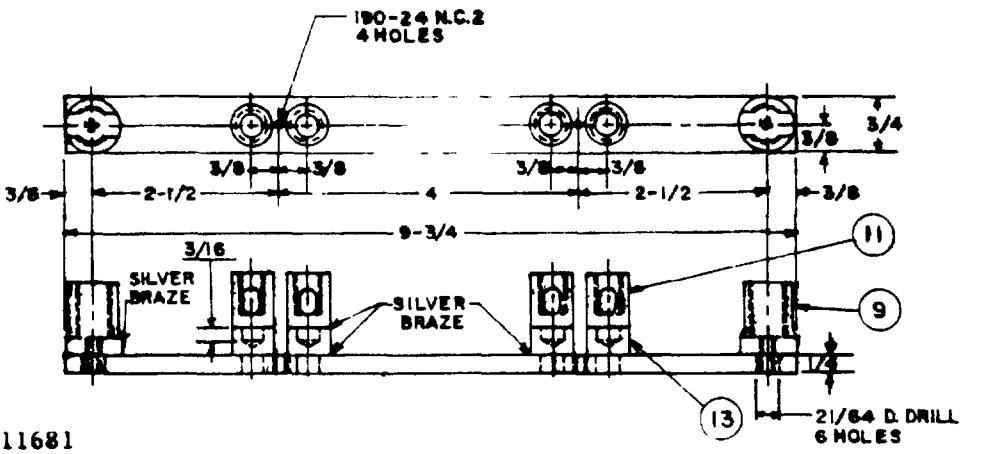


SH 11681

(7) FIGURE 6. Bus assembly - Phase "B".

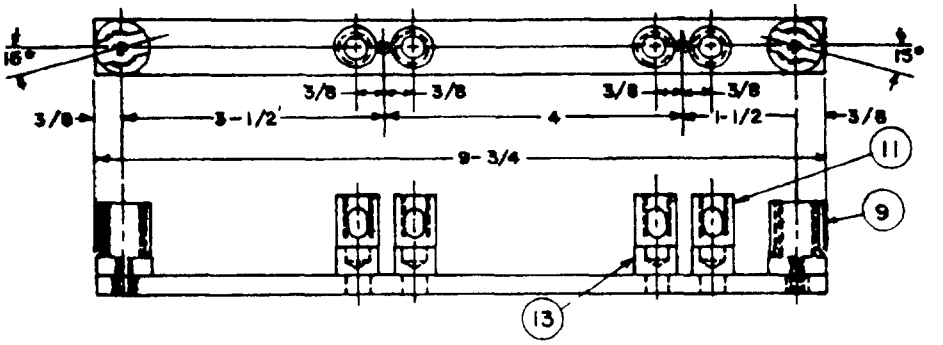


SH 11682

(8) FIGURE 7. Bus assembly - Phase "A" and "C".

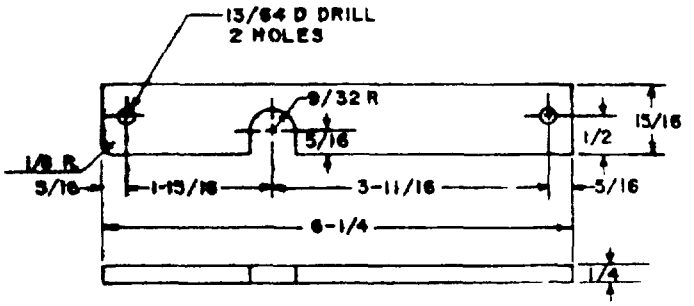

SH 11683


(17) FIGURE 8. Terminal board spacer.

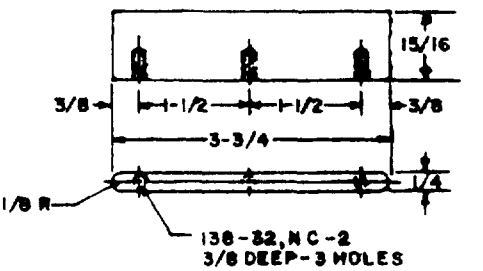

SH 11684


(18) FIGURE 9. Barrier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

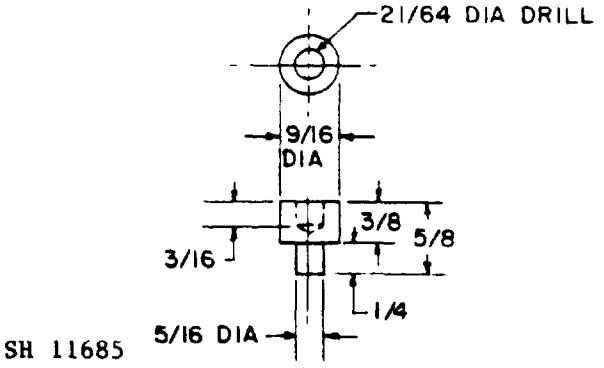


SH 11685

(13) FIGURE 10. Spacer.

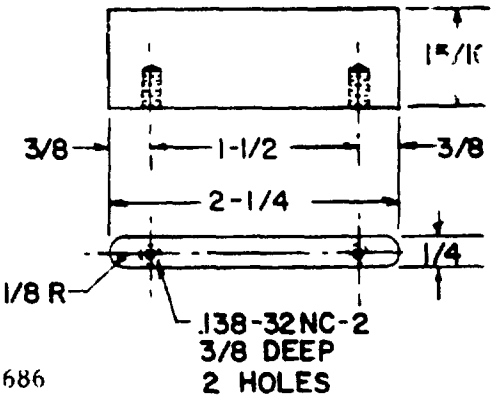


SH 11686

(14) FIGURE 11. Barrier.

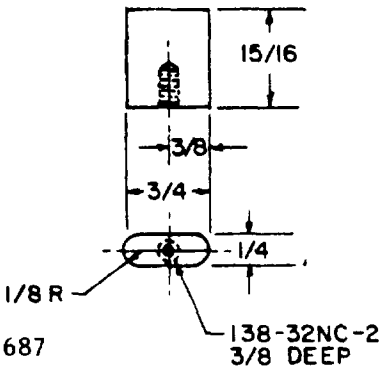

SH 11687

(15) FIGURE 12. Barrier.

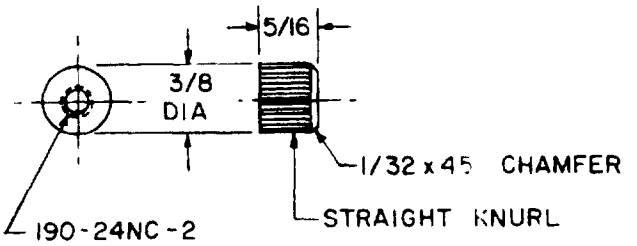

SH 11688

(16) FIGURE 13. Insert.

REQUIREMENTS.

DESIGN:

Electrical rating: 500-volt root mean square/direc current (rms/d.c.). Bus terminals are designed for 75 MCM cable. Branch terminals are designed for 40 MCM cables.

Dimensions and configuration: See figures 1 through 13.

Standard parts: The standard parts shown in table I shall be used in the construction of the connection box specified herein. Number in circles shown on the figures are the same as those shown in item column of table I.

Finish: The interior of enclosure may be unpainted or painted at contractor's option.

Enclosure: 15-foot submersible.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-T-24558.

(A) GENERAL INFORMATION: Assignment of military part numbers and general [illegible] is as follows:

a. Military part number: M24558/27-573.1.
b. Weight: The weight of the connection box shall be 36.8 pounds m[illegible]m
c. Formerly covered on NAVSHIPS Drawing No. 9000-S6202-74176.
d. Overall terminal box dimensions are approximate. Exact dimensions are shown on military specification for item 1, table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item	Description	Qty	Part no. or spec.	Remarks
1	Enclosure Assembly, Brass with Type "A" Cover	1	MIL-E-24142/6	M24142/6-005
2	Identification Plate	1	MIL-T-24558	Figure 6
3	Information Plate	1	MIL-T-24558	Figure 6
4	Terminal Board Base	1	Figure 4	MIL-P-15037 Type GME
5	Mounting Bracket	2	MIL-T-24558	Figure 2
6	Terminal Bus Cover	1	Figure 5	MIL-P-15037 Type GME
7	Terminal Bus Assembly - Phase "B"	1	Figure 6	Brass
8	Terminal Bus Assembly - Phase "A" and "C"	2	Figure 7	Brass
9	Main Terminal Body	6	S6202-73246-3	Brass
10	Main Terminal Pressure Screw Assembly	6	S6202-73246-23	Brass
11	Branch Terminal Body	12	S6202-73055-2	Brass
12	Branch Terminal Pressure Screw Assembly	12	S6202-73055-22	Brass
13	Spacer	12	Figure 10	Brass
14	Barrier	2	Figure 11	MIL-P-15037 Type GME
15	Barrier	8	Figure 12	MIL-P-15037 Type GME
16	Insert	4	Figure 13	Steel
17	Terminal Board Spacer	2	Figure 8	MIL-P-15037 Type GME
18	Barrier	1	Figure 9	MIL-P-15037 Type GME
19	RH Mach Screw .138-32x3/16" Long	4	COML.	Brass
20	FH Mach Screw .138-32x1/2" Long	15	COML.	Steel
21	RH Mach Screw .190-24x5/8" Long	12	COML.	Brass
22	Washer for .190 Screw	12	COML.	Steel
23	FH Mach Screw .190-24.x1-1/4" Long	4	COML.	Steel
24	RH Mach Screw 1/4-20x3/4" Long	6	COML.	Steel
25	Washer for 1/4" Screw	6	COML.	Steel

Preparing activity:
Navy - SH
(Project 5940-NB01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.