INCH-POUND

MIL-DTL-24558/27B
28 December 2004
SUPERSEDING
MIL-T-24558/27A
24 August 1984

DETAIL SPECIFICATION SHEET

TERMINAL BOX, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, THREE-PHASE, SYMBOL 573.1, TWELVE BRANCH TERMINALS FOR FOUR 3-CONDUCTOR 40 MCM CABLES; SIX MAIN BUS TERMINALS FOR TWO 3-CONDUCTOR 75 MCM CABLES

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1 through 13.

1. Electrical rating. The terminal box shall have an electrical rating of 500 volts rms/DC. Bus terminals are designed for 75 MCM cable. Branch terminals are designed for 40 MCM cable.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 13. All dimensions in figures 1 through 13 are expressed in inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/6, "Enclosure, Submersible (15-Foot), Sizes 8 By 10 Through 14 By 26".

3. Tolerance. All tolerances, other than specified herein, shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 through 13 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Finish. The interior of enclosure may be unpainted or painted at contractor's option.

7. Weight. The weight of the connection box shall be 36.8 lbs. maximum.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

GENERAL INFORMATION:

1. Drawing. The terminal box specified by MIL-DTL-24558/27B was formerly covered on NAVSHIPS Drawing No. 9000-S6202-74176.

2. Part or identification number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:

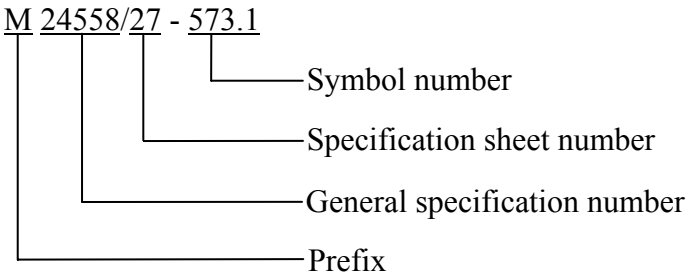



TABLE I. Parts list.

Item	Description	Qty.	Part no. or specification	Remarks
1	Enclosure assembly, brass with type "A" cover	1	MIL-E-24142/6	M24142/6-005
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Terminal board base	1	Figure 4	MIL-I-24768/1 type GME
5	Mounting bracket	2	MIL-DTL-24558	Figure 2
6	Terminal bus cover	1	Figure 5	MIL-I-24768/1 type GME
7	Terminal bus assembly - phase "B"	2	Figure 6	Brass
8	Terminal bus assembly - phase "A" and "C"	1	Figure 7	Brass
9	Main terminal body	6	S6202-73246-3	Brass
10	Terminal bus pressure screw assembly	6	S6202-73246-23	Brass
11	Branch terminal body	12	S6202-73055-2	Brass
12	Branch terminal pressure screw assembly	12	S6202-73055-22	Brass
13	Spacer	12	Figure 10	Brass
14	Barrier	2	Figure 11	MIL-I-24768/1 type GME

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list - Continued.


Item	Description	Qty.	Part no. or specification	Remarks
15	Barrier	8	Figure 12	MIL-I-24768/1 type GME
16	Insert	4	Figure 13	Steel
17	Terminal board spacer	2	Figure 8	MIL-I-24768/1 type GME
18	Barrier	1	Figure 9	MIL-I-24768/1 type GME
19	RH mach screw .138-32 X 3/16" long	4	COML	Brass
20	FH mach screw .138-32 X 1/2" long	15	COML	Steel
21	RH mach screw .190-24 X 5/8" long	12	COML	Brass
22	Washer for .190 screw	12	COML	Steel
23	FH mach screw .190-24 X 1-1/4" long	4	COML	Steel
24	RH mach screw 1/4-20 X 3/4" long	6	COML	Steel
25	Washer for 1/4" screw	6	COML	Steel

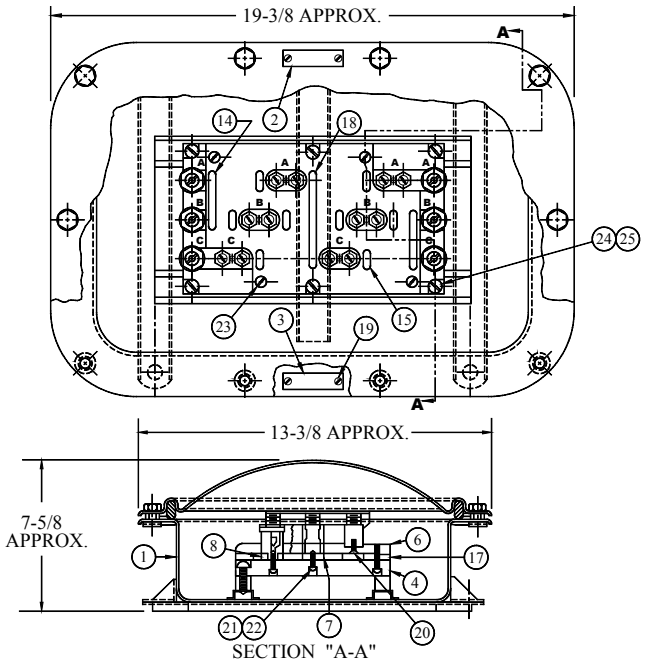

SH 11676


FIGURE 1. Connection box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

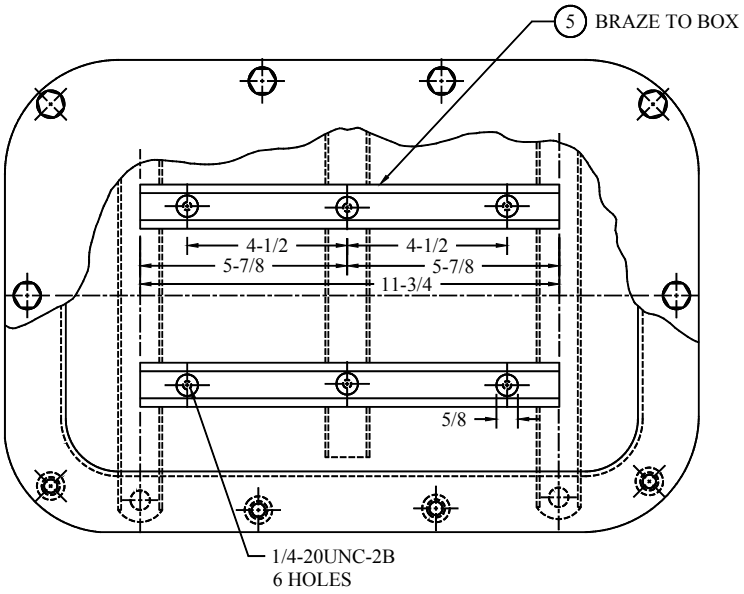

SH 11677

FIGURE 2. Location of terminal board mounting brackets.

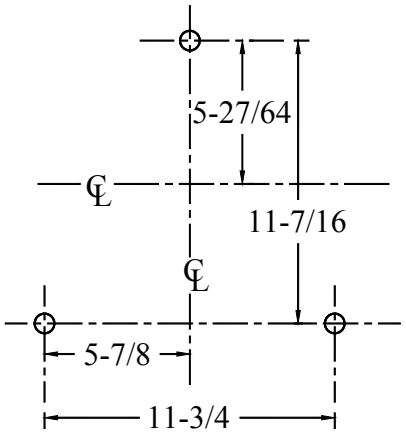


MOUNTING BOLTS SHALL BE 1/2-13

SH 11678


FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

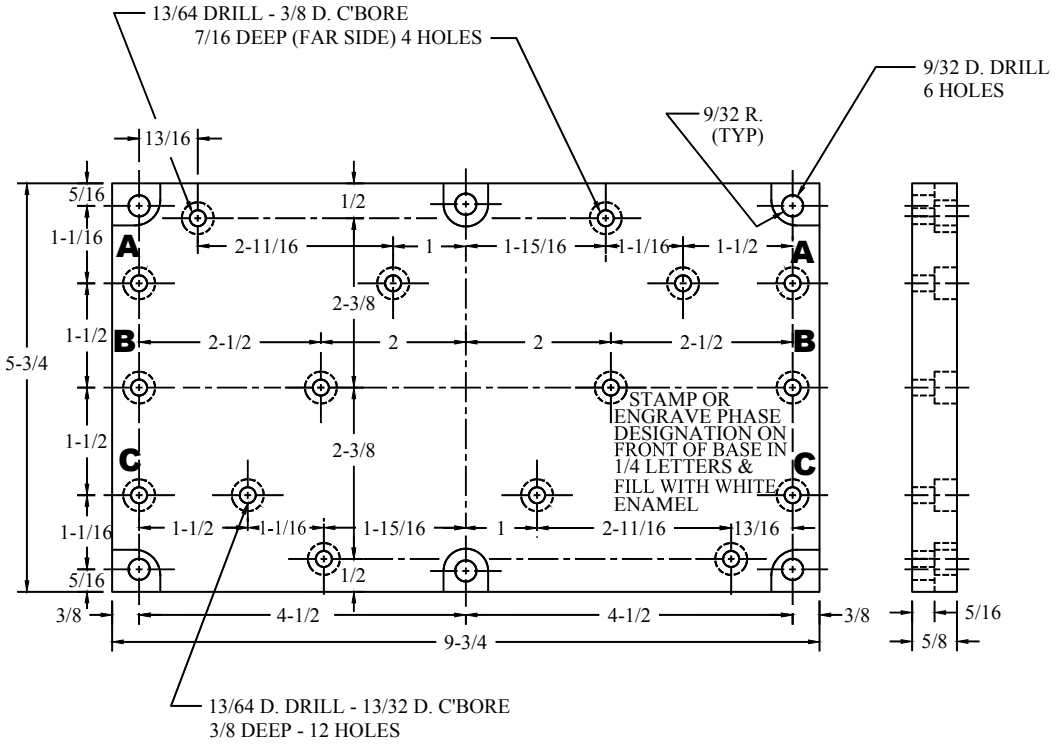

SH 11679


4 FIGURE 4. Terminal board base.

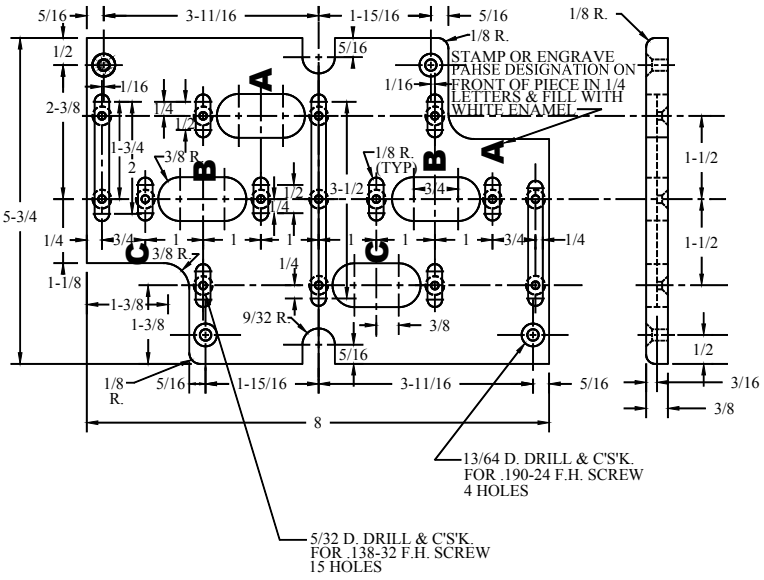

SH 11680

6 FIGURE 5. Terminal board bus cover.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

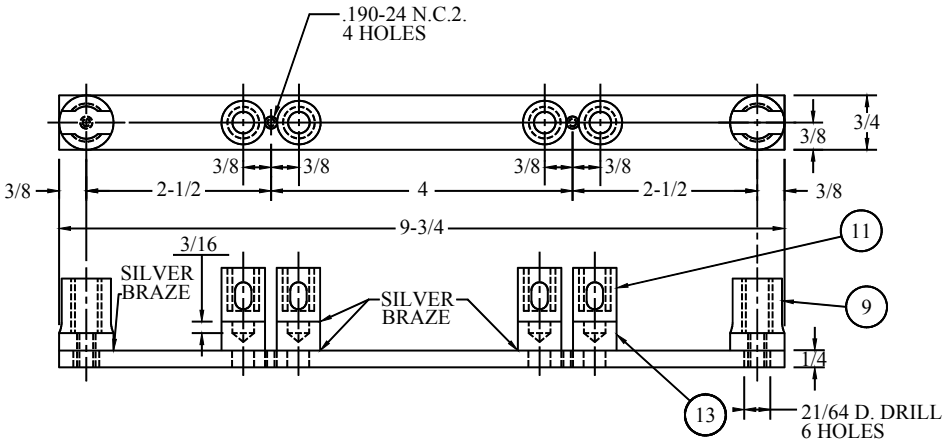

SH 11681

7


FIGURE 6. Bus assembly - Phase "B".

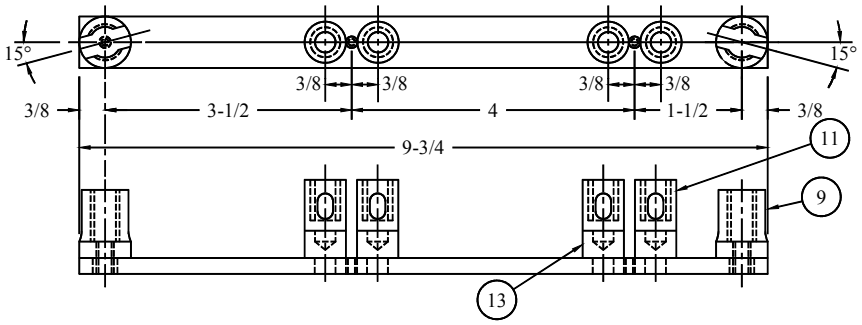

SH 11682

8

FIGURE 7. Bus assembly - Phase "A" and "C".

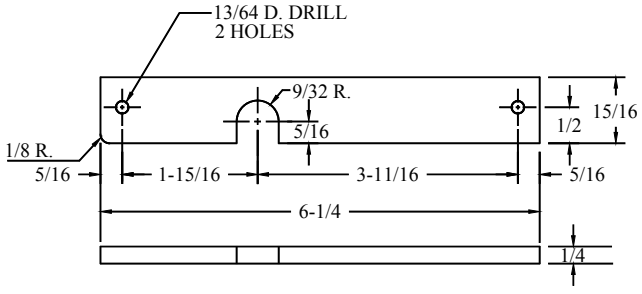


SH 11683

17

FIGURE 8. Terminal board spacer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.


SH 11684

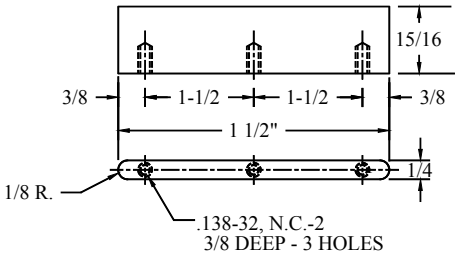

18

FIGURE 9. Barrier.


SH 11685

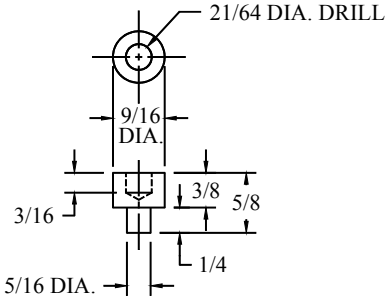

13

FIGURE 10. Spacer.


SH 11686

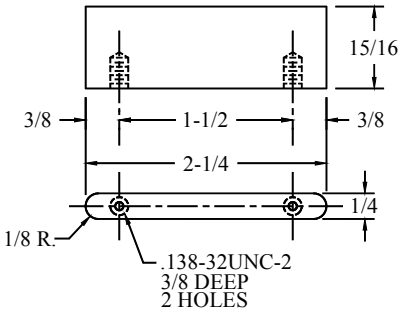

14

FIGURE 11. Barrier.

SH 11687




15

FIGURE 12. Barrier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.

SH 11688

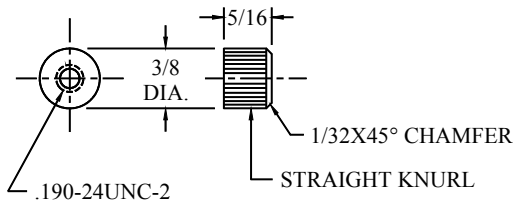

16

FIGURE 13. Insert.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy - SH

Preparing Activity:
DLA - GS2

(Project 5940-1516)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:50Z
Check the source to verify that this is the current version before use.