INCH-POUND

MIL-DTL-24558/28A
28 December 2004
SUPERSEDING
MIL-T-24558/28
8 May 1981

DETAIL SPECIFICATION SHEET

TERMINAL BOX, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, THREE-PHASE SYMBOL 574.1, EIGHTEEN BRANCH TERMINALS FOR SIX 3-CONDUCTOR 40 MCM CABLES, SIX MAIN BUS TERMINALS FOR TWO 3-CONDUCTOR 75 MCM CABLES

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1 through 13.

1. Electrical rating. The terminal box shall have an electrical rating of 500 volts rms/DC. Bus terminals are designed for 75 MCM cables. Branch terminals are designed for 40 MCM cables.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 13. All dimensions in figures 1 through 13 are expressed in inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/6, "Enclosure, Submersible (15-Foot), Sizes 8 By 10 Through 14 By 26".

3. Tolerance. All tolerances, other than specified herein, shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 through 13 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Finish. The interior of enclosure may be unpainted or painted at contractor's option.

7. Weight. The weight of the connection box shall be 36.8 lbs. maximum.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:51Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

GENERAL INFORMATION:

1. Drawing. The terminal box specified by MIL-DTL-24558/28A was formerly covered on NAVSHIPS Drawing No. 9000-S6202-74177.

2. Part or identification number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:

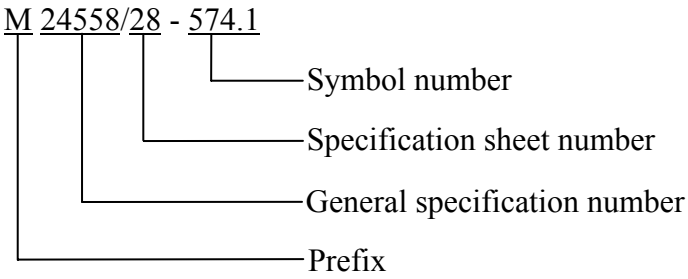



TABLE I. Parts list.

Item	Description	Qty.	Part no. or specification	Remarks
1	Enclosure assembly, brass with type "A" cover	1	MIL-E-24142/6	M24142/6-007
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Terminal board base	1	Figure 4	MIL-I-24768/1 type GME
5	Mounting bracket	2	MIL-DTL-24558	Figure 2
6	Terminal bus cover	1	Figure 5	MIL-I-24768/1 type GME
7	Main terminal body	6	S6202-73246-3	Brass
8	Main terminal pressure screw assembly	6	S6202-73246-23	Brass
9	Branch terminal body	18	S6202-73055-2	Brass
10	Branch terminal pressure screw assembly	18	S6202-73055-22	Brass
11	Spacer	18	Figure 9	Brass
12	Terminal bus assembly - phase "B"	1	Figure 6	ASTM B 36/B 36M
13	Terminal bus assembly - phase"A" and "C"	2	Figure 7	ASTM B 36/B 36M

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:51Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list - Continued.


Item	Description	Qty.	Part no. or specification	Remarks
14	Terminal board spacer	2	Figure 8	MIL-I-24768/1 type GME
15	Barrier	2	Figure 10	MIL-I-24768/1 type GME
16	Barrier	2	Figure 11	MIL-I-24768/1 type GME
17	Barrier	12	Figure 12	MIL-I-24768/1 type GME
18	Insert	6	Figure 13	Steel
19	RH mach screw #8-32 X 3/16" long	4	COML	Brass
20	FH mach screw #8-32 X 1/2" long	22	COML	Brass
21	RH mach screw #10-24 X 5/8" long	15	COML	Brass
22	Washer for #10 screw	15	COML	Bronze
23	FH mach screw #10-24 X 1-1/4" long	6	COML	Brass
24	RH mach screw 1/4-20 X 3/4" long	10	COML	Brass
25	Washer for 1/4" screw	10	COML	Bronze

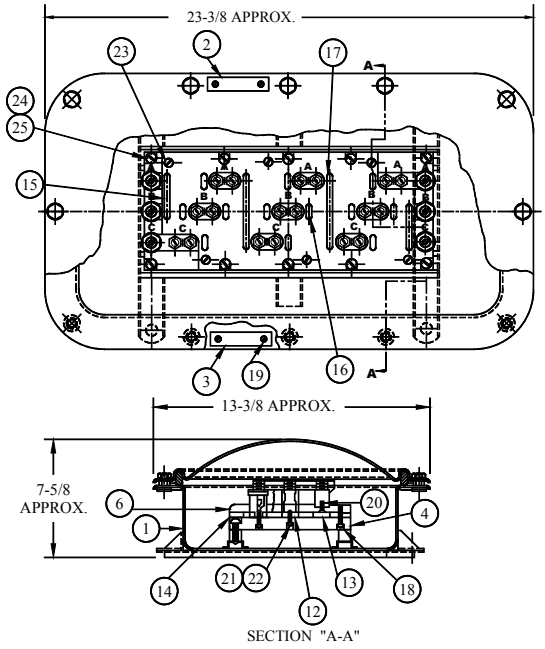

SH 11689


FIGURE 1. Connection box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:51Z
Check the source to verify that this is the current version before use.

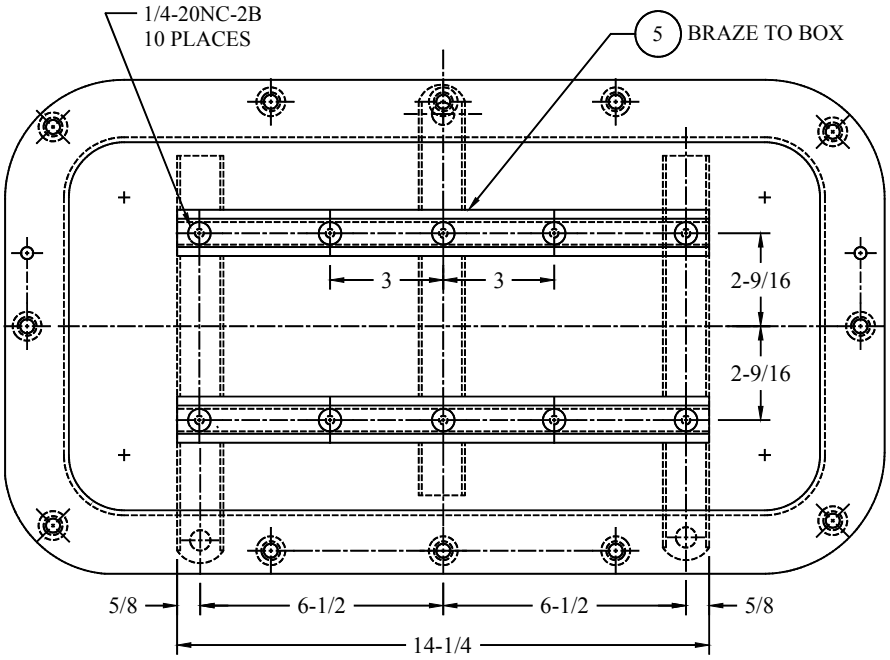

SH 11690


FIGURE 2. Location of terminal board mounting brackets.

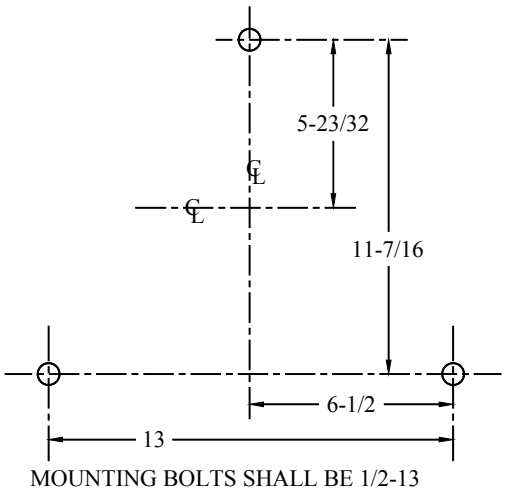

SH 11691


FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:51Z
Check the source to verify that this is the current version before use.

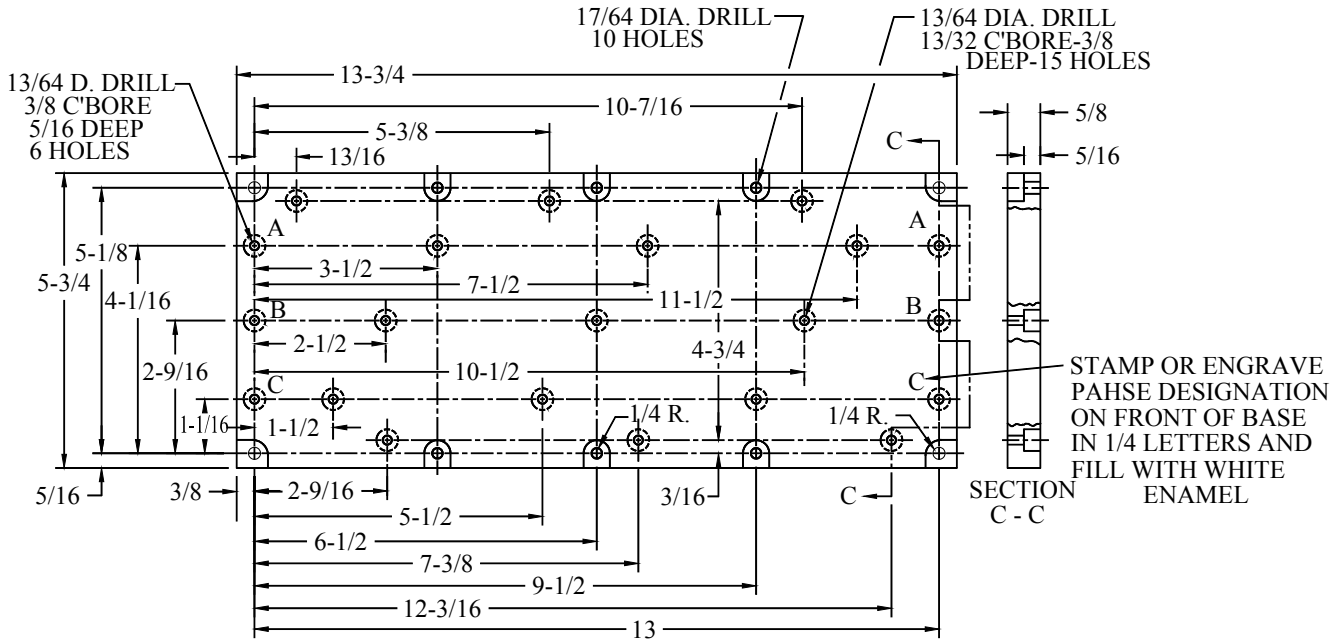

SH 11692


4 FIGURE 4. Terminal board base.

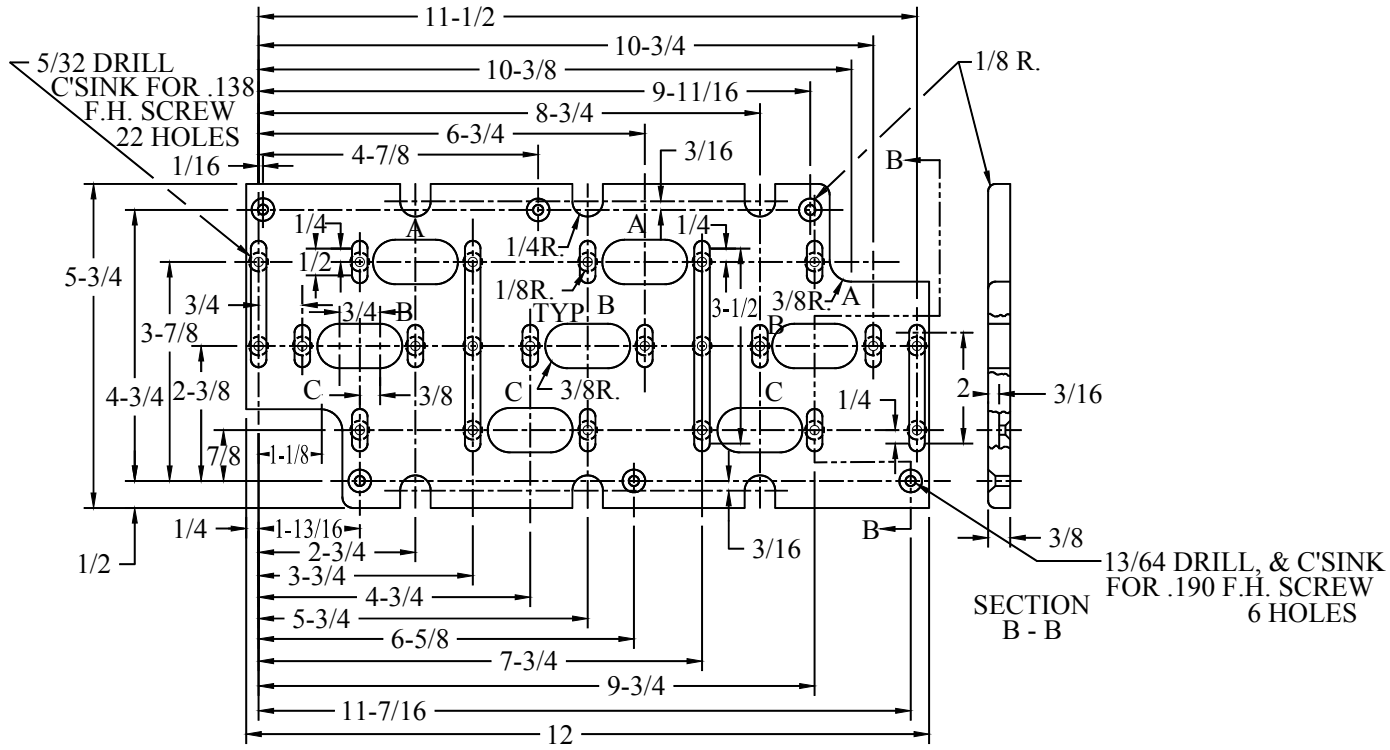

SH 11693


6 FIGURE 5. Terminal bus cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:51Z
Check the source to verify that this is the current version before use.

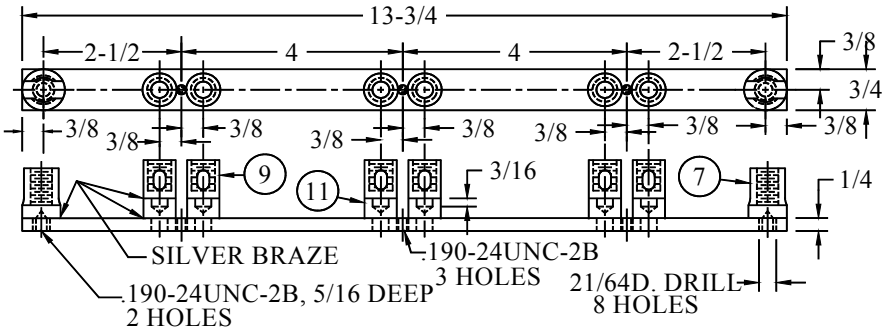


SH 11694

12 FIGURE 6. Terminal bus assembly - Phase "B".

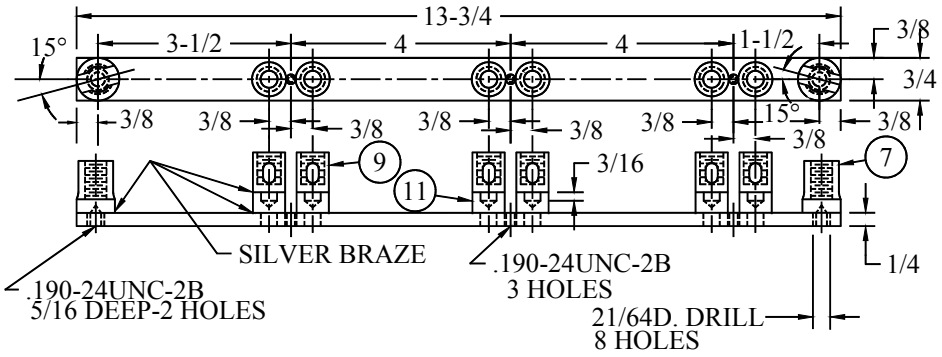

SH 11695

13 FIGURE 7. Terminal bus assembly - Phase "A" and "C".

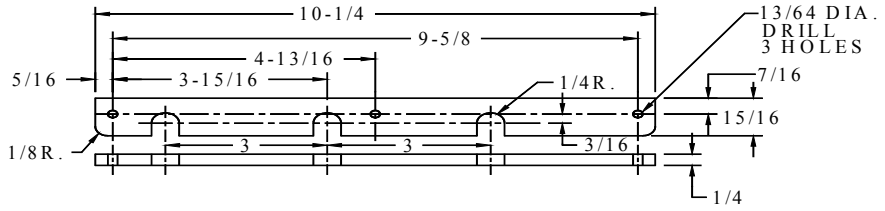


SH 11696

14 FIGURE 8. Terminal board spacer.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:51Z
Check the source to verify that this is the current version before use.

SH 11697

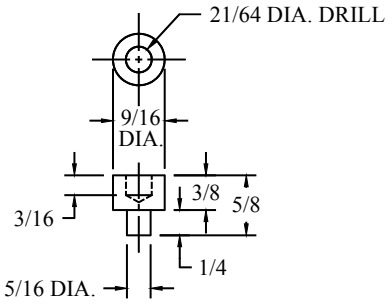


11 FIGURE 9. Spacer.

SH 11698

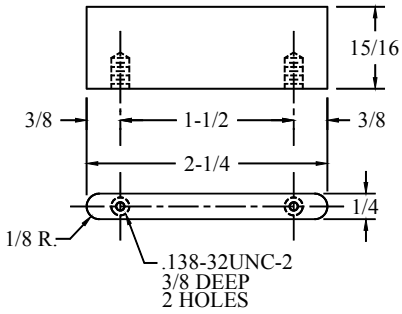


15 FIGURE 10. Barrier.

SH 11699




16 FIGURE 11. Barrier.

SH 11700

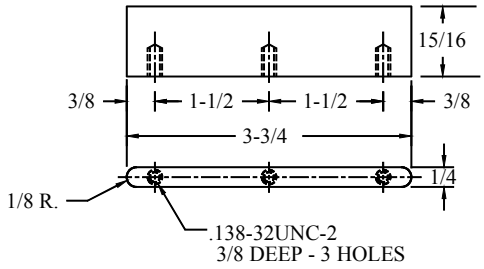

17 FIGURE 12. Barrier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:51Z
Check the source to verify that this is the current version before use.

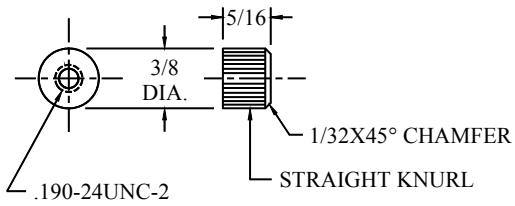

SH 11701

18 FIGURE 13. Insert.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy - SH

Preparing Activity:
DLA - GS2

(Project 5940-1517)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:51Z
Check the source to verify that this is the current version before use.