INCH-POUND

MIL-DTL-24558/29A
w/AMENDMENT 1
17 February 2006
SUPERSEDING
MIL-DTL-24558/29A
28 December 2004

DETAIL SPECIFICATION SHEET

TERMINAL BOX, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, THREE-PHASE, SYMBOL 575.1, SIX BRANCH TERMINALS FOR TWO 3-CONDUCTOR 75 MCM CABLES SIX MAIN BUS TERMINALS FOR TWO 3-CONDUCTOR 200 MCM CABLES

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1 through 12.

1. Electrical rating. The terminal box shall have an electrical rating of 500 volts rms/DC. Branch terminals are designed for 75 MCM cables. Bus terminals are designed for 200 MCM cables.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 12. All dimensions in figures 1 through 12 are expressed in inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/6, "Enclosure, Submersible (15-Foot), Sizes 8 By 10 Through 14 By 26".

3. Tolerance. All tolerances, other than specified herein, shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 through 12 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Finish. The interior of enclosure may be unpainted or painted at contractor's option.

7. Weight. The weight of the connection box shall be 32.0 lbs. maximum.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

GENERAL INFORMATION:

1. Drawing. The terminal box specified by MIL-DTL-24558/29A was formerly covered on NAVSHIPS Drawing No. 9000-S6202-74181.

2. Part or identification number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:

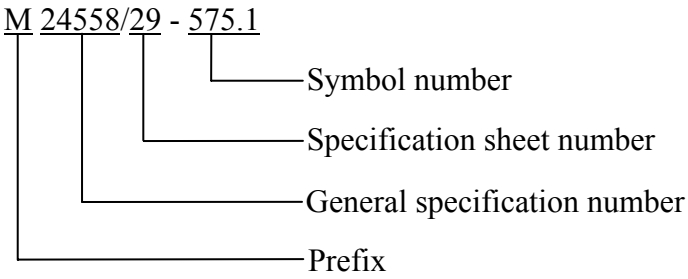



TABLE I. Parts list.

Item	Description	Qty.	Part no. or specification	Remarks
1	Enclosure assembly, brass with type "A" cover	1	MIL-E-24142/6	M24142/6-004
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Terminal board base	1	Figure 4	MIL-I-24768/1 type GME
5	Mounting bracket	2	MIL-DTL-24558	Figure 2
6	Terminal bus cover	1	Figure 5	MIL-I-24768/1 type GME
7	Terminal bus assembly - phase "A" and "C"	2	Figure 6	Brass
8	Terminal bus assembly - phase "B"	1	Figure 7	Brass
9	Main terminal body	6	S6202-73246-5	Brass
10	Main terminal pressure screw assembly	6	S6202-73246-25	Brass
11	Branch terminal body	6	S6202-73055-3	Brass
12	Branch terminal pressure screw assembly	6	S6202-73055-23	Brass
13	Barrier	2	Figure 8	MIL-I-24768/1 type GME

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list - Continued.


Item	Description	Qty.	Part no. or specification	Remarks
14	Terminal board spacer	6	Figure 9	ASTM B 36/B 36M
15	Barrier	4	Figure 10	MIL-I-24768/1 type GME
16	Insert	4	Figure 11	Steel
17	Spacer	2	Figure 12	Brass
18	RH mach screw .138-32 X 3/16" long	4	COML	Brass
19	FH mach screw .138-32 X 1/2" long	8	COML	Steel
20	RH mach screw .190-24 X 9/16" long	9	COML	Brass
21	Washer for .190 screw	9	COML	Steel
22	FH mach screw .190-24 X 1-1/4" long	4	COML	Steel
23	RH mach screw 1/4-20 X 1-1/4" long	4	COML	Brass
24	Washer for 1/4" screw	4	COML	Steel

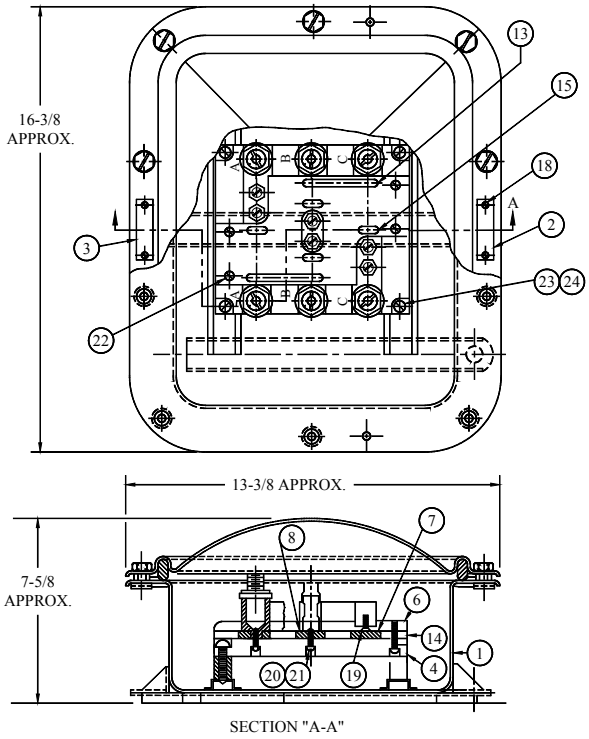

SH 11710


FIGURE 1. Connection box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

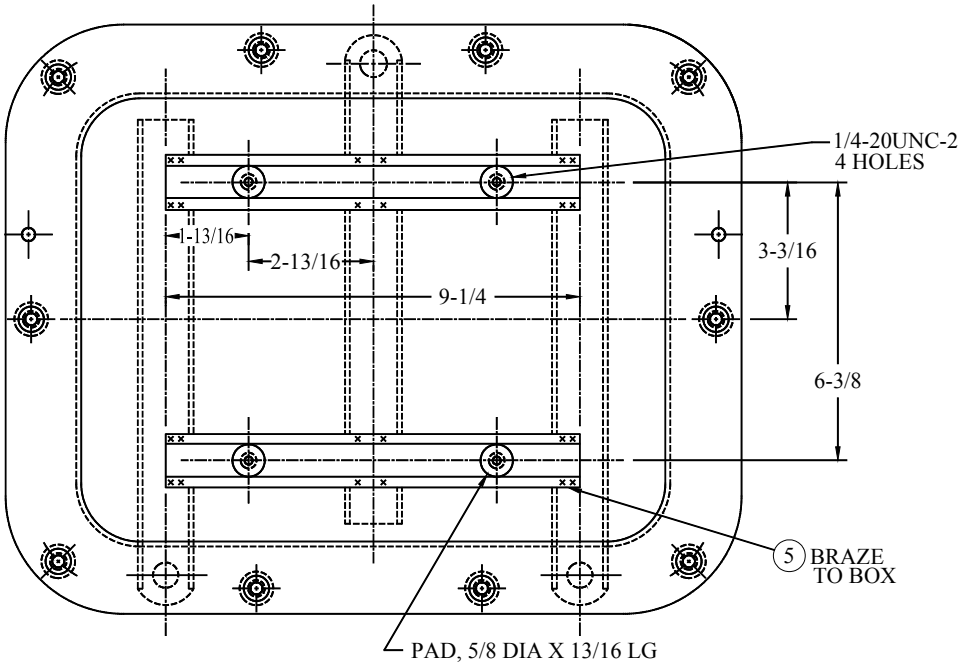

SH 11711

FIGURE 2. Location of terminal board mounting brackets.

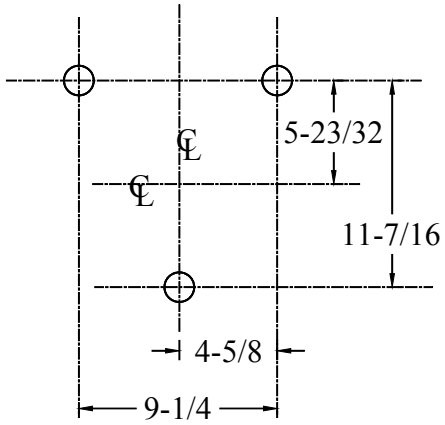


MOUNTING BOLTS SHALL BE 1/2-13

SH 11712


FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

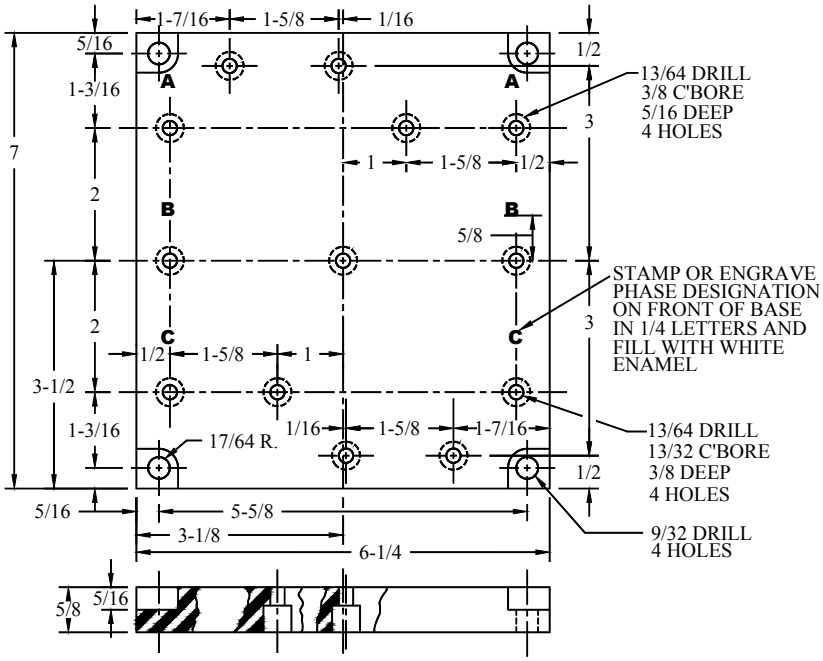

SH 11713


4 FIGURE 4. Terminal board base.

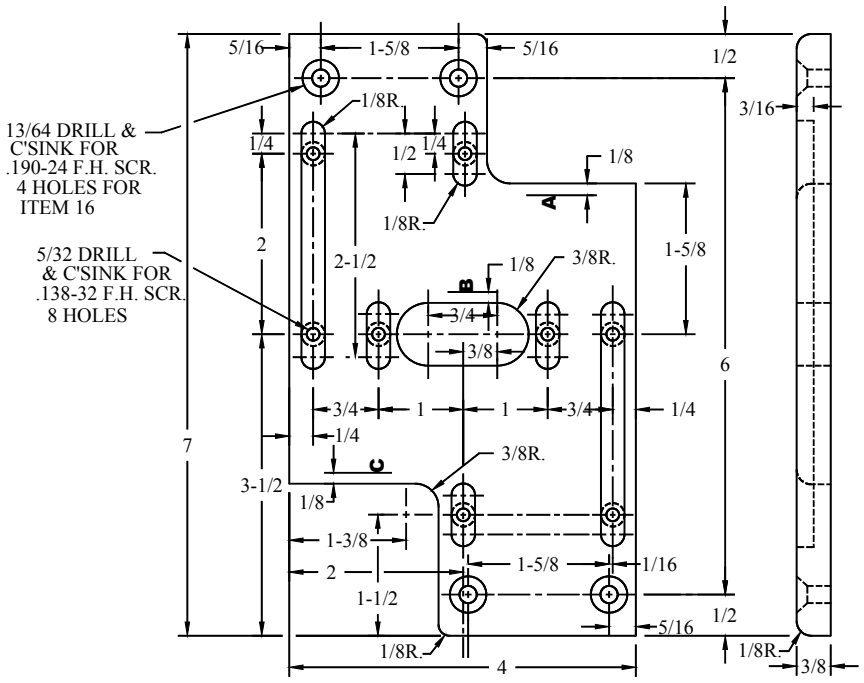

SH 11714

6 FIGURE 5. Terminal bus cover.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

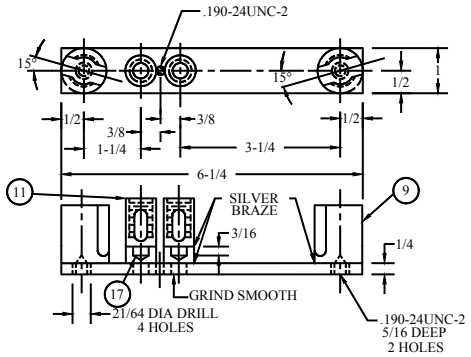

SH 11715

7


FIGURE 6. Terminal bus assembly - Phase "A" and "C".

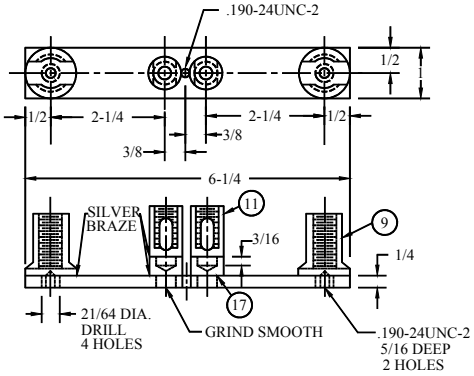

SH 11716

8

FIGURE 7. Terminal bus assembly - Phase "B".

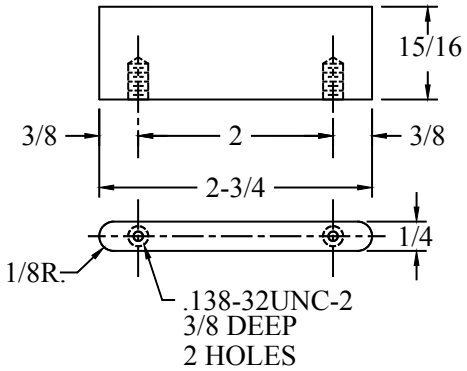


SH 11717

13


FIGURE 8. Barrier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

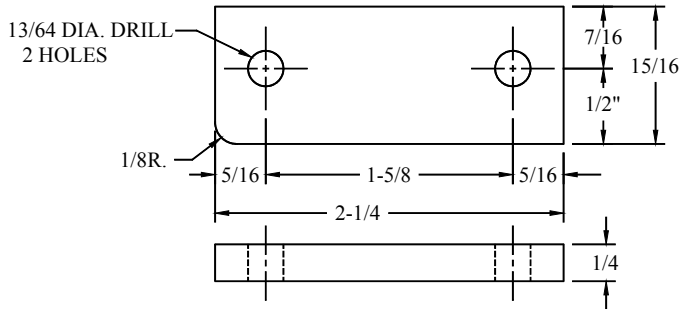


SH 11718

14 FIGURE 9. Spacer.

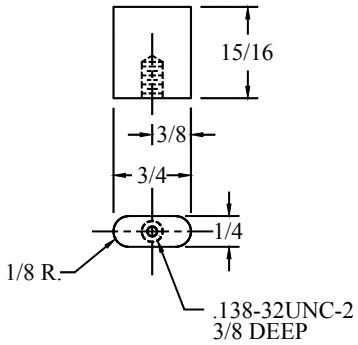

SH 11719

15 FIGURE 10. Barrier.

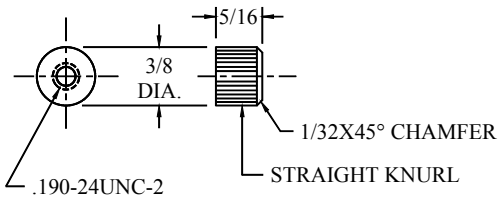


SH 11720

16 FIGURE 11. Insert.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

SH 11721

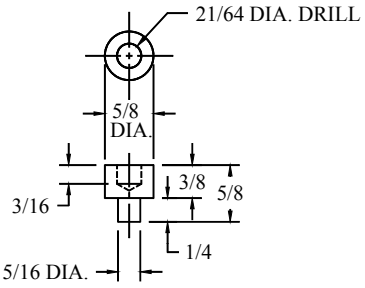

17

FIGURE 12. Spacer.

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodian:
Navy - SH

Preparing Activity:
DLA - GS2

(Project 5940-2005-025)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.