INCH-POUND

MIL-DTL-24558/30A
w/Amendment 1
15 July 2005
SUPERSEDING
MIL-T-24558/30
8 May 1981

DETAIL SPECIFICATION SHEET

TERMINAL BOXES, CONNECTION, SUBMERSIBLE (15-FOOT), 500 VOLTS, THREE-PHASE SYMBOL 576.1 - TWO CKTS FOR 150 MCM CABLE, ONE CKT FOR 200 MCM CABLE AND ONE CKT FOR 400 MCM CABLE SYMBOL 577.1 - ONE CKT FOR 150 MCM CABLE, ONE CKT FOR 200 MCM CABLE AND TWO CKTS FOR 250 MCM CABLE

This specification sheet is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1 through 8.

1. Electrical rating. The terminal box shall have an electrical rating of 500 volts rms/DC. Terminal lugs are designed for 150 MCM, 200 MCM, 250 MCM, and 400 MCM cables.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 8. All dimensions in figures 1 through 8 are expressed in inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/7, "Enclosures, Submersible (15-Foot), Size 20 By 24".

3. Tolerance. All tolerances, other than specified herein, shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 through 8 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

6. Finish. The interior of enclosure may be unpainted or painted at contractor's option.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

7. Weight. The weight of the connection box shall be 81.4 lbs. maximum.

8. Lugs. The contact surface of the lugs PC's 6, 7, 8, and 21 shall be silver plated and the minimum thickness of this plating shall be 0.0005 inch.

9. Terminal box. Each terminal box shall be furnished complete with terminal lugs installed as shown for 576.1. In addition, six 250 MCM lugs PC 21 shall be packaged inside the enclosure for conversion to symbol 577.1.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

GENERAL INFORMATION:

1. Drawing. The terminal box specified by MIL-DTL-24558/30A was formerly covered on NAVSHIPS Drawing No. 9000-S6202-74182.

2. Part or identification number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:

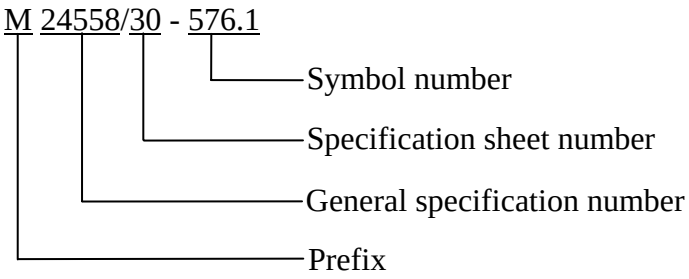



TABLE I. Parts list.

Item	Description	Qty.	Part no. or specification	Remarks
1	Enclosure assembly, brass	1	MIL-E-24142/7	M24142/7-001
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Terminal board base	1	Figure 4	MIL-I-24768/1 type GME
5	Mounting bracket	2	MIL-DTL-24558	Figure 2
6	Terminal lug 150 MCM, solderless	6	Figure 5	ASTM B 187/B 187M copper
7	Terminal lug 200 MCM, solderless	3	Figure 5	ASTM B 187/B 187M copper
8	Terminal lug 400 MCM, solderless	3	Figure 5	ASTM B 187/B 187M copper

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list - Continued.


Item	Description	Qty.	Part no. or specification	Remarks
9	Terminal bus assembly - phase "A"	1	Figure 6	ASTM B 187/B 187M copper
10	Terminal bus assembly - phase "B"	1	Figure 7	ASTM B 187/B 187M copper
11	Terminal bus assembly - phase "C"	1	Figure 8	ASTM B 187/B 187M copper
12	RH mach screw #6-32 X 1/4" long	4	COML	Brass
13	RH mach screw 7/16-14 X 1-3/16" long	8	COML	Steel
14	Washer for 7/16 screw	8	COML	Steel
15	RH mach screw 3/8-16 X 1-3/16" long	18	COML	Steel
16	Washer for 3/8 screw	18	COML	Steel
17	Stud 3/8-16 X 2-1/4" long	12	COML	Brass
18	Hex head nut 3/8-16	22	COML	Brass
19	Washer for 3/8 stud	22	COML	Brass
20	Pin 3/32 dia. - length to suit	12	ASTM B 124/B 124M	Brass
21	Terminal lug 250 MCM, solderless	6	Figure 5	ASTM B 187/B 187M copper

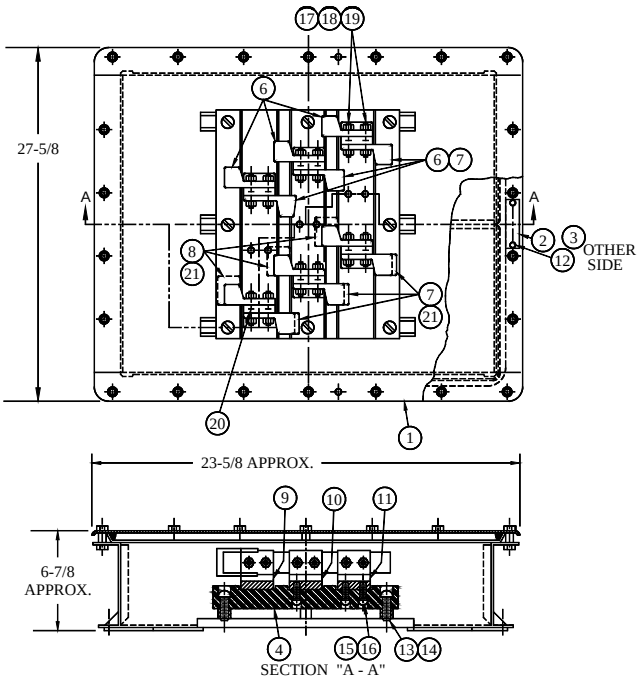

SH 11702


FIGURE 1. Connection box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

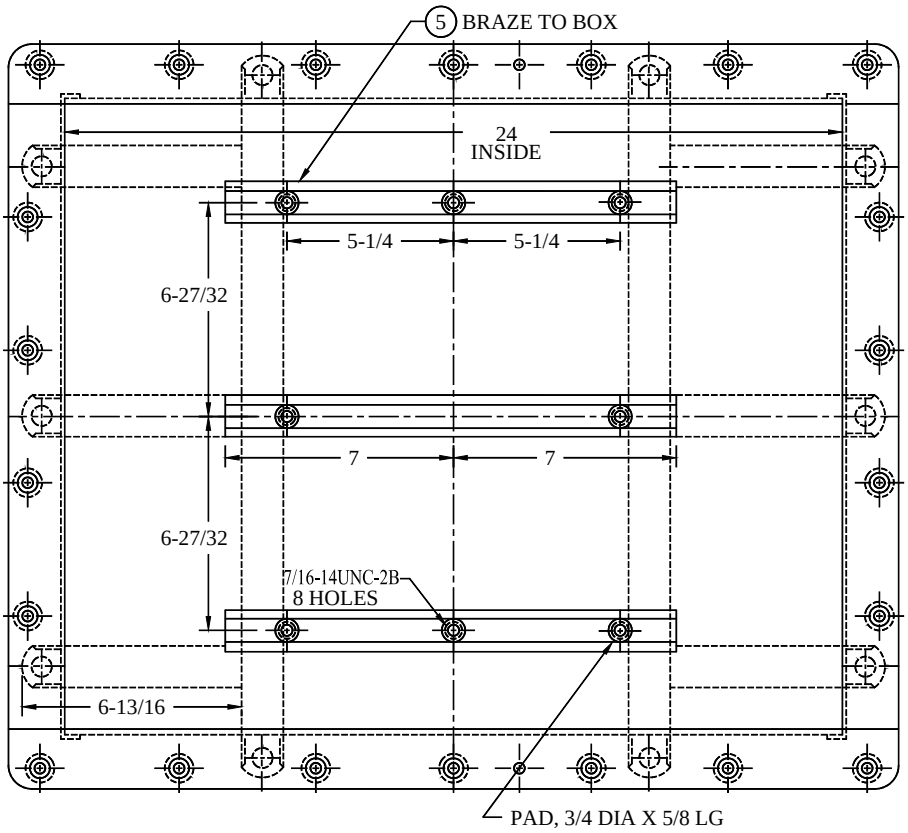

SH 11703


FIGURE 2. Location of terminal board mounting brackets.

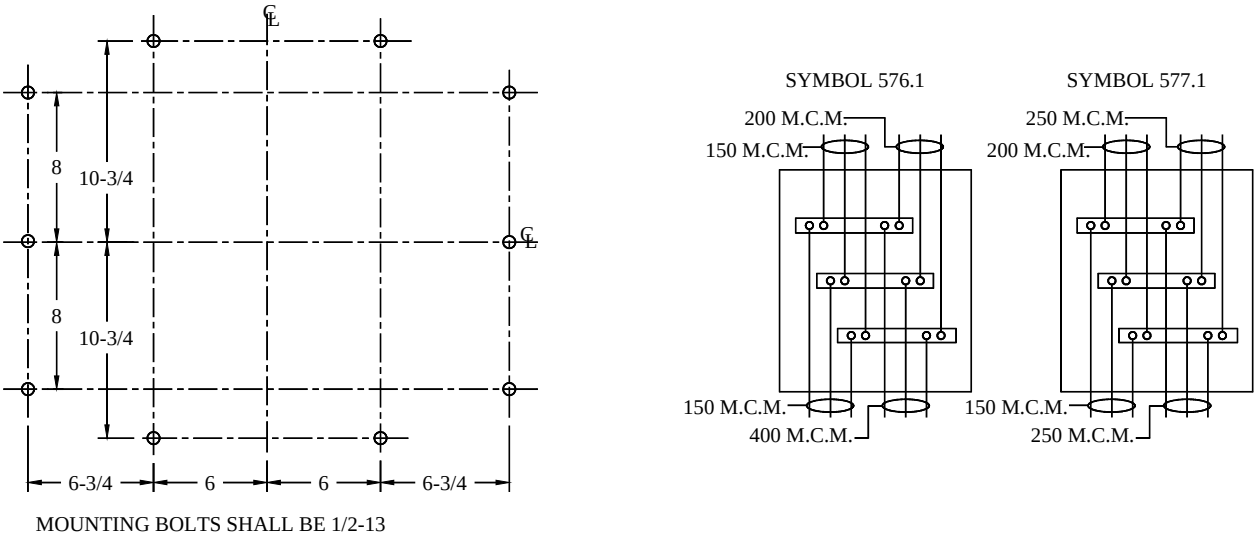

SH 11704


FIGURE 3. Mounting diagram and wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

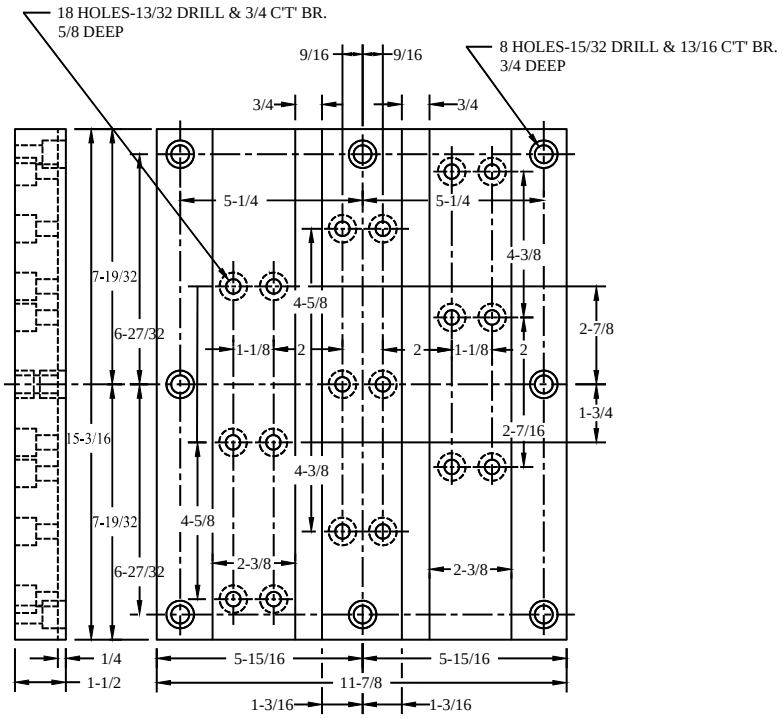

SH 11705


4 FIGURE 4. Terminal board base.

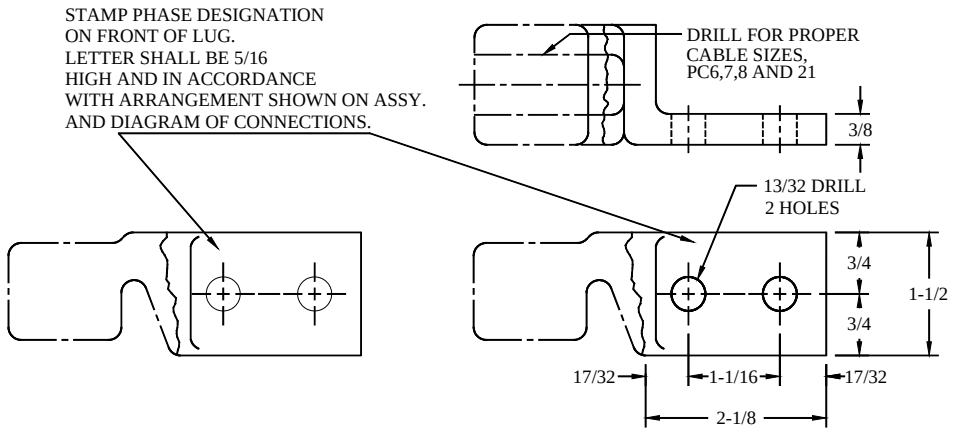

SH 11706

6 7 8 21 FIGURE 5. Terminal lugs.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

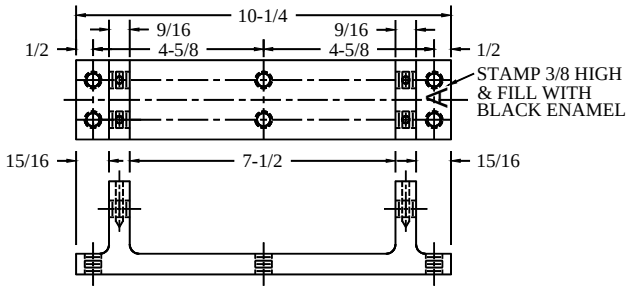

SH 11707

9


FIGURE 6. Bus assembly - Phase "A".

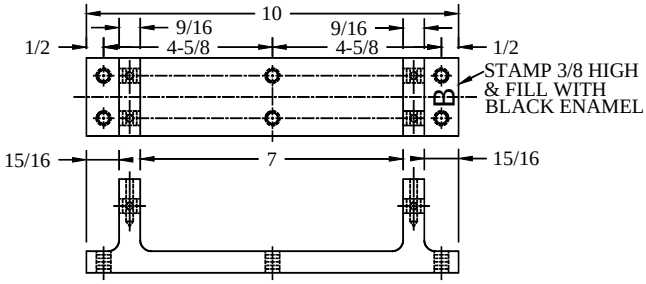

SH 11708

10

FIGURE 7. Bus assembly - Phase "B".

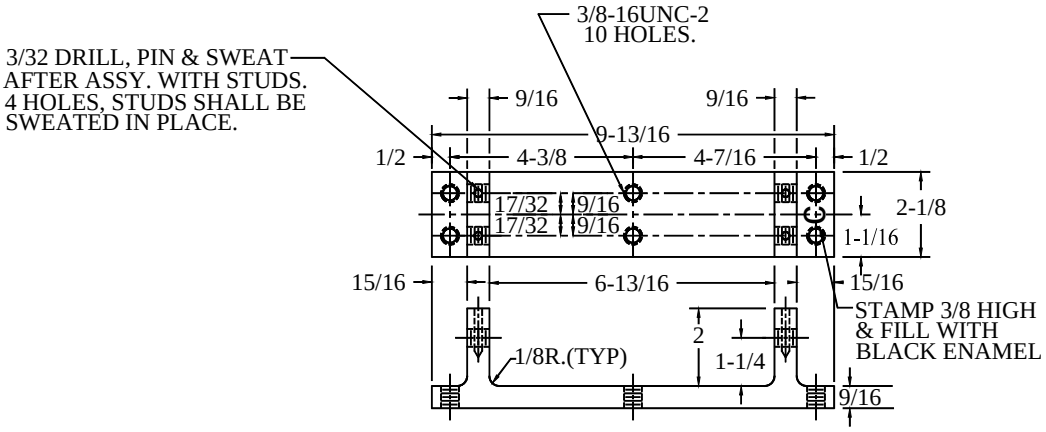

SH 11709

11

FIGURE 8. Bus assembly - Phase "C".

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.

AMENDMENT ANNOTATIONS: The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodian:
Navy - SH

Preparing Activity:
DLA - GS2

(Project 5940-2005-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:52Z
Check the source to verify that this is the current version before use.