
[INCH-POUND]
MIL-C-29600/20 (AS)
20 December 1989

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, COMPOSITE, HIGH DENSITY, QUICK COUPLING, ENVIRONMENT RESISTANT, REMOVABLE CRIMP CONTACTS, RECEPTACLE, FLANGED (SERIES B)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest revision of MIL-C-29600.

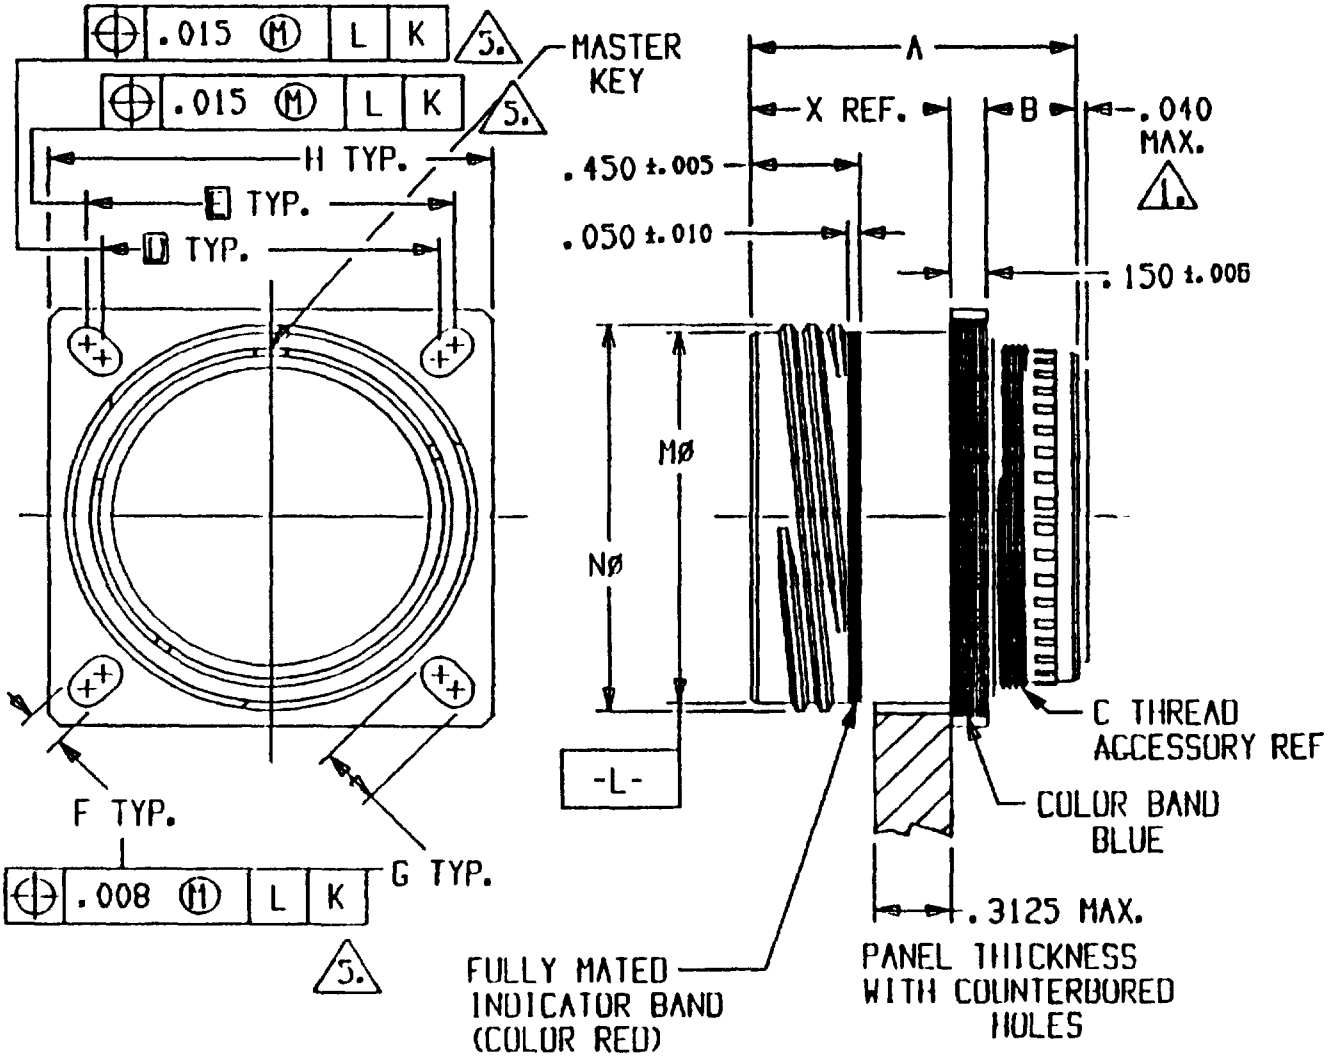

AMSC N/A

FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:38Z
Check the source to verify that this is the current version before use.

NOTES:

1 Arrangements containing size 12 contacts, the insert protrusion is .080 max.
2 Dimensions are in inches unless otherwise specified.
3 Metric equivalents are based upon 1 inch = 25 4 mm.
4 Dimensions apply after plating.
5 K datum is identified on Figure 8 MIL-C-29600.

Shell size	A ± 010	B ± 005	C Thread Ref	D Bsc	E Bsc	F+.004 -.002 Typ	G+.004 -.002 Typ
8	1.307	329	.500-28	.594	.719	.128	.216
10	1.307	.329	.625-28	.719	.812	.128	.194
14	1.307	.329	.875-28	.906	.969	.128	.173
16	1.307	.329	1.000-28	969	1.062	.128	.194
18	1.307	.329	1.125-28	1.156	1.250	.128	.194
20	1.336	.367	1.250-28	1.250	1.375	.154	.242
22	1.336	.367	1.375-28	1.375	1.500	.154	.242
24	1.336	367	1 500-28	1 375	1.500	.154	.242

Shell Size	H Typ ± 010	M Ø Ref	N Ø Max	X Ref
8	.939	.565	.628	.828
10	1.034	688	.753	.828
14	1.225	938	1.003	.828
16	1.318	1 109	1.190	.828
18	1.568	1.297	1.378	.828
20	1 694	1 422	1 503	.819
22	1.814	1.547	1 628	.819
24	1.814	1.609	1.690	.819

Inches	mm	Inches	mm	Inches	mm
.128	3.251	.828	21.031	1.336	33.934
154	3 912	906	23 013	1.375	34.925
.173	4 394	.938	23 825	1.378	35.001
.194	4.928	.939	23.851	1.422	36.119
216	5 486	.969	24.613	1.500	38.100
.242	6.147	1.003	25.476	1.503	38.176
.329	8.357	1.034	26.264	1.547	39.294
367	9.322	1.062	26.975	1.568	39.827
.565	14.351	1.109	28.169	1.609	40.869
.594	15.088	1.156	29.362	1.628	41.351
628	15 951	1.190	30 226	1.690	42.926
.688	17.475	1.225	31 115	1.694	43.028
.719	18.263	1.250	31.750	1.814	46.076
.753	19.126	1.297	32.944		
.812	20.625	1.307	33 198		
.819	20.803	1.318	33.477		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See Figure and Tables.

Requirements shall conform to MIL-C-29600.

Mating plug: MIL-C-29600/22 (AS).

Example of part number.

M29600/20	R	J	18	P	1
Specification sheet number	Class	Shell size (see Table VII MIL-C-29600)	Insert arrangement	Contact style	Polarization

Custodians:
Navy - AS

Preparing activity:
Navy - AS
(Project No. 5935-3701-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:38Z
Check the source to verify that this is the current version before use.