
INCH-POUND
MIL-C-29600/21(AS)
20 December 1989

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, COMPOSITE, HIGH DENSITY, QUICK COUPLING, ENVIRONMENT RESISTANT, REMOVABLE CRIMP CONTACTS, RECEPTACLE, JAM NUT (SERIES B)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest revision of MIL-C-29600.

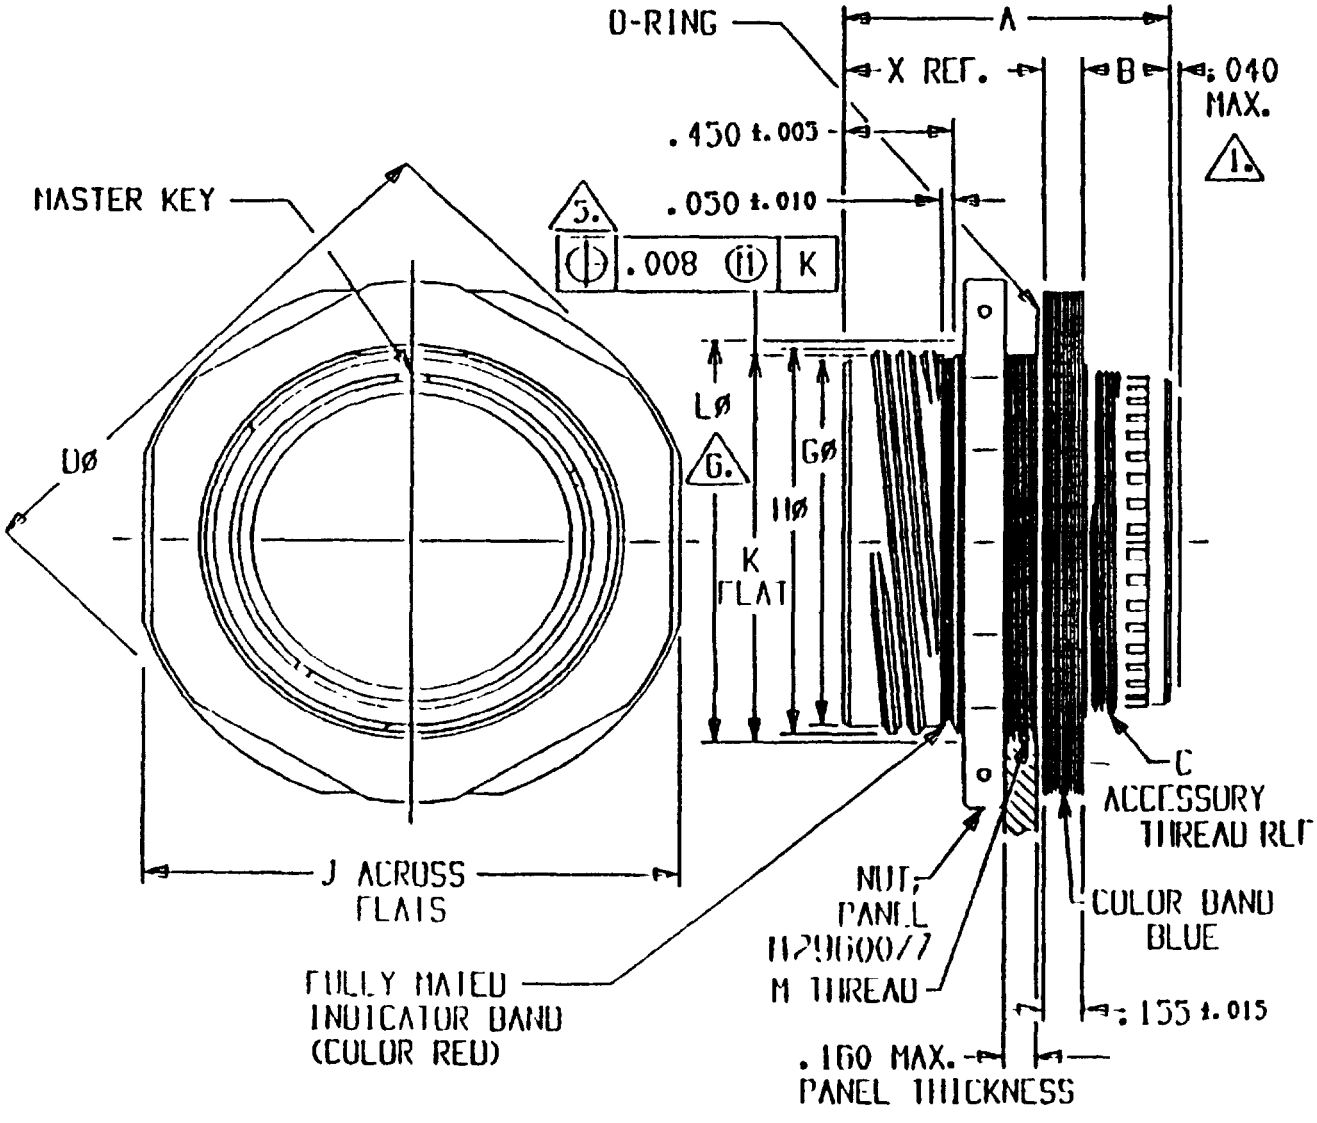


AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:39Z
Check the source to verify that this is the current version before use.

NOTES.

1. Arrangements containing size 12 contacts, the insert protrusion is .080 max
2. Dimensions are in inches unless otherwise specified.
3. Metric equivalents are based upon 1 inch = 25.4 mm.
4. Dimensions apply after plating.
5. K datum is identified on figure 8 of MIL-C-29600
6. LØ is the maximum jam nut thread diameter

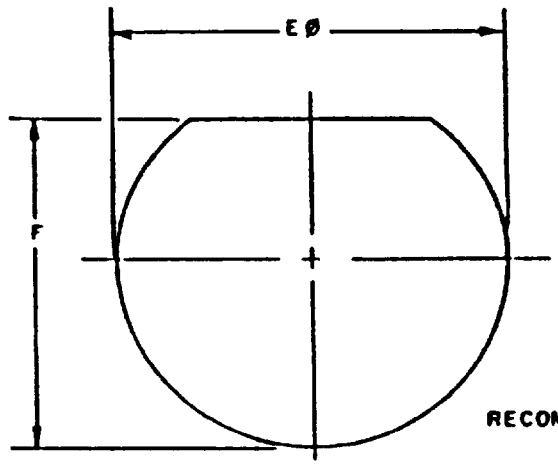

RECOMMENDED PANEL CUTOUT

Shell size	A ± .010	B ± .005	C Thread Ref	D ± .011	E+.010 -.000	F+.000 -.010	G Ref	X Ref	H Max
8	1.307	.329	.500-28	1.189	.697	.669	.565	.828	.628
10	1.307	.329	.625-28	1.374	.822	.769	.688	.828	.753
14	1.307	.329	.875-28	1.626	1.134	1.084	.938	.828	1.003
16	1.307	.329	1.000-28	1.752	1.269	1.208	1.109	.828	1.190
18	1.307	.320	1.125-28	2.063	1.507	1.459	1.297	.828	1.378
20	1.336	.358	1.250-28	2.189	1.634	1.584	1.422	.819	1.503
22	1.336	.358	1.375-28	2.311	1.759	1.709	1.547	.819	1.628
24	1.336	.358	1.500-28	2.311	1.759	1.709	1.609	.819	1.690

Shell Size	J ± .006	K Max	L Max	M Thread	MS 9068 dash No.	Torque Values (in/lb)
8	1.063	.655	.691	M17X1.0-0.100R	- 019	60
10	1.252	.755	.817	M20X1.0-0.100R	- 022	73
14	1.500	1.066	1.128	M28X1.0-0.100R	- 026	113
16	1.626	1.192	1.263	M32X1.0-0.100R	- 028	153
18	1.937	1.442	1.499	M38X1.0-0.100R	- 130	187
20	2.063	1.566	1.628	M41X1.0-0.100R	- 132	213
22	2.189	1.692	1.754	M44X1.0-0.100R	- 134	233
24	2.189	1.692	1.754	M44X1.0-0.100R	- 134	250

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:39Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
005	.127	817	20 752	1.263	32 080	1 566	39 776
006	.152	.819	20.803	1.269	32.233	1 584	40.234
.010	.254	.822	20.879	1.297	32.944	1.609	40.867
.011	.279	.828	21.031	1.307	33.198	1.626	41.300
.320	8.128	.938	23 825	1 333	33 858	1 628	41.351
.329	8 357	1.003	25.476	1 336	33 934	1 634	41.504
.358	9 093	1.063	27.000	1.374	34 900	1 690	42.926
.565	14.351	1.066	27.076	1.378	35.001	1.692	42.977
.628	15.951	1.084	27 534	1.384	35.154	1.709	43.409
.655	16.637	1.109	28.169	1.422	36.119	1.752	44.501
.669	16.993	1.128	28.651	1.442	36.627	1.754	44.552
.688	17.475	1.134	28.804	1.459	37.059	1.759	44.679
691	17.551	1 189	30 201	1 499	38.075	1.937	49 200
.697	17.704	1.190	30.226	1.500	38.100	2.063	52.400
753	19.126	1.192	30 277	1.503	38.176	2.189	55.601
.755	19.177	1.208	30.683	1.507	38.278	2 311	58 699
769	19.533	1.252	31.801	1 547	39.294		

REQUIREMENTS

Dimensions, design characteristics, and configuration: See Figure and Tables.

Requirements shall conform to MIL-C-29600.

Mating plug: MIL-C-29600/22.

Maximum Jam-nut torque values: Maximum torque values shall not exceed the values shown in the table.

O-ring: Use MS9068 per table.

Example of part number:

M29600/21	R	J	18	P	1
Specification sheet number	Class	Shell size (see Table VII MIL-C-29600)	Insert arrangement	Contact style	Polarization

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:39Z
Check the source to verify that this is the current version before use.

Custodians.
Navy - AS

Preparing activity:
Navy - AS
(Project No. 5935-3701-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:39Z
Check the source to verify that this is the current version before use.