
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, COMPOSITE, HIGH DENSITY, QUICK COUPLING, ENVIRONMENT RESISTANT, REMOVABLE CRIMP CONTACTS, PLUG (SERIES B)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest revision of MIL-C-29600.

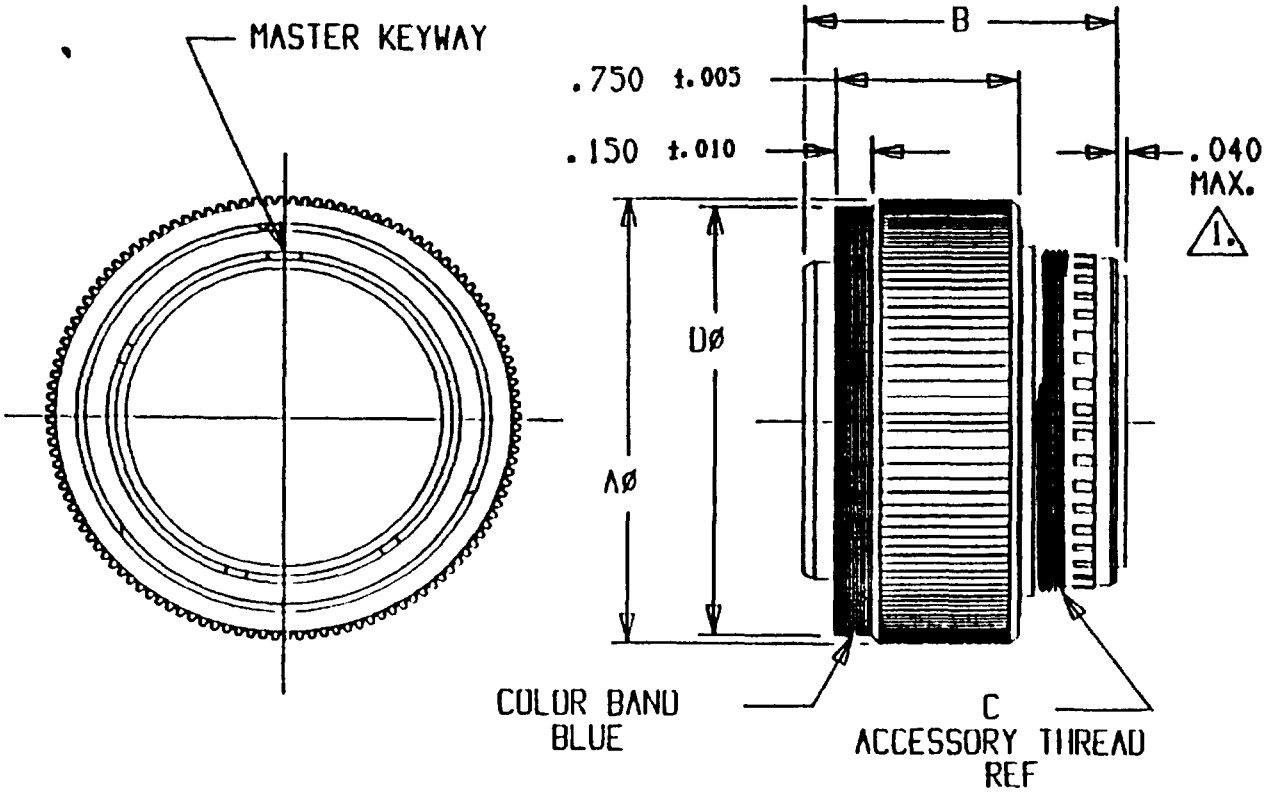

NOTES:

1. Arrangements containing size 12 contacts, the insert protrusion is .080 max.
2. Dimensions are in inches unless otherwise specified.
3. Metric equivalents are based upon 1 inch = 25.4 mm.
4. Dimensions apply after plating.

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:40Z
Check the source to verify that this is the current version before use.

Shell Size	A Ø Max	B ±.010	C Thread Ref	D Ø
8	.847	1.254	.500-28	.795
10	.990	1.254	.625-28	.920
14	1.245	1.254	.875-28	1.170
16	1.420	1.254	1.000-28	1.362
18	1 627	1.254	1.125-28	1.557
20	1 754	1.283	1.250-28	1.682
22	1.881	1.283	1.375-28	1.807
24	1.945	1.283	1.500-28	1.870

Inches	mm
.795	20.193
.847	21.514
.920	23.368
.990	25.146
1.170	29.718
1.245	31.623
1.254	31.852
1.283	32.588
1.362	34.595

Inches	mm
1.420	36.068
1.557	39 548
1.627	41.326
1.682	42.723
1.754	44.552
1.807	45.898
1.870	47.498
1.881	47.777
1.945	49.403

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See Figure and Tables

Requirements shall conform to MIL-C-29600.

Mating receptacle: MIL-C-29600/20 and /21.

Example of part number:

M29600/22	R	J	18	P	1
Specification sheet number	Class	Shell size (see Table VII MIL-C-29600)	Insert arrangement	Contact style	Polarization

Custodians:
Navy - AS

Preparing activity:
Navy - AS
(Project No 5935-3701-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:40Z
Check the source to verify that this is the current version before use.