
[INCH-POUND]
MIL-C-29600/23 (AS)
22 February 1990


MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, COMPOSITE, HIGH DENSITY, QUICK COUPLING, ENVIRONMENT RESISTANT, CONTACTS, SOCKET, CRIMP REMOVABLE, (FOR MIL-C-29600 SERIES B)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the contacts described herein shall consist of this specification and the latest revision of MIL-C-29600.

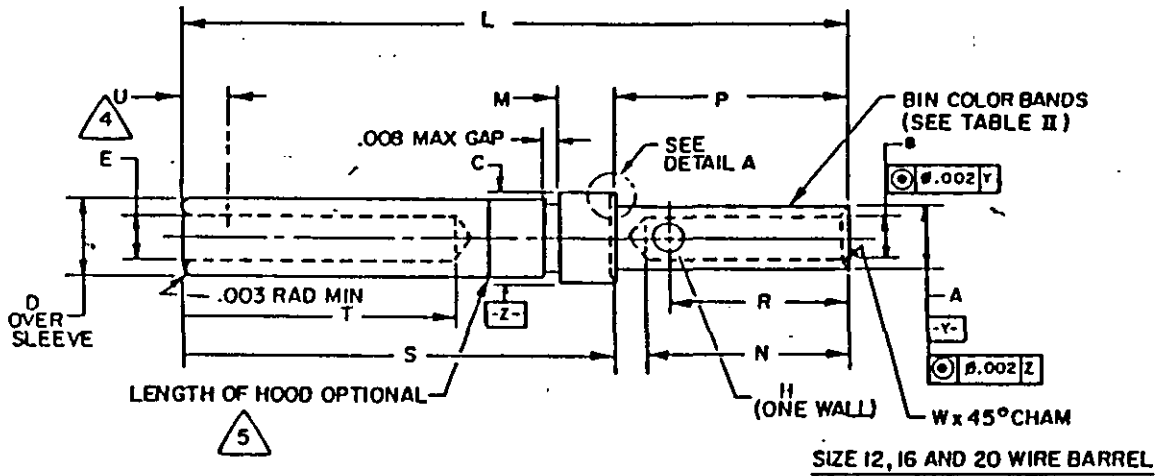

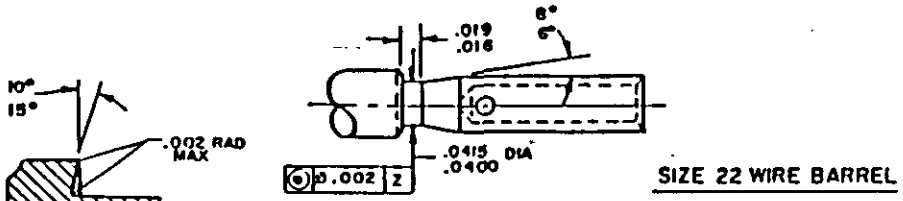

DETAIL A

NOTES:

1. Dimensions are in inches unless otherwise specified.
2. Metric equivalents are based upon 1 inch = 25.4 mm.
3. Dimensions apply after plating.
4. Point of initial engagement.
5. Maximum cap of .010 inch between hood and body of contact.
6. Manufacturer's trademark per AIR-1351.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:40Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

BIN Code	A Dia	B Dia	C Dia	D Max Dia	E Min Dia Only	H Dia	L (Ref)	M	N	P	R	S	T	U Max	W Cham
606	.0480	.0355	.0555	.055	.0280	.022	.937	.445	.155	.218	.145	.726	.250	.038	.006
	.0465	.0335	.0540			.018		.425	.145	.208	.139	.712	.190		.003
607	.0615	.0450	.0760	.076	.0415	.027	.937	.395	.195	.218	.165	.726	.360	.045	.007
	.0600	.0430	.0745			.023		.375	.185	.208	.159	.712	.270		.004
608	.0925	.0645	.1080	.108	.0640	.027	.937	.370	.195	.218	.165	.726	.360	.050	.010
	.0910	.0625	.1065			.023		.350	.185	.208	.159	.712	.270		.006
609	.1515	.1020	.1695	.169	.0955	.042	.954	.370	.232	.245	.196	.716	.360	.050	.012
	.1500	.0980	.1680			.038		.350	.216	.235	.190	.712	.250		.006

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:40Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0030	.0762	.0450	1.143	.1080	2.743	.2350	5.969
.0040	.1016	.0465	1.181	.1390	3.531	.2450	6.223
.0060	.1524	.0480	1.219	.1450	3.683	.2500	6.350
.0070	.1778	.0500	1.270	.1500	3.810	.2700	6.858
.0100	.2540	.0550	1.397	.1515	3.848	.3500	8.890
.0120	.3048	.0600	1.524	.1550	3.937	.3600	9.144
.0180	.4572	.0615	1.562	.1590	4.039	.3700	9.398
.0220	.5588	.0620	1.575	.1650	4.191	.3750	9.525
.0230	.5842	.0625	1.588	.1690	4.293	.3950	10.03
.0270	.6858	.0640	1.626	.1850	4.699	.4250	10.80
.0280	.7112	.0645	1.638	.1900	4.826	.4450	11.30
.0335	.8509	.0760	1.930	.1950	4.953	.7120	18.08
.0355	.9017	.0910	2.311	.1960	4.978	.7160	18.19
.0380	.9652	.0925	2.350	.2080	5.283	.7260	18.44
.0415	1.054	.0930	2.362	.2160	5.486	.9370	23.80
.0420	1.067	.0955	2.426	.2180	5.537	.9540	24.23
.0430	1.092	.1020	2.591	.2320	5.893		

TABLE II. Design characteristics.

BIN code	Color bands			Mating end size	Wire barrel size
	1st	2nd	3rd		
606	Blue	Black	Blue	23	22
607	Blue	Black	Violet	20	20
608	Blue	Black	Gray	16	16
609	Blue	Black	White	12	12

TABLE III. Tools.

Wire barrel size	Basic crimping tool	Positioner	Installing tool	Removal tool	
				Wired	Unwired
22	M22520/2-01	M22520/2-16	M81969/16-04	M81969/16-04	M81969/30-01
20	M22520/2-01	M22520/2-17	M81969/16-01	M81969/16-01	M81969/30-02
16	M22520/2-01	M22520/2-18	M81969/16-02	M81969/16-02	M81969/30-03
12	M22520/1-01	M22520/1-10	M81969/16-03	M81969/16-03	M81969/30-04

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See Figure and Table I.

Design characteristics and configuration: See Figure and Table II.

Tools: See Table III.

Mating contacts: MIL-C-29600/24.

Temperature: -65°C to +175°C.

Durability: 1500 cycles.

Vibration: The vibration requirements shall consist of those tests specified in MIL-C-29600. The contact sample group shall be 12 contacts, divided equally between the three separate vibration tests of MIL-C-29600.

Shock: The shock requirements shall consist of those tests specified in MIL-C-29600. The contact sample group shall be divided in half and each group subjected to a separate shock test.

Qualification: The qualification requirements shall consist of the sample numbers and tests specified in MIL-C-39029 for type A contacts with localized finish. The vibration test group shall consist of double the number of samples specified in MIL-C-39029. For those tests which require the use of a connector pair, either a composite or metal shell connector pair may be utilized. Caution should be used if exceeding the rated durability cycles of a metal shell connector. For vibration and shock testing, accessories shall be as specified in MIL-C-29600.

Periodic qualification: The manufacturer shall forward a report every 24 months to the qualifying activity. The periodic qualification requirements shall consist of those tests specified for qualification except for vibration and shock.

Quality conformance inspection: The quality conformance requirements shall consist of Groups A and B inspection as specified in MIL-C-39029.

Material: Base: Conductive copper alloy.
Plating: See 3.3.6 of MIL-C-29600.

Example of part number: M29600/23 606

BIN code

Specification sheet number

Custodians:
Navy - AS

Preparing activity:
Navy - AS
(Project No. 5935-3701-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:40Z
Check the source to verify that this is the current version before use.