MILITARY SPECIFICATION

COAT, WOMAN'S, BLUE, DRESS

This amendment forms a part of MIL-C-29628, dated 2 July 1991, and is approved for use by all departments and agencies of the Department of Defense.

PAGE 1

1.2.1, Under "Sizes, Body type", line 3, after "Misses": Delete "No designation" and substitute "M".

PAGE 3

2.1.1, Under "SPECIFICATIONS", "FEDERAL": Delete "V-T-276" and substitute "A-A-52094", delete "V-T-280" and substitute "A-A-50198"; delete "V-T-301" and substitute "A-A-50196". Add the following document "A-A-50199 - Thread, Polyester Core: Cotton- or Polyester Covered".

2.1.1, Under "SPECIFICATIONS", "MILITARY": Delete "MIL-C-15064 - Pads, Shoulder and Sleeve Head " and delete "MIL-T-43548 - Thread Polyester Core: Cotton-, Rayon-, or Polyester-Covered". Add the following documents: "MIL-C-15062 - Cloth, Flannel, Wool, Undercollar" and "MIL-C-29137 - Cloth, Felt Fabric Composite, Undercollar".

2.1.1, Under "STANDARDS", "MILITARY": Delete "MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes" and delete "MIL-STD-129 - Marking for shipment and Storage" and delete "MIL-STD-147 - Palletized Unit Loads" and delete "MIL-STD-2073-1 - DOD Materials Procedures for Development and Application of Packaging Requirements" and delete "MIL-STD-2073-2 - Packaging Requirement Codes". Add the following document "MIL-STD-984 - Provisions for Size Labeling for Women's Uniform Clothing".

PAGE 4

2.2, lines 7 through 16: Delete:

"NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

DISTRIBUTION STATEMENT A. ***Approved for public release; distribution is unlimited.***

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808)."

2.2, after line 6: Add:

"ANSI/ASCQ Z1.4- Sampling Procedures and Tables for Inspection of Attributes

(Applications for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018-3308.)"

PAGE 5

3.1: Delete.

3.3.3.1: Delete and substitute:

3.3.3.1 Fronts. The fusible interlining for the coat fronts shall be black or charcoal woven twill or weft inserted knit conforming to either Type II, style B, Class 1 or Type III, Style B, Class 1 of MIL-C-44296. The material shall have a uniformly distributed, dot-type nylon polyamide fusible adhesive evenly applied on one side in accordance with good commercial practice. Any given coat shall incorporate the same front fusible material.

3.3.3.2, line 2, after "topcollar,": Delete "undercollar," and substitute "breast welt,".

PAGE 6

After paragraph 3.3.3.6: Add new paragraph:

"3.3.3.7 Undercollar cloth. The undercollar material shall be a felt fabric composite conforming to requirements specified in MIL-C-29137. The shade shall be black and requirements for perspiration and crocking shall not apply."

3.3.4.3: Delete and substitute:

"3.3.4.3 Thread. The thread for seaming and stitching the floating chest piece assembly shall be cotton White AH, C.A. 66050 in accordance with the Department of Defense Standard Shades for Sewing Thread, conforming to type I, ticket no. 70, 2-ply of A-A-52094.".

PAGE 7

At top of page, before "Pocketing.": Insert paragraph number "3.3.5".

3.3.6: Delete and substitute:

"3.3.6 Shoulder and sleeve-head pads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

3.3.6.1 Shoulder Pad. The top and bottom covers of the shoulder pad shall be a 4 ounces per square yard polyester needlepunch felt. The bottom cover shall be approximately 1/4 inch shorter than the top cover for fullness of the filler. The filler shall be a one piece cotton filler in the pad, shaped to fill out the pad with an even smooth taper from center to all edges. The use of multiple pieces for the filler is not permitted. The top cover shall have a notch for shoulder seam alignment 4 (+1/4,-0) inches from the front of the pad. The pad shall be sewn concave in a shoulder fitting form with a continuing row of basting stitches forming six equally spaced rows of stitching throughout the pad. The finished pad shall measure 4-1/2 (+1/4, -0) inches at the point of widest dimension, 8-1/2 to 8-3/4 inches straight across the bottom (See Figure 1A). At the vertical center of the finished pad, its thickness shall be 3/8 inches and its armhole cut out shall be 3/8 to 1/2 inches.

3.3.6.2 Sleeve-head. The sleeve-head shall be constructed from one layer of bias cut muslin and one layer of 2 pound wadding. The muslin shall have a minimum of 60 ends per inch in the warp and 48 yarns per inch in the filling. The finished sleeve-head shall measure 13 (± 1/4) inches long and 1-7/8 (± 1/8) inches wide (See Figure 1B)."

3.3.9.1, line 2: Delete "MIL-T-43548" and substitute "type I of A-A-50199". In Operation table, under "Ply" column, lines 3 and 5: Delete "or 3".

PAGE 8

3.3.9.1.1, line 3: Delete "V-T-276" and substitute "type I of A-A-52094". Line 4: Delete "and types". Delete all references to "Type" in the operation table.

3.3.9.2, at the end of the first sentence: Add “The thread used for basting the sleeve hems shall be black in color.”

3.3.9.3, line 3: Delete "V-T-301" and substitute "A-A-50196".

3.3.9.6, lines 3, 4, 6, and 7: Delete "V-T-276, V-T-295, V-T-301, and MIL-T-43548" and substitute "A-A-50196, A-A-50199, A-A-52094, and V-T-295" respectively.

PAGE 9

3.3.10, line 2: Delete "V-T-280" and substitute "A-A-50198".

3.3.10.1, lines 3 and 5: Delete "V-T-280" and substitute "A-A-50198".

3.3.12.2: Delete and substitute:

"3.3.12.2 Size label. Each coat shall have a separate size label conforming to type IV, class 2 of DDD-L-20 and body dimensions labeling requirements conforming to MIL-STD-984. The label shall indicate size, body dimensions, and stock number as shown below:

SIZE CODE: 12JP (EXAMPLE)
BUST CIRC: 37 1/2 (EXAMPLE)
HIP CIRC: 38 (EXAMPLE)
HEIGHT: Less than 63 1/2 (P) (EXAMPLE)
STOCK NO: 8410-00-000-0000 (EXAMPLE)

NOTE: Abbreviations for the applicable body types shall be "J" for Juniors, "W" for Women's, and "M" for Misses body type). Abbreviations for the applicable lengths shall be "P" for Petite, "R" for Regular, and "T" for Tall."

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

3.3.12.3: Delete and substitute:

"3.3.12.3 Removable size ticket. Each coat shall have a commercial type size and body dimension ticket attached on the outside of the lower left sleeve. The ticket shall be 3 inches long and 1 inch high, made of a suitable plain white cardboard. The ticket shall be tacked on four corners by machine or hand (6 to 8 stitches per tack by machine or 2 to 4 stitches per tack by hand). As an alternate the corners can be tacked with plastic barb tack. The corners of the ticket may be double perforated for ease in tacking. The ticket shall be printed or stamped in blue or black ink and shall include information on size (including body types and lengths) and body dimensions as stated in 3.3.12.2."

After 3.3.12.3: Add new paragraph:

"3.3.12.4 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified as specified and so that it causes no damage to the item."

PAGE 10

3.4, line 2: Delete "two outside breast pocket flaps" and substitute "left outside breast welt". Line 3: Delete "round collar ends overlapping half-peaked lapels" and substitute "lapels with notched collar". At end of paragraph: Add "The bottom of the sleeves shall be unfinished but basted in place."

3.5.1: Delete and substitute:

3.5.1 Pattern parts. The component parts shall be cut from the materials as specified, and in accordance with the following pattern parts list:

Material	Pattern Name Abbreviation	Pattern Piece Nomenclature	Cut No.
Cloth, tropical	TOPCOLLAR	Topcollar	1
	B_WELT-A	Breast Welt - Sizes 4-8	1
	B_WELT-B	Breast Welt - Sizes 10-12	1
	B_WELT-C	Breast Welt - Sizes 14-16	1
	B_WELT-D	Breast Welt - Sizes 18-20	1
	B_WELT-E	Breast Welt - Sizes 22-28	1
	FRONT_MS_R	Front	2
	SFRNT_MS_R	Side Front	2
	SBACK_MS_R	Side Back	2
	BACK_MS_R	Back	1
	FRONT_JR _R	Front	2
	SFRNT_JR _R	Side Front	2
	SBACK_JR _R	Side Back	2
	BACK_JR_R	Back	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

4 of 21 Material	Pattern Name Abbreviation	Pattern Piece Nomenclature	Cut No.
Cloth, tropical	FRONT_WO_R	Front	2
	SFRNT_WO_R	Side Front	2
	SBACK_WO_R	Side Back	2
	BACK_WO_R	Back	1
	FRONT_MS_P	Front	2
	SFRNT_MS_P	Side Front	2
	SBACK_MS_P	Side Back	2
	BACK_MS_P	Back	1
	FRONT_JR _P	Front	2
	SFRNT_JR _P	Side Front	2
	SBACK_JR _P	Side Back	2
	BACK_JR_P	Back	1
	FRONT_WO_P	Front	2
	SFRNT_WO_P	Side Front	2
	SBACK_WO_P	Side Back	2
	BACK_WO_P	Back	1
	FRONT_MS_T	Front	2
	SFRNT_MS_T	Side Front	2
	SBACK_MS_T	Side Back	2
	BACK_MS_T	Back	1
	FRONT_WO_T	Front	2
	SFRNT_WO_T	Side Front	2
	SBACK_WO_T	Side Back	2
	BACK_WO_T	Back	1
	FRONT_JR _T	Front	2
	SFRNT_JR _T	Side Front	2
	SBACK_JR _T	Side Back	2
	BACK_JR_T	Back	1
	FRT_FAC_R	Front Facing	2
	TOPSLV_R	Top Sleeve	2
	UNDSLV_R	Undersleeve	2
	FRT_FAC_T	Front Facing	2
	TOPSLV_T	Top Sleeve	2
	UNDSLV_T	Undersleeve	2
	FRT_FAC_P	Front Facing	2
	TOPSLV_P	Top Sleeve	2
	UNDSLV_P	Undersleeve	2
Cloth, felt	UNDCLRCOMP	Undercollar Composite	1
Cloth, fusible (small parts)	TOPCLRINT	Topcollar Interlining	2
	TOPSLV_INT	Topsleeve Interlining	2
	UNDSLV_INT	Undersleeve Interlining	2
	LFACINT_R	Lapel Facing Interlining	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

Material	Pattern Name Abbreviation	Pattern Piece Nomenclature	Cut No.
Cloth, fusible (small parts)	LFACINT_P	Lapel Facing Interlining	2
	LFACINT_T	Lapel Facing Interlining	2
	B_WLT_IN-A	Breast Welt Interlining Szs 4-8	1
	B_WLT_IN-B	Breast Welt Interlining Szs 10-12	1
	B_WLT_IN-C	Breast Welt Interlining Szs 14-16	1
	B_WLT_IN-D	Breast Welt Interlining Szs 18-20	1
	B_WLT_IN-E	Breast Welt Interlining Szs 22-28	1
Cloth, fusible (fronts)	FRINT_MS_R	Front Interlining (Fusible)	2
	SFINT_MS_R	Side Front Interlining (Fusible)	2
	FRINT_JR_R	Front Interlining (Fusible)	2
	SFINT_JR_R	Side Front Interlining (Fusible)	2
	FRINT_WO_R	Front Interlining (Fusible)	2
	SFINT_WO_R	Side Front Interlining (Fusible)	2
	FRINT_MS_P	Front Interlining (fusible)	2
	SFINT_MS_P	Side Front Interlining (Fusible)	2
	FRINT_JR_P	Front Interlining (Fusible)	2
	SFINT_JR_P	Side Front Interlining (Fusible)	2
	FRINT_WO_P	Front Interlining (Fusible)	2
	SFINT_WO_P	Side Front Interlining (Fusible)	2
	FRINT_MS_T	Front Interlining (Fusible)	2
	SFINT_MS_T	Side Front Interlining (Fusible)	2
	FRINT_JR_T	Front Interlining (Fusible)	2
	SFINT_JR_T	Side Front Interlining (Fusible)	2
	FRINT_WO_T	Front Interlining (Fusible)	2
	SFINT_WO_T	Side Front Interlining (Fusible)	2
Haircloth, synthetic	C_PIECE	Chest Piece	2
Cloth, felt fabric composite	C_PADNG	Chest Padding	2
Cloth, twill	POCKET	Inside Pocket	1
	IP_STAY	Inside Pocket Stay	1
Cloth, lining	IP_W&F	Inside Pocket Welt & Facing	1
	FRLIN_MS_R	Front Lining	2
	SBLIN_MS_R	Side Back Lining	2
	BKLIN_MS_R	Back Lining	2
	FRLIN_JR _R	Front Lining	2
	SBLIN_JR _R	Side Back Lining	2
	BKLIN_JR _R	Back Lining	2
	FRLIN_WO_R	Front Lining	2
	SBLIN_WO_R	Side Back Lining	2
	BKLIN_WO_R	Back Lining	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

Material	Pattern Name Abbreviation	Pattern Piece Nomenclature	Cut No.
Cloth, lining	FRLIN_MS_P	Front Lining	2
	SBLIN_MS_P	Side Back Lining	2
	BKLIN_MS_P	Back Lining	2
	FRLIN_JR _P	Front Lining	2
	SBLIN_JR _P	Side Back Lining	2
	BKLIN_JR _P	Back Lining	2
	FRLIN_WO_P	Front Lining	2
	SBLIN_WO_P	Side Back Lining	2
	BKLIN_WO _P	Back Lining	2
	FRLIN_MS_T	Front Lining	2
	SBLIN_MS_T	Side Back Lining	2
	BKLIN_MS_T	Back Lining	2
	FRLIN_JR _T	Front Lining	2
	SBLIN_JR _T	Side Back Lining	2
	BKLIN_JR_T	Back Lining	2
	FRLIN_WO_T	Front Lining	2
	SBLIN_WO_T	Side Back Lining	2
	BKLIN_WO_T	Back Lining	2
	TOPSLVLN_T	Top Sleeve Lining	2
	UNDSLVLN_T	Undersleeve Lining	2
	TOPSLVLN_P	Top Sleeve Lining	2
	UNDSLVLN_P	Undersleeve Lining	2
	TOPSLVLN_R	Top Sleeve Lining	2
	UNDSLVLN_R	Undersleeve Lining	2
	TSLINALT_R	Topsleeve Lining (Alternate)	2
	USLINALT_R	Undersleeve Lining (Alternate)	2
	TSLINALT_T	Topsleeve Lining (Alternate)	2
	USLINALT_T	Undersleeve Lining (Alternate)	2
	TSLINALT_P	Topsleeve Lining (Alternate)	2
	USLINALT_P	Undersleeve Lining (Alternate)	2
Template	UNDCLRSHPR	Undercollar Shaper	-
	UCLRSTDMKR	Undercollar Stand Marker	-
	FINCOLLAR	T Finished Collar	-
	LAPLSHPR_R	T Lapel Shaper	-
	FINLAPEL_R	T Finished Lapel	-
	LAPLSHPR_P	T Lapel Shaper	-
	FINLAPEL_P	T Finished Lapel	-
	LAPLSHPR_T	T Lapel Shaper	-
	FINLAPEL_T	T Finished Lapel	-
	F_B_WELT-A	Finished Breast Welt - Sizes 4-8	-
	F_B_WELT-B	Finished Breast Welt - Sizes 10-12	-
	F_B_WELT-C	Finished Breast Welt - Sizes 14-16	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

Material	Pattern Name Abbreviation	Pattern Piece Nomenclature	Cut No.
Template	F_B_WELT-D	Finished Breast Welt - Sizes 18-20	-
	F_B_WELT-E	Finished Breast Welt - Sizes 22-28	-

PAGE 14

Table I, operation 4f: Delete and substitute:

	"f. Fuse welt interlining to welt, placing interlining 1/4 inch past fold line."				

PAGE 15

Table I, operation 6: Delete and substitute:

"6.	Make and attach breast welt.	301	SSa-1	10-14	50 50
	a. With face sides together, stitch welt ends 1/4 inch from raw edge and leave straight edge open. Trim outer corners and turn to finished position forcing out edges and corners.				
	b. Press welt smooth and flat.				
	c. Top and front of welt is indicated by marks on finished breast welt template.				
	d. Mark seamline for bottom edge of welt, to conform with finished breast welt template. Depth of welt should finish 7/8 - 1 inch for all sizes, on the left front of coat.				
	e. Place welt on left front with folded edge facing hemline. Position welt by matching the marked seamline on coat and stitch 1/4 inch from raw edge.	301	Lsbk-1	10-14	50 50 (a)
	NOTE: Care shall be taken to prevent ends protruding beyond the sides of welt when stitched to coat. Trim corners at an angle.				
	f. Turn welt up and stitch ends of welt 1/16 inch from each end.	Hand or Mach			Comrcl
	g. Vertically tack corners 1/4 inch down from top folded edge	301	smlr to Lsbk-1(b)	12-14	50 50
	h. The finished outside breast welt shall measure the following: Sizes 4 through 8 = 4 (± 1/16) inches Sizes 10 through 12 = 4-1/4 (± 1/16) inches Sizes 14 through 16 = 4-1/2 (± 1/16) inches Sizes 18 through 20 = 4-3/4 (± 1/16) inches Sizes 22 through 28 = 5 (+ 1/16) inches"				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

PAGE 17

Table I, operation 9a, line 1: Delete “a slit”.

Table I, operation 10, after "Make inside": Add "welt". Operation 10b, line 6, before "combination": Add "size and". After operation 10b: Add "Note: Top end of size label shall be placed on top of combination label."

PAGE 18

Table I, operation 10c, line 1, before “label”: Add “combination”. Line 4: Delete “label” substitute “combination label with top edge of size label”. Operation 10i, line 2 after “5”: Add “(± 3/8)”.

PAGE 20

Table I, operation 13c, line 5: Delete “trimmed along the shoulder” and substitute “placed”.

Table I, operation 16a: Delete “NOTE” in its entirety and substitute:

> “NOTE: As a guide, lapel shaper shall be placed with top of breakline at neckline notch and top buttonhole notch matching top buttonhole mark on front.”

PAGE 21

Table I, operation 17b, line 8: Delete " 1/4" and substitute "3/16."

Table I, operation 17e, line 6, after "template": Add "tolerance ± 1/16 inch".

PAGE 23

Table I, after Operation 19f: Add the following:

	"NOTE: As an alternate, Operations 19c and 19f may be completed by machine before basting lining into the coat (Operations 19a, 19b, 19d, and 19e)."				

Table I, "Operation 21 Make collar.": Delete and substitute.

"21.	Make collar. a. The topcollar assembly shall consist of a one-piece topcollar of basic material with interlining fused to the ends. The undercollar assembly shall consist of a one piece undercollar composite.				
	b. Mark and shape undercollar to conform to undercollar shaper template. Marking and shaping of undercollar may be performed with a clicker machine using dies conforming to undercollar shaper template.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

	c. Position neck edge of undercollar stand marker even with neck edge of undercollar and stitch breakline.				
	d. Overlap undercollar raw edge 3/8 inch over right side of top-collar. Baste outeredge of undercollar, distributing fullness of topcollar on outer edge of undercollar.		LSa-1		
	e. Stitch collar assembly next to outer raw edge of undercollar, making sure stitches do not extend onto topcollar material.	304	LSa-1	9-10	Comrcl or Silk
	Note: Operation 21e. shall be omitted when outeredge of collar is machine felled.				
	f. Turn face sides together and baste edge of topcollar. Putting in proper fullness at ends of topcollar, stitch sides of topcollar to undercollar, 1/4 inch from raw edge. Trim excess topcollar at corners and ends. Turn face side out.				
	g. Baste the topcollar to undercollar along breakline and outer edge putting in proper fullness. Finished collarstand at center shall measure 1-1/8 (± 1/8) inches.		Hand or Machine		Comrcl
	h. Press and crease the stand of the topcollar and the undercollar together in one operation to shape holding the crease line short. Center area of crease line shall be straight for a distance of 3 to 4 inches.				
	i. Trim neck edge of topcollar leaving a 3/8 inch seam allowance on gorge, gradually working to 3/8 inches at center back.				
	j. Remove basting of breakline.		Hand or Machine		Comrcl
	k. Flat press assembled collar."				

PAGE 25

Table I, Operations 22a through 22f: Delete and substitute:

	"a. Seam topcollar to front facing and back lining with 3/8 inch seam allowance. Notch seam allowance of gorge no less than 1 inch behind breakline, and trim down to 1/4 inch seam allowance.	301	SSa-1	10-14	50 50
	b. With hanger loop ends even with the neck with the neck edge, center hanger loop at back neck and stitch ends.	301		10-14	50 50
	c. Finished hanger loop shall measure 1-1/2 8 (± 1/4) inches between inner edges. When constructed of lining fabric, the loop shall finish approximately 1/4 inch wide.	301	EFp-2	10	50-50
	d. Spread gorge seam open and tack to the chest piece assembly.	Hand or 301	SSa-1	6-8 10-14	50 50 50 or Comrcl

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

	e. Stitch neckline of coat to seam allowance of topcollar assembly 1/4 inch from raw edge.				
	f. Baste undercollar to body of coat along neckline putting in proper fullness at shoulders	Hand or Mach			Comrcl
	NOTE: Finished ends of collar shall abut with tops of lapel. There shall be no gap at lapel notch (See Figure 1). Check width of collar lapel notch against finished collar and finished lapel template pattern, with a tolerance of + 1/16 inch."				

PAGE 26

Table I, operation 23c through 23g, including Note: Delete and substitute:

	"c. With face sides together, stitch buckram seam.	301	SSa-1	10-14	50 70
	d. Press buckram seam open and flat.				
	e. Turn sleeve bottom as indicated by pattern marks and baste along folded edge.	Hand or Mach	Osf-1		Comrcl
	f. Soft press bottom of sleeve and remove basting."				

PAGE 27

Table I, after operation 24c: Add the following:

	"OR 1. As an alternate, when using a sleeve lining using a sleeve lining felling machine (see 6.10), join backarm seam and forearm seam of sleeve lining. The distance between the notches on the forearm shall be left open.	301 or 401	SSa-1 SSa-1	10-14 10-14	30 30 30 50
	2. Position the sleeve lining top notches to the top of forearm sleeve seam and top of the backarm sleeve hem. Tack forearm seam and backarm seam of the sleeve lining to the forearm seam and backarm seam, respectively. The backarm seam tacking shall extend from approximately the midpoint of the backarm seam to not more than 7 inches above creased bottom edge. The forearm seam tacking shall be for a distance of 1-1/2 to 2 inches below the bottom left open forearm seam notch."	Hand or 301		2-3 4-8	50 50 50

Table I, Operation 25b: Delete and substitute:

"b. Press seam flat, shrinking fullness around sleeve head using a suitable shaped pressing buck. Open seam and press across top not less than 3 inches back and not more than 4 inches forward of shoulder seam."

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

PAGE 29

Table I, after operation 28a: Add the following:

	"OR As an alternate, the armhole lining may be felled utilizing a sleeve lining felling machine that consists of a one needle, two thread, feed off the arm machine equipped with a lower and upper feed (see operations 24c1. and 24c2).				
	1. Stitch sleeve lining to armhole on inside from front sleeve notch to backarm seam across undersleeve.	301	SSa-1	10-14	50 50
	2. Stitch the top sleeve lining to armhole on inside from the front armhole notch to top back arm lining seam across the crown of the top sleeve lining.	306	SSa-1	10-14	50 50 or or nylon nylon A A
	3. Close the previously left opened forearm seam 1/16 to 3/32 inch from edge.".	301	SSc-1	10-14	50 50

Table I, Operation 28f: Delete and substitute:

PAGE 30

	“f. With collar meeting lapel at gorge point tack underside of collar to lapel, 1/4 inch from finished gorge seam. This is to prevent gapping between collar and lapel."	Hand or 301			Comrcl

Table I, operation 28g, at end of operation: Add "Front seams of sleeve lining and shell shall match."

Operation 28h, at end of operation: Add "(see NOTE at end of Operation 19)."

PAGE 31

Table I, operation 31a, at end of paragraph: Add “ Also, sleeve hem basting shall remain for alteration purposes.”

Table I, operation 32, line 7: Delete "The sleeves shall not be creased." and substitute "The sleeves and the sleeve hems shall not be creased."

Table I, operation 32c: Delete and substitute:

	"c. Sleeves shall be roll pressed. The sleeve hems shall not be hard pressed, just steamed. (For alteration purposes)."				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

Table I, operation 32e: Delete and substitute:

	"e. Press the breakline of collar 3-4 inches across the center back. Press the break line of collar and lapel area 1 inch past gorge seam."				

PAGE 34

3.8, Table II: Delete and substitute:

"TABLE II - Sizes and measurements of coat

Size	Bust (A)	Waist (B)	Back Length (C)			Sweep (D)		
			Petite	Regular	Tall	Junior	Misses	Women
4	35-1/2	29	23-1/2	25	26-1/2	39	40-1/2	42
6	36-1/2	30	23-5/8	25-1/8	26-5/8	40	41-1/2	43
8	37-1/2	31	23-3/4	25-1/4	26-3/4	41	42-1/2	44
10	39	32-1/2	23-7/8	25-3/8	26-7/8	42-1/2	44	45-1/2
12	40-1/2	34	24	25-1/2	27	44	45-1/2	47
14	42	35-1/2	24-1/8	25-5/8	27-1/8	45-1/2	47	48-1/2
16	44	37-1/2	24-1/4	25-3/4	27-1/4	47-1/2	49	50-1/2
18	46	39-1/2	24-3/8	25-7/8	27-3/8	49-1/2	51	52-1/2
20	48	41-1/2	24-1/2	26	27-1/2	51-1/2	53	53-1/2
22	50	43-1/2	24-5/8	26-1/8	27-5/8	53-1/2	55	55-1/2
24	52	45-1/2	24-3/4	26-1/4	27-3/4	55-1/2	57	57-1/2
26	54	47-1/2	24-7/8	26-3/8	27-7/8	57-1/2	59	59-1/2
28	56	49-1/2	25	26-1/2	28	59-1/2	61	61-1/2
Tolerance	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	+3/4,-½	+3/4,-1/2	+3/4,-1/2

Sleeve Inseam (E):	All Petites (P) -	16-3/4
	All Regulars (R) -	17-3/4
	All Talls (T) -	19-3/4
	Tolerance	± 1/2

NOTE: Bust, waist, and length of coat measurements shall be taken with coat fully buttoned, placed smooth and flat. Sweep measurement shall be taken with coat unbuttoned and folded at center back. Refer to Figure 1 for A, B, C, and E measurements. Refer to Figure 2A for D measurement.

A. Bust - Twice the measurement taken across front at base of armholes from folded edge to folded edge.

B. Waist - Twice the measurement taken across front between third and bottom buttonhole.

C. Back Length - Measurement taken from base of undercollar down center of back to bottom edge of coat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

D. Sweep - Twice the measurement taken 2 inches up along hemmed bottom.
E. Sleeve Inseam - Measurement taken along inseam from armhole to bottom edge of sleeve."

PAGE 35

4.4, line 2: Delete "MIL-STD-105" and substitute "ANSI/ASCQ Z1.4".

PAGE 36

4.4.1, Table III: Add new components to table:

COMPONENT	CHARACTERISTIC	REQUIREMENT	TEST METHOD
Shoulder pad felt	Material Identification Weight	3.3.6.1 3.3.6.1	1/ ASTM-D 3776, option C
Filler pad completed	Material Identification Thickness	3.3.6.1 3.3.6.1	1/ 4.4.3.5
Sleeve-head	Material Identification	3.3.6.2	1/

PAGE 37

Before paragraph 4.4.2: Add new paragraphs:

"4.4.1.1 Shoulder pad inspection. For each contract ten shoulder pads shall be visually inspected for the following defects: Any hole, cut, tear, mend, burn, spot, or stain, broken or skipped stitch, run-off stitch, tight or loose stitch tension; shape of shoulder pad not concave; any component part omitted; notch on upper side of shoulder pad omitted; dimensions not as specified; more than one piece of cotton filler in shoulder pad; shoulder pad not constructed with basting stitches; shoulder pad not constructed with one continuous basting stitch forming six rows of equally spaced stitches. Any shoulder pad found to have the above defects shall be cause for rejecting the lot."

"4.4.1.2 Sleeve-head. For each contract ten sleeve-heads shall be visually inspected for the following defects: any hole, cut, tear, burn, spot or stain, broken or skipped stitch, run-off stitch, tight or loose stitch tension; any component part omitted, dimensions not as specified. Any sleeve-head found to have the above defects shall be cause for rejecting the lot."

PAGE 40

After para. 4.4.3.4: Add new paragraph:

"4.4.3.5 Thickness. The thickness of the pad shall be measured at the center notch with a platform micrometer having a 1 to 1-1/8 inch diameter presser foot and using a pressure of 0.1 pound per square inch. The reading for thickness shall be taken after an interval of 1 minute under load."

4.4.4, under "Point Value": Add the following new defects after "FUSIBLE":

"COLLAR OR LAPEL
Finished end of collar/lapel shall not vary from finished template by more than 1/8 inch 2
SHOULDER
Vertical seamlines on front and back of coat staggered 1/8 inch or more at shoulder seamline 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

SHOULDER STRAP 2

Front seams of sleeve lining and shell shall not be out of alignment by more than 1/4 inch".

PAGE 41

4.4.6: Delete.

4.4.7: Delete.

Section 5, "PACKAGING": Delete and substitute:

"5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department of Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity."

PAGE 43

6.2: Delete "e. Levels of preservation and packing required (see 5.1 and 5.2). f. When palletization is required (see 5.4) g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5)." and substitute "e. Packaging requirements (see 5.1)."

6.5, lines 3, 8, and 9: Delete "(Junior and Womens only)" and substitute "(Junior, Misses, and Womans)".

PAGE 44

After paragraph 6.9: Add new paragraph:

"6.10 Alternate machine felling construction. When the alternate construction to fell the armhole lining by machine is used, it consists of leaving an opening between the notches of the forearm sleeve lining seam. Stitching the lining to the armhole on the inside from front sleeve notch of sleeve to backarm seam across undersleeve (301 stitch). Utilizing the forearm sleeve opening stitch the top sleeve lining to the armhole on the inside by felling machine from front sleeve notch to backarm seam across the crown of top sleeve lining. Close the previously left opened forearm seam.".

PAGE 45

Before Figure 1: Add new Figures 1A and 1B.

Figure 1: Delete and substitute the new "Figure 1".

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

Before Figure 2: Add new “Figure 2A”.

Custodian
Navy - NU

Preparing Activity:
DLA - CT

Project No.
8410-0880

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

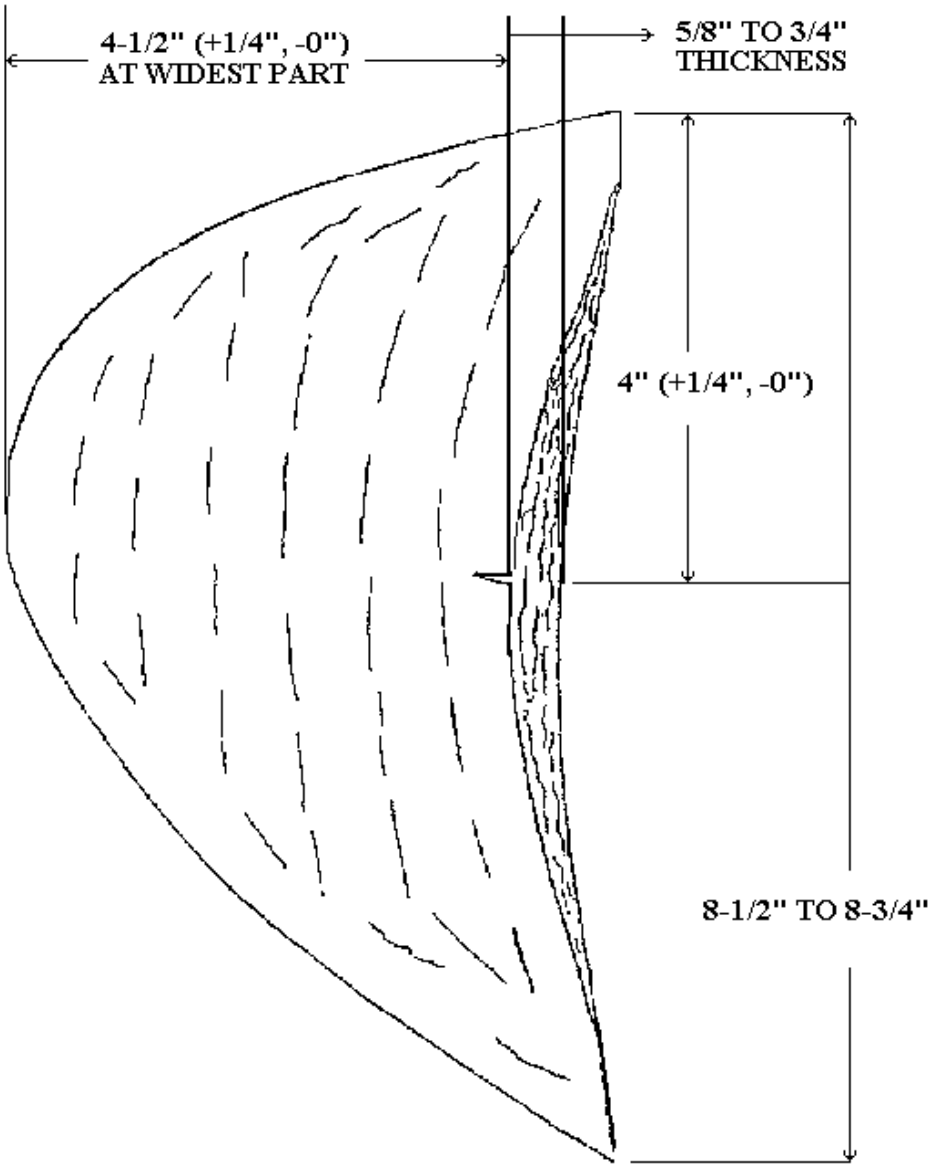


FIGURE 1A. Shoulder pad

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

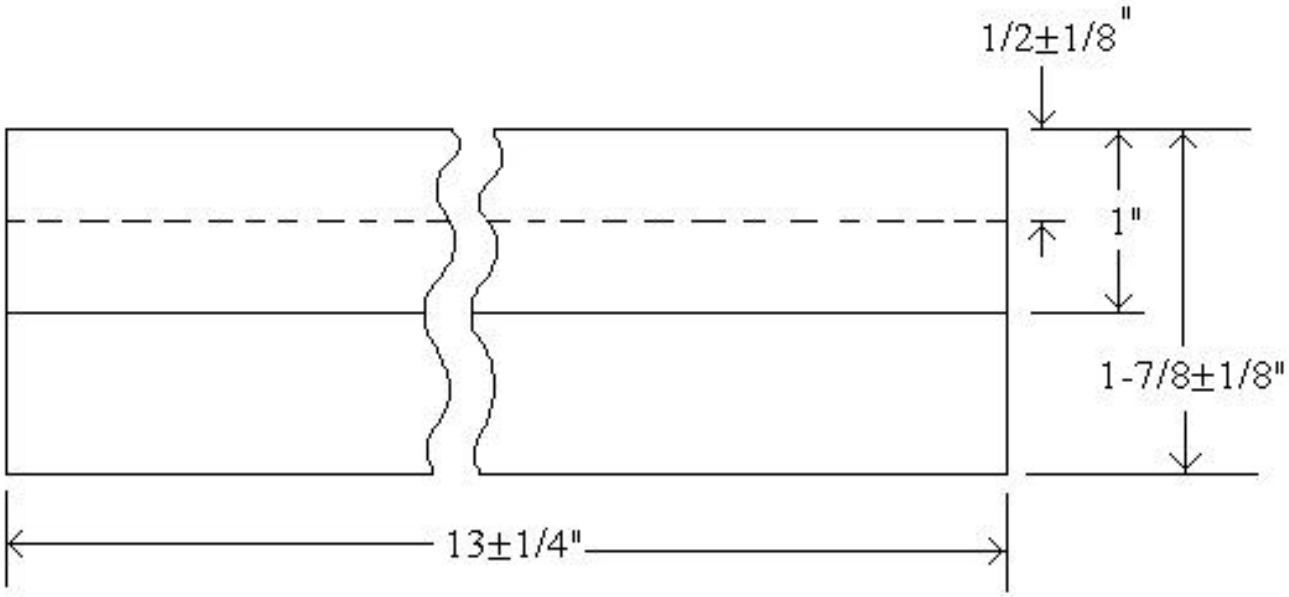


FIGURE 1B. Sleeve -head

NOTE:
1. Fold wadding 5/8 inch.
2. Fold muslin 1 inch.
3. Place wadding inside muslin.
4. Stitch both pieces together 1/2 inch from fold.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

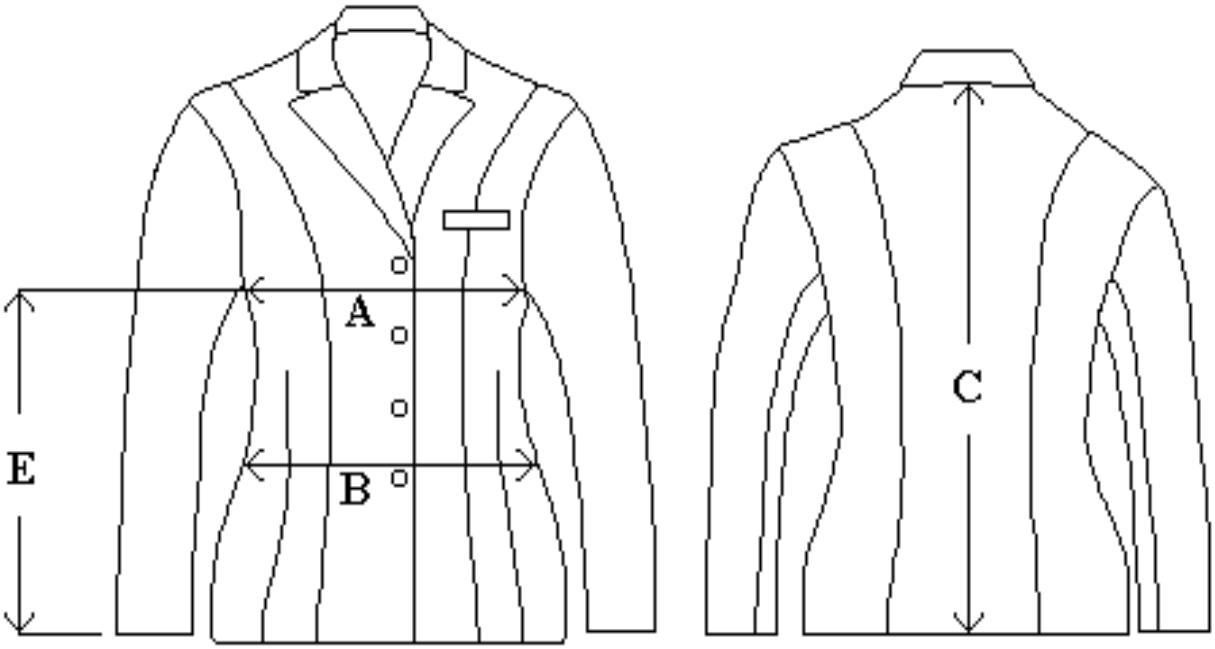


FIGURE 1. Coat, Woman's, Blue Dress

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.

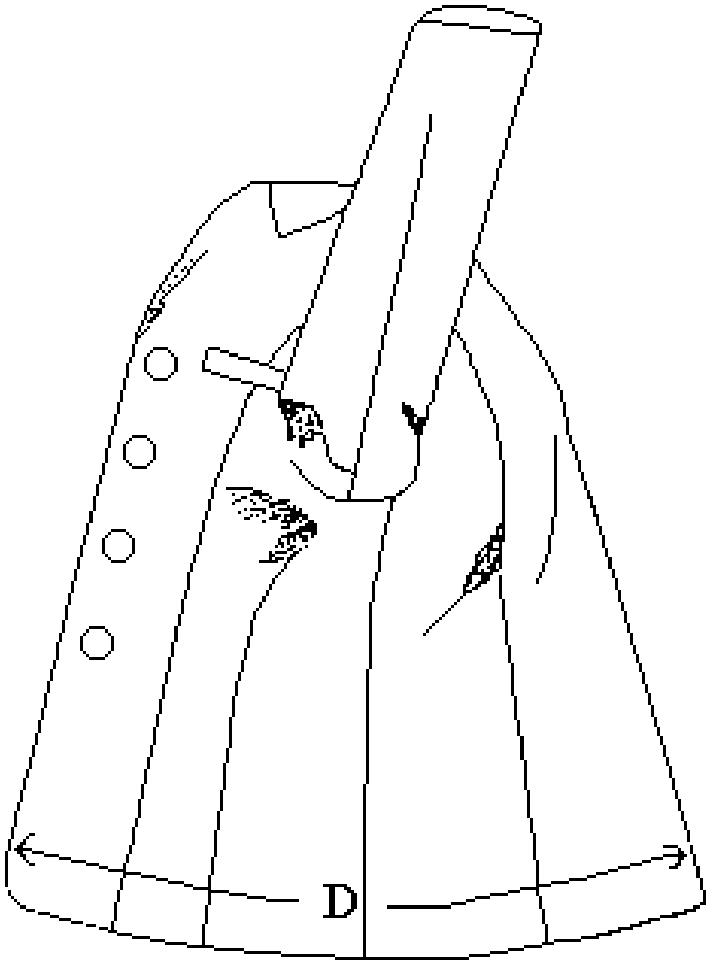


FIGURE 2A. Sweep

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:16Z
Check the source to verify that this is the current version before use.