NOT MEASUREMENT SENSITIVE

MIL-PRF-29607(AS)
19 September 1996

PERFORMANCE SPECIFICATION

CLEANING COMPOUND, AVIONICS COMPONENTS, NON-OZONE DEPLETING

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for an aqueous cleaning compound to be used in ultrasonic and immersion cleaning of avionics components.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in Sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Air Warfare Center Aircraft Division, Code 414100B120-3, Highway 547, Lakehurst, NJ 08733-5100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6850
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

CCC-C-46	-	Cloth, Cleaning, Non-woven Fabric
QQ-A-250/4	-	Aluminum Alloy 2024, Plate and Sheet
QQ-A-250/12	-	Aluminum Alloy 7075, Plate and Sheet
QQ-P-416	-	Plating, Cadmium (Electrodeposited)
VV-D-1078	-	Damping Fluid, Silicone Base (Dimethyl Polysiloxane)

DEPARTMENT OF DEFENSE

MIL-M-3171	-	Magnesium Alloy, Processes for Pretreatment and Prevention of Corrosion on
MIL-S-7952	-	Steel, Sheet and Strip, Uncoated, Carbon (1020 and 1025) (Aircraft Quality)
MIL-T-9046	-	Titanium and Titanium Alloy, Sheet, Strip, and Plate
MIL-C-81309	-	Corrosion Preventive Compounds, Water Displacing, Ultra-thin Film
MIL-H-83282	-	Hydraulic Fluid, Fire Resistant, Synthetic Hydrocarbon Base, Aircraft, Metric, NATO Code Number H-537

STANDARDS

FEDERAL

FED-STD-313	-	Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities

(Unless otherwise indicated, copies of the above specifications, standards and handbooks are available from the Standardization Documents Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

CODE OF FEDERAL REGULATIONS (CFR)

OCCUPATIONAL SAFETY AND HEALTH STANDARDS

29 CFR 1910.1200	-	Toxic and Hazardous Substances - Hazard Communications

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

PROTECTION OF THE ENVIRONMENT

40 CFR 261.24	-	Characteristics of Hazardous Wastes - Toxicity
40 CFR 401	-	Effluent Guidelines and Standards - General Provisions

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20370.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-A240	-	Heat-Resisting Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels, Standard Test Method for
ASTM-B152	-	Copper Sheet, Strip, Plate and Rolled Bar, Standard Specification for (DoD Adopted)
ASTM-D2834	-	Nonvolatile Matter in Water-emulsion Floor Polishes, Solvent-based Floor Polishes, and Polymer-emulsion Floor Polishes, Standard Test Method for
ASTM-E70	-	pH of Aqueous Solutions With The Glass Electrode, Standard Test Method for (DoD Adopted)
ASTM-F483	-	Total Immersion Corrosion Test for Aircraft Maintenance Chemicals, Standard Test Method for (DoD Adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

SOCIETY FOR AUTOMOTIVE ENGINEERS (SAE)

SAE-AMS4375	-	Magnesium Alloy Sheet and Plate 3.0 Al-1.0 Zn-0.20 Mn (AZ 31 B-O) Annealed and Recrystallized (DoD Adopted)

(Application for copies should be addressed to the Customer Service Department, Publications Group, SAE, 400 Commonwealth Drive, Warrendale, PA 15096.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

INSTITUTE FOR INTERCONNECTING AND PACKAGING ELECTRONIC CIRCUITS

J-STD-006 - Requirements for Electronic Grade Solder Alloys and Fluxed and Non-fluxed Solid Solders for Electronic Soldering Applications (DoD Adopted)

(Application for copies should be addressed to the Institute For Interconnecting And Packaging Electronic Circuits (IPC), 7380 N. Lincoln Avenue, Lincolnwood, IL 60646.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.2 Composition. The cleaning compound shall be a fully aqueous cleaner, containing no organic solvents. The specific composition is optional and is to be determined by the individual supplier, provided the compound conforms to the requirements specified herein.

3.2.1 Non-volatile content. The cleaning compound shall be tested for non-volatile content in accordance with ASTM-D2834 (see 4.5 and table VII). The values shall be recorded for use in conformance inspection.

3.3 Toxicity. The concentrated cleaning compound shall have no adverse effect on the health of personnel when used for its intended purpose. Questions pertinent to this effect shall be referred by the contracting activity to the appropriate medical service who will act as advisor to the contracting agency. A Material Safety Data Sheet (MSDS) conforming to 29 CFR 1910.1200 shall be prepared and submitted in accordance with FED-STD-313 (see 6.4). In addition, the cleaning compound shall comply as follows:

a. The compound shall be within the Toxicity Characteristic Leachate Potential (TCLP) limits when tested and listed in 40 CFR 261.24.

b. The compound shall not contain any known or suspected human carcinogens as defined by the National Toxicology Program's Annual Report on Carcinogens.

c. The compound shall not contain any toxic pollutants as defined in 40 CFR 401.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

3.4 Biodegradability. All surfactants contained in the cleaning compound shall be a minimum of 90 percent biodegradable when tested as specified in 4.5.1.

3.5 Corrosivity.

3.5.1 Solder corrosion. The cleaning compound shall not cause visual corrosion or a weight change in the test specimen greater than 0.04 mg/cm^2 when tested in accordance with 4.5.2.

3.5.2 Total immersion corrosion. The cleaning compound shall cause neither visual corrosion nor a weight change of any specimen greater than that shown in table I, when tested in accordance with ASTM-F483 (see 4.5.1 and table VII).

3.6 Cleaning efficiency. When tested as specified in 4.5.3, the cleaning compound shall meet or exceed the cleaning efficiency for the soils specified in table II.

3.7 pH. The compound, when tested in accordance with ASTM-E70 (see 4.5 and table VII), shall have a pH less than 10.0.

TABLE I. Total immersion corrosion limits.

TEST PANEL	APPLICABLE DOCUMENT	WEIGHT LOSS (mg/cm^2)
Aluminum alloy (2024)	QQ-A-250/4	0.04
Aluminum alloy (7075)	QQ-A-250/12	0.04
Copper	ASTM-B152	0.04
Steel	MIL-S-7952	0.04
Cadmium plated steel	MIL-S-7952, cadmium plated in accordance with QQ-P-416	0.20
Magnesium	SAE-AMS4375 pretreated in accordance with MIL-M-3171	0.20
Titanium	MIL-T-9046, Type III, Comp C	0.04

3.8 Thermal stability.

3.8.1 High temperature. After exposure to the high temperature specified in 4.5.4.1, the compound shall not separate, layer, or visibly deteriorate.

3.8.2 Low temperature. After exposure to the low temperature specified in 4.5.4.2, the compound shall not separate, layer, or visibly deteriorate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

TABLE II. Cleaning efficiency requirements.

SOIL 1/	CLEANING EFFICIENCY (PERCENT MIN)
MIL-C-81309 corrosion preventive compound	95
MIL-H-83282 aircraft hydraulic fluid	85
MIL-H-83282 aircraft hydraulic fluid plus 10% Raven 1040 2/	98
VV-D-1078 silicone base damping fluid	98

1/ Soils and panels prepared as specified in 4.5.3.1
2/ Raven 1040, Columbia Carbon Company or equivalent

3.9 Storage stability. After storage as specified in 4.5.5, the cleaning compound shall not separate, crystallize, or deteriorate and shall meet all other requirements of this specification. In addition, there shall be no container incompatibility, distortion, leakage, or container corrosion.

3.10 Product identification and warning. The following identification and warning label shall appear in two-inch-high bold block lettering on each product container:

CLEANING COMPOUND, AVIONICS COMPONENTS, NON-ODS
Do not use full strength. Dilute 1:10 with water.
Use at recommended temperature (140°F).

3.11 Workmanship. When visually examined at room temperature, the cleaning compound shall be a homogeneous liquid free of foreign matter. A faint turbidity shall be permissible.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Conformance inspection (see 4.4).

4.2 Inspection conditions. Unless otherwise specified herein, all inspections shall be performed in accordance with standard conditions. Standard conditions shall be a temperature of 72 ±4°F (22 ±2°C) and a relative humidity of 50 ±20 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. The first article inspection shall consist of all tests specified in table III. First time suppliers to this specification shall perform the first article inspections (see 6.3).

4.3.1 First article sample.

4.3.1.1 Laboratory test sample. The laboratory test sample shall consist of 4 liters of the cleaning compound. Samples shall be identified as follows:

Cleaning Compound, Avionics Components, Non-ozone depleting
First article test samples
Manufacturer's name and product number
Submitted by (name and date) for first article testing
in accordance with authorization (reference authorizing letter)
Manufacturer's recommended dilution

TABLE III. First article inspections.

Inspections	Requirement paragraph	Test paragraph
Composition 1/	3.2	----
Compositional assurance 1/	3.2.1	----
Toxicity 1/	3.3	----
Biodegradability 1/	3.4	4..5.1
Solder corrosion	3.5.1	4.5.2
Total immersion corrosion	3.5.2	Table VII
Cleaning efficiency	3.6	4.5.3
pH	3.7	Table VII
High temperature stability	3.8.1	4.5.4.1
Low temperature stability	3.8.2	4.5.4.2
Storage stability	3.9	4.5.5
Product identification and warning 2/	3.10	----
Workmanship 2/	3.11	----

1/ Supplier shall certify to this requirement for first article.
2/ Visual examination.

4.4 Conformance inspection. Conformance inspection results shall not differ from the first article inspection test values by more than ±3.0 percent of the total product weight.

4.4.1 Lot formation. A lot shall consist of all the cleaning compound produced by one supplier, at one plant, from the same materials, under essentially the same manufacturing

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

conditions provided the operation does not exceed 24 hours. When the process is considered a batch operation, each batch shall constitute a lot.

4.4.2 Visual inspection. A random sample of filled containers, prior to closure, shall be selected from each lot in accordance with table IV. The sample unit shall be one filled container. Inspection shall be in accordance with table V. There shall be no defects.

4.4.3 Physical property inspection. Two containers shall be randomly selected from each lot and tested in accordance with table VI. Each sample selected shall be thoroughly mixed prior to testing. Failure of either sample to conform to any requirement specified shall be cause to reject the entire inspection lot.

TABLE IV. Sampling plan.

Lot size	Number of samples for inspection
2 to 50	3
51 to 150	8
151 to 280	13
281 to 500	20
501 to 1200	32
1201 to 3200	50
3201 to 10,000	80
10,001 to 35,000	125
Over 35,000	350

TABLE V. Visual inspections for conformance.

Examine	Defect
Fill	Average net content per container less than specified in contract or order [Volume corrected to 60°F (16°C)].
Material	Not as specified.
Appearance	Presence of foreign matter. Not homogeneous.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

TABLE VI. Physical property conformance testing.

Characteristics	Requirement Paragraph	Test Paragraph
Non-volatile content	3.2.1	Table VII
pH 1/	3.7	Table VII
Solder corrosion	3.5.1	4.5.2
Workmanship 2/	3.11	----

1/ Value shall be within ±0.20 pH units of the first article value.
2/ Visual examination.

4.5 Test methods. The tests shall be conducted in accordance with table VII and 4.5.1 through 4.5.5. Unless otherwise specified in the test paragraph, all tests shall be conducted at dilution ratio of one part cleaning compound to ten parts distilled water (1:10).

TABLE VII. Test methods.

TEST	REQUIREMENT PARAGRAPH	TEST METHOD
Non-volatile content 1/	3.2.1	ASTM-D2834
Total immersion corrosion	3.5.2	ASTM-F483
pH	3.7	ASTM-E70

1/ Non-volatile content shall be determined using 2 to 3 gram sample weights, 100 mm diameter glass Petri dishes, and a forced draft oven set at 221 ±4°F (105 ±2°C) for 16 hours.

4.5.1 Biodegradability. Biodegradation shall be determined over 28 days by the "Shake Flask Biodegradation Tests" for measuring ultimate or ready degradation potential, monitored by analysis of Total Organic Carbon (TOC), as specified in EPA Chemical Fate Test Guidelines 40 CFR Method 796.3100 (Aerobic Aquatic Biodegradation Test) or 40 CFR Method 796.3240 (OECD Screening Test for Ready Biodegradability). Biodegradability shall be shown as carbon transformation by both soluble organic carbon reduction and CO_2 evolution. Conformance to 3.4 shall be achieved.

4.5.2 Solder corrosion.

4.5.2.1 Specimen preparation. Three 8-inch specimens shall be cut from 1/8-inch (0.125-inch) diameter rosin core, tin/lead solder (SN63PB37WR) conforming to J-STD-006. Each specimen shall be marked before sealing both ends with a soldering iron, followed by cleaning the entire length with isopropyl alcohol. Rinse with distilled, deionized water and allow to dry. The solder shall be coiled twice so that it may be suspended easily on a hook. The specimen shall be weighed to within ±0.0001 gram (W_1).

4.5.2.2 Procedure. Add 160 ±1 ml of the diluted cleaning compound to each of three glass jars. One specimen shall be suspended in each jar by means of a glass hook that ensures that the specimen

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

is not touching the sides. Each specimen shall be completely immersed in the cleaning compound. The temperature shall be maintained at 212 ±2°F (100 ±1°C) for a minimum of 24 hours. After the exposure period, the specimens shall be cleaned under running water with a bristle brush, allowed to dry in air, then weighed to within ±0.0001 gram (W_2).

4.5.2.3 Calculation. Corrosion loss shall be calculated as follows:

$$C = \frac{W_1 - W_2}{20.3} \text{ X } 100$$

where:

C = corrosion loss (mg/cm^2)
W_1 = initial weight (grams)
W_2 = final weight (grams)
20.3 = surface area of specimen in cm^2

Conformance to 3.6.1 shall be achieved.

4.5.3 Cleaning efficiency. The cleaning efficiency of the diluted cleaning compound shall be determined by immersing prepared test panels (see 4.5.3.1) in the soils specified in table VIII and then cleaning the panels as specified. Cleaning efficiency shall conform to table II.

4.5.3.1 Test panels. The test panels of stainless steel in accordance with ASTM-A240 shall conform to the dimensions as specified on figure 1. The panels shall be solvent wiped with acetone (dimethylketone) using CCC-C-46 Class 7 aerospace wipes. The pre-cleaning shall continue until the wipe is visually clean. Dry the panels in an oven maintained at 105 ±2°C (221 ±4°F) for 30 minutes. The panels shall then be removed from the oven, air-cooled to room temperature, and weighed to the nearest 0.0001g (W_1). A dipping machine similar to the Fisher-Payne Dipcoater shall be used to apply a uniform coating of each soil specified in table VIII. The panel should be immersed to the shoulder in 15 to 20 seconds and removed in approximately 70 seconds. All panels shall be placed in an oven set to 105 ±2°C (221 ±4°F) for one hour. The panels shall then be air-cooled to room temperature and weighed to the nearest 0.0001g (W_2). Three panels shall be prepared for each soil.

4.5.3.2 Apparatus. The cleaning apparatus shall be capable of completely immersing and removing the panel vertically at a rate of 20 ±1 cycles per minute for the clean and rinse test method while maintaining a constant temperature of 60 ±2°C (140 ±4°F) (see figure 2).

4.5.3.3 Soil removal. Add 200 ml of the cleaning compound to 2000 ml of distilled water. The cleaning test shall be run at 60 ±2°C (140 ±4°F). The cleaner shall be maintained at the specified temperature throughout the test. Two soiled panels shall be simultaneously immersed and withdrawn from the cleaning solution at a rate of 20 ±1 cycles per minute for fifteen minutes for the hydraulic fluid/carbon soil and five minutes for each of the other soils. Fresh cleaning compound shall be used for each panel when testing the hydraulic fluid/carbon soil, and every three panels when testing each of the other soils. The panels shall then be rinsed for 60 ±1 seconds in distilled water (fresh distilled

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

water for each panel) using the same equipment and procedure. The panels shall then be dried for one hour at 105 ±2°C (221 ±4°F). The panels shall be air-cooled and re-weighed (W_3). The percent soil removal (cleaning efficiency) shall be calculated as follows:

$$CE = \frac{W_2 - W_3}{W_2 - W_1} \quad X \ 100$$

where:

CE = cleaning efficiency (%)
W_1 = initial weight of panel (g)
W_2 = panel weight plus soil weight (g)
W_3 = final weight of panel after cleaning (g)

TABLE VIII. Soils.

SOIL TYPES
MIL-C-81309 corrosion preventive compound 1/
MIL-H-83282 aircraft hydraulic fluid 1/
MIL-H-83282 aircraft hydraulic fluid plus 10% Raven 1040 2/
VV-D-1078 silicone base damping fluid 1/ (100-500 centistokes)

1/ Use in 'as-supplied state'
2/ Add 500 grams to 50 grams of Raven 1040 Carbon Black (Columbia Carbon Co. or equal) in one-quart jar. Thoroughly agitate mixture on a high speed disperser for 5 minutes to a homogeneous state. Shake vigorously before each use.

The average of the three specimens shall be reported and shall conform to 3.6 and table II.

4.5.4 Thermal stability.

4.5.4.1 High temperature. Fifty milliliters of the 'as-received' cleaning compound shall be placed in a 50-ml graduated cylinder and stoppered. The cylinder shall be maintained at 49 ±1°C (120 ±2°F) for a minimum of one hour. At the end of one hour, the cylinder shall be allowed to return to standard conditions. The cleaning compound shall then be examined for conformance to 3.8.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

4.5.4.2 Low temperature. Fifty milliliters of the 'as-received' cleaning compound shall be placed in a 50-ml graduated cylinder and stoppered. The cylinder shall be maintained at 0 ±1°C (32 ±2°F) for a minimum of one hour. At the end of one hour, the cylinder shall be allowed to return to standard conditions. The cleaning compound shall then be examined for conformance to 3.8.2.

4.5.5 Storage stability. A one-quart container filled with cleaning compound furnished for storage stability shall be stored for 12 months at 21 ±2°C (70 ±4°F). After the storage period, the sample shall be tested to all the requirements of this specification and examined for conformance to 3.9.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The cleaning compound is intended for use in the cleaning of avionics components not harmed by water. This includes, but is not limited to, most printed circuit boards and electrical motors. The cleaning compound may be used in static immersion, immersion with mechanical agitation, and ultrasonic applications. It is not intended to be used in high-pressure spray cabinets or vapor degreasing equipment. This cleaning compound is intended to be mixed in the ratio of 1 part cleaner concentrate to 9 to 10 parts water and used at a temperature of 140°F.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DoDISS to be cited in the solicitation and if required the specific issue of individual documents referenced (see 2.1 and 2.2).

c. Quantity of cleaning compound desired.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

d. Packaging requirements (see 5.1).

e. Whether first article inspection is required (see 3.1).

6.3 First-time suppliers. First time suppliers who have not previously supplied products to MIL-PRF-29607 and wish to have their material tested may do so at their own expense. The attention of contractors is called to this requirement. Manufacturers are urged to have the products that they propose to offer to the federal government tested so that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. It is recommended that inquiries pertaining to the testing of products be addressed to the Naval Air Warfare Center Aircraft Division, Mail Stop 3, Bldg. 2188, Code 4.3.4.1, 40866 Shaw Road, Patuxent River, MD 20670-5304 (see 4.3).

6.4 Material Safety Data Sheets. Contracting officers will identify those activities requiring copies of completed Material Safety Data Sheets prepared in accordance with FED-STD-313. The pertinent Government mailing addresses for submission of data are listed in FED-STD-313.

6.5 Subject term (key word) listing.

Aqueous
Biodegradable
Dimethylketone
Isopropyl alcohol
Toxicity

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

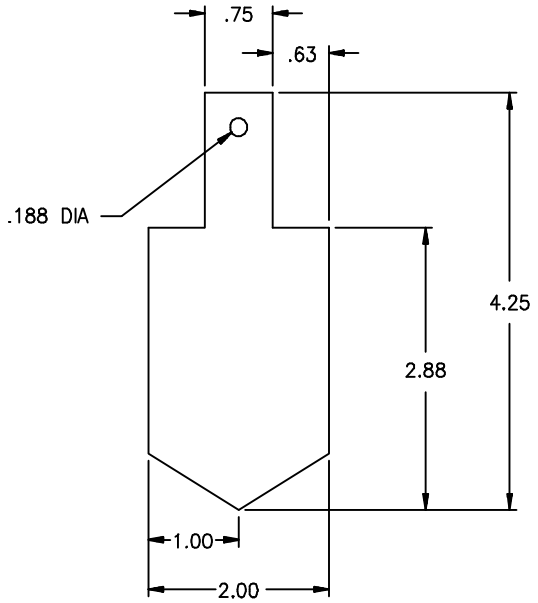


FIGURE 1. Dimensions of stainless steel panels.

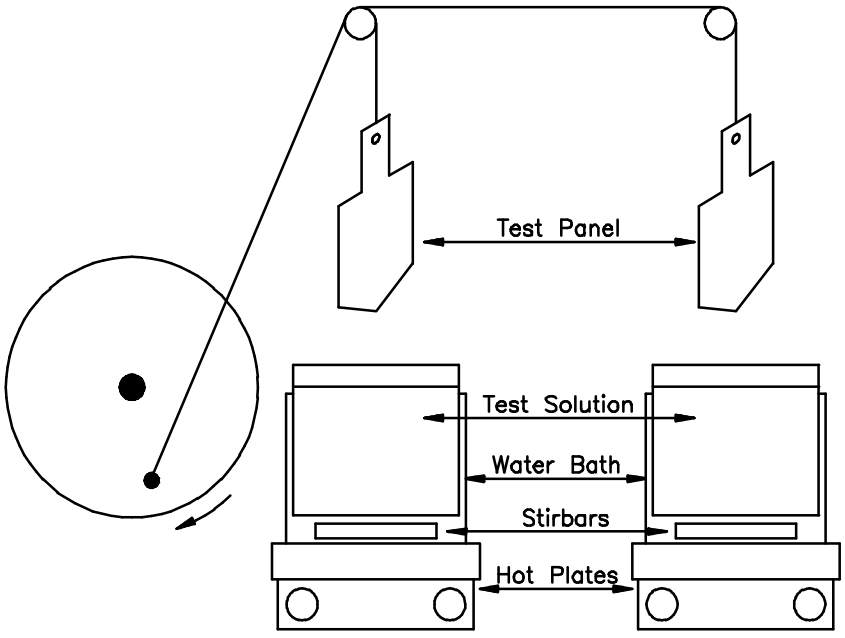


FIGURE 2. Test apparatus.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Preparing Activity:
Navy - AS
(Project 6850-N862)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.
   NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-29607(AS)	2. DOCUMENT DATE (*YYMMDD*) 960919

3. DOCUMENT TITLE
   CLEANING COMPOUND, AVIONICS COMPONENTS
   NON-OZONE DEPLETING

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial: (2) DSN: (*If Applicable*)	7. DATE SUBMITTED (*YYMMDD*)

8. PREPARING ACTIVITY

a. NAME COMMANDER NAVAL AIR WARFARE CENTER AIRCRAFT DIVISION	b. TELEPHONE NUMBER (*Include Area Code*) (1) Commercial (908) 323-1281 (2) DSN 624-1281
c. ADDRESS (*Include Zip Code*) CODE 414100B120-3 HIGHWAY 547 LAKEHURST, NJ 08733-5100	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office, 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 DSN 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.

COMMANDER
NAVAL AIR WARFARE CENTER
AIRCRAFT DIVISION
CODE 414100B120-3
HIGHWAY 547
LAKEHURST, NJ 08733-5100

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:00Z
Check the source to verify that this is the current version before use.