INCH-POUND

MIL-S-29629(NU)
1 February 1990

MILITARY SPECIFICATION

SKIRT, WOMAN'S (WITH WELT POCKETS)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for women's skirts in fabrics and colors as specified.

1.2 Classification. The skirts shall be of one type only in the following classes and sizes (body types and lengths) (see 6.2).

1.2.1 Classes.

Class 1 - Polyester/Wool, Blue 3346
Class 2 - Polyester, White 3006
Class 3 - Polyester/Cotton, White 3053

1.2.2 Sizes.

Body type	Length
Juniors - J	Petite (Short) - P
Misses - No designation	Regular - R
Womens - W	Tall (Long) - T

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

Schedule of sizes

MISSES

Petite (P)	Regular (R)	Tall (T)
4	4	4
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18
20	20	20

WOMENS

Petite (P)	Regular (R)	Tall (T)
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18

JUNIORS

Petite (P)	Regular (R)	Tall (T)
10	10	10
12	12	12
14	14	14
16	16	16

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitaton (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-F-106	- Fastener, Slide, Interlocking
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label, For Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-24910	- Cloth, Tropical; Polyester and Wool
MIL-C-29127	- Cloth, Twill, Polyester/Cotton (Crease-Resistent Finish)
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43718	- Cloth, Polyester; Polyester and Cotton; Polyester and Rayon, for Pockets
MIL-C-44296	- Cloth, Fusibles
MIL-C-87052	- Cloth, Twill Polyester, White
MIL-C-87059	- Cloth, Nylon, Tricot

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1609	- Provisions for Evaluating Quality of Women's Skirts
MIL-STD-2073-1	- DOD Materials Procedures for Development and Application of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

U.S. POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402-0001).

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

(Application for copies should be addressed to The Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

3.3 Material.

3.3.1 Basic material. The basic materials for the skirts shall be as specified in 3.3.1.1 thru 3.3.1.3.

3.3.1.1 Class 1. The material for the class 1 skirt shall be a tropical, polyester/wool, 10.0 (± .5) oz/sq yd, shade Blue 3346, conforming to MIL-C-24910.

3.3.1.2 Class 2. The material for the class 2 skirt shall be a texturized polyester twill, 6.7 oz/sq yd, shade White 3006, conforming to MIL-C-87052.

3.3.1.3 Class 3. The material for the class 3 skirt shall be a polyester/cotton, crease-resistant finished, twill, shade White 3053, conforming to class 2 of MIL-C-29127.

3.3.2 Lining material. The material for lining the class 2 and 3 skirts shall be a nylon tricot warp knit, 2.7 oz/sq yd, shade White 3006 conforming to MIL-C-87059.

3.3.3 Fusible interlining. The waistband and pocket welts of the skirt shall be nonwoven fusible interlining conforming to type V, class 2, style A of MIL-C-44296 except as noted below when tested as specified in 4.4.1.

Requirements

Appearance of fused samples 1/ 2/
Initial - No evidence of bubbling or delamination of the bond, change of color, or strike through.
After 3 launderings - No evidence of bubbling or delamination of the bond, change of color, or strike through.
After 3 dry cleanings - No evidence of bubbling or delamination of the bond, change of color, or strike through.

Bond strength
Initial - 22 oz. minimum
After 3 launderings - 18 oz. minimum
After 3 dry cleanings - 18 oz. minimum

Dimensional stability 2/
After 3 launderings - 2.5% maximum
After 3 dry cleanings - 2.5% maximum

1/ Applies to quality conformance and in-process tests.
2/ The same sample may be used for appearance and dimensional stability evaluations.

3.3.4 Pocketing. The material for the front and back plies of the pockets shall be fabric conforming to class 1 of MIL-C-43718. The color of the pocketing for the class 1 blue skirt shall be dark grey or black and for the class 2 and 3 white skirts shall be white.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

3.3.5 Tape, waistband, non-slip. The woven non-slip tape for the waistband shall be made of polyester or a blend of polyester/nylon, natural or white in color, 1/2 to 7/8 inch in width with two or three rows of nitrile or chloroprene rubber thread woven or stitched to the tape. The rows of rubber thread shall be positioned a minimum of 3/16 inch from edges of tape. The finished tape shall not shrink more than 2.0 percent in length direction when subjected to the manufacturer's standard procedures for determining dimensional stability to laundering and dry cleaning, as appropriate for the end item (see 4.4.1 and 6.4).

3.3.6 Thread, polyester core. The thread used for seaming, stitching, and overedging the skirts shall be a cotton-covered or rayon-covered polyester core, ticket No. 70, 2 or 3 ply, conforming to MIL-T-43548. The color of the thread for the class 1 skirt shall be dyed shade Black AA, C.A. 66043, and for the class 2 and 3 skirts shall be dyed shade White AH, Cable No. 66050 in accordance with the Department of Defense Standard Shades for Sewing Threads. The use of polyester-covered, polyester-core thread is not allowed.

3.3.6.1 Colorfastness of threads. The dyed threads shall show colorfastness to laundering, wet-dry cleaning, and light equal to or better than the standard sample when tested as specified in MIL-T-43548. As a limit of acceptability, or when no standard sample is available, the dyed threads shall show a minimum of "good" colorfastness to laundering, wet-dry cleaning, and light when tested as specified in MIL-T-43548.

3.3.7 Labels.

3.3.7.1 Combination label. Class 1 and 3 skirts shall have a combination personal/identification/instruction label conforming to type VI, classes 10 and 15 of DDD-L-20. Class 2 skirt shall have a separate personal/identification combination label conforming to type VI, classes 1 and 10 of DDD-L-20, and a separate instruction label conforming to type VI, class 3 of DDD-L-20. The printing shall show good colorfastness to laundering and dry cleaning. The labels shall bear the following inscription, and appropriate laundering instruction (separate label for class 2 skirt).

NAME:
SERVICE NO:
SKIRT, WOMAN'S (WITH WELT POCKETS) CLASS 3 (EXAMPLE)
FIBER CONTENT: 50% POLYESTER/50% COTTON (EXAMPLE)
LINING: 100% NYLON (CLASS 2 OR 3 SKIRT ONLY)
CONTRACT NO: DLA-100-00-0-0000
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (if other than contractor)

NOTE: The kick pleat shall finish 6-8 inches in length after alterations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

The following instructions apply to Class 1 skirts:

MACHINE WASH - PERMANENT PRESS CYCLE
IN WARM WATER (120° MAX)
DO NOT BLEACH
TUMBLE DRY MEDIUM HEAT - REMOVE IMMEDIATELY
MAY ALSO BE DRY CLEANED
OR
FOLLOW NAVEDTRA MANUAL 414-01-45-81 FORMULA III

The following instructions apply to Class 2 skirts:

MACHINE WASH, PERMANENT PRESS CYCLE, HOT WASH. DO NOT MIX COLORS.
FILL MACHINE WITH CLOTHES TO 2/3 CAPACITY. USE HEAVY DUTY SOAP OR DETERGENT.
PRESPOT STAINS WITH A LAUNDRY STAIN PRETREATMENT.
IF NEEDED USE A NON-CHLORINE BLEACH.
TUMBLE DRY USING A WARM SETTING OR SHAPE AND HAND DRY.
REMOVE AT ONCE FROM DRYER.
IF TOUCH-UP IRONING IS NEEDED, USE A WARM IRON.
OR
FOLLOW NAVEDTRA MANUAL 414-01-45-81 FORMULA II

The following instructions apply to Class 3 skirts:

MACHINE WASH WARM WATER
PERMANENT PRESS CYCLE
DO NOT USE CHLORINE BLEACH
TUMBLE DRY MEDIUM HEAT
REMOVE PROMPTLY
OR
FOLLOW NAVEDTRA MANUAL 414-01-45-81 FORMULA II

3.3.7.2 Size label. Each skirt shall have a separate size label conforming to type VI, class 2 of DDD-L-20. The label shall indicate size (body type and length) and stock number and shall bear the following inscription:

SIZE: 14JT (EXAMPLE - 14 Junior Tall) or 14T (EXAMPLE - 14 Misses Tall)
STOCK NO: 8410-00-000-0000 (EXAMPLE)

NOTE: Abbreviations for the applicable lengths shall be P for Petite, R for Regular, and T for Tall. Abbreviations for the applicable body types shall be J for Juniors and W for Womens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

		stitching shall be 1-1/4							

3.3.7.3 Removable size ticket. Each skirt shall have a commercial type size ticket attached to the outside of the waistband above the left back dart. The ticket shall be 3 inches long and 1 inch high, made of a suitable plain white cardboard. The corners of the ticket may be double perforated for ease in tacking. The size (14JT - Example) shall be printed or stamped on the upper left-hand corner in black or blue ink. The lettering for the size shall be 1/4 inch in height. Abbreviations for body types and lengths shall be allowed in accordance with 3.3.7.2.

3.3.8 Hook and eye fasteners. The hook and eye for waistband shall be of the clinch type conforming to North and Judd (Hook Flex H-29 and E-40) or equal (see 6.5). The finish of both components shall be nickel plate (see 4.4.1).

3.3.9 Slide fastener. The slide fastener for all classes shall be type I, style 1 or 1a (continuous chain) or style 3 or 4 (pre-assembled), size LS, short tab pull of V-F-106. The length of the style 3 or 4 slide fastener shall be 7 inches. All metal components of the slide fastener shall be brass, except for the cover and spring on a semi-automatic pin lock which shall be stainless steel. All component parts shall be from the same contractor (see 4.4.1). The complete slide fastener shall not shrink more than 2 percent when tested as specified in V-F-106. The style 1 or 1a (continuous chain) slide fastener requires the application of a slider and bottom stop during production of the skirts.

3.3.9.1 Color. The color of the slide fastener tape shall approximate the shade of the basic material.

3.3.9.2 Colorfastness. The dyed slide fastener tape shall show colorfastness to laundering equal to or better than the standard sample when tested as specified in V-F-106. As a limit of acceptability, or when no standard sample is available, the tape shall show a minimum of "good" colorfastness to laundering and wet-dry cleaning when tested as specified in V-F-106.

3.4 Design. The skirt shall be unhemmed with a one panel front and two panel back, slide fastener closure at center back, two straight welt pockets on front, a hemmed kick pleat, four waist darts, a one piece non-slip waistband with five belt loops and a hook and eye waistband closure (see Figure 1). The class 2 and 3 skirts are fully lined with a three panel lining.

3.4.1 Figure. The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during contruction are permitted on the working patterns. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification. The shell patterns provide seam allowance of 3/8 inch for waistband and side seams, 5/8 inch to pleat outlet and then 2-1/4 inches for remainder of back seam. The lining patterns provide seam allowances of 5/8 inch for back seam and 3/8 inch for side seams.

3.5.1 Pattern parts. The component parts of the skirt shall be cut from the materials specified and in accordance with the following pattern parts:

Material	Pattern Parts	Cut Parts
Basic material	Front	1
	Left back	1
	Right back	1
	Waistband	1
	Pocket facing	2
	Pocket welt	2
Cloth, nylon, lining (classes 2 and 3 only)	Front	1
	Backs	2
Cloth, pocketing	Pocket (front ply)	2
	Pocket (back ply)	2
Fusible interlining	Pocket welt interlining	2
	Waistband interlining	1

3.6 Construction.

3.6.1 Stitches, seams and stitchings. Stitches, seams and stitching types as specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seams or stitches are given for the same part of the operation, any one of them may be used. Seam allowances shall be maintained with seam sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the skirt. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. Unless otherwise specified, topstitching shall be 3/16 to 1/4 inch from the folded edge. The bight of the overedge stitch shall be 3/16 inch. The guide and knife shall be set to trim only the ravelled ends of the fabric. Bartacks shall be 1/4 to 3/8 inch in length, and 1/8 ($\pm$1/32) inch in width.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitching when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks of 401 stitch type shall be repaired by using 301 stitch type. When stitch type 401 is permitted as an option, it shall not be used unless the ends are caught in other seams or stitching. Thread ends of darts shall be trimmed to a length of 1/2 inch except when automatic dart machines are used. Then the ends shall be back stitched not less than 3 stitches.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The skirt shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished skirt is identical to that produced by following the sequence as listed in Table I. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification.

3.7.1 Shade and size marking. The component parts of the skirt shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

(a) Corrosive metal fastening devices
(b) Sew-on shade tickets
(c) Adhesive type tickets which discolor or adhere to the material upon removal of tickets

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and whenever possible, is covered by the seam allowance.

3.7.2 Pressing. Pressing where specified in Table I shall be accomplished with a heated pressing iron or machine.

3.7.3 Fusing. All fusing of the fusible to the basic material shall be on a single ply basis (no stacking allowed).

3.7.4 The statement "press fusible to various cut parts in accordance with the fusible manufacturer's recommendation" refers to time, temperature, and pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

3.7.5 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting a. Spread the material without tension, face to face. b. Cut the skirt in strict accordance with patterns furnished, which show directional lines for cutting, sizes, and the necessary marks for proper assembly of component parts. c. Cut all parts of the skirt out of the same piece of material except the belt loops and pocket facing which may be cut from ends. Parts cut from ends shall approximate the shade of the skirt. d. Cut the stripping for the belt loops of sufficient width to comply with finished measurements. e. Cut the front and back lining for Class 2 and 3 skirts from the same piece of material.				
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1609 shall be removed from production and replaced with non-defective and properly matched components.				
3.	Marking (see 3.7.1) Mark or ticket all parts except those parts cut from ends, to insure a uniform shade and size throughout the skirts.				

Source: https://assist.dla.mil -- Downloaded: 202610-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
4.	Make stripping for belt loops					
	a. Fold stripping in half with edges turned under along one side and stitch 1/16 inch from each folded edge. The finished stripping shall measure 5/16 to 3/8 inch in width.	301 or 401	EFp-2	10-14	70	70
	OR					
	b. Make belt loops by folding a piece of the basic material with the edges abutted at center and topstitch with a row of 1/4 inch stitching with a covering stitch on the underside.	406	EFh-1	10-14	70	70
5.	Prepare edges of skirt and lining					
	Overedge all raw edges of skirt panels and Class 2 and 3 skirt lining panels, except waist edges and sideseams.	502 or 503 or 504	EFd-1	8-10	70	70
	NOTE: The bottom of the skirt and the bottom of the lining may be overedged after the skirt is completed.					
6.	Make darts in the skirt and class 2 and 3 skirt lining					
	a. Fold darts in the skirt and class 2 and 3 skirt linings as indicated by marks on pattern and stitch, tapering lower end of darts to nothing (see figure 1). Drill holes are not permitted.	301 or 401	OSf-1	10-14	70 70	70 70
	b. Press darts flat with inside folded edge facing towards center of skirt.					
7.	Make welt for pockets					
	a. Position fusible interlining on underside of welt and press in accordance with the directions of the fusible manufacturer.					
	b. Fold welt according to marks on pattern, face to face, and stitch across each end of welt through all plies 1/4 inch from raw edges.	301	SSe-2(a)	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Trim corners, turn welt to finished position, and work out seamed edges and corners.					
	d. Topstitch ends and top edge of welt 1/4 inch from edges.	301	SSe-2(b) and OSf-1	10-14	70	70
8.	Make welt pockets and attach label					
	NOTE: Twill direction of the finished pocket welts shall be the same as twill direction on the finished skirt front.					
	a. Position the front pocket ply against the back portion of the welt. Center the welt on the top edge of the pocket aligning raw edges. Overedge stitch together.	503 504 or 602	SSa-1	8-10	70	70
	b. Position the front portion of welt assembly, top edge down, on the front of the skirt. Skirt front may be pre-slashed so the lower notched ends meet the end of the stitch line as marked on pattern. Stitch welt assembly to front along stitchline with 1/4 inch seam allowance, through all plies. The ends of the stitching shall finish at the welt ends.	301	LSbj-1	10-14	70	70
	c. Overedge bottom edge of pocket facing except when edge has a selvage or when contractor exercises the option to turn and stitch facing to pocket (see oper 8d)	503 504 or 602	EFd-1	8-10	70	70
	d. Align the lower serged or selvaged pocket facing edge with the notches at the back ply of pocket. Or turn under raw facing edge 1/4 inch and align folded edge with the notches at the back ply of pocket. Stitch close to finished edge.	301	LSbj-1 or LSd-1	10-14	70	70
	e. As an alternate to operation 8j, the following operation may be performed: Slash front in accordance with operation 8g. Align top edge of pocket facing face to face with top edge of slashed pocket opening and stitch 1/4 inch from raw edges. Fold pocket facing to finished position.	301	SSa-1	8-10	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Stitch the combination, personal/identification/instruction label for class 1 and 3 skirts and the personal/identification label for class 2 skirts on all four sides to the outside of the back ply of pocketing. Label shall be centered on the right pocket with the top edge positioned approximately 1/8 inch below and parallel to the facing piece joining seam. Stitch the instruction label for class 2 skirts in the same manner to the left pocket. The label inscription shall be upright and shall face the wearer. The stitching shall not be through the printing.	301	LSbj-1	10-14	70	70
	g. If not previously slashed, slash front about 1/4 inch above stitchline, 3/8 inch short of the welt ends and parallel to welt. Tongue notch opening to ends of stitchline and toward waist. Turn welt through opening to finished position. The notches shall not appear beyond the welt. NOTE: Tongue notch shall be folded in and caught in the topstitching of operation 8k.					
	h. Superimpose the back ply of pocket on the front ply, face to face, matching lower and curved edges. Overedge together the side and bottom edges of the pocketing, extending overedging along the raw side edges of the back pocket ply.	503 or 504 or 602	SSa-1 and EFd-1	8-10	70	70
	i. Stitch the side and bottom edges of pocketing 3/8 inch from serged edge. OR	301 or 401	SSa-1	10-14	70	70
	As an alternate, the side and bottom edges of the pocketing may be stitched with a 1/4-3/8 inch gauge safety stitch.	515 516 or 519	SSa-2	10-14	70 70	70 70
	NOTE: The top of the back pocketing piece may be smoothed out and staystitched to the top edge of skirt to assure back pocket ply lies flat when waistband is attached.	301	SSa-1	6-8	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	j. This operation is an alternate to operation 8e. Fold under upper lip of front pocket opening toward the waist and stitch 1/16 inch from the folded edge through the pocket facing and the back ply of pocketing. Tightness, twisting or distortion shall not be present in the facing, skirt, or pocketing.	301	LSd-1	10-14	70	70
	k. Topstitch across each end of welt 1/16 inch from edge through all plies. From the top edge of the welt, the topstitching shall continue diagonally down to meet the corner of the previously stitched row of 1/4 inch topstitching, then superimposed on the stitchline to the bottom of the welt.	301	SSe-2(b)	10-14	70	70
	l. The finished welts shall measure 1 to 1-1/8 inches deep and 4-1/8 to 4-3/8 inches wide for all sizes.					
9.	Make back					
	a. Join left and right backs at center with the seam allowance indicated by notches on patterns. Turn both seam allowances toward left side of skirt. Leave the seam open at top to accommodate a 7 inch long slide fastener (waistband not included). Back seam shall also be left open at the bottom for the length indicated for vent by marks on pattern.	301	SSa-1	10-14	70	70
10.	Attach slide fasteners					
	a. When style 3 or 4 (pre-assembled) slide fastener is used: The top of fastener chain shall finish not more than 1/8 inch below waistband joining seam. The bottom stop shall finish just below notch.					
	b. When style 1 or 1a (continuous chain) slide fastener is used: The coil and tape shall extend at least 1/4 inch into the waistband joining seam, and shall extend at least 1/2 inch past the fly notch at the bottom. A bottom stop shall be applied at the fly notch. The finished length of the slide fasteners from the bottom edge of the bottom stop to the waistband joining seam shall be 7 inches.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Position slide fastener face down to under side of right side opening in accordance with notches and with back edge of fastener tape parallel with overedged back panel. Stitch 1/16 inch from back edge of slide fastener tape.	301	SSa-1	10-14	70	70
	d. Turn under slide fastener on right side opening to finished position and topstitch skirt thru all plies 1/8 to 3/16 inch from front edge of slide fastener coil.	301	--	10-14	70	70
	e. Slash across seam allowance of right side just below fly notch.					
	f. Position slide fastener face down on underside of left side opening and stitch tape with one row of stitching 1/16 inch from back edge. Front edge of coil shall be positioned 1/8 to 3/16 inch from finished folded edge of opening.	301	SSa-1	10-14	70	70
	g. Fold under left side of slide fastener opening with attached fastener to finished position in accordance with notch at waist. Top stitch thru all plies 3/8 to 7/16 inch from folded edge starting at top of waistband to approximately 1 inch below fly notch.	301	Similar to LSbu-2	10-14	70	70
	h. The finished folded edge of the fastener opening shall completely cover the slide fastener when closed. Stitch lines employed in this area shall not interfere with the operation of slider.					
	i. When style 1 or 1a (continuous chain) slide fastener is used: Attach slide fastener, and with the chain even, apply bottom stop.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
11.	Make kick pleat and finish back seam					
	a. Turn under left side (top ply) of kick pleat in accordance with marks on pattern. (Length of kick pleat is approximately 9-1/4 inches for Petite, 10-1/4 inches for Regular, and 11-1/4 inches for Tall, measured from bottom raw edge). Topstitch from below zipper to bottom of skirt 3/8 to 7/16 inch from folded edge. At top of kick pleat back stitch, slide right kick pleat (bottom ply) out from under needle and continue stitching to bottom of skirt.	301	OSf-1	10-14	70	70
	NOTE: Top stitching in operations 10 and 11 may be performed in one operation.					
	b. Turn right side of kick pleat (bottom ply) under 1/2 (+ 1/16) inch, tapering to nothing approximately 2 inches above top of kick pleat, and stitch kick pleat 1/4 to 5/16 inch from folded edge.	301	EFa-1	10-14	70	70
	c. The right side of the kick pleat shall lay flat under the left side.					
12.	Join front to back					
	a. Stitch front to assembled back at each side with a 3/8 inch safety stitch.	515 or 516 or 519	SSa-2	10-14	70 70	70 70
	b. Turn seam allowances of side seams towards front of skirt and topstitch with a single row of 1/4 inch stitching.	301 or 401	LSq-2(b)	10-14	70 70	70 70
13.	Make waistband					
	a. Position fusible interfacing to the underside of the waistband and press in accordance with the directions of the manufacturer.					
	b. Overedge stitch the unnotched side of the waistband.	503 504 or 602	EFd-1	8-10	70	70
	c. Fold waistband in half lengthwise and press.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Center non-slip waistband tape on the overedged side of waistband and stitch 1/16 inch from edges of tape. The raw ends of tape shall be folded under. The rows of rubber gripper threads shall face the wearer. The ends of the tape shall finish as 1-1/2 to 2 inches from the end of the waistband when measured from the finished folded ends of waistband.	301 or 401	LSbj-1	10-14	70 70	70 70
	e. Fold waistband in half, face to face, stitch 1/4 inch from raw edge both ends and along bottom edge of the tab extension between notch and end of waistband. Trim when necessary, work out corners and turn waistband to finished position.	301	SSa-1	10-14	70	70
	f. The (right side) tab extension of the waistband shall finish 1-1/4 to 1-5/8 inches from the finished folded edge of slide fastener opening. The left side of the waistband shall finish even with the left side of slide fastener opening.					
14.	Make lining for class 2 or 3 skirts					
	a. Join left and right backs at center 5/8 inch from raw edge leaving the back seam open at the top and bottom as indicated by marks on pattern. The length of top opening shall extend approximately one inch below the slide fastener opening.	301 or 401 and 502 or 503 or 504	SSa-1	10-14 10-14 8-10	70 70 70	70 70 70
	b. Finish top opening of back seam by turning under the seam allowances and top stitching each side and across bottom of opening approximately 1/4 inch from folded edges.	301	EFa-1 and SSv-1	10-14	70	70
	c. Finish bottom opening of back seam by turning under the seam allowance and top stitching each side across top of opening approximately 1/4 inch from folded edges.	301	EFa-1 and SSv-1	10-14	70	70
	d. Safety stitch front to assembled backs at sides, face to face, 3/8 inch from raw edges as indicated by marks on pattern.	515 or 516 or 519	SSa-2	10-14	70 70	70 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
15.	Attach lining to class 2 or 3 skirt a. Pull assembled lining over assembled skirt, back to back, with slide fastener and kick pleat openings of skirt and lining corresponding with each other and waist edges of skirt and lining superimposed.					
	b. Stitch the two assemblies together along waist, 1/4 to 3/8 inch from raw edge simultaneously easing in any excess fullness and catching side seams and top edge of back pocketing piece.	301	SSa-1	10-14	70	70
16.	Attach waistband, belt loops and size label a. The waistband shall have five belt loops positioned as follows: (1) Two loops on front of skirt, each one 1/2 inch away from darts on front towards the center of the skirt (see figure 1). (2) Two loops on back of skirt, each one positioned midway between side seam and dart (see figure 1). (3) One loop on left end of waistband positioned approximately 1/2 inch to the left of the folded edge of slide fastener opening (see figure 1).					
	b. Stitch bottom edge of front ply of waistband face to face to the waist of skirt, 3/8 inch from raw edge as indicated by notches on pattern. The belt loops and top of back pocketing piece shall be caught simultaneously in this operation.	301 or 401	BSq-2(a)	10-14	70 70	70 70
	c. The lower end of each belt loop shall be inserted not less than 3/8 inch under bottom edge of waistband. As an alternate, the belt loops may be positioned and stay-stitched to the face side of skirt before joining the waistband.					
	d. Center and clinch a hook with a suitable reinforcement piece to the inside of left waistband. In the finished skirt, the rolled edge of the hook shall be aligned with the slide fastener scoops (see figure 1).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Center and clinch an eye with a suitable reinforcement piece to the outside of right waistband. The eye shall correspond with the hook on the left end waistband (see figure 1). The finished waistband and slide fastener shall lay flat when assembly is fastened.					
	f. Turn waistband to finished position, with seam allowance turned up, and topstitch 1/16 inch below joining seam on skirt, catching the backply of the waistband.	301	LSbd-2(b)	10-14	70	70
	g. Drop bottom of belt loops 3/16 to 1/4 inch below bottom edge of waistband and bartack.	301 or Bar-tack or Auto-matic Loop Tacker		10-14	70	70
				21-28	70	70
				24-28	70	70
	h. Turn under top of each belt loop with folded edge positioned even with the top folded edge of waistband and stitch or tack loop 1/16 to 1/8 inch from top folded edge thru all plies of waistband. The stitching or tacking shall extend the width of the loop and not beyond.	301 or Bar-tack or Auto-matic Loop Tacker		10-14	70	70
				21-28	70	70
				24-28	70	70
	i. Continue the line of stitching from operation 10d on the slide fastener across the width of the waistband on the right end.	301	SSa-1	10-14	70	70
	j. Stitch top edge of size label to the lower edge of the inside waistband, on the back of the skirt approximately three inches to the right or left of the slide fastnener. The ends of stitching need not be tacked provided the stitching extends at least 1/2 inch beyond each side of label.	301	-	10-14	70	70
	k. The finished waistband shall measure 1-1/8 to 1-1/4 inches in width. When the hook and eye assembly and slide fastener are fastened, the slide fastener shall lay flat, and the waistband shall be evenly aligned, and lay flat and smooth.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	1. The inside of finished loop shall measure 1-1/4 to 1-3/8 inches between bartack and bottom folded edge.				
17.	Clean skirt a. Trim all ends of stitching, remove all loose threads and basting threads.				
	b. Remove all spots, stains, shade tickets, and other markings without injury to material.				
	NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.				
	c. Attach removable size ticket to outside of waistband above the left back dart, tacking all four corners of ticket.	Hand or Mchne		2-4 stch/tack 2-4 stch/tack	
18.	Press skirt Press the entire skirt neatly with a heated pressing iron or machine.				
19.	Close back opening Close slide fastener and hook waistband. When fully closed the back closure shall not bulge, pucker, or twist.				

Source: https://assist.dla.mil -- Downloaded: 202610-21T01:19Z
Check the source to verify that this is the currentversion before use.

3.8 Measurements. The unhemmed skirt shall conform to the measurements and tolerances shown in Table II (see NOTE:). All measurements and tolerances are expressed in inches.

Table II - Sizes and measurements

Size	Waist (A)	Hip (B) Junior	Hip (B) Misses	Hip (B) Women	Sweep (C) Junior	Sweep (C) Misses	Sweep (C) Women
4	24-1/2	--	37-1/4	--	--	49	--
6	25-1/2	--	38-1/4	40-1/4	--	50	52-1/8
8	26-1/2	--	39-1/4	41-1/4	--	51	53-1/8
10	28	39	40-3/4	42-3/4	50-3/4	52-1/2	54-5/8
12	29-1/2	40-1/2	42-1/4	44-1/4	52-1/4	54	56-1/8
14	31	42	43-3/4	45-3/4	53-3/4	55-1/2	57-5/8
16	33	44	45-3/4	47-3/4	55-3/4	57-1/2	59-5/8
18	35	--	47-3/4	49-3/4	--	59-1/2	61-5/8
20	37	--	49-3/4	--	--	61-1/2	--
Tolerance:							
	± 1/4	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

Unhemmed length (D):
All Petites (P) - 26-1/4
All Regulars (R) - 28-1/4
All Talls (T) - 30-1/4
Tolerance - ± 1/2

NOTE: Waist and hip measurements of skirt shall be taken with slide fastener fully closed and waistband fastened. All measurements shall be taken with skirt placed smooth and flat.

A. Waist - Twice the measurement taken across center of waistband from folded edge to opposite folded edge.

B. Hip - Twice the measurement taken across the front of skirt from folded edge to opposite folded edge approximately 7-1/2 inches below the bottom edge of waistband at side seam.

C. Sweep (unhemmed) - Measurement shall be taken with kick pleat closed, from bottom of one side seam to bottom of opposite side seam, straight across skirt.

D. Length of skirt (unhemmed) - Measurement shall be taken along center back seam of skirt from bottom of waistband to overedged bottom of skirt.

3.9 Workmanship. The finished skirts shall conform to the quality established by this specification. As a final step in the contractor's production plan before formation of a lot, each skirt shall be closed, pressed and laid out flat on a table and examined for selected defects prior to folding for packaging. A skirt containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1609 indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable point value or defect limit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. The contractor shall furnish a certificate of compliance for the waistband tape requirements of 3.3.5, the hook and eye requirements of 3.3.8, and slide fastener requirements of 3.3.9. In addition, testing shall be performed on components listed in Table III and in accordance with characteristics noted. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Component	Lot expressed as	Sample unit for testing
Interlining fused to basic cloth	Yards	two 24 by 24 inch specimens 1/

1/ Prepared by the contractor during the same period and under the same conditions as for the fusing of the end item.

Table III - Component testing

Component	Characteristic	Requirement paragraph	Test Method
Interlining fused to basic cloth	Appearance		
	Initial	3.3.3	Visual
	After 3 launderings	3.3.3	Visual and MIL-C-44296
	After 3 dry cleanings	3.3.3	Visual and MIL-C-44296

4.4.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

4.4.2.1 Sample size. The size of the fused check sample shall correspond to the total area covered by the waistband and pocket welts which are fused at one time on the press.

4.4.2.2 Number of check samples. One check sample shall be prepared following fusing of every 1000 waistbands and pocket welts or once every four hours, whichever occurs first.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

4.4.2.3 Appearance of the fused check sample. Each check sample shall be visually inspected for color change, strike through, bubbling, and delamination. If there is any evidence of these conditions present, the previously fused pieces represented by the sample shall be inspected for the above conditions. Any fused part exhibiting one of the above conditions shall be removed from the lot (see 3.3.3).

4.4.3 End item examination. The end item examination provisions for the finished skirt shall be as specified for dress skirts in MIL-STD-1609, and the following defects:

Removable size ticket missing, incorrect, or illegible	3 points
Body of skirt or waistband exhibiting fullness at waistband joining seam	2 points
Length of back opening uneven at top (examination to be performed with slide fastener closed and hook and eye closed):	
By more than 1/2 inch	* (selected)
By 1/4 up to 1/2 inch (inclusive)	3 points
Slide fastener chain misplaced (set too high or low) or coil/stops not positioned as specified	2 points

4.4.4 Examination of packaging requirements. Examination of packaging requirements shall be in accordance with the provisions of MIL-STD-1609.

4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6, in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit preservation. Each skirt shall be folded in half along the length and then folded in thirds across the length. The completely folded skirt shall measure approximately 11 inches in length by 14 inches in width. Each folded skirt shall be inserted in a snug-fitting clear polyethylene film bag of 0.00125 inch (+ 20% tolerance) thickness. All sealed seams shall be formed with heat. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. As an alternate for class 1, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required. Also, the final closure of the bag shall be made with the flap tucked in or reversed.

5.1.2. Level C. Skirts shall be preserved to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C (see 6.2).

5.2.1 Level A. Twenty-six (26) class 1 blue skirts, or sixteen (16) class 2 or 3 white skirts, of one size (body type and length) only, preserved as specified in 5.1 shall be packed in a fiberboard shipping container, assembled, and closed conforming to class weather-resistant, type CF, variety DW, grade V15C, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic conforming to MIL-B-17757. Level A packaged skirts shall be stacked flat, one in width, two in length and thirteen (13) class 1 blue skirts or eight (8) class 2 or 3 white skirts in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Level B. Twenty-six (26) class 1 blue skirts, or sixteen (16) class 2 or 3 white skirts of one size (body type and length) only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class domestic, type CF, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A folded skirts shall be stacked flat, one in width, two in length and thirteen (13) class 1 blue skirts or eight (8) class 2 white skirts in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C. Skirts, preserved as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or Film bonding F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.5 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The skirts covered in this specification are intended to be worn by female personnel of the Navy.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Class and sizes (body types and lengths) required (see 1.2)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, testing and approval of the first article.
e. Levels of preservation and packing required (see 5.1 and 5.2)
f. When palletization is required (see 5.4)
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5).

6.3 Samples and patterns. For access to samples and patterns, address the procuring office issuing the invitation for bids.

6.4 Tape, waistband. A non-slip waistband tape conforming to the requirements of 3.3.5 may be obtained from Empire Bias Binding C., 18 West 20th Street, NY, NY, Atlantic Bias Products, Inc., 16 West 19th Street, NY, NY, United Elastic (Division of J.P. Stevens) Stuart Plant, Stuart, VA 24171. Style #N3 - 7675 or Silver Elastic Co., Inc., 37 Tweed Dr., Randolph, MA or equal (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:19Z
Check the source to verify that this is the current version before use.

6.5 Equal item. Prior to the use of an "or equal" item the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval.

6.6 Size (body type and length) abbreviations. The size (body type and length) abbreviations (example - 12JP) used in this specification follow the current industry practice of listing numerical size and one letter abbreviations for body type variation (Juniors and Womens only) and length (Petites, Regulars, and Talls).

The size (body type and length) abbreviations used on the patterns list a numerical size, a one letter abbreviation for length (Petites, Regulars, and Talls) and a two letter abbreviation for body type variation (Juniors and Womens only).

6.7 A khaki skirt is available as an optional item, and shall meet the requirements specified through the Certification Program.

6.8 Subject term (key word) listing.
Uniform, female belted waist
Uniform, female lined
Uniform, female polyester
Uniform, female polyester/cotton
Uniform, female polyester/wool
Uniform, female front pockets

Custodian:
Navy - NU


Preparing Activity:
Navy - NU

Review Activity:
DLA - CT


Project No. 8410-N738

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.


required. 2/ Size shown on one or more less than

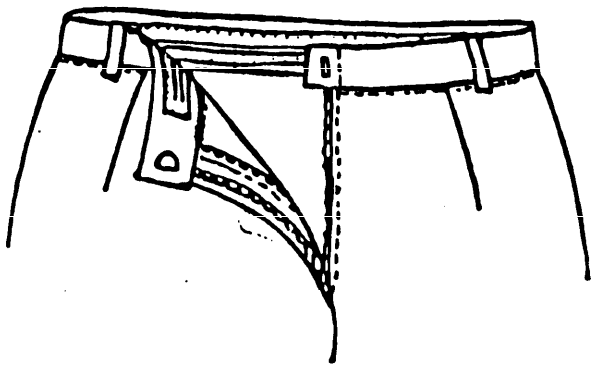

BACK CLOSURE

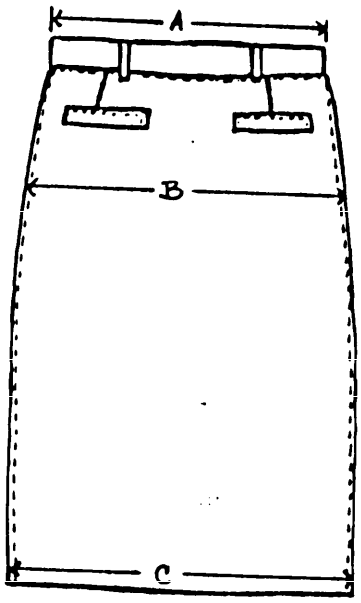

FRONT

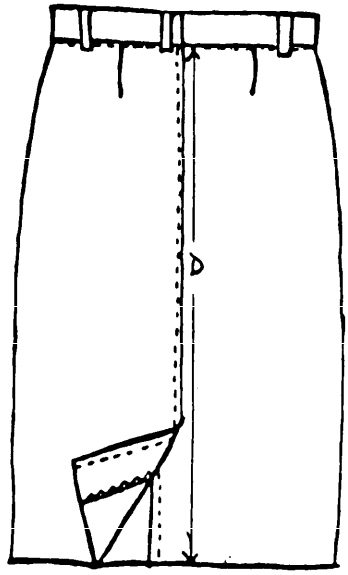

BACK

SKIRT, WOMAN'S (WITH WELT POCKETS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-29629(NU)	SKIRT, WOMAN'S (WITH WELT POCKETS)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:19Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:19Z
Check the source to verify that this is the current version before use.