INCH-POUND

MIL-S-29631
3 June 1991

MILITARY SPECIFICATION

SKIRT, WOMAN'S, BLUE, DRESS

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a woman's blue dress skirt with expanded size range covering body types and lengths.

1.2 Classification. The skirt shall be of one type and class only and in the following sizes (body types and lengths) (see 6.2).

1.2.1 Sizes.

Body type	Length
Juniors - J	Petite (Short) - P
Misses - No designation	Regular - R
Womens - W	Tall (Long) -T

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, Post Office Box 59, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

Schedule of sizes

MISSES

Petite (P)	Regular (R)	Tall (T)
4	4	4
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18
20	20	20

WOMENS

Petite (P)	Regular (R)	Tall (T)
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18

JUNIORS

Petite (P)	Regular (R)	Tall (T)
10	10	10
12	12	12
14	14	14
16	16	16

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

x breakline stitching

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106	- Fastener, Slide, Interlocking
V-T-276	- Thread, Cotton
V-T-280	- Thread, Gimp, Cotton, Buttonhole
NN-P-71	- Pallet, Material Handling, Wood Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label, For Clothing, Equipage, and Tentage (General Use)
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard, (Modular Sizes)
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43718	- Cloth, Polyester; Polyester and Cotton; Polyester and Rayon, for Pockets
MIL-C-44121	- Cloth, Twill, Polyester
MIL-C-44296	- Cloth, Fusibles

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1609	- Provisions for Evaluating Quality of Women's Skirts
MIL-STD-2073-1	- DOD Materials Procedures for Development and Application of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19120-5099.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001).

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads
Department of Defense Standard Shades for Buttons

(Applications for copies should be addressed to The Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material for the skirt shall be a polyester/wool blend, 10 ounce, shade Blue 3346, conforming to type III, class 3 of MIL-C-21115. The piece number for the Standard Sample is 4001369.

3.3.2 Lining material. The material for lining the skirt shall be a rayon twill, 3.7 ounce, shade Black 3202, conforming to Class 1 of MIL-C-368. The piece number for the Standard Sample is 79221 and applies to shade and finish. As an alternate, the material for lining the skirt may be polyester, twill, 2.4 oz/yd, shade Black 3202 conforming to MIL-C-44121, piece number 87034.

3.3.3 Pocketing. The material for the front and back plies of the pockets shall be a polyester/cotton blend twill fabric conforming to class 1 of MIL-C-43718. The color of the pocketing shall be black.

3.3.4 Fusible interlining. The waistband and pocket welts of the skirt shall be fused with a nonwoven fusible interlining conforming to type V, class 2, style A of MIL-C-44296 except as noted below when tested as specified in 4.4.1.

Requirements

Appearance of fused samples 1/ 2/
- Initial - No evidence of bubbling or delamination of the bond, change of color, or strike through.
- After 3 dry cleanings - No evidence of bubbling or delamination of the bond, change of color, or strike through.

Bond strength
- Initially - 22 oz. minimum
- After 3 dry cleanings - 18 oz. minimum

Dimensional stability 2/
- After 3 dry cleanings - 2.5% maximum

1/ Applies to quality conformance and in-process tests.
2/ The same sample may be used for appearance and dimensional stability evaluations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

d. Raw edge (classify any edge not finished as specified, including

3.3.5 Tapes.

3.3.5.1 Tape, woven. The tape for the skirt hanger loops shall be cotton, preshrunk, type I, class 3, 3/8 inch wide, conforming to DDD-T-86, except that the only colorfastness requirements applicable shall be to wet-dry cleaning. The tape shall be dyed black.

3.3.5.2 Tape, waistband, non-slip. The woven non-slip tape for the waistband shall be constructed of either polyester or polyester/nylon, natural or white in color, with two rows of nitrile or chloroprene rubber threads, woven or stitched to the tape (see 6.4). The width of the completed tape shall be 7/8 inch and shall not shrink more than 2% for drycleaning when tested as specified in 4.4.1. There shall be a minimum distance of 3/16 inch from the rubber thread to edge of tape.

3.3.6 Thread.

3.3.6.1 Polyester core. The thread used for seaming, stitching and overedging (when used) the skirt shall be a cotton-covered or rayon-covered polyester core thread conforming to MIL-T-43548. A polyester-covered, polyester core thread is not allowed. The thread shall be dyed shade Black AA, C.A. 66043 in accordance with the Department of Defense Standard Shades for Sewing Threads in the following sizes:

Use	Ply	Ticket No.
Machine stitching	2 or 3	50, 70
Overedging	2 or 3	70
Button sewing:		
Machine	2 or 3	24

3.3.6.2 Cotton thread. As an alternate, a cotton thread conforming to V-T-276 may be used. The color shall be dyed shade Black AA, C.A. 66043 in accordance with the Department of Defense Standard Shades for Sewing Threads in the following types and sizes:

Use	Type	Ply	Ticket No.
Machine stitching	1A3	3	30
Overedging	1A3	2	50
Button sewing:			
Machine	1A3	4	20

3.3.6.3 Colorfastness of threads. The dyed threads shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276 or MIL-T-43548. As a limit of acceptability, or when no standard sample is available, the dyed threads shall show a minimum of "good" colorfastness to wet-dry cleaning and light when tested as specified in V-T-276 or MIL-T-43548.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

3.3.7 Gimp. The gimp for reinforcing the buttonholes shall be a cotton buttonhole gimp thread conforming to type I or II, size No. 8 of V-T-280. The gimp shall be dyed Black AA, CA 66043 according to the Department of Defense Standard Shade for Sewing Threads.

3.3.7.1 Colorfastness. The dyed gimp shall show colorfastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. As a limit of acceptability, or when no standard sample is available, the dyed gimp shall show a minimum of "good" colorfastness to wet-dry cleaning when tested as specified in V-T-280.

3.3.8 Labels.

3.3.8.1 Combination label. Each skirt shall have a combination personal/identification/instruction label conforming to type VI, classes 10 and 15 of DDD-L-20. The printing shall show good colorfastness to dry cleaning and shall bear the following inscription:

NAME:
SERVICE NO:
SKIRT, WOMAN'S, BLUE, DRESS
FIBER CONTENT: 55% Polyester/45% Wool (Example)
LINING: 100% Rayon Twill (Example)
CONTRACT NO.: DLA-100-00-0-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (if other than contractor)

DRY CLEAN ONLY

3.3.8.2 Size label. Each skirt shall have a separate size label conforming to type VI, class 2 of DDD-L-20. The label shall indicate size (body type and length) and stock number and shall bear the following inscription:

SIZE: 12JP (Example - 12 Junior Petite) or 12T (Example - 12 Misses Tall)
STOCK NO.: 8410-00-000-000 (Example)

NOTE: Abbreviations for the applicable body types shall be "J" for Juniors and "W" for Womens. Abbreviations for the applicable lengths shall be "P" for Petite, "R" for Regular, and "T" for Tall.

3.3.8.3 Removable size ticket. Each skirt shall have a commercial type size ticket attached to the outside of the waistband above the left back gore seam. The ticket shall be three inches long and one inch high, made of a suitable plain white cardboard. The corners of the ticket may be double perforated for ease in tacking. The size (12 JP - Example) shall be printed or stamped on the upper left-hand corner in black or blue ink. The lettering for the size shall be 1/4 inch in height. Abbreviations for body types and lengths shall be allowed in accordance with 3.3.8.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

3.3.9 Button, plastic. The button for the waistband closure shall conform to type II, class D, style 20-21, 24-line of V-B-871. The color shall be Black BT, Cable No. 62001 in accordance with the Department of Defense Standard Shades for Buttons.

3.3.10 Slide fastener. The slide fastener shall conform to type I, style 1a (continuous chain) or 3 (pre-assembled), short tab pull, size LS, 7 inches long of V-F-106. The slide fastener shall be continuous monofilament nylon or polyester coil. The complete slide fastener shall not shrink more than 2 percent when tested as specified in V-F-106. The component parts of the slide fastener shall approximate the color of the basic material, or the color of the coil may be clear. The style 1a (continuous chain) requires the application of a slider and bottom stop during production of the skirts.

3.3.10.1 Colorfastness. The dyed slide fastener tape shall show colorfastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-F-106. As a limit of acceptability, or when no standard sample is available, the tape shall show a minimum of "good" colorfastness to wet-dry cleaning when tested as specified in V-F-106.

3.4 Design. The skirt shall be unhemmed, six gore, with 2 diagonal welt pockets, one on each of the front seams, slide fastener and placket closure on left side seam, a non-slip sewn-on waistband buttoned by a tab extension. The skirt is fully lined with a six gore lining.

3.4.1 Figure. The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification. The patterns provide a 3/8 inch seam allowance for waistband joining seams and 3/4 inch allowance for gore joining seams of skirt and lining and as otherwise indicated in Table I.

3.5.1 Pattern parts. The component parts of the skirt shall be cut from the materials specified and in accordance with the following pattern parts:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

Material	Pattern Parts	Cut Parts
Basic material	Center front	1
	Side front	2
	Center back	1
	Side back	2
	Waistband	1
	Placket	1
	Pocket facing	2
	Pocket welt	2
Cloth, twill lining	Center front lining	1
	Side front lining	2
	Center back lining	1
	Side back lining	2
Cloth, pocketing	Pocket (front ply)	2
	Pocket (back ply)	2
Fusible interlining	Pocket welt interlining	2
	Waistband interlining	1
Template	Pocket marker	-

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitches, seams and stitching types as specified in Table I, shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitching are given for the same part of the operation, any one may be used. Seam allowances shall be maintained with seam sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so there is no tight or loose stitching. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the skirt. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitching. Unless otherwise specified, edgestitching shall be 1/16 to 1/8 inch from the edge as well as straight and parallel to the edge. The bight of the overedge stitching shall be 3/16 inch. The guide and knife shall be set to trim only the ravelled ends of the fabric. Buttonholes shall be cut clean and the stitching shall be securely caught in the fabric.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) shall be repaired by using 301 stitch type. When stitch type 401 is permitted as an option, it shall not be used unless the ends are caught in other seams or stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The skirt shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished items are identical to those produced by following the sequence of operations as listed in Table I. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification.

3.7.1 Shade and size marking. The component parts of the skirt shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

a. Corrosive metal fastening devices
b. Sew-on shade tickets
c. Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

3.7.2 Pressing. All pressing as required by Table I shall be performed with a heated pressing iron or machine at a suitable temperature for synthetics.

3.7.3 Fusing. All fusing of the fusible to the basic material shall be on a single ply basis (no stacking allowed).

3.7.4 The statement "press fusible to various cut parts in accordance with the fusible manufacturer's recommendation" refers to time, temperature, and pressure.

3.8 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

b. Shoulder seamline curved rearward back from

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
1.	Cutting. a. Spread the material without tension, face to face.					
	b. Cut the skirt in strict accordance with patterns furnished, which show size, directional lines for cutting, and the necessary marks for the proper assembly of all component parts.					
	c. Cut all parts of the skirt out of the same piece of material, except the placket which may be cut from ends. The placket piece cut from ends shall approximate the shade of the skirt.					
	d. Raw edges may be serged as an alternate whenever pinking is required.					
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1609 and Section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Marking (see 3.7.1). Mark or ticket all parts except those parts cut from ends, to insure a uniform shade and size throughout the skirts.					
4.	Assemble skirt panels (gores). a. Pink the raw edges of the sides of the gores. (May be performed during the seaming of the gores).					
	b. Stitch side front gores to center front gore, as indicated by marks on patterns.	301 or 401	SSa-1	10-14	50 50	50 70
	c. Stitch side back gores to center back gore as indicated by marks on patterns.	301 or 401	SSa-1	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Press seam open and flat.					
5.	Make welt pockets.					
	a. Position fusible interlining on underside of welt and press in accordance with the directions of the fusible manufacturer.					
	b. Fold welt lengthwise at marks, face to face, and stitch across each end of welt through all plies 1/4 inch from raw edge.	301	SSe-2(a)	10-14	50	50
	c. Trim corners, turn welt to finish position and work out seamed edges and corners.					
	d. Position the front pocket ply against the back portion of the welt. Center the welt on the top edge of the pocket, aligning raw edges. Overedge stitch together.	503 504 or 602	SSa-1	8-10	70	70
	e. Position the front portion of welt assembly, top edge down, on the front of the skirt. Skirt front may be pre-slashed so the lower notched ends meet the end of the stitch line as marked on pattern. Stitch welt assembly to front along stitchline with a 1/4 inch seam allowance, through all plies. The ends of the stitching shall finish at the welt ends.	301	LSbj-1	10-14	50	50
	f. Overedge bottom edge of pocket facing except when edge has a selvage.	503 504 or 602	EFd-1	8-10	70	70
	g. Align the lower serged or selvaged pocket facing edge with the marks at the back ply of pocket. Stitch 1/16 to 1/8 inch from finished edge.	301	LSbj-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T01:23Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	h. Stitch combination label on all four sides to the outside of the back ply of pocketing. Label shall be centered on the right pocket with the top edge positioned approximately 1/8 inch below and parallel to the facing piece joining seam. The label inscription shall be upright and shall face the wearer. The stitching shall not be through the printing.	301 or 401	LSbj-1	10-14	50 50	50 70
	i. If not previously slashed, slash front in accordance with marks on pattern about 1/4 inch above stitchline, 3/8 inch short of the welt ends and parallel to welt. Tongue notch opening to ends of stitchline and toward waist. Turn welt through opening to finished position. The notches shall not appear beyond the welt.					
	j. Superimpose the back ply of pocket on the front ply, face to face, matching lower and curved edges. Overedge together the side and bottom edges of pocketing, extending overedging along the raw side edges of the back pocket ply.	503 504 or 602	SSa-1 and EFd-1	8-10	70	70
	k. Stitch the side and bottom edges of pocketing 3/8 inch from serged edge. OR	301 or 401	SSa-1	10-14	50 50	50 70
	As an alternate, the side and bottom edges of the pocketing may be stitched with a 1/4-3/8 inch gauge safety stitch.	515 or 516 or 519	SSa-2	10-14	50 (chn-stch) 50 (over-edge)	50 70
	NOTE: The top of the back pocketing piece may be smoothed out and stay stitched to the top edge of skirt to assure back pocket ply lies flat when waistband is attached.	301	SSa-1	6-8	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	l. Fold under upper lip of front pocket opening toward the waist and stitch 1/16 inch from the folded edge through the pocket facing and the back ply of pocketing. Tightness, twisting or distortion shall not be present in the facing, skirt, or pocketing.	301	LSd-1	10-14	50	50
	m. Edgestitch thru all plies across each end of welt.	301	Smlr to LSd-1	10-14	50	50
	n. The finished welt shall measure 1 to 1-1/8 inches high and 4-1/8 to 4-3/8 inches wide for all sizes.					
6.	Assemble front and back of skirt.					
	a. Pink the raw edges of the front and back. (May be performed when closing the side seams).					
	b. Stitch skirt front to back at sides, as indicated by marks, leaving an opening on left side to accommodate a 7 inch slide fastener (waistband not included).	301 or 401	SSa-1	10-14	50 50	50 70
	c. Pink the bottom edge of the skirt.					
	d. Press the seams open and flat.					
7.	Attach slide fastener to skirt.					
	a. Finished appearance - Exercise care not to stretch fabric when attaching slide fastener. The welt on front skirt shall completely cover the slide fastener when fastener is closed. The stitching shall not interfere with the operation of the slider and the welt shall be uniform in width.					
	Note: When a style 3 (pre-assembled) slide fastener is used the bottom stop shall finish at the notch at the base of zipper opening and the top stop shall be placed no further than 1/4 inch from waistband joining seam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	When a style 1a (continuous chain) slide fastener is used the coil and tape shall extend at least 1/4 inch into the waistband joining seam, and shall extend at least 1/2 inch past the notch at the bottom. A bottom stop shall be applied at the fly notch. The finished length of the slide fasteners from the bottom edge of the bottom stop to the waistband joining seam shall be 7 inches.					
	b. Fold the placket piece in half lengthwise and overedge the side and bottom raw edges together.	503 or 504 or 602	SSa-1	8-10	70	70
	c. Place back half of slide fastener tape even with the pinked outseam. Stitch 1/8 to 3/16 inch in from tape edge.	301	SSab-1	10-14	50	50
	d. Place overedged side edge of placket approximately 5/8 inch in from the pinked (outseam) left side back. Stitch 1/4 to 5/16 inch from chain edge. Turn placket to finished position, roll joining seam to coincide with outseam allowance at bottom of placket opening. Topstitch 1/16 inch from rolled edge with fastener chain approximately 1/8 to 3/16 inch from the rolled seam.	301	LSa-1 and LSq-2(b) (shows finished seam)	10-14	50	50
	e. Place front half of slide fastener tape approximately 1/8 to 3/16 inch in from the pinked (outseam) left side front. Stitch 1/4 to 5/16 inch in from chain edge. For use with style 1a (continuous chain) slide fastener: Attach slide fastener and with chain even apply bottom stop.	301	SSal-2(a)	10-14	50	50
	f. Fold the left skirt front at top as indicated by pattern notch and in line with the side seam line at the bottom. Stitch left front skirt to slide fastener tape forming a 1/2 to 5/8 inch wide welt. The stitching shall be 3/16 to 1/4 inch from the chain edge. The welt shall cover the slide fastener and the stitching on the back opening with no outside pleat at bottom of opening when slide fastener is closed.	301	SSal-2(b)	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	g. Stitch across bottom of welt within 1/4 inch of the lower edge of bottom stop, up to sideseam, from outside of skirt, catching ends of tape and back part of placket piece.	301	SSv-1	10-14	50	50
8.	Make lining.					
	a. Pink the raw edges of the sides of the gores. (May be performed during the seaming of the gores).					
	b. Stitch side front gores to center front gore, as indicated by marks on patterns.	301 or 401	SSa-1	10-14	50 50	50 70
	c. Stitch side back gores to center back gore as indicated by marks on patterns.	301 or 401	SSa-1	10-14	50 50	50 70
	d. Press seams open and flat.					
9.	Assemble front and back of skirt lining.					
	a. Pink the raw edges of the front and back. (May be performed when closing the side seams).					
	b. Stitch skirt front to back at sides, as indicated by marks, leaving an opening on left side to correspond with slide fastener closure.	301 or 401	SSa-1	10-14	50 50	50 70
	c. Finish top opening of left side by turning under the seam allowance and top stitching each side and across bottom of opening approximately 1/4 inch from folded edges.	301	EFa-1 and SSv-1	10-14	50	50
	d. Pink bottom edge of skirt lining.					
	e. Press the seams open and flat.					
10.	Attach lining to skirt.					
	a. Pull assembled lining over assembled skirt, back to back, with slide fastener, front and back gores, and side seams of skirt and lining corresponding with each other and waist edges of skirt and lining superimposed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Join the two assemblies together along waist, 1/4 to 3/8 inch from raw edge, simultaneously catching and securing the top ends of slide fastener tape, pocket tops, front, back, side seams and both plies of folded placket.	301	SSa-1	10-14	50	50
11.	Make waistband.					
	a. Position fusible interfacing to the underside of the waistband and press in accordance with the directions of the fusible manufacturer.					
	b. Overedge stitch the inside bottom edge of the waistband.	503 504 or 602	EFd-1	8-10	70	70
	c. Center non-slip waistband tape on the outer surface of back ply of waistband and stitch 1/16 inch from edges of tape. Stitching shall not penetrate the rubber thread. The raw ends of tape shall be folded under. The rows of rubber gripper threads shall face the wearer. The ends of tape shall finish as follows when measured from the finished folded ends of waistband: From pointed end (top ply) - 4 to 4-1/2 inches. From squared end (bottom ply) - 2 to 2-1/8 inches.	301 or 401	LSbj-1	10-14	50 50	50 70
12.	Attach waistband, size label and hanger loops.					
	a. Join waistband to the top of skirt, face to face, 3/8 inch from raw edges, leaving extensions as indicated by pattern notches. Simultaneously catch and secure the top of back pocketing piece, the label at center back 1/2 inch off center tolerance, both plies folded placket, and two skirt loops (3/8 inch wide) folded and positioned with one loop at the right side seam and one loop directly back of placket on left side.	301 or 401	BSp-2(a)	10-14	50 50	50 70
	b. The tape loops shall have a free opening of approximately 1-1/2 to 2 inches.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Fold waistband in half lengthwise; seam straight end and pointed end, trim, turn, and work out corners and point.	301	SSe-2(a)	10-14	50	50
	OR					
	d. As an alternate, pointed and straight ends of waistband may be seamed, trimmed, turned and edgestitched prior to setting to waist.	301	SSe-2(a&b)	10-14	50	50
	e. The front extension of the waistband shall measure 2 (± 1/16) inches beyond fold of welt to the finished point of tab. The back extension shall measure 1 (± 1/16) inch beyond fold of placket piece to the finished square end of tab.					
	f. Turn waistband to finished position, and edgestitch on outside along bottom folded edge, continuing along tab ends and top of waistband.	301	BSp-2(b) and SSe-2(b) and EFa-1	10-14	50	50
	g. The finished width of the waistband shall be 1-1/8 to 1-1/4 inches.					
	h. Press waistband flat.					
13.	Buttonholes. a. The stitching shall be securely caught in the fabric, and with purling on the outside, worked over gimp and end of buttonhole securely tacked.					
	b. Stitch a 3/4 inch horizontal eyelet end taper bar buttonhole, centered with the inside purled edge 5/8 (± 1/8) inch in from the finished pointed end of the waistband tab.	Button-hole		52-54 per buttonhole	50	50
	c. Stitch a 5/8 to 3/4 inch horizontal eyelet end taper bar bottonhole centered with the inside purled edge 5/8 (± 1/8) inch in from the finished straight end of the waistband tab.	Button-hole		52-54 per buttonhole	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SKIRT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
14.	Buttons.					
	a. Close slide fastener, align top edge of waistband even, extend waistband to assure that placket covers slide fastener, and mark placement of buttons through each buttonhole eyelet.					
	b. Sew a 24-line button through both plies of the waistband, centered to correspond with buttonhole eyelet in pointed end of tab.	101 or 301		20-22 14-16 per button	24 24	24
	c. Sew a 24-line button through underply of waistband centered to correspond with buttonhole eyelet in straight end of tab.	Hand or Machine		20-22 14-16 per button	24 24	24
15.	Clean skirt.					
	a. Trim all thread ends and remove all loose threads.					
	b. Remove all spots, stains, shade tickets and other markings without injury to material.					
	NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.					
16.	Pressing.					
	Press neatly. If machine pressed, do not lock machine.					
17.	Removable size ticket.					
	Tack all corners of removable size ticket to outside of waistband above the left back gore seam.	Hand or Machine		2-4 stitches per tack 6-8 stitches per tack		
18.	Close skirt.					
	Close slide fastener and button waistband. When fully closed the side closure shall not bulge, pucker or twist.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

* 3.8 Measurements. The unhemmed skirt shall conform to the measurements shown in Table II. All measurements and tolerances are expressed in inches.

Table II - Size and measurements

		Hip (B)			Sweep (C)	
Size	Waist (A)	Junior	Misses	Women	Junior	Misses	Women
4	24-1/2	--	36-1/2	--	--	45-1/4	--
6	25-1/2	--	37-1/2	39-1/2	--	46-1/4	48-1/4
8	26-1/2	--	38-1/2	40-1/2	--	47-1/4	49-1/4
10	28	39	40	42	47-1/4	48-3/4	50-3/4
12	29-1/2	40-1/2	41-1/2	43-1/2	48-3/4	50-1/4	52-1/4
14	31	42	43	45	50-3/4	51-3/4	53-3/4
16	33	44	45	47	52-1/4	53-3/4	55-3/4
18	35	--	47	49	--	55-3/4	57-3/4
20	37	--	49	--	--	57-3/4	--
Tolerance:	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2

Unhemmed length (D)	All Petites (P)	- 26-1/4
	All Regulars (R)	- 28-1/4
	All Talls (T)	- 30-1/4
	Tolerance	- ±1/2

NOTE: Waist and hip measurements of skirt shall be taken with slide fastener fully closed and waistband tabs buttoned. All measurements shall be taken with skirt placed smooth and flat.

A. Waist - Twice the measurement taken across center of waistband from folded edge to opposite folded edge.

B. Hip - Twice the measurement taken across the front of skirt from folded edge to opposite folded edge approximately 7-3/4 inches below the bottom of the waistband at side seam.

C. Sweep (unhemmed) - Twice the measurement taken on a straight line across bottom width of skirt, from folded edge to folded edge.

D. Length of skirt (unhemmed) - Measurement shall be taken along center back of skirt from bottom of waistband to pinked bottom of skirt.

3.9 Workmanship. The finished skirts shall conform to the quality established by this specification. As a final step in the contractor's production control plan before formation of a lot, each skirt shall be buttoned, pressed and laid out flat on a table and examined for selected defects prior to folding for packaging. A skirt containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1609 indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable point value or defect limit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4)

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-1609 except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. The contractor shall furnish a certificate of compliance for the waistband tape requirements of 3.3.5.2 and the slide fastener requirements of 3.3.10. In addition, testing shall be performed on components listed in Table III in accordance with referenced test methods of Fed-Std-191 when applicable, and characteristics as noted. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Source: https://assist.dla.mil -- Downloaded: 202610-21T01:23Z
Check the source to verify that this is the current version before use.

Component	Lot size expressed as	Sample unit for testing
Interlining fused to basic cloth	yards	two 24x24 inch specimen 1/

1/ Prepared by the contractor during the same period and under the same conditions as for the fusing of the end item.

Table III - Component testing

Component	Characteristic	Requirement Paragraph	Test Method
Interlining fused to basic cloth	Appearance		
	Initial	3.3.4	Visual
	After 3 dry cleanings	3.3.4	Visual and MIL-C-44296
Non-slip tape	Shrinkage		
	Drycleaning	3.3.3	5580 1/

1/ A certificate of compliance will be acceptable for this requirement.

4.4.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicted nonconformance.

4.4.2.1 Sample size. The size of the fused check sample shall correspond to the total area covered by the waistband and pocket welt which are fused at one time on the press.

4.4.2.2 Number of check samples. One check sample (see 4.4.2.1) shall be prepared following fusing of every 1000 waistbands or pocket welts, or once every four hours whichever occurs first, and tested for characteristics in 4.4.2.3.

4.4.2.3 Appearance of the fused check sample. Each check sample shall be visually inspected for bubbling, strike through, strike back, color change or delamination. If there is any evidence of these conditions present, the previously fused 1000 waistbands or pocket welts shall be inspected for the above conditions. Any waistband or pocket welt exhibiting one of the above conditions shall be removed from the lot (see 3.3.4).

4.4.3 End item examination. Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1609.

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:23Z
Check the source to verify that this is the current version before use.

4.4.4 Examination of packaging. Examination of packaging requirements shall be in accordance with the provisions of MIL-STD-1609.

4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit preservation. Each skirt shall be folded in half along the length and then folded in thirds across the length. The completely folded skirt shall measure approximately 11 inches in length by 14 inches in width. Each folded skirt shall be inserted in a snug-fitting clear polyethylene film bag of 0.00125 inch ± 20 percent tolerance thickness. All sealed seams shall be formed with heat. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required. This final closure shall be made with the flap tucked in or reversed.

5.1.2 Level C. Skirts shall be preserved to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:23Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Sixteen (16) skirts, of one size (body type and length) only, preserved as specified in 5.1 shall be packed in a fiberboard shipping container, assembled, and closed conforming to class weather-resistant, type CF, variety DW, grade V15C, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic conforming to MIL-B-17757. Level A packaged skirts shall be stacked flat, one in width, two in length and eight in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Level B. Sixteen (16) skirts of one size (body type and length) only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class domestic, type CF, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to class domestic type CF, variety SW or DW, grade 200, of MIL-B-17757. Level A folded skirts shall be stacked flat, one in width, two in length and eight in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C. Skirts, preserved as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or Film bonding F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

5.5 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The skirt covered in this specification is intended to be worn by female personnel of the Navy.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Sizes (body types and lengths) required (see 1.2)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, testing and approval of the first article.
e. Levels of preservation and packing required (see 5.1 and 5.2)
f. When palletization is required (see 5.4)
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5).

6.3 Samples and patterns. For access to samples and patterns, address the procuring office issuing the invitation for bids (see 3.1 and 3.5).

6.4 Tape, waistband. A non-slip waistband tape conforming to the requirements of 3.3.5.2 may be obtained from Empire Bias Binding Co., 18 West 20th St., NY, NY.; or Atlantic Bias Products, Inc., 16 West 19th St., NY, NY; United Elastic (Division of J.P. Stevens) Stuart Plant, Stuart, VA 24171. Style #N3 - 7675 or Silver Elastic Co., Inc., 37 Tweed Drive, Randolph, MA or equal (see 6.5).

6.5 Equal item. Prior to the use of an "or equal" item the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval.

6.6 Size (body type and length) abbreviations. The size (body type and length) abbreviations (example - 12JP) used in this specification follow the current industry practice of listing numerical size and one letter abbreviations for body type variation (Juniors and Womens only) and length (Petites, Regulars, and Talls).

The size (body type and length) abbreviations used on the patterns list a numerical size, a one letter abbreviation for length (Petites, Regulars, and Talls) and a two letter abbreviation for body type variations (Juniors and Womens only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

6.7 Subject term (key word) listing:

Uniform, female, dress
Uniform, female, lined
Uniform, female, non-slip waistband
Uniform, female, tropical, polyester/wool

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA-CT

Project No. 8410-N742

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

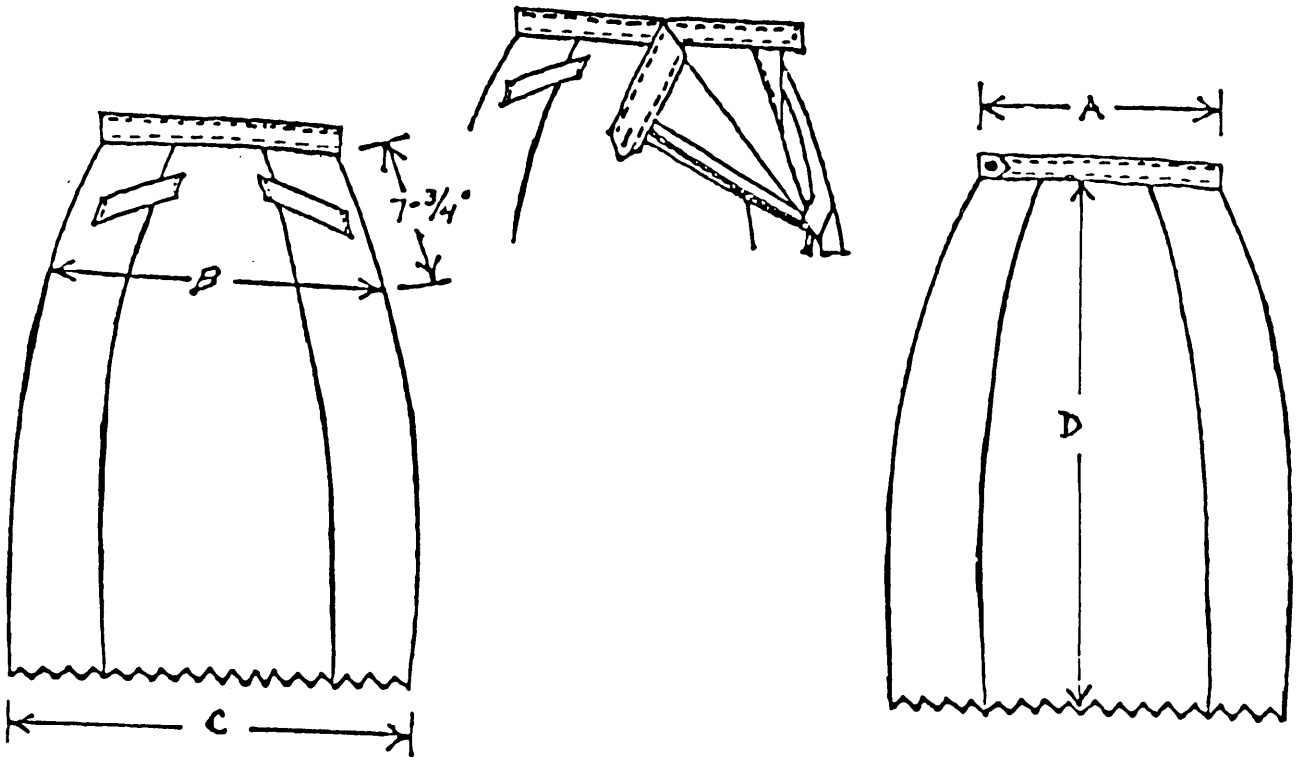


FIGURE 1

Skirt, Woman's, Blue, Dress

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-29631	SKIRT, WOMAN'S, BLUE, DRESS

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026/10/21T01:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
P.O. Box 59
Natick, MA 01760-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:23Z
Check the source to verify that this is the current version before use.