INCH-POUNDS

MIL-S-29633A(CG)
10 September 1991
SUPERSEDING
MIL-S-29633(CG)
29 June 1990

MILITARY SPECIFICATION

SHIRT, WOMAN'S, DRESS, SHORT AND LONG SLEEVE (COAST GUARD)

This specification is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a woman's short sleeve blue shirt, long sleeve blue shirt, and a long sleeve white shirt made of a polyester and cotton material.

1.2 Classification. The shirt shall be of the following types, classes, and sizes (see 6.2).

1.2.1 Type I - Long sleeve, w/epaulets
Type II - Short sleeve, w/epaulets

1.2.2 Class 1 - Blue
Class 2 - White

1.2.3 Sizes. The woman's shirt, short and long sleeve, shall be furnished in the following sizes (see 6.2).

1.2.3.1 Neck sizes. 13, 13-1/2, 14, 14-1/2, 15, 15-1/2, 16, 16-1/2, and 17

1.2.3.2 Long sleeve sizes. 31 and 33

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, P.O. Box 59, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC/NA FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50135	- Cloth, Interlining, Polyester
A-A-50199	- Thread, Polyester Core, Cotton- or Polyester-covered
V-B-871	- Button, Sewing Hole and Button, Staple (Plastic)
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction 2 Way and 4 Way (Partial)
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)
PPP-B-676	- Boxes, Setup

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-21881	- Cloth, Poplin, Polyester and Cotton
MIL-C-43992	- Cloth, Broadcloth, Polyester/Cotton, Durable Press
MIL-P-55010	- Plastic Sheet, Polyethylene Terephthalate

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-105	- Sampling Procedures and Tables For Inspection by Attributes
MIL-STD-147	- Palletized Unit Loads
MIL-STD-2073-1	- DOD Materials Procedures For Development and Applications of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. Postal Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material.

3.3.1.1 Class 1. The basic material for the types I and II class 1 shirts shall be a polyester/cotton broadcloth, shade blue 1550 conforming to class 4 of MIL-C-43992.

3.3.1.2 Class 2. The basic material for the type I, class 2 shirt shall be a polyester/cotton poplin, 4.1 to 4.6 oz., shade White 3013 conforming to type II, class 2 of MIL-C-21881.

3.3.2 Interlining. The material for interlining the collar, collarstand, pocket flaps, epaulets and cuffs (type I shirts) shall be polyester fiber cloth conforming to A-A-50135. The color shall be white.

3.3.3 Thread. The thread for seaming, stitching, buttonholes, and button sewing shall be a cotton-covered polyester core thread, ticket Nos. 50 or 70, conforming to type I of A-A-50199. The thread shall be dyed to match White AH, Cable No. 66050.

3.3.3.1 Colorfastness of thread. The finished thread shall show a minimum of "good" colorfastness to laundering, perspiration and light as specified and tested in A-A-50199.

3.3.4 Buttons. The buttons used for the fronts and cuffs shall be type II, 19 line, class k, style 25 of V-B-871. The buttons shall match Shade White BA, Cable No. 62031.

3.3.5 Collar stay. The collar stay shall be of polyethylene terephthalate plastic sheet conforming to MIL-P-55010, except the thickness shall be 0.014 ± 0.001 inch, the color shall be natural (clear or opaque) and the transparency and optical properties shall not apply. The stay shall measure 3/8 (± 1/32) inch wide and 3 to 3-1/2 inches in length. The stay shall have two slots 1-1/8 (± 1/32) inch long, centered along the length of the stay. Each slot shall be 1/8 (± 1/32) inch wide and spaced an equal distance across the width of the stay when tested as specified in 4.4.1. Both ends shall be round, pointed, cut on an angle or any combination thereof. When other than round, points shall be rounded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

3.3.6 Labels.

3.3.6.1 Combination label. Each shirt shall have a combination personal-/identification/instruction label conforming to type VI, classes 10 and 15 of DDD-L-20. The marking shall show colorfastness to laundering. The inscription and format shall be as follows:

NAME:
SERVICE NO:
NAME OF ITEM: SHIRT, WOMAN'S, DRESS, LONG SLEEVE (CG) (EXAMPLE)
TYPE I, CLASS 1 (EXAMPLE)
FIBER CONTENT: 65% POLYESTER / 35% COTTON
CONTRACT NO: DLA 100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (IF OTHER THAN CONTRACTOR)

LAUNDERING INSTRUCTIONS

MACHINE WASH - WARM WATER, - NO BLEACH
TUMBLE DRY - MEDIUM HEAT - REMOVE PROMPTLY

3.3.6.2 Size label. Each shirt shall have a size label conforming to type IV or VI, class 2 of DDD-L-20. The inscription shall be as follows:

15N - 31S (Example)

STOCK NUMBER - 8410-00-000-0000 (Example)

Note: The neck and sleeve length may be abbreviated as ""N" and "S" as shown above. Note: The type II shirt will not have the sleeve lengths listed on the label.

3.4 Design. The type I shirt shall have long sleeves, underarm front dart, shoulder epaulets, with 6 button front closure and one button neck closure. The fronts shall have breast patch pockets with button down flaps. The collar shall have a collar leaf, collarstand and collar stays. The collar leaf, collarstand, cuffs, pocket flaps and shoulder epaulets are interlined. The cuff opening shall have 2 buttons on each cuff for adjustment. (See figures 1 and 2). The type II shirt is the same as the type I shirt except it shall have short sleeves.

3.4.1 Figures. Figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification. The standard patterns provide an allowance of 1/4 inch for all seams except for the sleeve binding seam, pocket attachment, and attachment of cuff (type I only). Unless otherwise indicated in Table II, seams shall be in accordance with these seam allowances.

3.5.1 List of pattern parts. The component parts of the shirt shall be cut from the materials as specified and in accordance with the number of parts required for the manufacturing process as follows:

Table I - List of pattern parts

Material	Nomenclature of Pattern Parts	CutParts
Basic material	Back	1
	Front	2
	Sleeves (type I)	2
	Sleeves (type II)	2
	Cuff (type I)	4 1/
	Collar leaf	2
	Collarstand	2
	Pocket	2
	Pocket flap	4
	Shoulder epaulets	4
Interlining cloth	Collar leaf interlining	1 2/
	Collarstand interlining	1
	Cuff interlining (type I)	2
	Pocket flap interlining	2
	Shoulder epaulets interlining	2
Templates	Template finished pocket	-
	Template finished pocket flap	-

1/ When optional cuff setting operation is used (see operation 14f), 1/8 inch may be added to the patterns. However, finished cuff measurements shall be maintained.

2/ Seam allowance at collar point may be trimmed to facilitate collar point shaping operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

Workmanship Inadequate application of components, such as:

3.6 Construction.

3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types, as specified in Table II shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the shirt. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitching. Unless otherwise specified, edgestitching shall be 1/16 inch and topstitching shall be 1/4 inch from folded edge. The bight of the overedge stitching shall be 3/16 inch. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. The guides and knives on the safety stitch machine shall be set to trim only the ravelled ends of the fabric. Buttonholes shall be clean cut and the stitching shall be securely caught in the fabric. Where stitch type 515, 516 or 519 is called for, the operations may be performed in two separate operations.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitching, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.6.4 Buttonholes. The buttonholes shall be straight style with both ends securely barred. The finished cut length shall be 1/2 to 9/16 inch.

3.7 Manufacturing operations requirements. The shirt shall be manufactured in accordance with operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations provided the finished shirt is identical to that produced by following the sequence as listed in Table II. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

3.7.1 Shade and size marking. The component parts of the shirt shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Corrosive metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

NOTE: The use of ink pad numbering machine, rubber stamp, or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

3.7.2 Pressing operations. All pressing operations referenced in Table II shall be performed by using a heated pressing iron or steam pressing machine.

3.7.3 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
1.	Cutting a. All components of the basic cloth shall be cut in strict accordance with patterns furnished, which show size, shape, placement of pockets, directional lines for cutting and notches for proper assembly of all parts. The fronts shall be cut with the edge of the grown-on facing on the selvage. When shuttleless looms are used, or when selvageless cloth is utilized, or when selvage edge is cut or frayed, the edge shall be overedged. b. Cut the components from one piece of material, except for the under ply of collar, underply of collarstand, underply of epaulets, and underply of cuffs which may be cut from ends. Parts cut from ends shall approximate the shade of the main assembly. The binding for the sleeve facing may be roll cut providing that the finished width of the binding conforms to the measurements cited in operation 10d and matches the shade of the main assembly. Splicing of the material is not permitted. c. The component parts cut from the basic poplin cloth (class 2) shall finish with the face side of the material on the outside.	503 or 504 or 505	EFd-1	8-10	70	70
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched material.					
3.	Shade and size markings (see 3.7.1) All parts shall be marked or ticketed to insure proper shade and size identification. Parts cut from ends need not be shade marked, but shall approximate the shade of the basic material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
4.	Make underarm front dart.					
	a. Stitch underarm front dart from side seam in accordance with marks on patterns to 5/8 inch beyond end of dart mark. End of dart should end under patch pocket.	301	SSv-1	10-14	50	50
	b. Press dart towards the bottom of shirt.					
5.	Make patch pockets					
	a. Fold a 1 inch wide vertical box pleat to the outside in the center of the pocket and stitch. Press pleat open and flat with a heated pressing iron.	301	OSf-1	10-14	50	50
	b. Overedge stitch top raw edge of pockets. Fold the top edge of pocket as indicated by pattern marks forming hem. The hem shall measure 7/8 (±1/8) inch.	502 or 503 or 504 or 505	EFd-1	8-10	50	70
	or					
	As an alternate, form a hem at top of pocket according to pattern marks with raw edge folded under and stitch 1/16 inch from folded edge. The hem shall measure 7/8 (±1/8) inch.	301	EFb-1	10-14	50	50
	c. The pockets may be creased on an edge creasing machine to insure uniformity of size and shape before stitching to the shirt.					
6.	Attach patch pockets					
	a. Set pockets to shirt according to marks on patterns, topstitching 1/16 inch from folded edge along the bottom and sides, having a turn under of 3/8 inch.	301	LSd-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	b. Backstitch 3/4 inch each end of pocket opening with the backstitching superimposed upon pocket stitching.	301	Similar to LSd-2	10-14	50	50
	or					
	As an alternate, the top corners of the pocket may be tacked with triangular stitching. The base of the triangle (1/8 to 3/16 inches wide), shall be at the top of the pocket with the apex 1/2 to 3/4 inches below the top of the pocket.	301	Similar to LSd-2	10-14	50	50
	c. The finished pocket finished measurements shall be:					
	Size / Width / Depth 13 to 14 / 3-3/4 / 4-3/4 14-1/2 to 15-1/2 / 4-1/4 / 5 16 to 17 / 4-3/4 / 5-1/4					
	Note: The finished pocket shall be checked for size and uniformity against the pocket template.					
7.	Make pocket flaps					
	a. Superimpose interlining to backside of outer ply of pocket flap. With face sides together superimpose pocket flap pieces and stitch along sides and pointed edge 1/4 (+ 1/16) inch from raw edges.	301 or 401	SSe-2(a)	10-14	50 50	50 70
	b. Trim points, turn to finished position, working corners and seams out smooth and flat to edges.					
	c. Edgestitch sides and pointed edge 1/16 inch from turned edge.	301	SSe-2(b)	10-14	50	50
8.	Attach pocket flaps					
	a. Position flaps on shirt in accordance with marks on patterns, and stitch 1/8 to 3/16 inch from the raw edge.	301	LSbk-2(a)	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	b. Turn flaps down and topstitch 1/4 inch from folded edge. Backstitch end of topstitching. The raw edge of the pocket flap shall not be exposed.	301	LSbk-2(b)	10-14	50	50
	c. The finished flap shall measure as follows: Size / Width / Depth 13 to 14 / 3-7/8 / 2 14-1/2 to 15-1/2 / 4-3/8 / 2 16 to 17 / 4-7/8 / 2 Note: The finished flap shall be checked for size and uniformity against the flap template.					
9.	Join shoulder seam. a. With shoulder edge of shirt fronts and backs even and face to face, stitch from neck edge to sleeve opening.	515 or 516 or 519	SSa-1	10-14	50 50	50 70
10.	Attach sleeve bindings (type I shirt only). a. Finished appearance. The binding of the sleeve opening shall be uniform in width and shall finish smooth and flat. Sleeve opening shall measure 4-1/2 (±1/2) inches long exclusive of cuff.					
	b. Stitch the binding to the edge of the underside of the sleeve opening.	301 or 401	BSg-2(a)	10-14	50 50	50 70
	c. Turn the facing to the outside and edgestitch 1/16 inch from folded edge, with the raw edge turned under 5/16 to 3/8 inch.	301 or 401	BSg-2(b)	10-14	50 50	50 70
	or					
	As an alternate, bind underside of sleeve openings with a continuous 1-1/2 inch wide strip of basic fabric. Fold strip in half, turn raw edges of bindings inside, inserting edges of sleeve openings. Stitch through all plies of material, 1/16 inch from folded edge of binding.	301 or 401	BSc-1	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	d. The finished sleeve binding shall measure 1/2 to 5/8 inch wide.					
	e. Turn binding to inside of sleeve and stitch or bartack through binding and sleeve 1/8 to 1/4 inch below top of opening, the full width of the binding.	301 or brtck		10-14 28 per brtck	50 50	50 50
	or					
	f. Turn binding to inside of sleeve and stitch or bartack diagonally through binding only. An automatic straight tack may be used.	301 or brtck or tacker		10-14 28 per brtck	50 50	50 50
11.	Make shoulder epaulets					
	a. Superimpose interlining to backside of outer ply of epaulet. With face sides together, superimpose epaulet pieces and stitch along sides and pointed edges 1/4 inch from raw edges.	301 or 401	SSe-2(a)	10-14	50 50	50 70
	b. Trim corners, work out points and turn inside out to finished position.					
	c. Topstitch 1/4 inch from the folded edge the sides and pointed end.	301	SSe-2(b)	10-14	50	50
12.	Attach sleeves and shoulder epaulets					
	a. Position the epaulet so that the notch in the center of the back (squared) end of the epaulet is centered on the shoulder seam (up to 1/8 inch in front of the shoulder seam is allowed), with the pointed end positioned 1/4 inch from the raw edge of the neckline.					
	b. Join sleeves to armhole by seaming and overedging the raw edges in one operation catching end of shoulder epaulet in stitching. The end of the shoulder epaulet may be trimmed to conform to armhole.	515 or 516 or 519	SSa-1	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	c. The width of the finished epaulets shall measure as follows: 1-1/2 (± 1/8) inches at buttonhole 1-3/4 (± 1/8) inches at armhole					
13.	Join sides and sleeve seams					
	a. Join side and sleeve seams by seaming and overedging the raw edges in one operation. Ends of armhole seam shall not be staggered more than 3/8 inch at armpit.	515 or 516 or 519	SSa-1	10-14	50 50	50 70
14.	Make and set cuff (type I shirt).					
	a. Fold top edge of outer ply of cuff over and even with top edge of interlining and stitch 1/4 to 5/16 inch from folded edge catching interlining in the stitching.	301 or 401	SSbc-1	10-14	50 50	50 70
	b. Position cuff pieces face to face and stitch bottom and side edges together.	301 or 401	SSe-2(a)	10-14	50 50	50 70
	c. Turn to finished position and top stitch bottom and side edges of cuff 1/4 inch from worked out folded edges. The top stitching on the side of the cuff shall finish 1/2 (±1/8) inch from top edge of finished cuff. The top stitching may taper to edge of cuff at ends of stitching and need not be backstitched.	301	SSe-2(b)	10-14	50	50
	d. Stitch the raw (top) edge of the bottom ply of cuff to the inside of the bottom edge of sleeve 3/8 inch from edge, putting two pleats in sleeve according to marks on pattern. The pleats shall be folded towards the sleeve opening.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	e. Turn cuff to finished position and stitch 1/16 to 1/8 inch from the folded top edge of the cuff to the bottom of sleeve on the outside. The finished cuff shall measure 2-1/2 (± 1/8) inches in depth.	301	LSb-1	10-14-50		50
	or					
	f. As an alternate, the cuff may be attached in one operation (see Table I, footnote 1/), provided that the finished appearance is the same as specified in 14d and 14e above. The ends of the row of stitching shall be backtacked or crossed with another row of stitching.	301	LSe-1	10-14	50	50
15.	Hem sleeve (type II shirt)					
	a. Form a hem on the bottom of the sleeves with raw edge turned under 1/4 to 3/8 inch. Turn hem up according to marks on patterns. Stitch hem 1/16 to 1/8 inch from inner folded edge.	301	EFb-1	10-14	50	50
	NOTE: The hemming of sleeves may be performed before or after joining of underarm seam.					
	b. The finished hem shall measure 1 (±1/8) inch wide.					
NOTE:	When sleeve is hemmed prior to joining underarm seam, end of seam shall be backtacked not less than 3/8 inch, or a horizontal bartack shall be placed across seam allowance, at the end of the underarm seam 3/16 to 1/4 inch from bottom of sleeve.	301 or bar-tack	SSa-1	10-14 21-28 stchs/ bartack	50 50	50 50
16.	Make collar					
	Finished appearance. The collar shall finish smooth and flat without puckers, pleats or raw edges. When closed, both sides and points shall be equal and finish 3-1/2 (± 1/8) inches long.					
	a. The stays shall be positioned so that on the finished shirt they are at a 25 to 30 degree angle from the front edge of the collar and the tapered ends are fitted into the collar points. The construction shall be as follows:					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	(1) Superimpose interlining onto inside of undercollar and stitch collar stay tunnel for stay placement. Insert the stay into the tunnel so that the bottom of the slotted portion finishes 1-1/2 inches from the point of the finished collar.	301	SSv-2	10-14	50	50
	or					
	(2) Spot laminate both ends of the stays to the undercollar positioned with the slotted end as specified above.					
	or					
	(3) The slotted stays may be stitched down the center of the stay, positioned as above. The end of the stitching shall extend beyond the end of the stay by more than 3 stitches.	301	SSv-1	10-12	50	50
	b. Join the collar together with the topcollar and undercollar pieces face to face. Stitch together along outside edges 1/4 inch from the raw edge.	301 or 401	SSe-2(a)	10-14	50 50	50 70
	c. Trim corners, turn to finished position working out points.					
	d. Topstitch around the top and side edges of collar, 1/4 inch from the folded edge. The stay shall not be caught in the topstitching.	301	SSe-2(b)	10-14	70	70
17.	Make collarstand and attach collar					
	a. Superimpose interlining to underside of collarstand. Place collar between the top and under side of collarstand (with interlining) as indicated by notches on pattern and stitch from end to end along top edge of collarstand, 1/4 inch from edge.	301 or 401	SSq-2(a)	10-14	50 50	50 70
	b. Turn collarstand to finished position and edgestitch 1/16 inch from folded edge. The stitching may continue around the ends of the collarstand.	301	SSq-2(b)	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
18.	Attach collar to shirt					
	a. Fold front of shirt to the inside as indicated by marks on the patterns. The facing shall finish 1-5/8 inches wide.					
	b. Stitch the neck edge of the under ply (with attached interlining) of the collar stand to the neck edge of the shirt, 1/4 inch from the edge.	301	SSa-1	10-14	50	50
	c. Turn to finished position and stitch 1/16 inch from the turned edge the top ply of the collarstand to the shirt with the raw edge of the collarstand turned under 1/4 inch.	301	LSb-1	10-14	50	50
	d. Stamp the size label inscription as specified in 3.3.6.2 inside center back of collarstand. There shall be no evidence of the printing visible on the outside of the finished collar as worn.					
	or					
	Simultaneously center and catch the size label in the stitching between the collarstand and neck edge of the shirt (operation 18c).					
	NOTE: There shall be no evidence of the collar stay protruding into the fold of the finished top collar.					
19.	Hem bottom of shirt					
	a. Form a hem on the bottom of shirt with raw edge turned under 1/8 inch and the bottom edge of the facing caught in the hem. Hem stitching shall be 1/16 inch from the folded edge along the top of the hem.	301	EFb-1	10-14	50	50
	b. The finished hem shall measure 1/8 to 3/16 inch wide and shall be backtacked.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
20.	Make buttonholes					
	a. Make six (6) vertical buttonholes through right front, 5/8 (± 1/16) inch from folded edge, in accordance with marks on pattern.	Btnhl		42-46 per Btnhl including tack	70	70
	b. Make one horizontal buttonhole at top right front through collarstand, with the cut edge of the buttonhole finishing 1/8 inch forward of front vertical buttonholes.	Btnhl		42-46 per Btnhl including tack	70	70
	c. (type I shirt) Make and center one horizontal buttonhole in the end of cuff, with the cut edge of the buttonhole finishing 3/8 to 1/2 inch from the end of the cuff.	Btnhl		42-46 per Btnhl including tack	70	70
	d. Make one vertical buttonhole, centered in each pocket flap, 3/8 inch from lower edge. The measurement shall be taken from lower cut edge of buttonhole.	Btnhl		42-46 per Btnhl including tack	70	70
	e. Make one horizontal buttonhole in the pointed end of the shoulder epaulets. The cut edge of the buttonhole shall be 1/2 inch from the point.	Btnhl		42-46 per btnhl including tack	70	70
21.	Attach buttons					
	a. Sew six (6) buttons securely to left front through all plies with the center of each button 5/8 (± 1/16) inch from the front edge. Each button shall be positioned in the center of the corresponding buttonholes.	101	-	20-22 per button	70	-
		or				
		301	-	14-16 per button	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	b. Sew one button to top left front of collarstand, through all plies, to correspond with the buttonhole at the top right front. The button shall be positioned so that when the collar is buttoned, center of the button shall be in alignment with the vertical buttons on the front, without any distortion or puckering.	101 or	-	20-22 per button	70	-
		301	-	14-16 per button	70	70
	c. (type I shirt) Sew two buttons on each cuff aligned and centered to correspond with buttonhole in cuff; with center of first button 1/2 (±1/8) inch from edge of cuff and center of second button placed 5/8 inch from the center of the first button.	101 or	-	20-22 per button	70	-
		301	-	14-16 per button	70	70
	d. Sew a button on each pocket to correspond with center of buttonhole in pocket flap.	101 or	-	20-22 per button	70	-
		301	-	14-16 per button	70	70
	e. Sew a button on the shirt front to correspond with the buttonhole in the epaulet. The center of the button shall be 1/8 inch forward of the shoulder seam and 1/2 inch from the neck line seam.	101 or		20-22 per button	70	
		301		14-15 per button	70	70
	NOTE: The buttons shall align evenly with corresponding buttonholes, to assure a neat and smooth closure.					
22.	Attach combination label (see 3.3.6.1)					
	a. Position the combination label on outside of left front so that on the finished shirt the bottom of the label shall be 1/2 to 3/4 inch from the hemmed bottom and the side of the label shall be 1-1/4 to 2 inches from the front folded edge. Stitch around all four sides, 1/8 to 3/16 inch from the edge. The stitching shall not be through the printing.	301	LSbj-1	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
23.	Clean shirt				
	a. Trim all thread ends.				
	NOTE: Care shall be taken when trimming to ensure that damage to the fabric does not result.				
	b. Remove all loose threads.				
	c. Remove all spots, stains and size markings.				
24.	Press and prepare for packaging				
	a. Press shirt with a heated pressing iron or machine.				
	b. Button shirt and fold for packaging.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of the finished shirt shall be as shown in Table III. All measurements are expressed in inches.

Table III - Sizes and finished measurements

Neck size	Collar	Bust (buttoned)	Back Length (center)	Sleeve length long		short
13	13	34	25-3/4	31	33	4
13-1/2	13-1/2	36	25-3/4	31	33	4
14	14	38	25-3/4	31	33	4
14-1/2	14-1/2	40	26-1/2	31	33	4
15	15	42	26-1/2	31	33	4
15-1/2	15-1/2	44	26-1/2	31	33	4
16	16	46	27-1/4	31	33	4
16-1/2	16-1/2	48	27-1/4	31	33	4
17	17	50	27-1/4	31	33	4
Tolerance	±1/8	±1/2	±1/2	±1/2	±1/2	±1/4

NOTE: Measurements shall be taken with the shirt buttoned, laid flat, and smooth (except where noted).

Collar. With shirt unbuttoned, and the collar laid flat and smooth, measure from center of button to front cut edge of buttonhole.

Bust. Twice the measurement taken across the front, from folded edge to folded edge at base of armhole.

Back length. Back length shall be taken along the center of the back from collar band setting seam at neck line to bottom edge of shirt.

Sleeve length. 1. Long sleeve. Measurement shall be taken from center of back at collarstand setting seam, across shoulders and down sleeve to bottom edge of cuff.

2. Short sleeve. Measurement shall be taken along inseam from underarm seam to bottom edge of sleeve.

3.9 Workmanship. The finished shirts shall conform to the quality of product established by this specification. The occurance of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. The contractor shall furnish a certificate of compliance for the collar stay requirements of 3.3.5. All requirements are applicable to the sample unit and the lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. All test reports shall contain the individual values utilized in expressing the final results.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

4.4.2 Examination of the end item. The item shall be examined for the defects listed in 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL'S) shall be as indicated in 4.4.2.3. The sample unit shall be one finished shirt. The lot size shall be expressed in units of one shirt.

4.4.2.1 Visual examination. The shirt shall be examined for defects in design, material, construction, workmanship and marking and the defects classified in accordance with the list below. The terms "outside" and "inside" as used throughout this examination are defined as follows:

Outside Any part of shirt that is visible when the completely buttoned and closed shirt is examined.

Inside Any part of shirt that is not visible when the completely buttoned and closed shirt is examined.

Defect	Classification		
	Major	Minor	
		A	B
I MATERIAL DEFECT AND DAMAGE			
a. Any hole (including drill hole 1/), cut, tear, smash, burn, or scorched area:			
1. On outside (longest dimension in any direction):			
(a) Up to 1/4 inch, inclusive		X	
(b) More than 1/4 inch	X		
2. On inside (longest dimension in any direction):			
(a) Up to 1/4 inch inclusive			X
(b) More than 1/4 inch		X	
b. Misweave, missing yarn, broken yarn, visible mend, or thin place, on outside 2/	X		
c. Loose yarn, snagged thread, or woven in waste 2/		X	
d. Embedded crease of a permanent nature in cloth	X		
e. Needle chew on outside (largest dimension in direction):			
1. Up to and including 1/2 inch		X	
2. More than 1/2 inch	X		
f. Knot or slub on outside (exceeding basic fabric requirements): 3/		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

Classification Defect	Major	Minor A	Minor B
II SHADED PART			
a. Any component part required to be cut from one piece, shaded	X		
b. Variation in shade within an outside part or between outside parts 2/	X		
c. Undercollar, underflaps, sleeve bindings or bottom cuffs do not approximate the shade of the shirt			X
III CLEANNESS			
a. Any spot or stain on outside 2/	X		
b. Three or more thread ends not trimmed to 1/4 inch or less on outside		X	
c. Five or more thread ends not trimmed to 1/2 inch or less on inside		X	
d. Two or more shade or size tickets not removed			X
e. Any shade or size marking visible on outside	X		
f. Any spot or stain on inside visible on outside	X		
IV CUTTING			
a. Any component part not cut in conformance with specification requirement	X		
V COMPONENT AND ASSEMBLY			
a. Any component part or required operation omitted (unless otherwise classified herein)	X		
b. Any component part twisted, distorted, pleated, misshaped, tight, or full (unless otherwise classified herein)		X	
c. Any component not as specified (type, size, color, etc.)	X		
d. Any operation not performed as specified (unless otherwise classified herein)	X		
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	

1/ Drill hole - Do not score when visible on inside provided the components attached to outside of shirt fully cover the drill holes.

2/ For these defects, do not score on the undercollar, bottom ply of cuffs or under flaps, unless it can be seen on the outside of shirt. Do not score below bottom button unless it can be seen when worn.

3/ For these defects, use the Sears Fabric Defect Scale (see 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
VI PRESSING			
a. Omitted (entire shirt)		X	
b. Burned or scorched	X		
c. Pressing excessive, forming gloss on outside		X	
d. Seams not pressed flat		X	
e. Part of shirt not pressed			X
VII SEAMS AND STITCHING			
a. Accuracy of seaming			
1. Seam irregular, twisted, pleated, or wavy on outside	X		
2. Seam puckered (score only when on major portion of seam)			X
3. Any part of shirt caught in an unrelated operation or stitching		X	
4. End of stitching, when not caught in other seams or stitching, backtacked less than 3/8 inch			X
5. Thread break secured by stitching back of the break less than 1/2 inch			X
6. Ends of a continuous line of stitching overlapped less than 1/2 inch			X
7. Wrong or varying shades of thread used on outside	X		
b. Gauge of stitching and seam allowance:			
1. Gauge irregular or not within range specified			X
2. Edge or top stitching sewn too close to edge, resulting in damage to cloth	X		
3. Seam allowance not as specified or 1/16 inch more or less than specified when no tolerance is given		X	
c. Open seam:(resulting from 2 or more skipped, broken, run-off, or missing stitches)			
1. On all seams except label stitching			
(a) Up to 1/4 inch inclusive			X
(b) More than 1/4 inch up to and including 1/2 inch		X	
(c) More than 1/2 inch	X		
2. Label stitching			X

NOTE: A safety-stitch seam shall be considered open when either the inside stitch or the overedging is broken. A joining seam shall be classified as open when one or more stitches in a seam are broken or runoff, or when two or more continuous skipped stitches occur.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
d. Runoff:			
1. On joining seam, score as open seam			
2. Edge or top stitching (when not resulting in an open seam):			
(a) Up to and including 1/2 inch			X
(b) More than 1/2 inch		X	
e. Raw edge:			
1. On outside:			
(a) Up to and including 1/8 inch			X
(b) 1/8 inch to 1/2 inch inclusive		X	
(c) More than 1/2 inch	X		
2. On inside:			
(a) 1/2 inch to 1 inch inclusive			X
(b) More than 1 inch		X	
f. Seam and stitch type:			
1. Not specified seam or stitch type		X	
2. Any required line of stitching omitted	X		
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Any seam not lapped or finished as specified		X	
g. Broken, missing, or skipped stitches on top stitching (when seam is seamed, turned, and stitched):			
1. 1/4 inch up to and including 1/2 inch			X
2. More than 1/2 inch		X	
h. Stitch tension:			
1. Loose tension resulting in a loose seam	X		
(a) Up to 1/2 inch inclusive			X
(b) More than 1/2 inch up to 3/4 inch inclusive		X	
(c) More than 3/4 inch	X		
2. Loose tension on top stitching, resulting in exposed loose thread			X
3. Tight tension (stitches break when strain is applied in direction of seam or stitching)	X		
4. Tight tension, top and bottom thread loops not uniform		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

u. Align the lower serged or selvaged pocket [illegible] 10 1/4 70 70

Defect	Classification Major	Minor A	Minor B
i. Stitches per inch (to be scored only when the condition exists on more than half the length of seam or stitching):			
1. Less than the minimum		X	
2. More than the maximum			X
VIII BARTACK OR TACK: One or more			
a. Missing, insecure, misplaced, not specified size or type or not serving intended purpose	X		
b. Loose stitch tension		X	
IX LABEL OR MARKING			
a. Not attached or affixed as specified, misplaced, or stitching through the printing		X	
b. Missing, incorrect, illegible, or strike through	X		
X BOTTOM HEM			
a. Width not as specified		X	
b. Irregular in width by 1/16 inch or more		X	
c. Hem twisted, pleated or puckered		X	
d. Hem end extending more than 1/8 inch beyond front edge of shirt		X	
XI BUTTONHOLE			
a. Omitted	X		
b. Not specified type or size		X	
c. Misplaced, not positioned as specified		X	
d. Ragged edge, i.e., yarn or thread ends on inside of bottonhole not trimmed to less than 1/4 inch, incomplete stitching, stitching not securely caught in fabric		X	
e. Two or more broken stitches or three or more skipped stitches in one or more buttonholes		X	
f. Buttonhole stitching extending beyond bartack; stitches per buttonhole less than minimum specified			X
g. Finished cut length not as specified			X
h. Uncut or partially cut buttonhole		X	
XII BUTTON - One or more			
a. Missing, broken, defective, misplaced, not positioned or attached as specified, or insecurely sewn	X		
b. Not specified type, size, or color		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
c. Stitching on one or more not locked at end of cycle (tug at the loose end of the thread when accessible to determine if it will ravel)		X	
d. Stitching not caught through all plies			
XIII SLEEVE BINDING(S)			
a. Omitted	X		
b. Misplaced, not positioned as specified		X	
c. Construction of sleeve opening:			
1. End of facing not securely caught in sleeve opening, i.e., can be easily pulled away	X		
2. Top of bound opening not stitched across width of facing		X	
3. Facing twisted or puckered		X	
4. Bound edge of sleeve opening not turned to the inside at end of cuff		X	
5. Facing width not as specified		X	
6. Sleeve opening not as specified		X	
7. Splice visible on sleeve facing		X	
XIV COLLAR			
a. Not uniform in size or shape - any point (excluding collar points) varying:			
1. More than 3/8 inch with corresponding point on matching part	X		
2. 1/4 inch up to 3/8 inch (inclusive) with corresponding point on matching part		X	
b. Collar points uneven in length by:			
1. 1/8 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		
c. Collar off center by more than 3/8 inch 1/		X	
d. Any pleat, pucker, or crease			
1. On topcollar piece		X	
2. On undercollar piece			X

1/ Center of collar is determined by aligning the two shoulder seams at junction of collar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
e. Twisted, not smooth, too full, short, or tight causing collar to turn out	X		
f. Edge of collar not properly forced out, i.e., having a fold of:			
1. 1/16 inch up to and including 1/8 inch in depth			X
2. More than 1/8 inch in depth		X	
g. One or both collar stays missing	X		
h. One or both collar stays misplaced		X	
i. Edge of undercollar exposed beyond edge of top collar:			
1. 1/16 inch or more for a distance of 2 inches or more	X		
2. Less than 1/16 inch on major portion of collar		X	
XV EPAULET(S)			
a. Not uniform in size or shape - any point varying:			
1. More than 3/8 inch with corresponding point on matching part	X		
2. 1/4 inch up to and including 3/8 inch with corresponding point on matching point		X	
3. 1/8 inch up to and including 1/4 inch with corresponding point on matching point			X
b. Not positioned as specified or attached crookedly		X	
c. Width at wide end or narrow end not as specified		X	
d. Length not as specified		X	
XVI POCKETS OR FLAPS			
a. Not uniform in size or shape - any measurement varying from pocket to pocket, or flap to flap:			
1. 1/8 inch up to and including 1/4 inch		X	
2. More than 1/4 inch	X		
b. Out of alignment at any point from pocket to pocket or flap to flap by: (Determination shall be made by a straight edge)			
1. 1/8 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
c. Pocket or flaps not according to template on any side by:			
1. More than 1/8 inch up to and including 3/16 inch			X
2. More than 3/16 inch up to and including 1/4 inch		X	
3. More than 1/4 inch	X		
d. Unbalanced positioning between pockets to center front (measurement taken from side edge of pocket to center of buttonhole)			
1. 1/4 inch up to and including 3/8 inch			X
2. More than 3/8 inch up to and including 1/2 inch		X	
3. More than 1/2 inch	X		
XVII POCKET(S)			
a. Pocket edge(s) not parallel to front edge of shirt by:			
1. 3/16 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		
b. Edge of pocket pleated or twisted			X
c. Width and depth of pocket not as specified		X	
d. Pocket hem not as specified		X	
XVIII FLAP(S)			
a. Width and depth of pocket flap not in accordance with templates		X	
b. Pocket exposed beyond end of flap by 1/8 inch or more with flap unbuttoned		X	
c. Fabric threads visible after attachment of flap		X	
d. Attached crookedly (Distance between sides of pocket and underside of opened flap vary by more than 1/8 inch)	X		
XIX FRONTS			
a. Any button out of alignment with corresponding buttonhole, causing a noticeable bulge		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
b. Lengths of fronts uneven at bottom when buttoned:			
1. 3/8 inch up to 3/4 inch inclusive			X
2. More than 3/4 inch		X	
XX SLEEVES AND ARMHOLE			
a. Setting:			
1. Sleeve tight at armhole, causing pleats or excessive puckers on front, back, or sleeve		X	
2. Sleeves reversed, i.e., left sleeve in right armhole; right sleeve in left armhole	X		
3. Side and underarm seam staggered more than 1/4 inch			X
XXI CUFF(S)			
a. Construction and setting:			
1. Reversed, i.e., buttonhole on underside and button on top side	X		
2. Irregular in length by 1/4 inch or more			X
3. Cuff depth more than 2-5/8 inches or less than 2-3/8 inches		X	
4. Fullness of sleeve bottom not taken up as specified			X
5. Button or buttonhole on wrong side of cuff	X		

4.4.2.2 Dimensional examination. The shirt shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from the dimensions and tolerances specified in Table III, shall be scored as a size measurement defect.

b. Sleeves uneven in length by 1/2 inch or more, shall be scored as a size measurement defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

4.4.2.3 Inspection levels and acceptable levels (AQL). The inspection levels and the acceptable quality levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

	AQL	Inspection level
For defects applicable to 4.4.2.1		III
Major	1.5	
Major and Minor A	6.5	
Major, Minor A and Minor B (combined)	15.0	
For defects applicable to 4.4.2.2		
One class	4.0	S-3

4.4.3 Packaging inspection. An examination shall be made to determine that packaging, packing, and marking comply with the Section 5 requirements of this specification. The sample unit shall be one shipping container fully prepared for delivery, except that it need not be sealed. Examination for closure defects listed below shall be made. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper location, sequence, or method of applications. Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as; incomplete closure of container flaps, loose strapping, inadequate stapling or improper taping. Bulged or distorted container. Open and non-continuous heat sealed seams of polyethylene bag or incorrectly fabricated bag.
Content	Number of shirts per shipping container more or less than specified 1/.

1/ For this defect, one container in the sample shall be examined.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 as specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Preservation shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each fully buttoned shirt shall be neatly folded to measure approximately 14-1/2 inches by 10-1/2 inches. The folded shirt shall be secured with stainless steel (AISI type 304 or 316) pins, aluminum clips, or plastic fasteners. Each shirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of not less than 0.00125 inch thickness (+ 25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. As an alternate for the class 1 shirt, the polyethylene bag may be of the tuck-in or reverse flap type in which case a heat seal closure and corner vent hole are not required.

5.1.1.1 Intermediate packaging. Five (5) shirts of one size, type, class, and sleeve length (when applicable) only, packaged as specified in 5.1.1 and alternated top to bottom shall be placed in a set-up paperboard box conforming to type II, variety 1, class a or c, style 4 of PPP-B-676. Outside dimensions of the set-up box, cover included, shall be 14-1/2 inches in length, 11-1/2 inches in width and 3-3/4 inches in depth. The depth of the cover shall be one inch.

5.1.2 Level C. Shirts shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Eight (8) intermediate packages (40 shirts of one size, class, type and sleeve length (when applicable) only), packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. The intermediate packages shall be arranged in the shipping container in two stacks, side by side and four high.

5.2.2 Level B. Eight (8) intermediate packages (40 shirts of one size, class, type, and sleeve length (when applicable) only), packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. The intermediate packages shall be arranged in the shipping container in two stacks, side by side and four high.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.2.4 Palletization. When specified (see 6.2), item, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding method C and D or Film bonding and F or G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III, or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate packs (when applicable), exterior containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.4 MIL-STD-2073. When specified, (see 6.2) Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The shirts are intended for wear by Coast Guard female military personnel.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Type, class, size, and sleeve length (when applicable) required (see 1.2)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1 and 2.2)
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quality, testing and approval of the first article.
e. Levels of packaging and packing required (see 5.1 and 5.2)
f. When palletization is required (see 5.4)
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 Sears Fabric Defect Scales are available from Sears, Roebuck and Company, Department 817, (Attn: BSC-23-29), Chicago, IL 60694.

6.5 Recyled material. It is encouraged that recyled material be used when practical as long as it meets the requirements of this specification.

6.5 Subject term (key words) listing.

Clothing, dress
Clothing, long sleeve
Clothing, short sleeve
Epaulet, shoulder
Garment, AF style
Garment, uniform

Custodian:
Navy - NU


Review Activity:
Navy - CG
DLA - CT

Preparing Activity:
Navy - NU

Project No. 8410-N786


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TYPE I - WOMEN'S LONG SLEEVE SHIRT W/ EPAULETS
(Officer & Enlisted Personnel)
(Classes1 & 2)

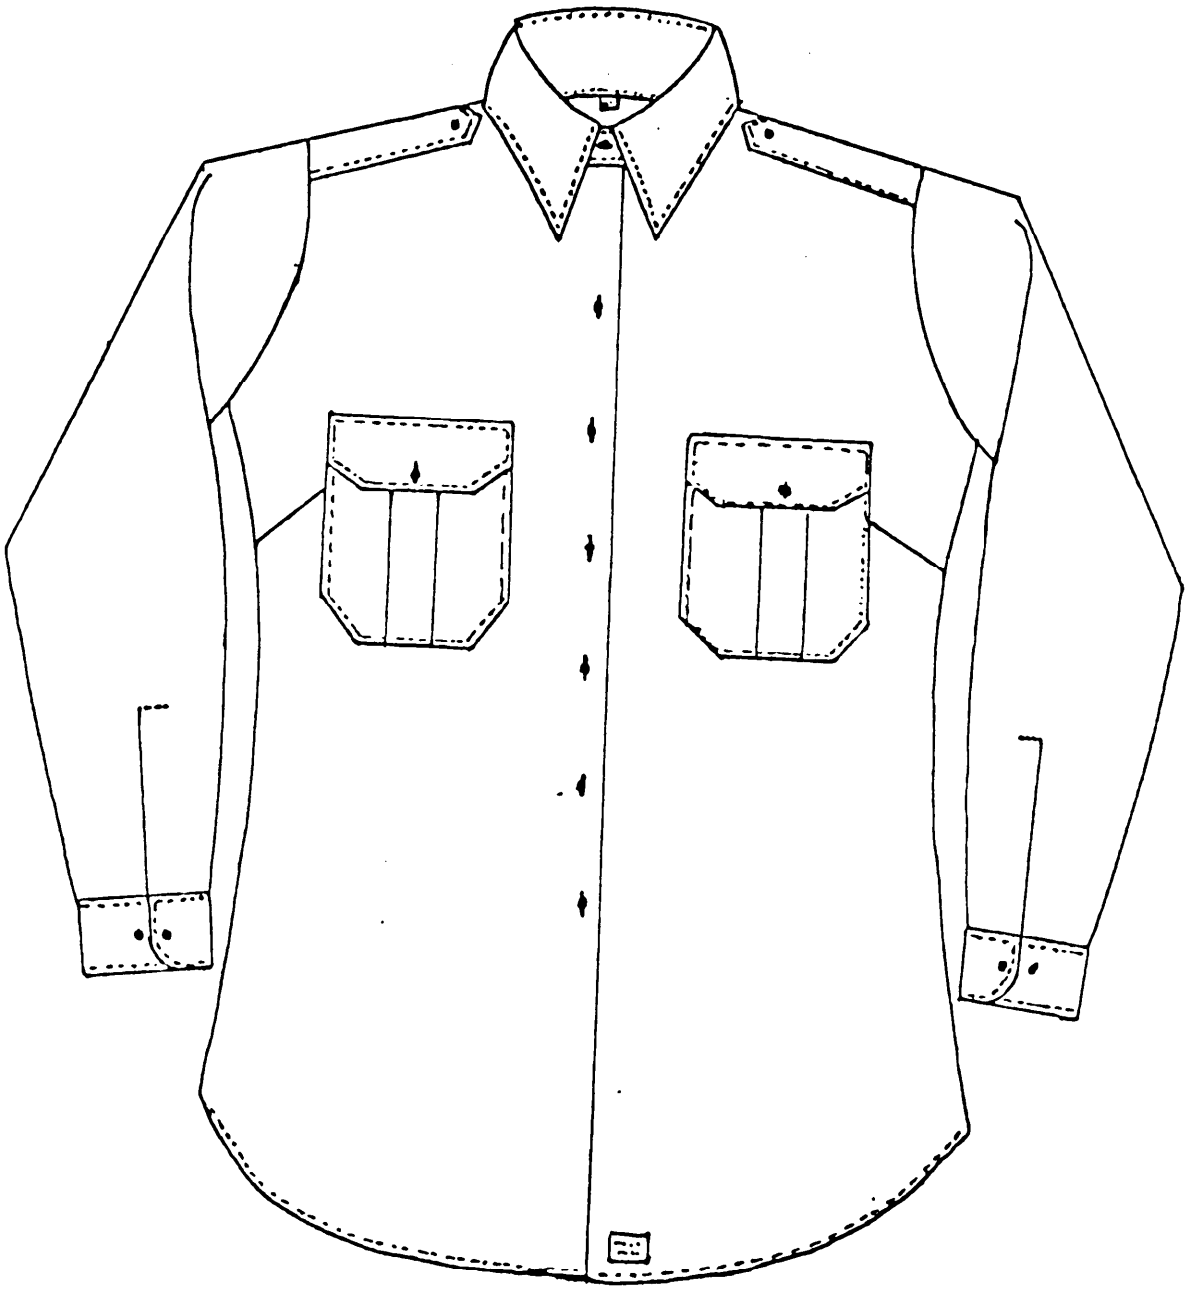

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

TYPE II -WOMEN'S SHORT SLEEVE SHIRT W/ EPAULETS
(Officer & Enlisted Personnel)
(Class 1)

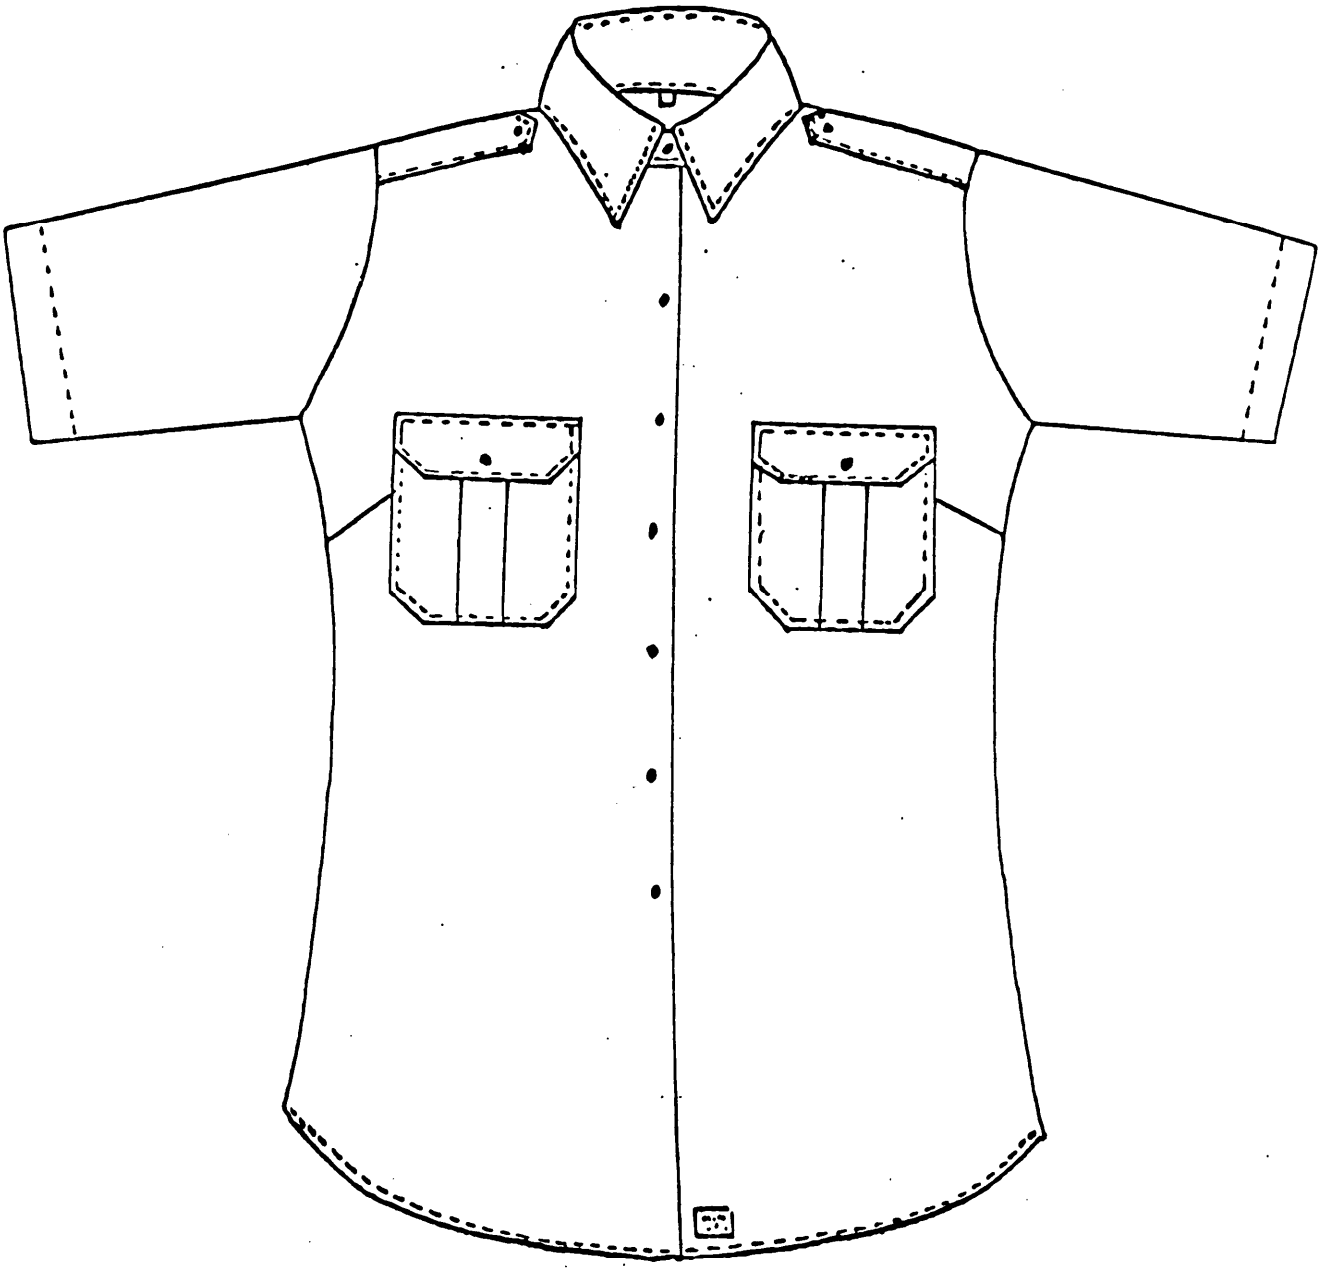

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
P.O. Box 59
Natick, MA 01760-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-29633A(CG)	SHIRT, WOMAN'S, DRESS, SHORT AND LONG SLEEVE (COAST GUARD)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil – Downloaded: 2026-02-21 01:25Z
Check the source to verify that this is the current version before use.