
FED. SUP CLASS
5306

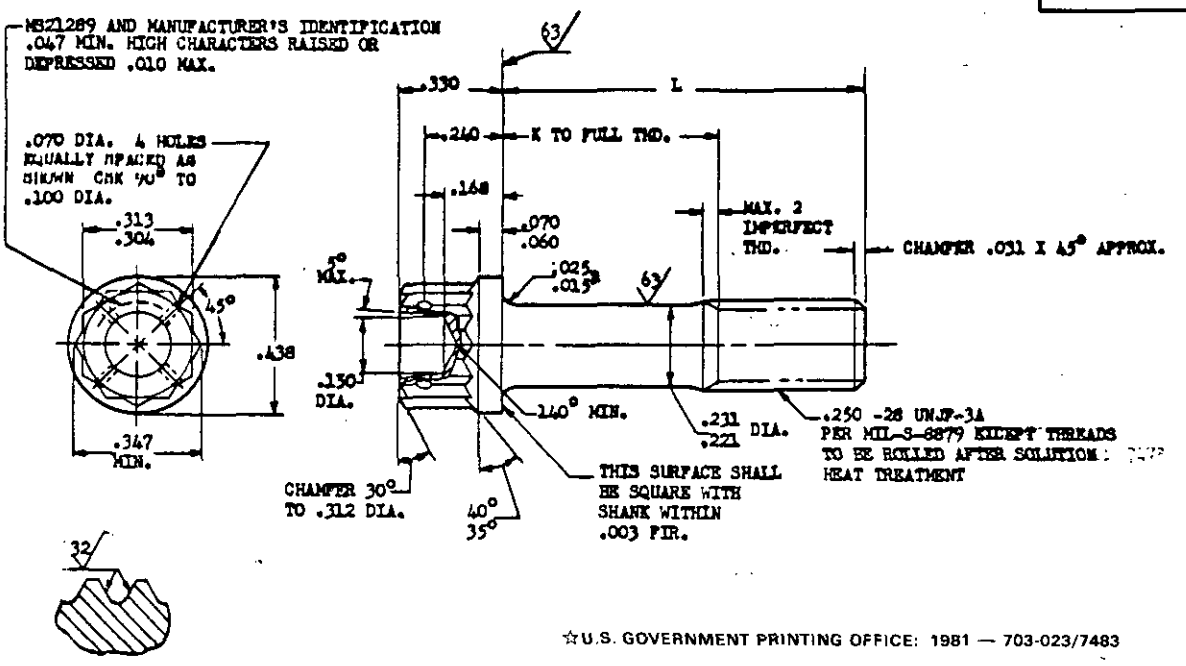

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/7483

PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100	PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100	PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100
MS21289-05	.438	(a)	1.22	MS21289-23	1.562	.812	2.50	MS21289-41	3.625	2.875	4.85
MS21289-06	.500	(a)	1.29	MS21289-24	1.625	.875	2.57	MS21289-42	3.750	3.000	4.99
MS21289-07	.562	(a)	1.36	MS21289-25	1.688	.938	2.64	MS21289-43	3.875	3.125	5.13
MS21289-08	.625	(a)	1.44	MS21289-26	1.750	1.000	2.72	MS21289-44	4.000	3.250	5.27
MS21289-09	.688	(a)	1.51	MS21289-27	1.875	1.125	2.86	MS21289-45	4.125	3.375	5.42
MS21289-10	.750	(a)	1.58	MS21289-28	2.000	1.250	3.00	MS21289-46	4.250	3.500	5.56
MS21289-11	.812	(a)	1.65	MS21289-29	2.125	1.375	3.14	MS21289-47	4.375	3.625	5.71
MS21289-12	.875	.125	1.72	MS21289-30	2.250	1.500	3.29	MS21289-48	4.500	3.750	5.85
MS21289-13	.938	.188	1.79	MS21289-31	2.375	1.625	3.43	MS21289-49	4.625	3.875	6.00
MS21289-14	1.000	.250	1.86	MS21289-32	2.500	1.750	3.57	MS21289-50	4.750	4.000	6.14
MS21289-15	1.062	.312	1.93	MS21289-33	2.625	1.875	3.71	MS21289-51	4.875	4.125	6.29
MS21289-16	1.125	.375	2.00	MS21289-34	2.750	2.000	3.85	MS21289-52	5.000	4.250	6.43
MS21289-17	1.188	.438	2.08	MS21289-35	2.875	2.125	4.00	MS21289-53	5.125	4.375	6.56
MS21289-18	1.250	.500	2.15	MS21289-36	3.000	2.250	4.14	MS21289-54	5.250	4.500	6.70
MS21289-19	1.312	.562	2.22	MS21289-37	3.125	2.375	4.29	MS21289-55	5.375	4.625	6.84
MS21289-20	1.375	.625	2.29	MS21289-38	3.250	2.500	4.43	MS21289-56	5.500	4.750	6.99
MS21289-21	1.438	.688	2.36	MS21289-39	3.375	2.625	4.58	MS21289-57	5.625	4.875	7.13
MS21289-22	1.500	.750	2.43	MS21289-40	3.500	2.750	4.72	MS21289-58	5.750	5.000	7.28
								MS21289-59	5.875	5.125	7.42
								MS21289-60	6.000	5.250	7.57

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS. EXCEPT INCOMPLETE THREADS NOT TO ENTER FILLET RADIUS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .013 FIR.

MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735
MANUFACTURING SPECIFICATION: AMS 7478 EXCEPT HEADS TO BE FORMED BY HOT OR COLD UPSETTING.
PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
SURFACE ROUGHNESS: MIL-STD-10 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE UNASSIGNED PART NUMBERS.

© CANCELLED AFTER 15 SEPT 1981.
NO SUPERSEDING STANDARD.

APPROVED 1 May 61 REVISED (A) 23 Oct 61 (B) 17 Sep 63 (C) 15 Sep 81

P.A. Navy - Wep Other Cust Air Force - ASD	TITLE BOLT, MACHINE - STEEL, DRILLED DOUBLE HEXAGON, EXTENDED WASHER, .250-28 (MIL-S-8879 THREAD) (B)	MILITARY STANDARD MS21289 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

This standard has been approved by the BuWep (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:31Z
Check the source to verify that this is the current version before use.