FED. SUP CLASS
5305

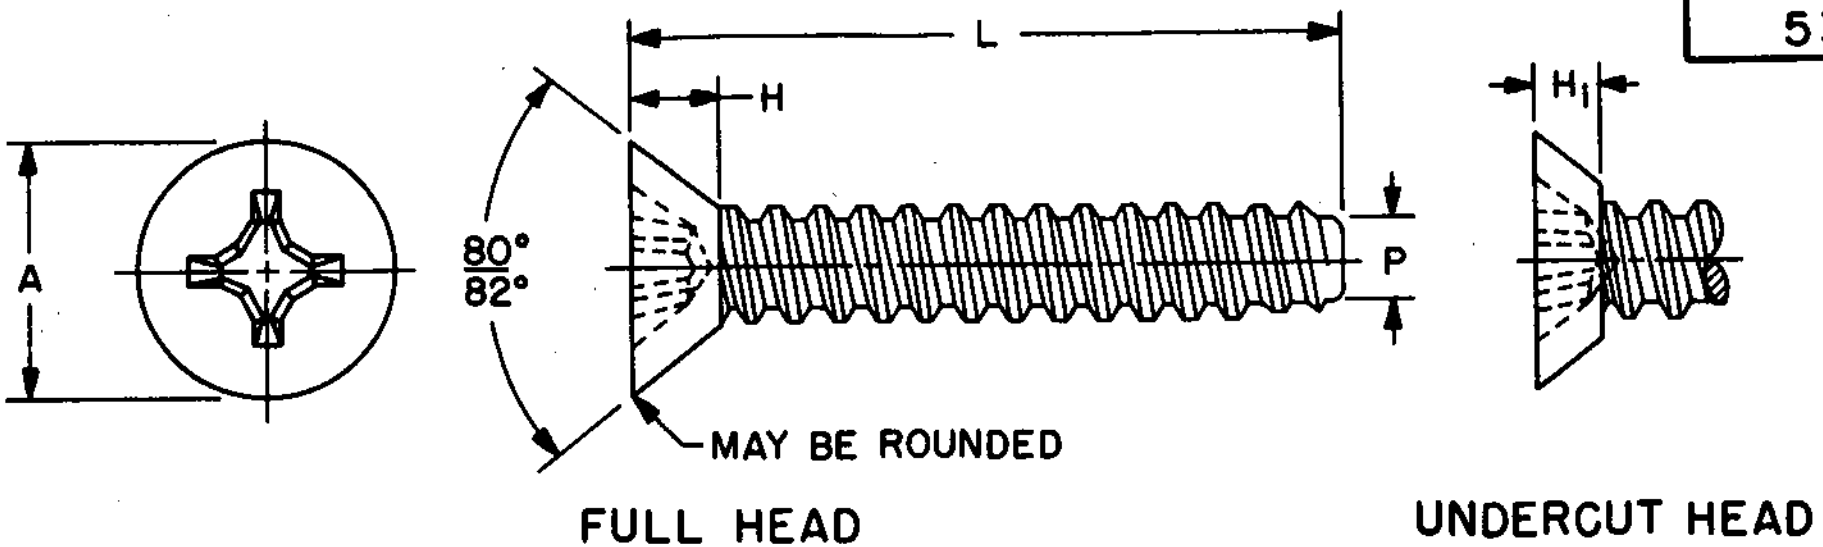

TABLE I

		NOMINAL SIZE	4 (.112)	6 (.138)	8 (.164)	10 (.190)	1/4 (.250)
	THREADS PER INCH		24	20	18	16	14
A	HEAD DIA	MAX SHARP MIN FLAT	.225 .195	.279 .244	.332 .292	.385 .340	.507 .452
H	HEAD HEIGHT - REF		.067	.083	.100	.116	.153
H_1	UNDERCUT HEAD HEIGHT	MAX MIN	.047 .038	.059 .048	.070 .058	.081 .068	.107 .092
P	POINT DIA	MAX MIN	.079 .074	.095 .089	.112 .106	.130 .123	.179 .171
L	LENGTH	TOL	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
	.188	+0 -.031	1				
	.250		2	9			
	.312		3	10			
	.375		4	11	22		
	.500		5	12	23	38	52
	.625			13	24	39	53
	.750			14	25	40	54
	.875	+0 -.047		15	26	41	55
	1.000			16	27	42	56
	1.250			17	28	43	57
	1.500			18	29	44	58
	1.750	+0 -.062			30	45	59
	2.000				31	46	60
	2.250				32	47	61
	2.500				33	48	62

NOTES:

1. MATERIAL: Steel, carbon, in accordance with procurement specification.
2. PROTECTIVE COATING: Cadmium plated in accordance with procurement specification.
3. THREADS: The threads shall be in accordance with the applicable requirements of the procurement specification.
4. RECESS: The recess shall be in accordance with MS9006.
5. SHORT LENGTHS: Lengths above dotted line shall have undercut heads.
6. HOLE SIZES: For approximate hole sizes see MS24632.
7. DIMENSIONS: Unless otherwise specified, all dimensions are in inches.
8. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS24619-1.
9. Referenced documents shall be of the issue in effect on date of invitations for bid.
10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

CANCELLED AFTER 15 MAY 1975

SUPERSEDED BY MS51862

Ⓒ

INTERCHANGEABILITY TABLE

The screws covered by MS24639 are cancelled after 25 Feb 1963. The cancelled screws cannot always replace the superseding screws and should be used until existing stocks are depleted. Use only the superseding screws for design and engineering. Replacement shall be in accordance with the table below.

DASH NUMBER

CANCELLED MS24639	SUPERSEDING MS24619	CANCELLED MS24639	SUPERSEDING MS24619	CANCELLED MS24639	SUPERSEDING MS24619	CANCELLED MS24639	SUPERSEDING MS24619
1	2	14	14	30	38	38	46
2	3	20	22	31	39	42	54
3	4	21	23	32	40	43	55
4	5	22	24	33	41	44	56
9	9	23	25	34	42	45	57
10	10	24	26	35	43	46	58
11	11	25	27	36	44	47	59
12	12	26	28	37	45	48	60
13	13						

P.A. WC Other Cust 82	TITLE SCREW, TAPPING-THREAD FORMING, TYPE B, FLAT 82° COUNTERSUNK HEAD, CROSS-RECESSED, CARBON STEEL	MILITARY STANDARD MS24619
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES: MS24639, BCXX2.2 and BCXX4.3 in part	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

REVIEWER: AV, IS, MI, NSA, 85
USER: AS, AT, GL, MC, ME, OS, SH

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 5 OCT 1959 REVISED Ⓐ 25 FEB 1963 Ⓑ 27 AUG 1969 Ⓒ 15 MAY 1975

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.