
FED. SUP CLASS
5305

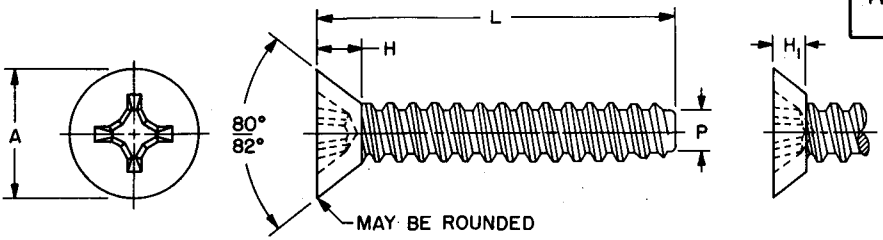

FULL HEAD UNDERCUT HEAD

NOMINAL SIZE			4 (.112)	6 (.138)	8 (.164)	10 (.190)	1/4 (.250)
THREADS PER INCH			24	20	18	16	14
A	HEAD DIA	MAX SHARP	.225	.279	.332	.385	.507
		MIN FLAT	.195	.244	.292	.340	.452
H	HEAD HEIGHT - REF		.067	.083	.100	.116	.153
H_1	UNDERCUT HEAD HEIGHT	MAX	.047	.059	.070	.081	.107
		MIN	.038	.048	.058	.068	.092
P	POINT DIA	MAX	.079	.095	.112	.130	.179
		MIN	.074	.089	.106	.123	.171
L	LENGTH	TOL	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.188			1				
.250			2	9			
.312		+0	3	10			
.375		-.031	4	11	22		
.500			5	12	23	38	52
.625				13	24	39	53
.750				14	25	40	54
.875				15	26	41	55
1.000		+0		16	27	42	56
1.250		-.047		17	28	43	57
1.500				18	29	44	58
1.750					30	45	59
2.000		+0			31	46	60
2.250		-.062			32	47	61
2.500					33	48	62

NOTES:
1. MATERIAL: Steel, corrosion-resisting, in accordance with procurement specification.
2. PROTECTIVE COATING: Passivated in accordance with procurement specification.
3. THREADS: The threads shall be in accordance with the applicable requirements of the procurement specification.
4. RECESS: The recess shall be in accordance with MS9006.
5. SHORT LENGTHS: Lengths above dotted line shall have undercut heads.
6. HOLE SIZES: For approximate hole sizes see MS24632.
7. DIMENSIONS: Unless otherwise specified, all dimensions are in inches.
8. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS24620-1.
9. Referenced documents shall be of the issue in effect on date of invitations for bid.
10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

CANCELLED AFTER 15 MAY 1975
SUPERSEDED BY MS51862

©

INTERCHANGEABILITY TABLE

The screws covered by MS24640 are cancelled after 25 Feb 1963. The cancelled screws cannot always replace the superseding screws and should be used until existing stocks are depleted. Use only the superseding screws for design and engineering. Replacement shall be in accordance with the table below.

DASH NUMBER

CANCELLED MS24640	SUPERSEDING MS24620	CANCELLED MS24640	SUPERSEDING MS24620	CANCELLED MS24640	SUPERSEDING MS24620	CANCELLED MS24640	SUPERSEDING MS24620
1	2	14	14	30	38	38	46
2	3	20	22	31	39	42	54
3	4	21	23	32	40	43	55
4	5	22	24	33	41	44	56
9	9	23	25	34	42	45	57
10	10	24	26	35	43	46	58
11	11	25	27	36	44	47	59
12	12	26	28	37	45	48	60
13	13						

P.A. WC
Other Cust 82

TITLE
SCREW, TAPPING-THREAD FORMING, TYPE B, FLAT 82° COUNTERSUNK HEAD, CROSS-RECESSED, CORROSION-RESISTING STEEL

MILITARY STANDARD
MS24620

PROCUREMENT SPECIFICATION
FF-S-107

SUPERSEDES:
MS24640: BCXX4.3 in part

SHEET 1 OF 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the currentversion before use.

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

REVIEWER: AV, IS, MI, NSA, 85,
USER: AS, AT, GL, MC, ME, OS, SH

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 5 OCT 1959 REVISED (A) 25 FEB 1963 (B) 27 AUG 1969 (C) 15 MAY 1975