
REVIEWER: AV, IS, MI, NSA, 85, MU
USER: AS, AT, GL, MC, ME, OS, SH

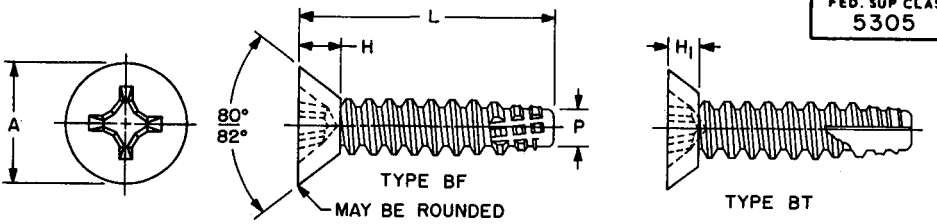

FULL HEAD

UNDERCUT HEAD

TABLE I

NOMINAL SIZE		2(.086)	4(.112)	6(.138)	8(.164)	10(.190)	1/4(.250)
THREADS PER INCH		32	24	20	18	16	14
A HEAD DIA	MAX SHARP	.172	.225	.279	.332	.385	.507
	MIN FLAT	.147	.195	.244	.292	.340	.452
H HEAD HEIGHT - REF		.051	.067	.083	.100	.116	.153
H_1 UNDERCUT HEAD HEIGHT	MAX	.036	.047	.059	.070	.081	.107
	MIN	.028	.038	.048	.058	.068	.092
P POINT DIA	MAX	.058	.079	.095	.112	.130	.179
	MIN	.054	.074	.089	.106	.123	.171

L LENGTH	TOL.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.250	+0 -.031	1	9	20			
.312		2	10	21			
.375		3	11	22	33		
.500			12	23	34	47	
.625				25	35	48	60
.750				26	36	49	61
.875	+0 -.047			27	37	50	62
1.000				28	38	51	63
1.250				29	39	52	64
1.500				30	40	53	65
1.750	+0 -.062				41	54	66
2.000					42	55	67
2.250					43	56	68
2.500					44	57	69

© CANCELLED AFTER 15 MAY 1975
SUPERSEDED BY MS24628

NOTES:

1. MATERIAL: Steel, corrosion-resisting, in accordance with procurement specification.
2. PROTECTIVE COATING: Passivated in accordance with procurement specification.
3. THREADS: The threads shall be in accordance with the applicable requirements of the procurement specification.
4. RECESS: The recess shall be in accordance with MS9006.
5. SHORT LENGTHS: Lengths above dotted line shall have undercut heads.
6. HOLE SIZES: For approximate hole sizes see MS24633.
7. DIMENSIONS: All dimensions are in inches, unless otherwise specified.
8. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS24624-1.
9. Referenced documents shall be of the issue in effect on date of invitations for bid.
10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

INTERCHANGEABILITY TABLE

The screws covered by the following dash numbers of MS24644 are cancelled after 25 Feb 1963. The cancelled screws cannot always replace the superseding screws and should be used until existing stocks are depleted. Use only the superseding screws for design and engineering. Replacement shall be in accordance with this table.

DASH NUMBERS

CANCELLED MS24644	SUPERSEDING MS24624	CANCELLED MS24644	SUPERSEDING MS24624	CANCELLED MS24644	SUPERSEDING MS24624	CANCELLED MS24644	SUPERSEDING MS24624
1	9	14	26	30	47	38	55
2	10	20	33	31	48	42	61
3	11	21	34	32	49	43	62
4	12	22	35	33	50	44	63
9	20	23	36	34	51	45	64
10	21	24	37	35	52	46	65
11	22	25	38	36	53	47	66
12	23	26	39	37	54	48	67
13	25						

APPROVED 5 OCT 1959 REVISED (A) 25 FEB 1963 (B) 27 AUG 1969 (C) 15 MAY 1975

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC
Other Cust
82

TITLE
SCREW, TAPPING-THREAD CUTTING, TYPE BF OR BT, FLAT 82° COUNTERSUNK HEAD, CROSS-RECESSED, CORROSION-RESISTING STEEL

MILITARY STANDARD
MS 24624
SHEET 1 OF 1

PROCUREMENT SPECIFICATION
FF-S-107

SUPERSEDES:
MS24644

DD FORM 672-1 (Coordinated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20240-23T14:58Z
Check the source to verify that this is the current version before use.