
FED. SUP CLASS
5305

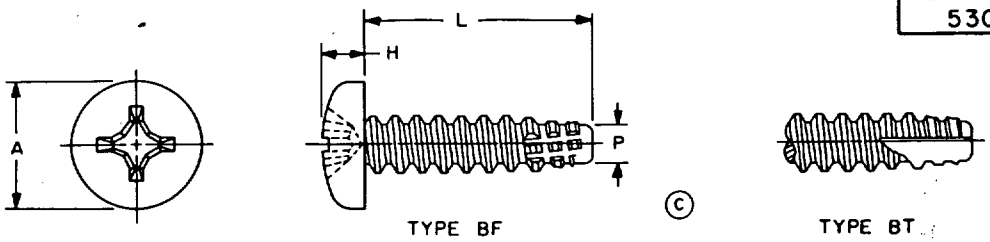

TYPE BF

TYPE BT

TABLE I

NOMINAL SIZE			2(.086)	4(.112)	6(.138)	8(.164)	10(.190)	1/4(.250)
THREADS PER INCH			32	24	20	18	16	14
A HEAD DIA		MAX	.167	.219	.270	.322	.373	.492
		MIN	.155	.205	.256	.306	.357	.473
H HEAD HEIGHT		MAX	.062	.080	.097	.115	.133	.175
		MIN	.053	.070	.087	.105	.122	.162
P POINT DIA		MAX	.058	.079	.095	.112	.130	.179
		MIN	.054	.074	.089	.106	.123	.171
L LENGTH	TOL.		DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.188	+0 -.031		1					
.250			2	9	17			
.312			3	10	18	28		
.375			4	11	19	29	42	55
.500			5	12	20	30	43	56
.625			6	13	21	31	44	57
.750				14	22	32	45	58
.875	+0 -.047				23	33	46	59
1.000					24	34	47	60
1.250					25	35	48	61
1.500					26	36	49	62
1.750	+0 -.062					37	50	63
2.000						38	51	64
2.250						39	52	65
2.500						40	53	66

NOTES:

1. MATERIAL: Steel, carbon, in accordance with procurement specification.
2. PROTECTIVE COATING: Cadmium plated in accordance with procurement specification.
3. THREADS: The threads shall be in accordance with the applicable requirements of the procurement specification.
4. RECESS: The recess shall be in accordance with MS9006.
5. HOLE SIZES: For approximate hole sizes see MS24633.
6. DIMENSIONS: All dimensions are in inches, unless otherwise specified.
7. PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS24625-1.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.
9. For design feature purposes, this standard takes precedence over procurement document referenced herein.
10. For aeronautical applications, these screws are subject to AND10087 limitations and installation requirements.

INTERCHANGEABILITY TABLE

The screws covered by the following dash numbers of MS24645 are cancelled after 25 Feb 1963. The cancelled screws cannot always replace the superseding screws and should be used until existing stocks are depleted. Use only the superseding screws for design and engineering. Replacement shall be in accordance with the table.

DASH NUMBERS									
CANC MS24645	SUPSD MS24625	CANC MS24645	SUPSD MS24625	CANC MS24645	SUPSD MS24625	CANC MS24645	SUPSD MS24625	CANC MS24645	SUPSD MS24625
1	1	17	17	29	29	44	43	57	56
2	2	18	16	30	30	45	44	58	57
3	3	19	19	31	31	46	45	59	58
4	4	20	20	32	32	47	46	60	59
8	9	21	21	33	33	48	47	61	60
9	10	22	22	34	34	49	48	62	61
10	11	23	23	35	35	50	49	63	62
11	12	24	24	36	36	51	50	64	63
12	13	28	28	43	42	52	51	65	64

REVIEWER: AV, IS, MI, NSA, ES, MC
USER: AS, AT, GL, NC, ME, OS, SH

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 5 OCT 1959 REVISED (A) 7 JUN 1961 (B) 25 FEB 1963 (C) 27 AUG 1969

P.A. MC
Other Cust 82

TITLE
SCREW, TAPPING-THREAD CUTTING, TYPE BF OR BT, PAN HEAD, CROSS-RECESSED, CARBON STEEL

MILITARY STANDARD
MS24625
SHEET 1 OF 1

PROCUREMENT SPECIFICATION
FF-S-107

SUPERSEDES:
MS24645

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.