Thi[illegible]ry standard is approved by the AFLC, Depa[illegible]of the Air Force and is mandatory for use by that [illegible]ity. All other military activities are required to employ this standard where suitable.

Cu[illegible] Air Force 85
Re[illegible] Air Force 85
"Re[illegible]r/User information is current as of the date of this document. For future coordinat[illegible] changes to this document, draft circulation should be based on the information in the current DODISS."

FED. SUP CLASS
5930

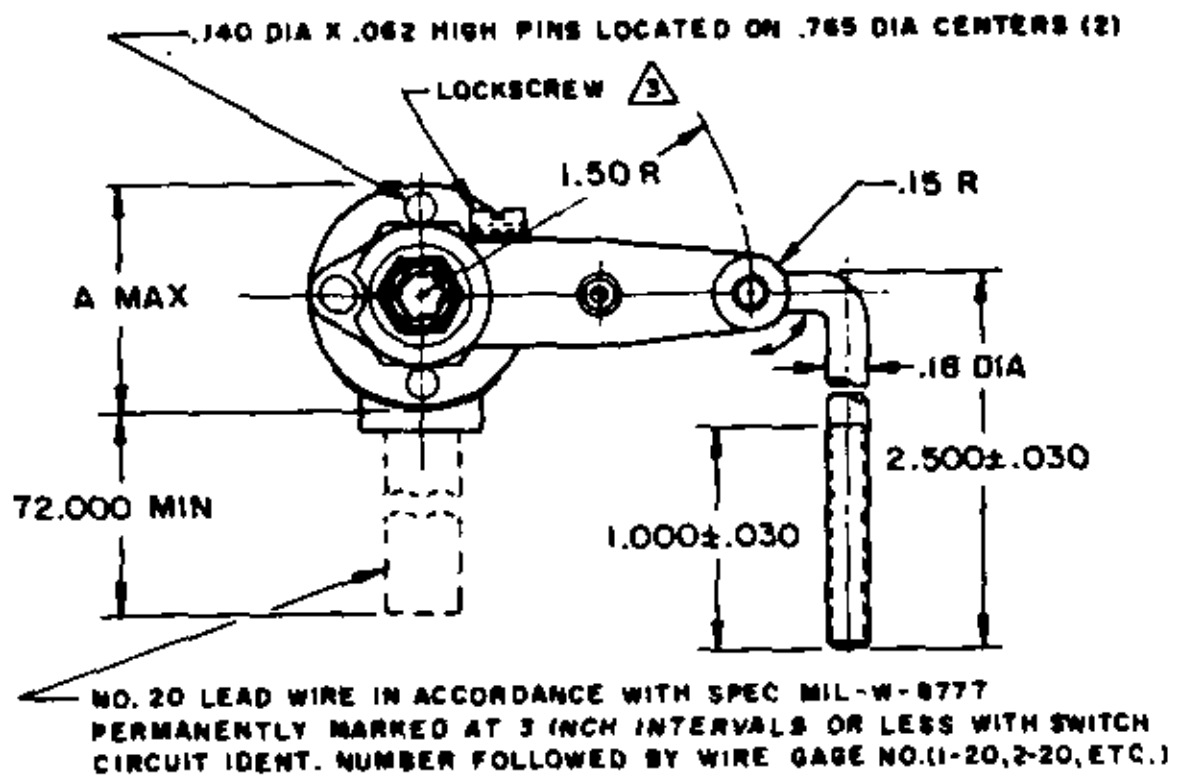
.140 DIA X .062 HIGH PINS LOCATED ON .765 DIA CENTERS (2)
LOCKSCREW 3
1.50 R
.15 R
A MAX
.18 DIA
2.500±.030
72.000 MIN
1.000±.030
NO. 20 LEAD WIRE IN ACCORDANCE WITH SPEC MIL-W-8777 PERMANENTLY MARKED AT 3 INCH INTERVALS OR LESS WITH SWITCH CIRCUIT IDENT. NUMBER FOLLOWED BY WIRE GAGE NO.(1-20, 2-20, ETC.)

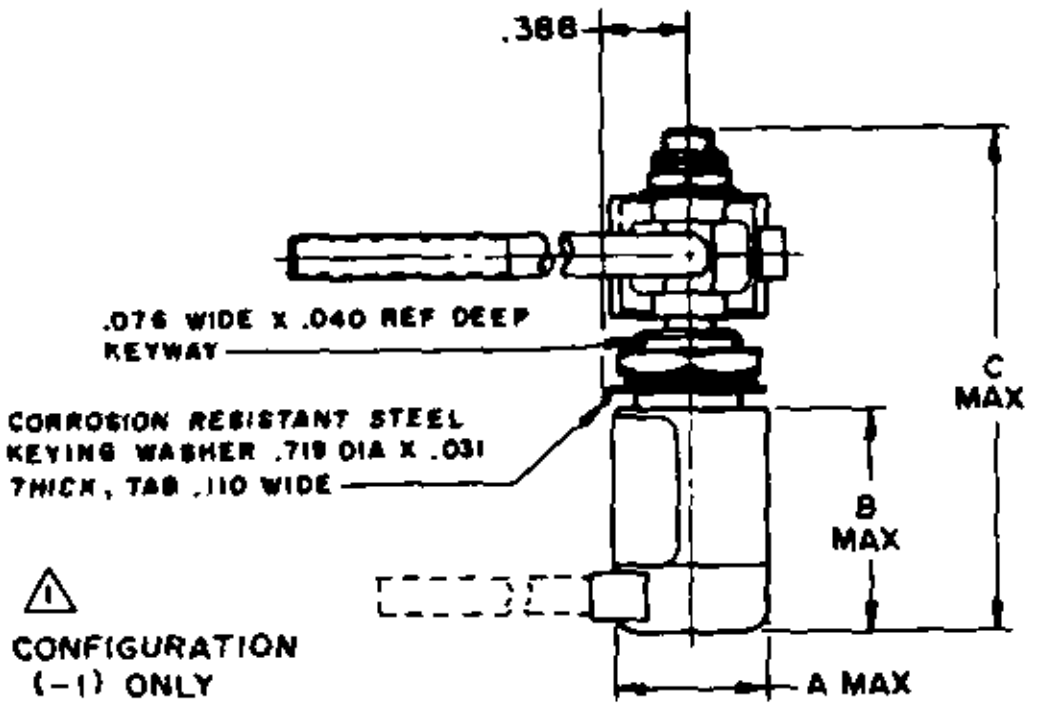
.388
.076 WIDE X .040 REF DEEP KEYWAY
C MAX
CORROSION RESISTANT STEEL KEYING WASHER .719 DIA X .031 THICK, TAB .110 WIDE
B MAX
A MAX

1 CONFIGURATION (-1) ONLY

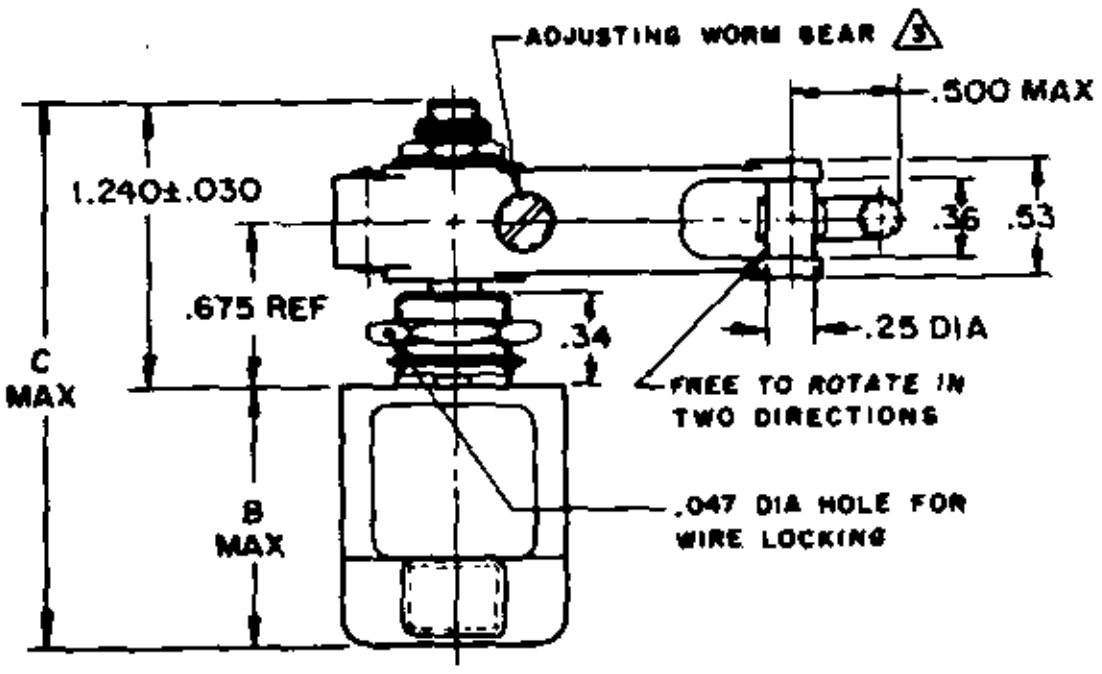

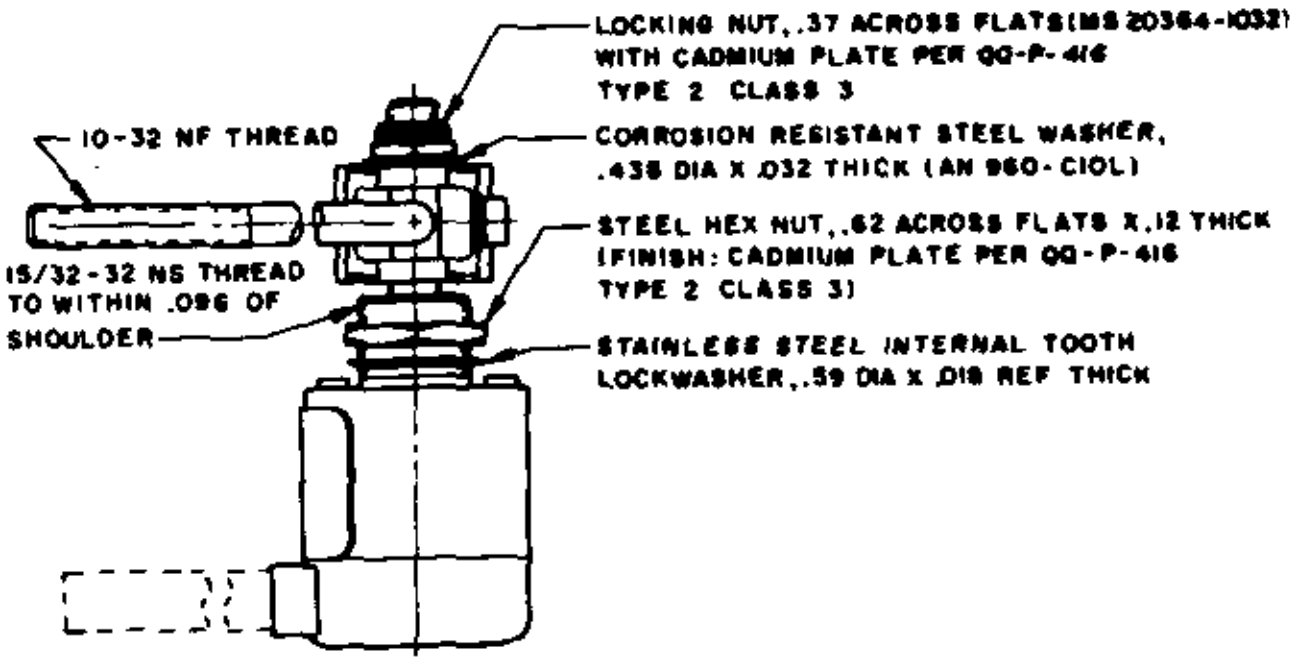
LOCKING NUT, .37 ACROSS FLATS (MS 20364-1032) WITH CADMIUM PLATE PER QQ-P-416 TYPE 2 CLASS 3
10-32 NF THREAD
CORROSION RESISTANT STEEL WASHER, .438 DIA X .032 THICK (AN 960-C10L)
STEEL HEX NUT, .62 ACROSS FLATS X .12 THICK (FINISH: CADMIUM PLATE PER QQ-P-416 TYPE 2 CLASS 3)
15/32-32 NS THREAD TO WITHIN .096 OF SHOULDER
STAINLESS STEEL INTERNAL TOOTH LOCKWASHER, .59 DIA X .018 REF THICK

DASH NO.	A DIA	B	C	LEAD WIRES NO. REQD	OPERATING TORQUE	WEIGHT
-1	.720	1.030	2.30	6	3 IN LB MAX	.46 LB MAX WITH LEADS .16 LB MAX WITHOUT LEADS
-2	1.031	1.300	2.600	12	3 IN LB MAX	.79 LB MAX WITH LEADS .19 LB MAX WITHOUT LEADS

ELECTRICAL RATINGS

RESISTIVE @ 28 VDC – 7 A (SEA LEVEL)
7 A (50,000 FT)
INDUCTIVE @ 28 VDC – 4 A (SEA LEVEL)
2.5 A (50,000 FT)



CIRCUIT DIAGRAM (-1)

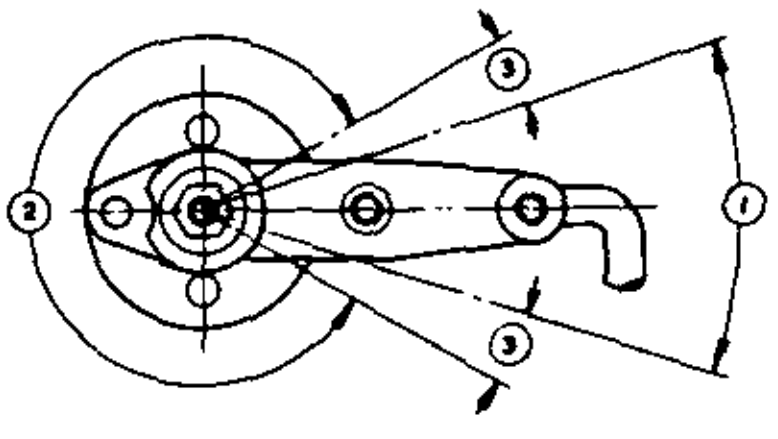



CIRCUIT DIAGRAM (-2)

CHARACTERISTICS (-1)

(1) 50° ± 15° FREE POSITION AREA CIRCUITS 1-3 AND 4-6 MADE
(2) 286° REF CIRCUITS 1-2 AND 4-5 MADE
(3) 12° MAX DIFFERENTIAL TRAVEL

CHARACTERISTICS (-2)

(1) 50° $^{+20°}_{-15°}$ FREE POSITION AREA CIRCUITS 1-2, 4-5, 7-8, AND 10-11 MADE
(2) 286° REF CIRCUITS 1-3, 4-6, 7-9, AND 10-12 MADE
(3) 12° MAX DIFFERENTIAL TRAVEL

CHARACTERISTICS

NOTE -
1 THE (-1) AND (-2) UNIT DESIGNS ARE SIMILAR EXCEPT AS NOTED.
2- THE SWITCH SHALL MEET THE IMMERSION TEST PROCEDURE I SPECIFICATION MIL-E-5272.
3 LEVER SHALL BE ADJUSTED BY [illegible] DIRECTION [illegible] LOOSEN LOCKSCREW [illegible] LOCKSCREW IS TIGHTENED TO POSITIVELY LOCK LEVER IN POSITION.
4- UNIT PROVIDES NO SHAFT RESTORING FORCE. THE ACTUATING DEVICE MUST CONTROL MOVEMENT OF SHAFT.
5- THE CIRCUIT DIAGRAM SHALL BE PERMANENTLY AND LEGIBLY MARKED ON THE SWITCH ENCLOSURE.
6- DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS, TWO PLACE ±.015, THREE PLACE ±.005.
7- CONFIGURATION OPTIONAL, PROVIDED MAXIMUM DIMENSIONS SPECIFIED ARE NOT EXCEEDED.
8- REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS TO BID.
9- [illegible] DOCUMENTS REFERENCED HEREIN.

Ⓐ CANCELLED - FOR PROCUREMENT USE MIL-S-8805/83

APPROVED 31 DECEMBER 1964 **REVISED** Ⓐ 11 OCTOBER 1968

P.A. Air Force 85 Other Cust	TITLE SWITCH, SENSITIVE, ROTARY ACTUATED, SEALED	**MILITARY STANDARD** **MS27259 (USAF)**
PROCUREMENT SPECIFICATION MIL-S-6744	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 **672-1** (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5930-F230-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:20Z
Check the source to verify that this is the current version before use.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-513/A-2403