
FED. SUP CLASS
6140

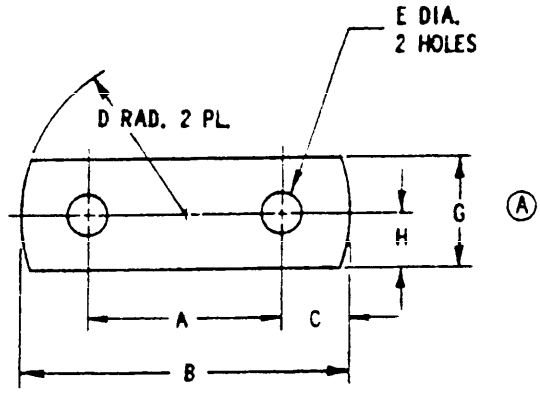

Ⓐ

Ⓐ DASH NO.	DIMENSIONS A ±.015	B ±.015	C ±.015	D ±.062	E ±.010	Ⓐ Thickness ±.010	Ⓐ G ±.031	Ⓐ H ±.010
Ⓐ −1	.890	1.515	.312	.750	.178	.062	.500	.250
−2	1.175	1.925	.375	.500	.218	.125	.750	.375
Ⓐ −3	1.140	1.765	.312	.750	.178	.062	.500	.250
Ⓐ −4	1.390	2.140	.375	.500	.218	.125	.750	.375
Ⓐ −5	1.080	1.705	.312	.750	.178	.062	.500	.250
Ⓐ −6	1.300	2.050	.375	.500	.218	.125	.750	.375
Ⓐ −7	1.070	1.820	.375	.500	.218	.125	.750	.375

Notes:

1. Material: Copper, Specification QQ-C-520.
2. Finish: Nickel Plate, Specification QQ-N-290, Type V.
3. Dimensions in inches.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓐ REDRAWN

APPROVED 23 MAR 64 REVISED Ⓐ 26 MAY 1977

This military standard is approved for use by (Sacramento ALC AMIRE) Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

P A Air Force-99 Other Cust	INTERNATIONAL INTEREST	TITLE CONNECTOR, BATTERY CELL, STRAIGHT	MILITARY STANDARD MS27309 (99)
PROCUREMENT SPECIFICATION MIL-B-26220	SUPERSEDES		SHEET 1 OF 1

DD FORM 672-1 LIMITED EDITION STOCK

6140-F454

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:21Z
Check the source to verify that this is the current version before use.