This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for procurement of active use shall be made from this document when applicable.

New activities: Army - MI, MU
Navy - EC, MC, OS
Air Force - 11, 15, 17, 80
DSA - ES

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672

Procurement Specification: MIL-C-38999

P.A: AF-85
Other Cust: ARMY-EL, NAVY-AS

International interest:

SUPERSEDES: MS27342(USAF)

TITLE: ADAPTER, ELECTRICAL CONNECTOR, SERIES I AND II

MILITARY STANDARD

MS27342


SHEET 1 OF 1

FED. SUP CLASS 5935


5935-2005-73

(D) DENOTE CHANGES


Source of this file: http://assist.daps.dla.mil - Downloaded: 2025-10-23T15:22Z
Check the source to verify that this is the current version before use.

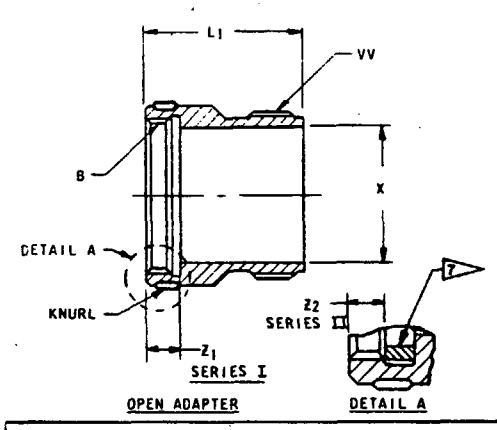

OPEN ADAPTER — DETAIL A — -1

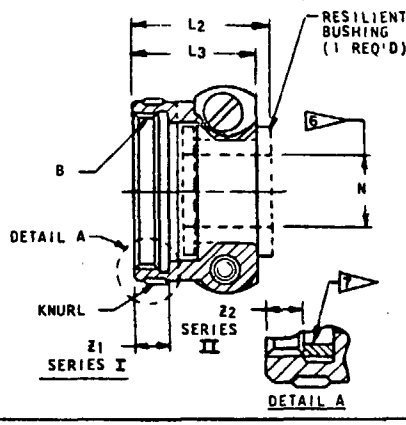

DETAIL A

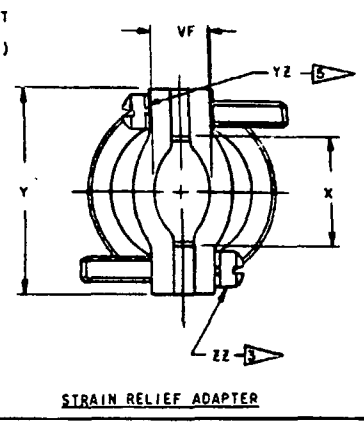

STRAIN RELIEF ADAPTER — -2

SHELL SIZE SERIES II	SHELL SIZE SERIES I	B THREAD CLASS 2B UNEF	L1 MAX	X MIN DIA	Z2 +.005 -.010 SERIES II	Z1 +.000 -.015 SERIES I	VV THREAD CLASS 2A UNEF
8	9	7/16-28		.281			1/2-28
10	11	9/16-24		.406			5/8-24
12	13	11/16-24		.531			3/4-20
14	15	13/16-20	.688	.656	.114	.219	7/8-20
16	17	15/16-20		.781			1-20
18	19	1 1/16-18		.875			1 3/16-18
20	21	1 3/16-18		1.000			
22	23	1 5/16-18	.750	1.125			1 7/16-18
24	25	1 7/16-18		1.250			

B THREAD CLASS 2B UNEF	N +.010 -.025 FREE DIA	L2 MAX	L3 MAX	X DIA MIN OPEN	Y MAX	Z2 +.005 -.010 SERIES II	Z1 +.000 -.015 SERIES I	VF MAX CLOSED	ZZ SCREWS MS35271 (3)	YZ LOCKWASHERS (5)
7/16-28	.125	.875	.781	.234	.828	.114	.219	.187	-30	AN935B6L OR AN935-6L
9/16-24	.188			.297	.981			.281		
11/16-24	.312			.422	1.016			.325	-32	AN936-A6BOR AN936-A6
13/16-20	.375	.938	.844	.547	1.141			.356		
15/16-20	.500			.609	1.203			.456	-48	AN935-8BLOR AN935-8L
1 1/16-18	.625			.734	1.469			.519		AN936-A8BOR AN936-A8
1 3/16-18		1.000	.906						-50	
1 5/16-18	.750			.922	1.656			.657	(4)	
1 7/16-18	.800			.984	1.750					

NOTES:
1. DIMENSIONS IN INCHES.
2. MATERIALS:
   ADAPTER BODIES AND CLAMPING BARS: ALUMINUM ALLOY
   RESILIENT BUSHING: SILICONE
3. DRILL HOLE IN HEAD IS OPTIONAL.
4. EXCEPT THAT LENGTH OF SCREW UNDER HEAD SHALL BE 1.125 +.000-.062.
5. LOCKWASHERS MAY BE CAPTIVATED.
6. USE AN3420 BUSHING IF REDUCED OPENING IS REQUIRED.
7. ON SERIES II ADAPTERS, THE Z2 DIMENSION MAY BE ACHIEVED BY TWO PIECE CONSTRUCTION.

MS27342 A -12 -1

MS NO.	FINISH (COLOR) (D)	SHELL SIZE	ADAPTER GEOMETRY

1 - OPEN ADAPTER
2 - STRAIN RELIEF ADAPTER

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENT SHALL BE OF THE ISSUE IN EFFECT ON INVITATIONS FOR BID.

APPROVED 28 JAN 66 REVISED (D) 2 JAN 1976