
FED. SUP CLASS.
4820

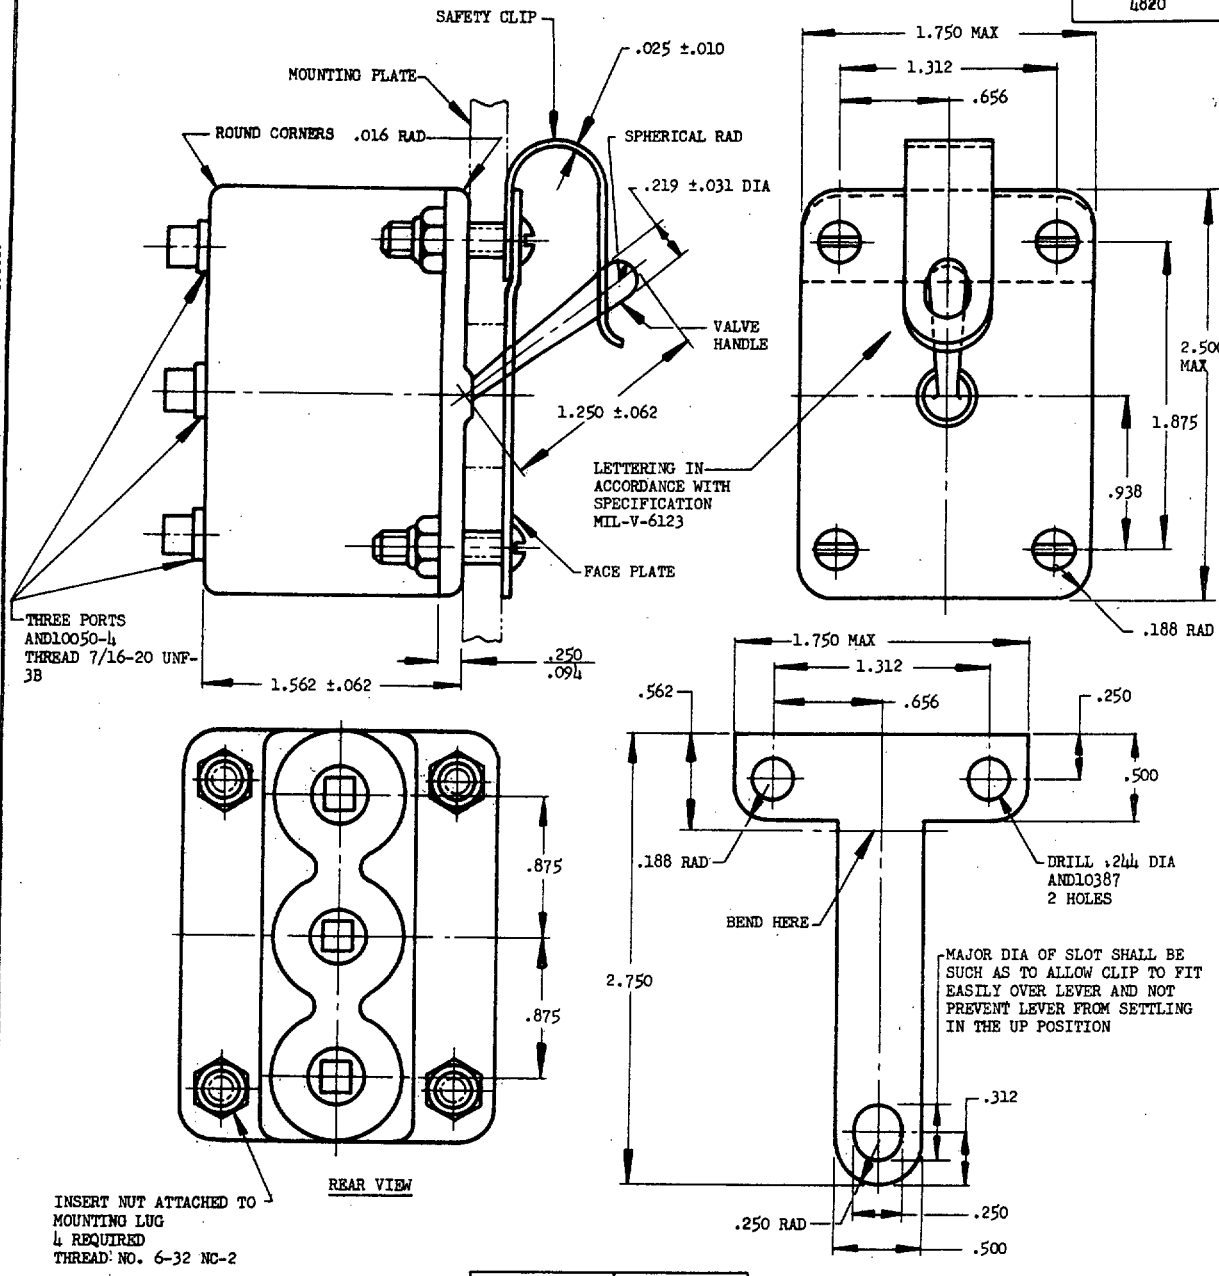

MS PART NO.	FIIN
MS28051-1	

MATERIAL: SAFETY CLIP, STEEL, SPECIFICATION MIL-S-7947.

HEAT TREAT: SAFETY CLIP, SPECIFICATION MIL-H-6875.

FINISH: SAFETY CLIP, PHOSPHATE PRETREATMENT AND SPECIFICATION MIL-E-7729, INSIGNIA RED ENAMEL.

HARDNESS: SAFETY CLIP, ROCKWELL C40-45, AFTER FORMING.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.

FOR INSTALLATION, CLEARANCE SHALL BE ALLOWED FOR THE MAXIMUM OVER-ALL DIMENSIONS SHOWN ON THE DRAWING.

APPROVED 1 Sep 55 REVISED

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS28051 (ASG)
Navy - BuAer Air Force	A - N - AF -	VALVE, STATIC PRESSURE SELECTOR	
PROCUREMENT SPECIFICATION MIL-V-6123		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.