
USER SYMBOLS:

REVIEWER SYMBOLS:
ARMY - AV
NAVY - AS
USAF - 82

"Revieur/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
2915

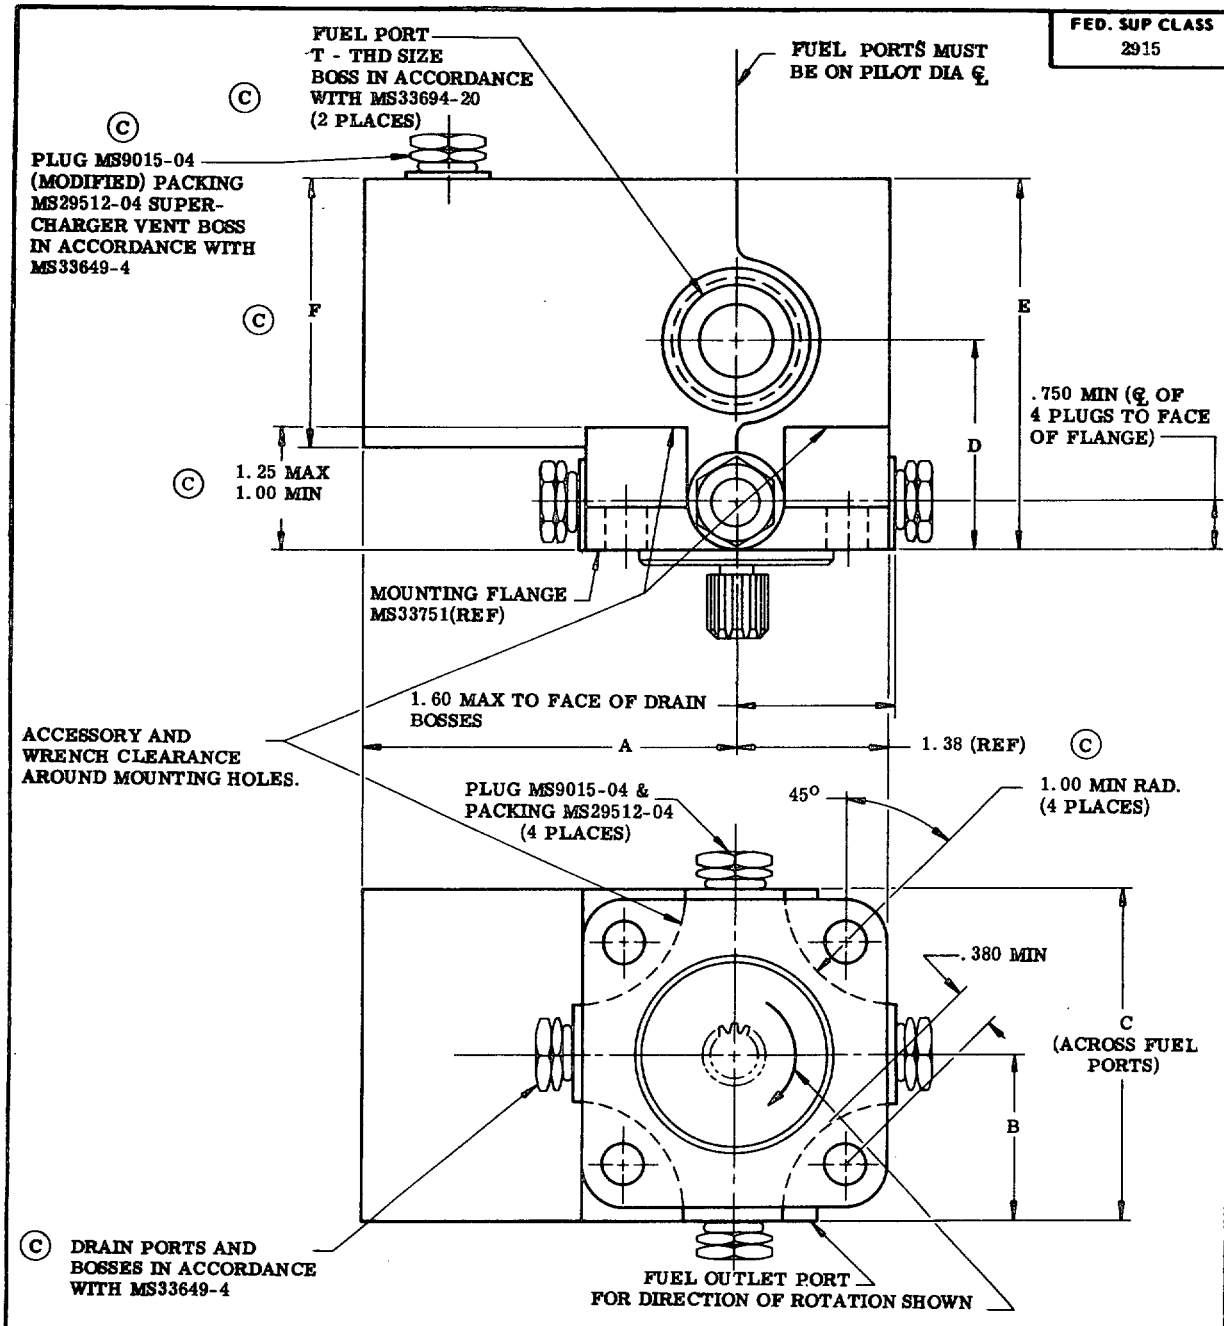

NOTES:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO PLACE DECIMALS ± .02, ANGLES ± 0° 30'.
2. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
3. ROTATION: COUNTERCLOCKWISE AS VIEWED FROM OPPOSITE THE DRIVE END.
4. THREADS SHALL BE IN ACCORDANCE WITH HANDBOOK H28. (C)

REQUIREMENTS:

1. THE PUMP SHALL OPERATE SATISFACTORILY WITH OIL LEAKAGE OF 0 CC TO 2 CC PER HOUR FROM THE ENGINE ACCESSORY DRIVE.
2. NORMAL RATED SPEED SHALL BE 2500 RPM.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) REVISED (D) CANCELLED AFTER 23 APR 82 NO SUPERSEDING STD

APPROVED 21 SEP 1954 REVISED (B) 2 AUG 1965 (C) 5 FEB 71 (D) 23 APR 82

P.A. NAVY - AS Other Cust ARMY - AV USAF - 82	TITLE PUMP, ROTARY, POWER DRIVEN, FUEL, AIRCRAFT (STRAIGHT THREADED PORTS)	MILITARY STANDARD MS29542 THRU MS29546
PROCUREMENT SPECIFICATION MIL-P-25030	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:02Z
Check the source to verify that this is the current version before use.