
(a)

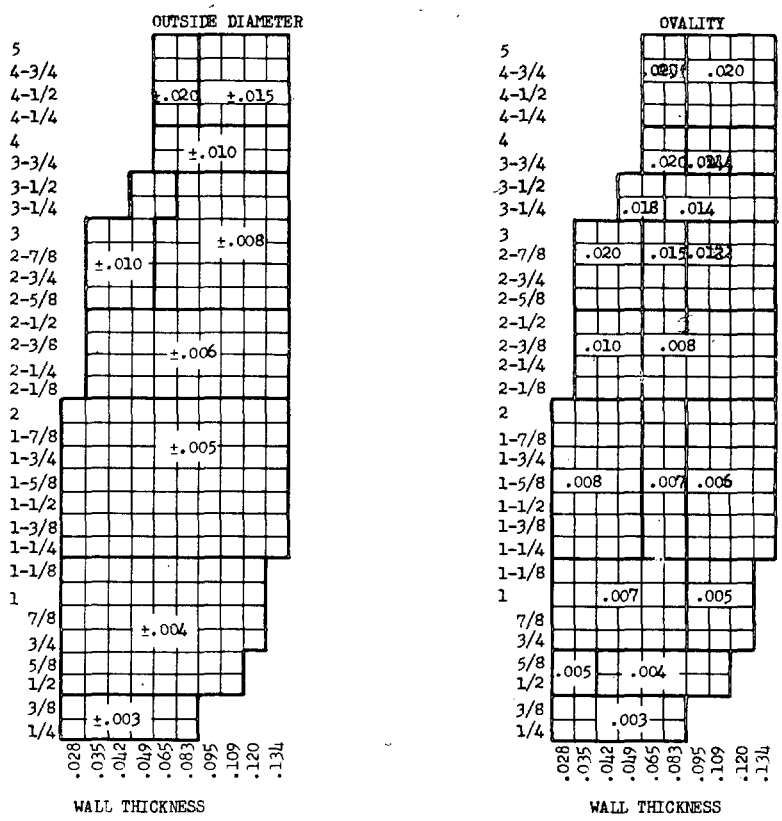

WALL THICKNESS TOLERANCE

GAUGE OR WALL THICKNESS, INCHES	DIAMETER, INCHES			
	1/4 TO 7/8	1 TO 1-7/8	2 TO 3-3/4	4 TO 5
.028	+.0015 -.003	+.0015 -.003	- -	- -
.035	+.0015 -.004	+.0015 -.004	+.002 -.004	- -
.049	+.0015 -.004	+.0015 -.005	+.002 -.005	- -
.065	+.002 -.004	+.002 -.005	+.0025-.005	+.000 -.006
.083	+.002 -.004	+.002 -.005	+.0025-.006	+.000 -.007
.095	+.002 -.004	+.002 -.005	+.0025-.006	+.000 -.007
.109	- -	+.002 -.006	+.0025-.006	+.000 -.007
.120	- -	+.002 -.006	+.0025-.006	+.000 -.007
.134	- -	+.002 -.006	+.0025-.006	+.000 -.007

INSIDE WELDING FLASH

GRADE	MAXIMUM HEIGHT OF FLASH
FLASH-IN	60% OF WALL THICKNESS BUT IN NO CASE TO EXCEED 3/64 INCH
STANDARD OD TOLERANCES UP TO 25% CLOSER THAN STANDARD, OR ID TOLERANCES UP TO 40% CLOSER THAN STANDARD	0.010 INCH 0.002 INCH

(a) OVALITY IS THE DIFFERENCE BETWEEN THE MAXIMUM AND MINIMUM DIAMETERS OF ANY ONE SECTION OF TUBE.

STRAIGHTNESS TOLERANCE: STANDARD TOLERANCE FOR STRAIGHTNESS IS 0.030 INCHES IN A LENGTH OF 3 FEET FOR TUBING LENGTHS 24 FEET AND UNDER.

THIS IS A DESIGN STANDARD. NOT USED AS A PART NUMBER.

CUSTODIAN	MILITARY STANDARD	MS33530(ASG)
Navy - BuAer Air Force		
PROCUREMENT SPECIFICATION NONE	TOLERANCES - WELDED CARBON AND ALLOY STEEL TUBING	SHEET 1 OF 1

SUPERSEDES AND10365, SHEET 1

APPROVED 26 Jan 1953 REVISED

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:04Z
Check the source to verify that this is the current version before use.